Understanding the Role of User Profile in the Personalization of Large Language Models

Bin Wu Z

Zhengyan Shi Hossein A. Rahmani Varsha Ramineni Emine Yilmaz

University College London, United Kingdom {bin.wu.23,emine.yilmaz}@ucl.ac.uk

Abstract

Utilizing user profiles to personalize Large Language Models (LLMs) has been shown to enhance the performance on a wide range of tasks. However, the precise role of user profiles and their effect mechanism on LLMs remains unclear. This study first confirms that the effectiveness of user profiles is primarily due to personalization information rather than semantic information. Furthermore, we investigate how user profiles affect the personalization of LLMs. Within the user profile, we reveal that it is the historical personalized response produced or approved by users that plays a pivotal role in personalizing LLMs. This discovery unlocks the potential of LLMs to incorporate a greater number of user profiles within the constraints of limited input length. As for the position of user profiles, we observe that user profiles integrated into different positions of the input context do not contribute equally to personalization. Instead, where the user profile that is closer to the beginning affects more on the personalization of LLMs. Our findings reveal the role of user profiles for the personalization of LLMs, and showcase how incorporating user profiles impacts performance providing insight to leverage user profiles effectively.

1 Introduction

Large Language Models (LLMs) trained on vast quantities of corpus have greatly advanced the field of natural language processing (NLP) (Brown et al., 2020; Liu et al., 2023a; Chang et al., 2023). Despite their capabilities, LLMs are often equipped with a general level of cognition, which might not fully satisfy the diverse demands of users in practical scenarios (Chen et al., 2023b; Liu et al., 2023a; Wu et al., 2022). This is primarily because preferences can vary significantly among users, leading to situations where the same input can yield different, or even contradictory expectations. Consequently, there is a clear need for personalizing LLMs to address this issue.

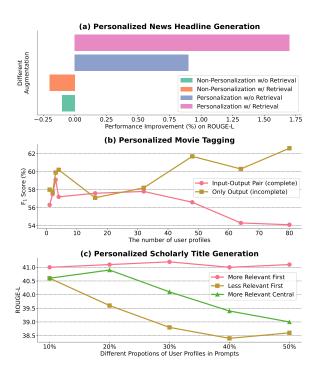


Figure 1: Our key findings: (a) Semantic information is less critical to the effectiveness of user profile than personalization, and it only contributes when built on top of personalization (\$4); (b) The impact of user responses on personalization is greater than that of previous input and their mapping between users' previous input and response (\$5.1); (c) The user profiles in the different positions of the context contribute differently to the personalization, where profiles positioned closer to the beginning contribute more (\$5.2).

One intuitive approach for providing personalized service with LLMs is to utilize user profiles, particularly historical records, to capture underlying user preferences (Salemi et al., 2023). By incorporating selected historical records alongside the initial input as context, LLMs can generate personalized responses. Existing research suggests that user profiles can effectively enhance performance across a wide range of tasks by retrieving relevant user profiles from current users (Richardson et al., 2023; Kang et al., 2023; Salemi et al., 2024). However, it remains unclear how incorporated user profiles specifically affect LLM personalization. This uncertainty arises from potential overlaps with retrieval-augmentation generation (RAG) (Lewis et al., 2020) and in-context learning (ICL) (Brown et al., 2020), where personalization is not directly addressed. RAG relies on retrieving documents relevant to the input, implicitly requiring semantic information to provide answers (Mallen et al., 2023), while ICL uses input-output pairs as demonstrations to guide LLMs in forming relevant mappings (Garg et al., 2022), necessitating complete input-output pairs. Therefore, the actual role of user profiles in LLM personalization remains ambiguous, complicating the collection and effective use of user information in the real world.

In this paper, we aim to explore the role of user profiles in the personalization of LLMs by answering the following questions:

- **RQ**₁ *Do user profiles rely on semantic information (context similar to the input) to improve LLM performance?*
- **RQ**₂ In what ways do user profiles affect the personalization of LLMs?

To address \mathbf{RQ}_1 , we design and compare the impact of different augmentation methods for user profiles on enhancing performance across various downstream tasks (see §4). Our findings indicate that considering only semantic information falls short in improving performance and only contributes to when combined with personalization. Our empirical analysis underscores that personalization information is more critical than semantic information in contributing to user profiles' effectiveness in meeting users' demands.

To address \mathbf{RQ}_2 , we further investigate how user profiles affect the personalization of LLMs from two perspectives: within the user profile, which explores which part of the user profile most significantly contributes to personalizing LLMs (see §5.1), and the position of user profiles, which explores the impact of the order of each user profile in the input context in personalizing LLMs (see §5.2). From the perspectives of within the user profile, we evaluate the impact of different parts (e.g., the previous input or the personalized response), by combining various sampling strategies to construct variants of the user profile. We find that the personalized response produced or approved by users significantly enhances the personalization, while the previous input and the correct mapping between

it and the response are not critical in most cases. This finding highlights the potential of LLMs to integrate a great number of user profiles, leading to a significant improvement under the limited input length in our empirical analysis. From the perspectives of *the position of user profiles* in context, we surprisingly find that (1) user profiles in different positions do not contribute equally to the personalization of LLMs; and that (2) the user profiles positioned earlier in the input context tend to have a greater effect on the personalization of LLMs.

In summary, our analysis provides a new view to understand the role of user profiles in personalizing LLMs. Our findings can be summarized as follows, as shown in Figure 1:

- User profiles rely largely on personalization information rather than semantic information; semantic information contributes to user profiles only when combined with personalization.
- Responses that are generated or approved by users play a crucial role in the personalization of LLMs, while the correct mapping within user profiles is not always essential for effective personalization;
- The impact of user profiles in different positions on personalization is not uniform: the user profile closer to the start of the input context tends to have a larger effect on personalizing LLMs.

2 Related Work

Personalization of LLMs. LLMs have shown impressive performance in different fields (Achiam et al., 2023; Shi and Lipani, 2023b), but there is a gap between models' response and humans' expectations due to general cognition from the pre-training stage. Recent efforts, such as reinforcement learning from human feedback (RLHF) (Ouyang et al., 2022; Yang et al., 2024) to personalize LLMs, try to align LLMs with users' preferences (Jang et al., 2023; Shi et al., 2024), but is easily subject to a narrow set of preferences caused by the limited number of crowd-workers (Kirk et al., 2023; Wu et al., 2023). Therefore, our work focuses on another line of research, personalizing the LLMs via utilizing user profiles. In this way, Salemi et al. (2023) offered a comprehensive evaluation benchmark with diverse language tasks, where the user profiles consist of the user's previous queries and the personalized response. More

recent works have demonstrated the effectiveness of introduced user profiles in different ways, such as the summarization (Richardson et al., 2023), keywords synthesis (Li et al., 2023b), user embeddings (Doddapaneni et al., 2024; Ning et al., 2024), parametric knowledge (Tan et al., 2024) via Lora (Shi and Lipani, 2023a) or the prompt rewriting via reinforcement learning (Li et al., 2023a). While user profiles have been shown to enhance performance on traditional metrics, it is still uncertain which information contributes to the improvement. The difficulty lies in the overlap with the retrieved documents in RAG, which requires the semantically similar context to provide the direct answer. Additionally, how introduced user profiles impact the personalization of LLMs is underexplored. Therefore, understanding the role of the user profiles is significant and would improve our understanding of the personalization of LLMs.

Retrieval-Augmentation Generation. RAG has become one powerful way to unlock the ability of LLMs to incorporate external knowledge (Lewis et al., 2020). The use of retrieved documents mitigates the issue of hallucination (Gao et al., 2023b), especially on knowledge-intensive tasks. Various efforts have highlighted the necessity of post-retrieval strategies for effectively utilizing retrieved documents, such as reranking (Liu et al., 2023b) and compression (Chen et al., 2023a). However, the role of the user profile in personalizing the LLMs is different from the retrieved documents in RAG, where RAG expects semantic information (context similar to input) of the retrieved documents to provide the direct answer, while user profiles are designed to reflect user preferences more broadly.

In-Context Learning. ICL (Brown et al., 2020) takes the input-label pair as the demonstration to prompt the LLMs to deal with downstream tasks. Some efforts are made to explore what factor influences ICL, such as the format of the demonstration (Min et al., 2022; Wei et al., 2023), and the selection of the demonstration (Liu et al., 2022; Gao et al., 2023a). Some other works aim to explore the inner mechanism of the ICL, including the learning ability (Garg et al., 2022; Akyürek et al., 2022), the Bayesian inference view (Xie et al., 2022) and the information flow (Wang et al., 2023). However, user profiles are different from the demonstrations in ICL, since LLM is expected to capture user preference from the profiles instead of directly formu-

	Task Description	Metrics
LaMP-1	Personalized Citation Identification	Acc
LaMP-2	Personalized Movie Tagging	Acc, F_1 Score
LaMP-3	Personalized Product Rating	MAE, RMSE
LaMP-4	Personalized News Headline Generation	ROUGE-1&-L
LaMP-5	Personalized Scholarly Title Generation	ROUGE-1&-L
LaMP-7	Personalized Tweet Paraphrasing	ROUGE-1&-L

Table 1: Task description for the used LaMP dataset.

lating the mapping. Therefore, the existing works in ICL cannot directly explain the role of the user profiles in the personalization of LLMs.

3 Preliminary

Problem Definition. The problem definition of the personalization of LLMs follows LaMP (Salemi et al., 2023): given a textual input x describing a user u's task, the goal for the LLM, parameterized by θ , is to generate a personalized response y conditioned on the user u. The user u is represented by the user profiles \mathcal{P}_u defined as users' historical data that consists of the user input and the personalized response produced or approved by the users, i.e., $\mathcal{P}_u = \{(x_{u_1}, y_{u_1}), ..., (x_{u_{N_u}}, y_{u_{N_u}})\}$ with N_u being the number of the user profiles. Mathmetically, the goal is to formulate the personalized response $p(y|x, \mathcal{P}_u; \boldsymbol{\theta})$. To address it, existing methods mainly include three components: (1) query generation ϕ_q to transform the input into the query q for retrieval; (2) retrieval model $\mathcal{R}(q, \mathcal{P}', k)$ to retrieve the relevant k user profile from the candidate \mathcal{P}' ; and (3) prompt construction ϕ_p to merge the original input x with the retrieved user profiles.

Experimental Setup. We analyze the personalization of LLMs using the LaMP benchmark (Salemi et al., 2023) (shown in Table 1). Flan-T5-base (Chung et al., 2022) are employed as the model architecture. More details can be seen in Appendix §B. Our code is available at https://github.com/Bingo-W/Personalisation-in-LLM.

4 The Actual Affect of User Profile

To rigorously assess for user profile, whether semantic information (*i.e.*, context similar to the input) or personalization information (context similar to the user) contributes more effectively to the personalization of LLMs (\mathbf{RQ}_1), we compare four distinct augmentation strategies employing various methods for sampling user profiles

Non-Personalization Augmentation w/o Retrieval. This strategy involves randomly sampling

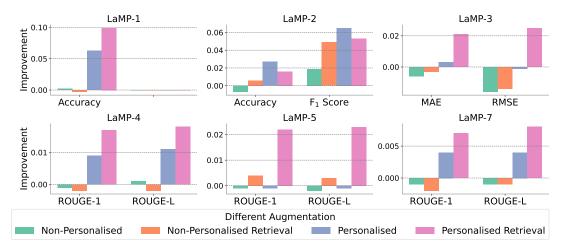


Figure 2: The improvement of performance (Flan-T5-base) on LaMP dataset with different Augmentation based on the user profiles (k = 1) compared to without augmentations. Note that LaMP-3 shows a **decreases** in performance compared to the no-augmentations baseline, indicated by the lower values of both MAE and RMSE, where lower scores signify better performance.

k profiles from the entire set of user profiles \mathcal{P} . This approach does not take into account either personalization or semantic information.

Non-Personalization Retrieval-Augmentation. In this strategy, a subset of user profiles $\mathcal{P}sub \subset \mathcal{P}$ is randomly sampled, with the subset size equal to the average number of profiles per user $\overline{N_u}$, to ensure fair comparison. Retrieval is then employed to select the *k* most relevant profiles based on the input query $\mathcal{R}(\phi q(x_i), \mathcal{P}_{sub}, k)$. This strategy considers only semantic information (*i.e.*, retrieving the relevant user profile), ignoring personalization information.

Personalization Augmentation w/o Retrieval. This method randomly samples profiles directly from the current user's set, *i.e.*, \mathcal{P}_u . It takes into account personalization information only (*i.e.*, only consider the current user's profile), without considering semantic information.

Personalization Retrieval Augmentation. This strategy retrieves the *k* most relevant user profiles from the current user's set based on the input query $\mathcal{R}(\phi_q(x_i), \mathcal{P}_u, k)$. It considers both personalization and semantic information. It takes into account both personalization and semantic information.

4.1 Results: Semantic Information Matters Less Than Personalization

We present the performance improvements with different augmentations compared to scenarios with no user profiles in Figure 2.

Semantic Information Alone Cannot Lead to Consistent Performance Improvement. Considering only semantically similar context (*i.e.*, Non-Personalization Retrieval-Augmentation) improves performance on LaMP-2 and LaMP-5 but decreases performance on the remaining four tasks. When compared to considering personalization information only (*i.e.*, Personalization Augmentation), the semantic information approach shows a performance gap in most tasks. These observations indicate that semantic information (*i.e.*, context similar to the input) has a limited impact on the effectiveness of user profiles in the personalization of LLMs.

Semantic Information contributes to performance improvement Only When Combined with Personalization. When the candidate set is limited to user profiles from the current user (*i.e.*, context similar to the user), retrieval augmentation (*i.e.*, Personalization Retrieval Augmentation) shows performance improvements across almost all tasks. It outperforms strategies that consider either semantic information or personalization alone. This evidence suggests that semantic information contributes to the effectiveness of user profiles only when built on top of personalization information.

Summary. Our results validate that semantic information has less impact on the effectiveness of user profiles compared to personalization information, and only contributes when combined with personalization. Additional experiments in Appendix §D confirm that our conclusions hold across different quantities of user profiles and even with larger non-fine-tuned models (*e.g.*, LLAMA-2).

5 How do User Profile Affect the Personalization of LLMs

This section further explores how the user profiles influence the personalization of LLMs (\mathbf{RQ}_2). We specifically explore which components of the user profile contribute to personalizing LLMs, and examine the impact of the position and order of user profiles within the input context on personalization effectiveness.

5.1 The Effective Part of User Profile

We identify three key parts within user profiles that potentially affect LLM personalization: (a) the previous input from users, (b) the response produced or endorsed by users, and (c) the accurate mapping between these inputs and responses.

To investigate the impact of three parts, we employ two distinct strategies to sample or retrieve two lists of user profiles, which are then merged to form a final profile list. Specifically, user profiles are randomly selected from the entire pool of user profiles, denoted as $\mathcal{P}_1 \in \mathcal{P}$, or chosen either randomly \mathcal{P}_2 or semantically based on the retrieval model \mathcal{P}_3 from the profiles of the current user \mathcal{P}_u . The previous section has demonstrated that the effectiveness of the selected user profile for personalization is ordered by $\mathcal{P}_3 > \mathcal{P}_2 > \mathcal{P}_1$. We only use the input part from the first list and the output part from the second list from two strategies, *i.e.*, $\mathcal{P}' = \{(x_i, y_j) | (x_i, y_i) \in \mathcal{P}_{input}, (x_j, y_j) \in$ \mathcal{P}_{output} , where \mathcal{P}_{input} , $\mathcal{P}_{output} \in \{\mathcal{P}_1, \mathcal{P}_2, \mathcal{P}_3\}$. Note that if the employed sampling strategies for input and output are the same, *i.e.*, $\mathcal{P}_{input} = \mathcal{P}_{output}$, it would maintain the correct mapping within the user profiles due to the same list of the selected user profiles. We report the results on four tasks (i.e., LaMP-2, LaMP-3, LaMP-4 and LaMP-5) that have the complete user profiles in Figure 3.

5.1.1 Results: The Impact of Different Part

Correct mapping is not necessary for personalization. In Figure 3, diagonal cells from the bottom-left to the up-right (*i.e.*, $\mathcal{P}_{input} = \mathcal{P}_{output}$) maintain the correct mapping, whereas other cells do not. However, except for the bottom-left cells, a consistent increase is not evident in centric and upright cells compared to their respective row (incorrect input) and column (incorrect output) counterparts. For instance, in LaMP-5, using personalized w/o retrieval for both input and output performs worse than its row neighbor (0.421 vs. 0.428/0.428) and its column neighbor (0.421 vs. 0.428/0.445). These observations suggest that the correct mapping between previous input and response is not necessary for LLM personalization. An exception is observed in LaMP-3, where the centric and upright cell performs better, possibly because LaMP-3 uses virtual labels (scores from 1 to 5) without semantic information, thereby necessitating correct mapping to guide LLMs in interpreting the scores accurately.

Previous Input has limited impact on the personalization. Due to the more powerful sampling strategy from left to right, the right cell uses user profiles with a more effective input for personalization than the left cell. However, no substantial increase is observed across all four tasks. In LaMP-4, with a more powerful input part within user profiles, performance on centric and bottom-centric cells with \mathcal{P}_2 for the input part is better than their right neighborhood with \mathcal{P}_3 for the input part (0.155 vs. 0.153 and 0.144 vs. 0.142 for ROUGE-L metric). Our results indicate that the improvement does not result from the complete user profile, suggesting that personalization within the previous input has a limited impact on LLM personalization.

The response produced or endorsed by users contributes to the personalization. Cell-related strategies from bottom to top use user profiles with a more effective output for personalization. A noticeable change in color from blue to red (red to blue for LaMP-3) indicates that a more effective output markedly enhances performance. Even with incorrect mapping, the up-centric cell with a more effective output outperforms the centric cell with correct mapping but a less powerful output. Our results underscore that, compared to mapping and the input part of user profiles, personalization within the response produced or endorsed by users plays a crucial role in LLM personalization.

Summary. It is the response produced or endorsed by users that enhances LLM personalization, rather than correct mapping or previous input from users. Correct mapping is deemed necessary only for non-semantic output space.

5.1.2 Results: The Impact of Only Output

Previous findings indicate that the correct mapping between input and output does not necessarily contribute to LLM personalization. To further investigate the role of its input and output parts, we con-

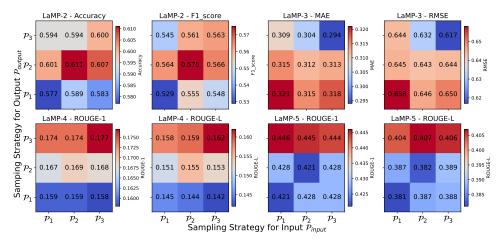


Figure 3: The performance on 4 LaMP tasks, with different combinations of sampling strategies for the construction of the introduced user profiles. Note that the metrics for LaMP-3 are the lower, the better.

duct experiments where we focus solely on either the input or output part while ignoring the mapping. We modify the template part of the prompt with minimal changes (see Appendix §C). It is important to note that using the incomplete user profile helps to shorten the input context, thereby enabling the incorporation of more user profiles for personalizing LLMs within the limited input length. We expand the number of utilized user profiles, ranging from 10% to 50% of the most relevant profiles.

Only using the output part substantially enhances the personalization. Our results in Figure 4 reveal that, except for LaMP-3, using only the output part of user profiles achieves comparable (LaMP-4) or even superior performance (LaMP-2 and LaMP-5) compared to using complete user profiles. In contrast, utilizing only the input part leads to noticeable performance degradation across all tasks. This supports our earlier findings, emphasizing the importance of user profiles with a more powerful output for LLM personalization. It further underscores that responses produced or endorsed by users play a pivotal role in effective personalization, particularly when contrasted with correct mapping and previous input considerations. In the case of LaMP-3, where tasks involve non-semantic label spaces, utilizing incomplete user profiles (only output or input) leads to a noticeable decrease, supporting the notion that correct mapping is essential for such tasks.

Only using output unlocks the potential to use more user profiles. As depicted in Figure 5, our analysis of various proportions of user profiles reveals that using complete user profiles often exceeds the maximum input length, necessitating truncation that leads to substantial performance losses. In contrast, focusing solely on personalized responses improves performance across all tasks compared to using complete user profiles. Notably, there is a substantial increase in LaMP-2 (from 0.571 to 0.626 for the F_1 score) and LaMP-4 (from 0.182 to 0.188 for ROUGE-1). For LaMP-3 and LaMP-5, where using complete user profiles suffers from severe degradation, exclusively leveraging the output of user profiles proves to be a robust strategy. This not only affirms the efficacy of the output part for personalization but also highlights that using only the output part extends the capacity of LLMs to leverage more user profiles, leading to greater performance improvement.

Summary. The findings underscore the vital contribution of the output part of user profiles to LLM personalization. This finding supports the strategy of extending the LLMs' capacity to utilize more user profiles, especially when focusing on the output, which may result in notable performance gains.

5.2 Exploring the Impact of User Profile Order

The order in which multiple user profiles are arranged within the input context may largely affect the personalization capabilities of LLMs. Previous work in RAG (Liu et al., 2023b) has indicated that LLMs may overlook the document containing the correct answer when placed in the middle position of the input context. Considering that user profiles differ fundamentally from the documents typically retrieved in traditional RAG setups, it's crucial to assess how the order of user profiles influences personalization.

To explore the effect of varying orders of user

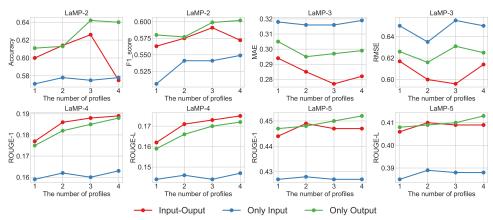


Figure 4: The performance with different numbers of used user profiles on four LaMP datasets when only with the input part and only with the output part. Note that the metrics for LaMP-3 are the lower, the better.

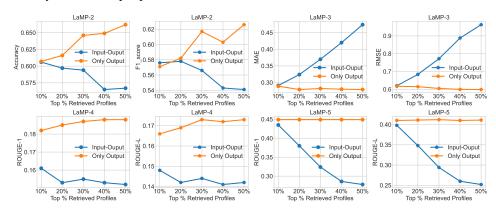


Figure 5: The performance with different proportions of user profiles on four LaMP datasets when only using the output part of the completed user profile. Note that the metrics for LaMP-3 are the lower, the better.

Ordering Strategy	User Profile Order
BM25 Original Order	[1], [2], [3], [4], [5]
More Relevant First	[1], [2], [3], [4], [5]
Less Relevant First	[5], [4], [3], [2], [1]
More Relevant Central	[4], [2], [1], [3], [5]

Table 2: Illustration of the order of user profiles in our experiments, where [1] refers to the most relevant one according to the BM25 relevance ranking.

profiles in the input context, we select the top k relevant user profiles and arrange them in the input context using different approaches (seen Table 2):

More Relevant First (MRF). Following conventional retrieval practices (Salemi et al., 2023), this method places profiles with higher semantic similarity earlier in the input context.

Less Relevant First (LRF). This order is the inverse of the More Relevant First, positioning the most relevant profiles nearer to the end of the context.

More Relevant Central (MRC). Unlike the above orders and the ListInMiddle Ranker in RAG (Liu et al., 2023b), this method places the more relevant user profiles in the more central position.

		LRF	MRC	MRF
LaMP-1	Acc.↑	0.707	0.714	0.711
LaMP-2	Acc.↑	0.606	0.611	0.606
	F1↑	0.568	0.584	0.576
LaMP-3	$MAE\downarrow$	0.296	0.298	0.291
	$RMSE\downarrow$	0.628	0.632	0.620
LaMP-4	ROUGH-1↑	0.152	0.154	0.161
	ROUGH-L↑	0.140	0.142	0.148
LaMP-5	ROUGH-1↑	0.428	0.430	0.435
	ROUGH-L↑	0.391	0.393	0.398
LaMP-7	ROUGH-1↑	0.520	0.520	0.524
LawP-/	ROUGH-L↑	0.465	0.466	0.469

Table 3: The performance with different ordering strategies for the top 10% user profiles on LaMP datasets. The best result for each dataset is highlighted in bold.

5.2.1 Results: The Impact of Different Order

User profiles in different positions contribute not equally to the personalization. Our results in Table 3 reveal substantial variations in performance across tasks when the same subset of user profiles is arranged in different orders within the input context. For instance, on LaMP-2, MRC achieves a MAE of 0.298, whereas MRF records 0.291. Similarly, on LaMP-5, LRF yields a ROUGH-1 score of 0.152, while MRF achieves




Figure 6: The performance on LaMP with user profiles located in different positions in the retrieved ranked list. Note that .1 refers to the 10%-th position. Note that the metrics for LaMP-3 are the lower, the better.

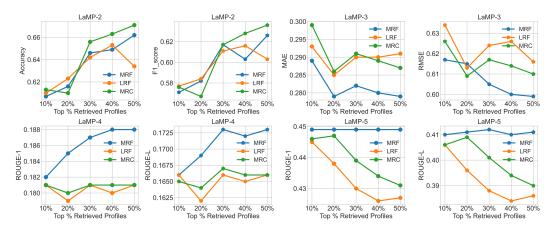


Figure 7: The performance with different proportions of user profiles on four LaMP datasets when only using the output part with three different orders. Note that the metrics for LaMP-3 are the lower, the better.

0.161. This observation emphasizes that the user profiles in different positions of the input context do not contribute equally to performance gains.

The user profile closer to the start of the input context tends to have a larger effect. Before we analyze the difference in the position of input context, the findings in Figure 6 highlight the importance of semantic relevance, showing that user profiles with higher semantic similarity have a stronger impact on personalization. Table 3 further supports that MRF achieves the best result on all tasks except for LaMP-1 and LaMP-2. MRF exhibits improvement ranging from 1% to nearly 5% across the last four tasks, with a slight decrease on LaMP-2 due to the effectiveness of most user profiles within the current user. Additionally, both MRF and MRC consistently outperform LRF on all tasks, emphasizing that user profiles closer to the beginning contribute more to personalization.

More forward more contribution when only using output. We further examine if the conclusion holds when only using the output part. We analyze performances with three different orders only using the output part of different proportions of the top relevant user profiles, ranging from 10% to 50% in Figure 7. Our results demonstrate that MRF outperforms on all tasks except LaMP-2 when only using the output part, and the performance gap widens as more user profiles are utilized. For LaMP-2, MRC performs better than MRF, suggesting that profiles placed at the start position (even if they are not the most relevant) substantially contribute to personalization. This underscores that even when only using the output part of user profiles, the user profile closer to the start of the input context contributes more to the personalization of LLMs.

6 Conclusion

In this work, we study the role of user profiles on the LLM personalization. Our findings indicate that the semantic information contained in user profiles does not significantly contribute to LLM personalization and only has an impact when built on top of personalization. We also reveal that precise input-response mapping is often unnecessary for effective personalization; instead, responses that users produce or endorse are crucial. Moreover, using only the response part of profiles not only matches but can exceed the performance of full profiles when considering input constraints. Additionally, we find that the position of user profiles within the input context largely affects LLM focus, with profiles closer to the start having a greater impact. This study reveals how the user profile affects the personalization of LLMs not only underscores the importance of personalization in LLMs but also clarifies the roles of user profiles in effective personalization, providing insights into optimal utilization strategies.

Limitations

While our study provides insights into LLM personalization, it has two key limitations. Firstly, while our research scope has explored various tasks including text classification tasks and sentencelevel text generation, we leave the exploration of broader recommendation tasks and paragraph-level text generation for future work. Secondly, due to hardware constraints, our analysis was limited to models with less than 1 billion parameters for finetuned settings and 7 billion parameters for frozen models. Future research employing larger-scale models and a wider range of tasks could refine our conclusions and broaden the applicability of our findings.

Ethics Statement

The datasets and models employed in this study are sourced from publicly available and open-source repositories. Notably, the dataset provider has already taken measures to anonymize personally identifiable information, mitigating potential ethical concerns. As a result, we do not anticipate any ethical issues arising from the utilization of these datasets. Our commitment to ethical research practices remains paramount, and we ensure compliance with relevant guidelines and regulations throughout the study.

References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *ArXiv preprint*, abs/2303.08774.
- Ekin Akyürek, Dale Schuurmans, Jacob Andreas, Tengyu Ma, and Denny Zhou. 2022. What learning algorithm is in-context learning? investigations with linear models. In *The Eleventh International Conference on Learning Representations*.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language models are few-shot learners. In Advances in Neural Information Processing Systems 33:

Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual.

- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Linyi Yang, Kaijie Zhu, Hao Chen, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, et al. 2023. A survey on evaluation of large language models. ACM Transactions on Intelligent Systems and Technology.
- Howard Chen, Ramakanth Pasunuru, Jason Weston, and Asli Celikyilmaz. 2023a. Walking down the memory maze: Beyond context limit through interactive reading. *ArXiv preprint*, abs/2310.05029.
- Jin Chen, Zheng Liu, Xu Huang, Chenwang Wu, Qi Liu, Gangwei Jiang, Yuanhao Pu, Yuxuan Lei, Xiaolong Chen, Xingmei Wang, et al. 2023b. When large language models meet personalization: Perspectives of challenges and opportunities. *ArXiv preprint*, abs/2307.16376.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. 2022. Scaling instruction-finetuned language models. *ArXiv preprint*, abs/2210.11416.
- Sumanth Doddapaneni, Krishna Sayana, Ambarish Jash, Sukhdeep Sodhi, and Dima Kuzmin. 2024. User embedding model for personalized language prompting. *ArXiv preprint*, abs/2401.04858.
- Lingyu Gao, Aditi Chaudhary, Krishna Srinivasan, Kazuma Hashimoto, Karthik Raman, and Michael Bendersky. 2023a. Ambiguity-aware in-context learning with large language models. *ArXiv preprint*, abs/2309.07900.
- Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, and Haofen Wang. 2023b. Retrieval-augmented generation for large language models: A survey. *ArXiv preprint*, abs/2312.10997.
- Shivam Garg, Dimitris Tsipras, Percy S Liang, and Gregory Valiant. 2022. What can transformers learn in-context? a case study of simple function classes. *Advances in Neural Information Processing Systems*, 35:30583–30598.
- Joel Jang, Seungone Kim, Bill Yuchen Lin, Yizhong Wang, Jack Hessel, Luke Zettlemoyer, Hannaneh Hajishirzi, Yejin Choi, and Prithviraj Ammanabrolu. 2023. Personalized soups: Personalized large language model alignment via post-hoc parameter merging. ArXiv preprint, abs/2310.11564.
- Wang-Cheng Kang, Jianmo Ni, Nikhil Mehta, Maheswaran Sathiamoorthy, Lichan Hong, Ed Chi, and Derek Zhiyuan Cheng. 2023. Do llms understand user preferences? evaluating llms on user rating prediction. *ArXiv preprint*, abs/2305.06474.

- Hannah Rose Kirk, Bertie Vidgen, Paul Röttger, and Scott A Hale. 2023. Personalisation within bounds: A risk taxonomy and policy framework for the alignment of large language models with personalised feedback. *ArXiv preprint*, abs/2303.05453.
- Patrick S. H. Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. Retrieval-augmented generation for knowledge-intensive NLP tasks. In Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual.
- Cheng Li, Mingyang Zhang, Qiaozhu Mei, Weize Kong, and Michael Bendersky. 2023a. Automatic prompt rewriting for personalized text generation. *ArXiv preprint*, abs/2310.00152.
- Cheng Li, Mingyang Zhang, Qiaozhu Mei, Yaqing Wang, Spurthi Amba Hombaiah, Yi Liang, and Michael Bendersky. 2023b. Teach llms to personalize–an approach inspired by writing education. *ArXiv preprint*, abs/2308.07968.
- Chin-Yew Lin. 2004. ROUGE: A package for automatic evaluation of summaries. In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Jiachang Liu, Dinghan Shen, Yizhe Zhang, Bill Dolan, Lawrence Carin, and Weizhu Chen. 2022. What makes good in-context examples for GPT-3? In Proceedings of Deep Learning Inside Out (DeeLIO 2022): The 3rd Workshop on Knowledge Extraction and Integration for Deep Learning Architectures, pages 100–114, Dublin, Ireland and Online. Association for Computational Linguistics.
- Junling Liu, Chao Liu, Renjie Lv, Kang Zhou, and Yan Zhang. 2023a. Is chatgpt a good recommender? a preliminary study. *ArXiv preprint*, abs/2304.10149.
- Nelson F Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. 2023b. Lost in the middle: How language models use long contexts. *ArXiv preprint*, abs/2307.03172.
- Alex Mallen, Akari Asai, Victor Zhong, Rajarshi Das, Daniel Khashabi, and Hannaneh Hajishirzi. 2023. When not to trust language models: Investigating effectiveness of parametric and non-parametric memories. In Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 9802–9822.
- Sewon Min, Xinxi Lyu, Ari Holtzman, Mikel Artetxe, Mike Lewis, Hannaneh Hajishirzi, and Luke Zettlemoyer. 2022. Rethinking the role of demonstrations: What makes in-context learning work? In Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing, pages 11048–11064, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.

- Lin Ning, Luyang Liu, Jiaxing Wu, Neo Wu, Devora Berlowitz, Sushant Prakash, Bradley Green, Shawn O'Banion, and Jun Xie. 2024. User-Ilm: Efficient Ilm contextualization with user embeddings. *ArXiv* preprint, abs/2402.13598.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. 2022. Training language models to follow instructions with human feedback. Advances in Neural Information Processing Systems, 35:27730–27744.
- Chris Richardson, Yao Zhang, Kellen Gillespie, Sudipta Kar, Arshdeep Singh, Zeynab Raeesy, Omar Zia Khan, and Abhinav Sethy. 2023. Integrating summarization and retrieval for enhanced personalization via large language models. *ArXiv preprint*, abs/2310.20081.
- Alireza Salemi, Surya Kallumadi, and Hamed Zamani. 2024. Optimization methods for personalizing large language models through retrieval augmentation. *arXiv preprint arXiv:2404.05970*.
- Alireza Salemi, Sheshera Mysore, Michael Bendersky, and Hamed Zamani. 2023. Lamp: When large language models meet personalization. *ArXiv preprint*, abs/2304.11406.
- Zhengxiang Shi and Aldo Lipani. 2023a. Dept: Decomposed prompt tuning for parameter-efficient finetuning. arXiv preprint arXiv:2309.05173.
- Zhengxiang Shi and Aldo Lipani. 2023b. Don't stop pretraining? make prompt-based fine-tuning powerful learner. *Advances in Neural Information Processing Systems*, 36:5827–5849.
- Zhengyan Shi, Adam X Yang, Bin Wu, Laurence Aitchison, Emine Yilmaz, and Aldo Lipani. 2024. Instruction tuning with loss over instructions. *arXiv preprint arXiv:2405.14394*.
- Zhaoxuan Tan, Qingkai Zeng, Yijun Tian, Zheyuan Liu, Bing Yin, and Meng Jiang. 2024. Democratizing large language models via personalized parameter-efficient fine-tuning. *ArXiv preprint*, abs/2402.04401.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023. Llama 2: Open foundation and fine-tuned chat models. *ArXiv preprint*, abs/2307.09288.
- Lean Wang, Lei Li, Damai Dai, Deli Chen, Hao Zhou, Fandong Meng, Jie Zhou, and Xu Sun. 2023. Label words are anchors: An information flow perspective for understanding in-context learning. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 9840–9855.

- Jerry Wei, Jason Wei, Yi Tay, Dustin Tran, Albert Webson, Yifeng Lu, Xinyun Chen, Hanxiao Liu, Da Huang, Denny Zhou, et al. 2023. Larger language models do in-context learning differently. *ArXiv preprint*, abs/2303.03846.
- Bin Wu, Jinyuan Fang, Xiangxiang Zeng, Shangsong Liang, and Qiang Zhang. 2023. Adaptive compositional continual meta-learning. In *International Conference on Machine Learning*, pages 37358–37378. PMLR.
- Bin Wu, Zaiqiao Meng, Qiang Zhang, and Shangsong Liang. 2022. Meta-learning helps personalized product search. In *Proceedings of the ACM Web Conference 2022*, pages 2277–2287.
- Sang Michael Xie, Aditi Raghunathan, Percy Liang, and Tengyu Ma. 2022. An explanation of in-context learning as implicit bayesian inference. In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022.* OpenReview.net.
- Adam X Yang, Maxime Robeyns, Thomas Coste, Jun Wang, Haitham Bou-Ammar, and Laurence Aitchison. 2024. Bayesian reward models for llm alignment. ArXiv preprint, abs/2402.13210.

Appendix Overview

The appendix is structured as follows:

Appendix §A provides a brief description for each dataset.

Appendix §B provides implementation details and hyperparameters used in our experiments.

Appendix §C describes the prompts used in our experiments.

Appendix §D provides additional experiments regarding different augmentations.

A The Details of Dataset

We give a detailed introduction to the dataset we used in the following. LaMP (Salemi et al., 2023) consists of six tasks, from the text classification to the text generation tasks. In our work, we use the user-based dataset and choose six LaMP tasks except LaMP-6 considering the public availability. The details of the selected tasks are:

- LaMP-1: Personalized Citation Identification Given a paper from a user, an LLM needs to predict which one of the two candidates will cite in this paper based on the user profile. User profiles refer to the paper that the user has authorized before.
- LaMP-2: Personalized Movie Tagging Given a movie description, an LLM needs to predict which one of the 15 candidate tags the user will give to the movie based on the user profile. User Profiles refer to the user's historical tagging behavior, consisting of the movie description and the given tag.
- LaMP-3: Personalized Product Rating Given a review from a user, an LLM needs to predict the score with an integer with the range from 1 to 5 that the user will give based on the user profile. User profiles refer to the user's historical rating behavior, consisting of the reviews and the associated rating score.
- LaMP-4: Personalized News Headline Generation Given an article from a user, an LLM needs to generate the headline for this article based on the user profile. User profiles refer to the authors' historical article-title pairs.
- LaMP-5: Personalized Scholarly Title Generation Given an article's abstract, an LLms

needs to generate the scholar title for this article based on the user profile. User profiles refer to the user's historical article-title pairs.

• LaMP-7: Personalized Tweet Paraphrasing Given a tweet, an LLM needs to generate a tweet in the style of the user. User profiles refer to the user's historical tweets.

Evaluation Following the previous work (Salemi et al., 2023), we employ Accuracy for LaMP-1, Accuracy and F1 score for LaMP-2, MAE and RMSE for LaMP-3 and Rough-1 and Rough-L (Lin, 2004) for the left three tasks (*i.e.*, LaMP-4, LaMP-5 and LaMP-7).

Statistic Information We use the average number of user profiles per user in our analysis, which is different across different tasks. The average number of user profiles per user is 90.61, 159.29, 188.10, 287.16, 89.61 and 17.74 for the used six tasks, respectively.

B The Details of Experiments

We analyze the personalization of LLMs using the LaMP benchmark (Salemi et al., 2023), except LaMP-6 due to unavailability. Performance is reported on the validation dataset as the test dataset is not available. The task description and metrics are shown in Table 1 and more details are in Appendix §A. Following the existing work (Salemi et al., 2023), the fine-tuning setting employs Flan-T5-base (Chung et al., 2022) with 250M parameters, while the non-fine-tuning setting uses the chat version of the Llama 2-7B model (Touvron et al., 2023) for reproducibility. The fine-tuning setting, following the same optimization from Salemi et al. (2023), employs the AdamW optimizer, learning rate of 5×10^{-5} , 5% warmup steps with a linear scheduler, and decay of 10^{-4} . For text classification tasks (LaMP-1, LaMP-2, LaMP-3), the model is trained for 10 epochs; for text-generation tasks (LaMP-4, LaMP-5, LaMP-7), it's trained for 20 epochs. The maximum length for input is set as 512 and for output is set as 128. For the frozen largescale model, we set the maximum input length as 1500 and the output length as 128. Maximum input/output lengths are set at 512/128 for the finetuned Flan-T5-base model and 1500/128 for the frozen Llama 2-7B-chat model. Both settings use a beam search of size 4. All experiments run on a Titan GPU with 24GB memory.

Tasks	Strategy	Template Part of Prompt	Original Template Part of Prompt
LaMP-2	Only Input Only Output	"The previous movies are [Input]" "The tag for the previous movies are [Output]"	"The tag for the movie: [Input] is [Output]"
LaMP-3	Only Input Only Output	"The previous reviews are [Input]" "[Output] are the score for the previous review"	"[Output] is the score for [Input]"
LaMP-4	Only Input Only Output	"The previous articles are [Input]" "[Output] are the title for previous articles"	"[Output] is the title for [Input]"
LaMP-5	Only Input Only Output	"The previous papers are [Input]" "[Output] are the title for the previous papers"	"[Output] is the title for [Input]"

Table 4: The template part of the used prompt for only using the input or output part of the user profiles. [Input] and [Output] refer to the input part and output part of the used user profiles, respectively.

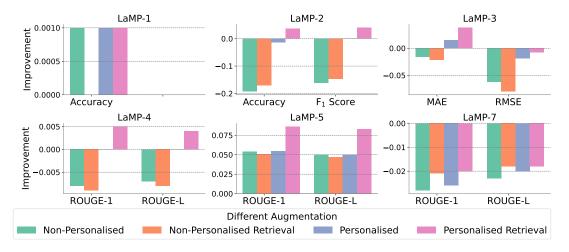


Figure 8: The improvement of performance (Llama 2) on LaMP dataset with different Augmentation based on the user profiles (k = 1) compared to without augmentations. Note that LaMP-3 shows the **decreases** when compared to without augmentations since both MAE and RMSE are the lower, the better.

C The Details of Used Prompts

There are two types of prompts that we used in our work. The first one following the previous work (Salemi et al., 2023) is to utilize the complete user profile. When only input or outpart of the user profile in LaMP-2, LaMP-3, LaMP-4 and LaMP-5, we instead use other prompts with the minimum change compared to the original one. The details can be seen in Table 4.

D More results about Different Augmentations

D.1 Results: More User Profile.

We also show the performance of the augmentation methods with different numbers k of the used user profiles in Figure 9.

The conclusion that user profiles actually enhance personalization remains when with different numbers of user profiles. The reported results show that compared to non-personalization augmentation methods, the personalization augmentation methods achieve a constant improvement on most tasks, even with the different number of used user profiles. On the other hand, the nonpersonalization augmentation cannot introduce a constant benefit for the performance. It further confirms the conclusion we get in the main paper.

The enhancement of personalization augmentation increases with more user profiles. The extent of the enhancement on personalization by personalization augmentation increases from k = 1to k = 4. Especially for the personalization with retrieval sees the improvement on all tasks. However, when more user profiles are utilized, it easily introduces some noise and suffers from degradation. This observation further confirms that within the reasonable range, the enhancement extent by user profile increases with the increased number of used user profiles.

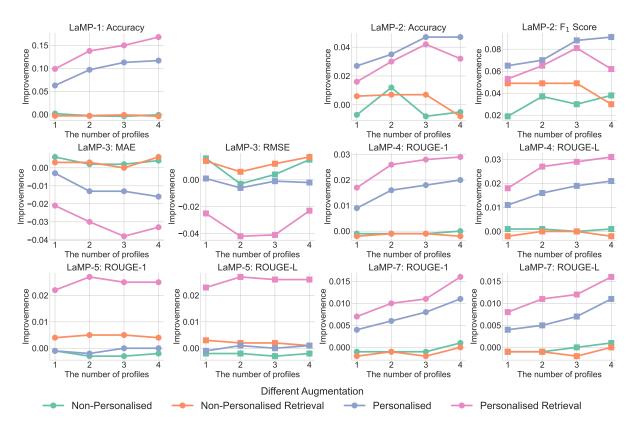


Figure 9: The improvement of performance (Flan-T5-base) on LaMP dataset with Augmentation based on the different number of user profiles compared to without augmentations. Note that LaMP-3 shows the **decreases** when compared to without augmentations since both MAE and RMSE are the lower, the better.

D.2 Results: Frozen Models

We also report the results with a frozen Llama 2 with the chat version in Figure 8, to examine the conclusion from Section 4.1.

Even for frozen LLMs, user profiles actually enhance personalization, but the performance improvement decreases due to no fine-tuning. Results on frozen LLMs exhibit similar patterns, where both two personalized augmentation methods can achieve an improvement on most tasks (except LaMP-7). Conversely, the augmentations without considering the personalization decreases the performance on most tasks, although they positively impact only on LaMP-1 and LaMP-5. These observations underscore the pivotal role of user profiles containing user preferences, supporting the assumption that introduced user profiles enhance LLM personalization for performance improvement. However, it's noteworthy that personalization augmentation with non-fine-tuning improves performance less than the ones with fine-tuning and even introduces some noises on LaMP-7. This suggests that although user profiles can enhance personalization, LLMs without fine-tuning struggle to capture user preferences from the introduced user profile in the input context to obtain performance improvements.