

DEEP MAMBA MULTI-MODAL LEARNING

Jian Zhu¹, Xin Zou², Yu Cui¹, Zhangmin Huang¹, Chenshu Hu¹, Bo Lyu¹

¹ Zhejiang Lab, China {qijian.zhu, yu.cui, zmhuang, hucs_frog, bo.lyu}@zhejianglab.edu.cn

² China University of Geosciences, China {zouxin}@cug.edu.cn

ABSTRACT

Inspired by the excellent performance of Mamba networks, we propose a novel Deep Mamba Multi-modal Learning (DMML). It can be used to achieve the fusion of multi-modal features. We apply DMML to the field of multimedia retrieval and propose an innovative Deep Mamba Multi-modal Hashing (DMMH) method. It combines the advantages of algorithm accuracy and inference speed. We validated the effectiveness of DMMH on three public datasets and achieved state-of-the-art results.

Index Terms— Multi-view Hash, Mamba Network, Multi-modal Hash, Multi-view Fusion

1. INTRODUCTION

We propose a new Deep Mamba Multi-modal Learning (DMML) method. As shown in Fig. 1, it is made up of Mamba networks and CNNs. Firstly, it uses a Mamba network to enhance the semantic features of a single modality. Secondly, we adopt an additive method to achieve a simple fusion of multi-modal features. Finally, it uses CNNs for the deep fusion of multi-modal features to enhance semantic expression ability.

Based on DMML, we propose a novel Deep Mamba Multi-modal Hashing (DMMH) method. Our DMMH method is validated for effectiveness on three datasets and achieves state-of-the-art results in multimedia retrieval.

Our contributions are as follows:

- We are using the Mamba network for the first time in multimedia retrieval.
- We present a novel Deep Mamba Multi-modal Learning (DMML) method to fuse heterogeneous data.
- We propose a new Deep Mamba Multi-modal Hashing (DMMH), which achieves the state-of-the-art result in multimedia retrieval.

2. METHODOLOGY

Deep multi-modal hashing network aims to convert multi-modal data into hash code. As shown in Fig. 2, DMMH consists of backbones, MLPs, dilation networks, Mamba networks, CNNs, and a hash layer. These modules are described in detail below.

1. **Vision Backbone:** VGGNet is used to generate visual features.
2. **Text Backbone:** BoW model is utilized to produce text features.
3. **MLPs:** We use MLPs networks for feature normalization. It achieves alignment of multi-modal feature dimensions.

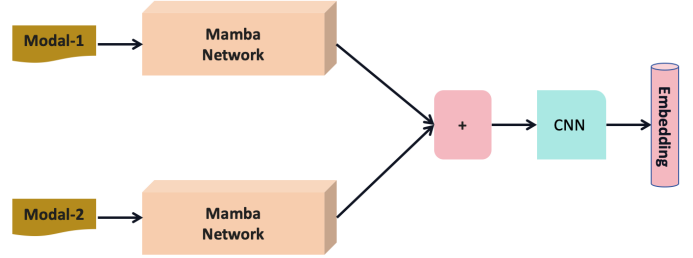


Fig. 1: Deep Mamba Multi-modal Learning

4. **Dilation:** Dilation networks mainly inflate single modal features and convert them into sequence embeddings.
5. **Mamba Network:** We use Mamba networks for fine-grained semantic mining.
6. **CNNs:** We use CNNs for deep fusion of multi-modal features.
7. **Hash Layer:** The hash layer converts the learned embeddings into binary hash codes.

3. EXPERIMENTS

3.1. Evaluation Datasets and Metrics

We assess the effectiveness of the proposed DMMH method in multimedia retrieval tasks. We use three public datasets: MIR-Flickr25K [1], NUS-WIDE [2], and MS COCO [3]. We use mean Average Precision (mAP) as the analysis metric. An overview of the dataset statistics utilized in the studies is given in Table 1.

3.2. Baseline Methods

To determine the retrieval metric, we compare the proposed DMMH method with thirteen multi-view hashing methods, including four unsupervised methods (e.g., Multiple Feature Hashing (MFH) [4], Multi-view Alignment Hashing (MAH) [5], Multi-view Latent Hashing (MVLH) [6], and Multi-view Discrete Hashing (MvDH) [7]) and nine supervised methods (e.g., Multiple Feature Kernel Hashing (MFKH) [8], Discrete Multi-view Hashing (DMVH) [9], Flexible Discrete Multi-view Hashing (FDMH) [10], Flexible Online Multi-modal Hashing (FOMH) [11], Deep Collaborative Multi-view Hashing (DCMVH) [12], Supervised Adaptive Partial Multi-view Hashing (SAPMH) [13], Flexible Graph Convolutional Multi-modal Hashing (FGCMH) [14], Bit-aware Semantic Transformer Hashing (BSTH) [15], ACMVH [16], FMMVH [17] and Deep Metric Multi-View Hashing (DMMVH) [18]).

Deep Mamba Multi-modal Hashing

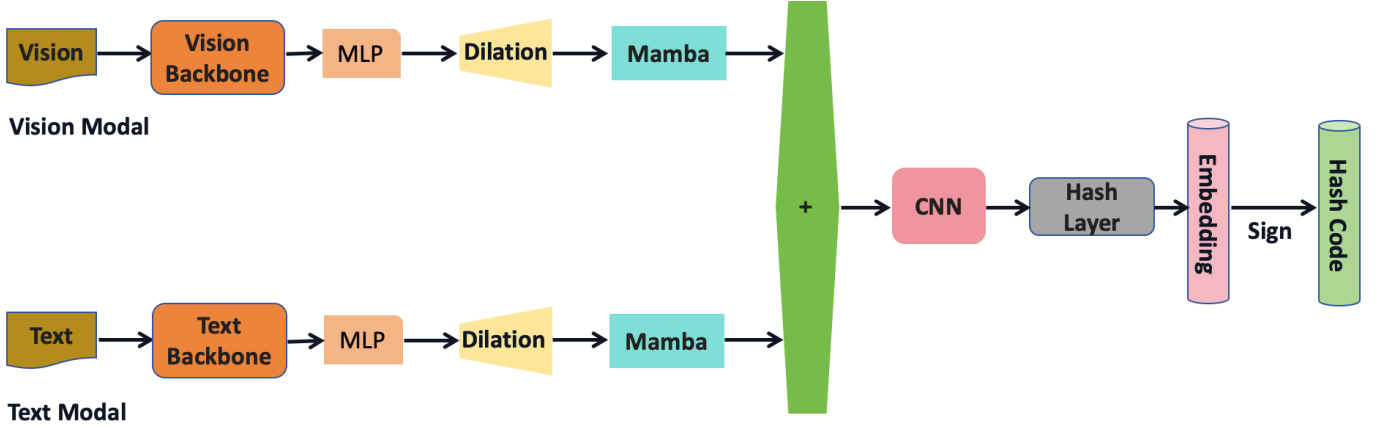


Fig. 2: Deep Mamba Multi-modal Hashing

Table 1: An statistical overview of three public datasets.

| Dataset | Training Size | Retrieval Size | Query Size | Categories | Vision Embedding | Text Embedding |
|---------------|---------------|----------------|------------|------------|------------------|----------------|
| MIR-Flickr25K | 5000 | 17772 | 2243 | 24 | 4096-D | 1386-D |
| NUS-WIDE | 21000 | 193749 | 2085 | 21 | 4096-D | 1000-D |
| MS COCO | 18000 | 82783 | 5981 | 80 | 4096-D | 2000-D |

Table 2: The comparable mAP results on MIR-Flickr25K, NUS-WIDE, and MS COCO. The best results are bolded, and the second-best results are underlined. The * indicates that the results of our method on this dataset are statistical significance.

| Method | Ref. | MIR-Flickr25K* | | | | NUS-WIDE* | | | | MS COCO* | | | |
|--------|---------|----------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | | 16 bits | 32 bits | 64 bits | 128 bits | 16 bits | 32 bits | 64 bits | 128 bits | 16 bits | 32 bits | 64 bits | 128 bits |
| MFH | TMM13 | 0.5795 | 0.5824 | 0.5831 | 0.5836 | 0.3603 | 0.3611 | 0.3625 | 0.3629 | 0.3948 | 0.3699 | 0.3960 | 0.3980 |
| MAH | TIP15 | 0.6488 | 0.6649 | 0.6990 | 0.7114 | 0.4633 | 0.4945 | 0.5381 | 0.5476 | 0.3967 | 0.3943 | 0.3966 | 0.3988 |
| MVLH | MM15 | 0.6541 | 0.6421 | 0.6044 | 0.5982 | 0.4182 | 0.4092 | 0.3789 | 0.3897 | 0.3993 | 0.4012 | 0.4065 | 0.4099 |
| MvDH | TIST18 | 0.6828 | 0.7210 | 0.7344 | 0.7527 | 0.4947 | 0.5661 | 0.5789 | 0.6122 | 0.3978 | 0.3966 | 0.3977 | 0.3998 |
| MFKH | MM12 | 0.6369 | 0.6128 | 0.5985 | 0.5807 | 0.4768 | 0.4359 | 0.4342 | 0.3956 | 0.4216 | 0.4211 | 0.4230 | 0.4229 |
| DMVH | ICMR17 | 0.7231 | 0.7326 | 0.7495 | 0.7641 | 0.5676 | 0.5883 | 0.6902 | 0.6279 | 0.4123 | 0.4288 | 0.4355 | 0.4563 |
| FOMH | MM19 | 0.7557 | 0.7632 | 0.7564 | 0.7705 | 0.6329 | 0.6456 | 0.6678 | 0.6791 | 0.5008 | 0.5148 | 0.5172 | 0.5294 |
| FDMH | NPL20 | 0.7802 | 0.7963 | 0.8094 | 0.8181 | 0.6575 | 0.6665 | 0.6712 | 0.6823 | 0.5404 | 0.5485 | 0.5600 | 0.5674 |
| DCMVH | TIP20 | 0.8097 | 0.8279 | 0.8354 | 0.8467 | 0.6509 | 0.6625 | 0.6905 | 0.7023 | 0.5387 | 0.5427 | 0.5490 | 0.5576 |
| SAPMH | TMM21 | 0.7657 | 0.8098 | 0.8188 | 0.8191 | 0.6503 | 0.6703 | 0.6898 | 0.6901 | 0.5467 | 0.5502 | 0.5563 | 0.5672 |
| FGCMH | MM21 | <u>0.8173</u> | <u>0.8358</u> | 0.8377 | <u>0.8606</u> | 0.6677 | 0.6874 | 0.6936 | 0.7011 | 0.5641 | 0.5273 | 0.5797 | 0.5862 |
| BSTH | SIGIR22 | 0.8145 | 0.8340 | <u>0.8482</u> | 0.8571 | <u>0.6990</u> | <u>0.7340</u> | <u>0.7505</u> | <u>0.7704</u> | <u>0.5831</u> | <u>0.6245</u> | <u>0.6459</u> | <u>0.6654</u> |
| DMMH | ours | 0.8319 | 0.8523 | 0.8694 | 0.8788 | 0.7229 | 0.7424 | 0.7661 | 0.7806 | 0.5869 | 0.6299 | 0.6477 | 0.6715 |

3.3. Analysis of Experimental Results

Table 2 illustrates the results of the mAP. The results show that the DMMH performs significantly better than any of the examined multi-view hashing methods. In particular, our technique delivers an average mAP improvement of 2.00%, 1.43%, and 4.80% on the MIR-Flickr25K, NUS-WIDE, and MS COCO datasets, respectively, when compared to the state-of-the-art multi-modal hashing method DMMVH [18]. There are two primary reasons for these better results:

- The Mamba network has excellent representation ability.
- Deep Mamba Multi-modal Learning (DMML) has excellent fusion ability of heterogeneous data.

4. CONCLUSION AND FUTURE WORK

To fuse multiple source data, we present a new multi-modal learning method termed DMML. On the basis of DMML, we propose an innovative Deep Mamba Multi-modal Hashing (DMMH) method. Experiments demonstrate that the proposed DMMH achieves state-of-the-art results in multimedia retrieval tasks. In the future, we will work out more application problems of the Mamba network in multimedia retrieval.

5. REFERENCES

- [1] M. J. Huiskes and M. S. Lew, "The mir flickr retrieval evaluation," in *Proceedings of the 1st ACM international conference on Multimedia information retrieval*, 2008, pp. 39–43.
- [2] T.-S. Chua, J. Tang, R. Hong, H. Li, Z. Luo, and Y. Zheng, "Nus-wide: a real-world web image database from national university of singapore," in *Proceedings of the ACM international conference on image and video retrieval*, 2009, pp. 1–9.
- [3] T.-Y. Lin, M. Maire, S. Belongie, J. Hays, P. Perona, D. Ramanan, P. Dollár, and C. L. Zitnick, "Microsoft coco: Common objects in context," in *European conference on computer vision*. Springer, 2014, pp. 740–755.
- [4] J. Song, Y. Yang, Z. Huang, H. T. Shen, and J. Luo, "Effective multiple feature hashing for large-scale near-duplicate video retrieval," *IEEE Transactions on Multimedia*, vol. 15, no. 8, pp. 1997–2008, 2013.
- [5] L. Liu, M. Yu, and L. Shao, "Multiview alignment hashing for efficient image search," *IEEE Transactions on image processing*, vol. 24, no. 3, pp. 956–966, 2015.
- [6] X. Shen, F. Shen, Q.-S. Sun, and Y.-H. Yuan, "Multi-view latent hashing for efficient multimedia search," in *Proceedings of the 23rd ACM international conference on Multimedia*, 2015, pp. 831–834.
- [7] X. Shen, F. Shen, L. Liu, Y.-H. Yuan, W. Liu, and Q.-S. Sun, "Multiview discrete hashing for scalable multimedia search," *ACM Transactions on Intelligent Systems and Technology (TIST)*, vol. 9, no. 5, pp. 1–21, 2018.
- [8] X. Liu, J. He, D. Liu, and B. Lang, "Compact kernel hashing with multiple features," in *Proceedings of the 20th ACM international conference on multimedia*, 2012, pp. 881–884.
- [9] R. Yang, Y. Shi, and X.-S. Xu, "Discrete multi-view hashing for effective image retrieval," in *Proceedings of the 2017 ACM on international conference on multimedia retrieval*, 2017, pp. 175–183.
- [10] L. Liu, Z. Zhang, and Z. Huang, "Flexible discrete multi-view hashing with collective latent feature learning," *Neural Processing Letters*, vol. 52, no. 3, pp. 1765–1791, 2020.
- [11] X. Lu, L. Zhu, Z. Cheng, J. Li, X. Nie, and H. Zhang, "Flexible online multi-modal hashing for large-scale multimedia retrieval," in *Proceedings of the 27th ACM international conference on multimedia*, 2019, pp. 1129–1137.
- [12] L. Zhu, X. Lu, Z. Cheng, J. Li, and H. Zhang, "Deep collaborative multi-view hashing for large-scale image search," *IEEE Transactions on Image Processing*, vol. 29, pp. 4643–4655, 2020.
- [13] C. Zheng, L. Zhu, Z. Cheng, J. Li, and A.-A. Liu, "Adaptive partial multi-view hashing for efficient social image retrieval," *IEEE Transactions on Multimedia*, vol. 23, pp. 4079–4092, 2020.
- [14] X. Lu, L. Zhu, L. Liu, L. Nie, and H. Zhang, "Graph convolutional multi-modal hashing for flexible multimedia retrieval," in *Proceedings of the 29th ACM International Conference on Multimedia*, 2021, pp. 1414–1422.
- [15] W. Tan, L. Zhu, W. Guan, J. Li, and Z. Cheng, "Bit-aware semantic transformer hashing for multi-modal retrieval," in *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 2022, pp. 982–991.
- [16] J. Zhu, Y. Cui, Z. Huang, X. Li, L. Liu, L. Zeng, and L.-R. Dai, "Adaptive confidence multi-view hashing for multimedia retrieval," in *ICASSP 2024 - 2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2024, pp. 7900–7904.
- [17] J. Zhu, P. Hu, B. Li, and Y. Zhou, "Fast metric multi-view hashing for multimedia retrieval," *Information Fusion*, vol. 103, p. 102130, 2024.
- [18] J. Zhu, Z. Huang, X. Ruan, Y. Cui, Y. Cheng, and L. Zeng, "Deep metric multi-view hashing for multimedia retrieval," *arXiv preprint arXiv:2304.06358*, 2023.