

Korean Aspect-Based Sentiment Analysis via Implicit-Feature Alignment with Corpus Filtering

Kibeom Nam

Department of Data Science, Hongik University
KorABSA Laboratory, MODULABS
skar1qja68@gmail.com

Abstract

Investigations into Aspect-Based Sentiment Analysis (ABSA) for Korean industrial reviews are notably lacking in the existing literature. Our research proposes an intuitive and effective framework for ABSA in low-resource languages such as Korean. It optimizes prediction labels by integrating translated benchmark and unlabeled Korean data. Using a model fine-tuned on translated data, we pseudo-labeled the actual Korean NLI set. Subsequently, we applied LaBSE and MSP-based filtering to this pseudo-NLI set as implicit feature, enhancing Aspect Category Detection and Polarity determination through additional training. Incorporating dual filtering, this model bridged dataset gaps, achieving positive results in Korean ABSA with minimal resources. Through additional data injection pipelines, our approach aims to utilize high-resource data and construct effective models within communities, whether corporate or individual, in low-resource language countries. Compared to English ABSA, our framework showed an approximately 3% difference in F1 scores and accuracy. We release the dataset and our code for Korean ABSA, at this link¹.

1 Introduction

In low-resource downstream tasks such as Korean ABSA, constraints exist in constructing ABSA systems that are socially and industrially beneficial (*e.g.*, obtaining accurate labels and high-quality training data, building a efficient serving model). Addressing this challenge is fundamentally crucial for the practical implementation of multilingual ABSA leveraging the advantages of language models (Zhang et al., 2021; Lin et al., 2023). On the other hand, ABSA utilizing Large Language Models like ChatGPT can perform labeling through prompt tuning. However, it still has limitations

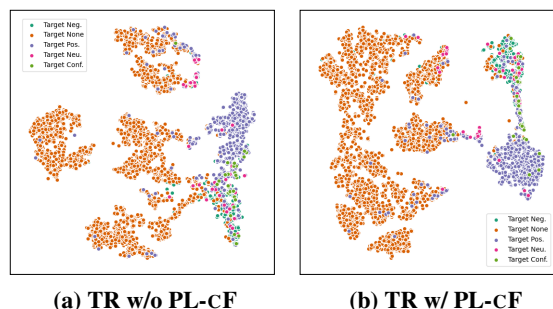


Figure 1: t-SNE visualization of last [CLS] embeddings extracted from KR3 test set by two different experimental Baseline_{XLM-R} encoders. Our PL-CF encourages the encoder to produce discriminable representations of different sentiment polarities.

compared to small-scale models in terms of classifier metrics and resource for training and inference (Wang et al., 2023; Wu et al., 2023).

In this study, we derive pseudo-labels for real Korean reviews using machine-translated English ABSA data, inspired by the past research (Balahur and Turchi, 2012; Hoshino et al., 2024). Moreover, we employ Dual filtering on the actual Korean corpus converted to implicit NLI task (Hendrycks and Gimpel, 2017; Sun et al., 2019; Feng et al., 2022), thereby constructing an effective framework coined as Korean ABSA using Pseudo-Classifier with Corpus Filtering (KPC-cF) for implicit-feature alignment. Through this process, we assess the impact of our constructed classifier on the practical alignment of actual reviews. We validate that the pseudo-classifier, generated through the sentence-pair approach, outperforms the single approach in translation task. Furthermore, using the model that predicts the translated dataset most effectively as a baseline, we generate pseudo-labels for actual data and conduct real-world testing of Korean ABSA. This involves subsequent fine-tuning the filtered corpus based on language-agnostic embedding similarity for review and aspect sentence pairs, along

¹<https://github.com/namkibeom/KPC-cF>

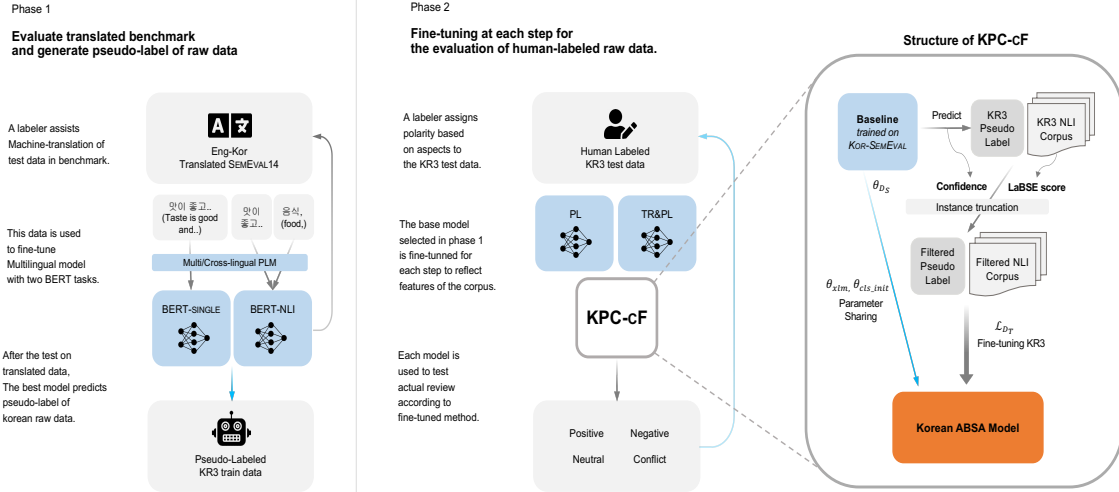


Figure 2: A diagram illustrating the two phase of our method: (1) Fine-tuning Kor-SemEval and generate pseudo-labeled KR3, (2) Fine-tuning KR3 using baseline model selected phase 1. We illustrated the filtering process (right) for fine-tuning KR3 data. Blue arrows (left & middle) indicate that this model is used to predict best label of review.

with setting a threshold for Maximum Softmax Probability (MSP) in pseudo-labels.

The main contributions of our work are:

- This is, to our knowledge, the first approach to generating a pseudo-classifier for automatic classification of aspect-based sentiment in the actual Korean domain.
- For actual review-based ABSA, we propose a filtered NLI corpus as implicit feature and fine-tuning framework that enables important data selection in low-resource languages on models trained with high-resource dataset.
- A new challenging dataset of Korean ABSA, along with a KR3 and translated benchmark correlated with cross-lingual understanding.

2 Two phase of Pseudo-Classifier

2.1 Motivation and Contribution

The goal of this research is to propose a framework for achieving the best ABSA on actual data with Korean nuances through high-resource languages. Past research by Balahur and Turchi (2012) has shown that Machine Translation (MT) systems can obtain training data for languages other than English in general sentiment classification. However, existing research using translation data for alignment and alignment-free methods (Li et al., 2020; Zhang et al., 2021) inadequately address the challenge of universal knowledge transfer for linguistic

subgroups like Korean. Also, although it was a different domain at Zhou et al. (2021), we found it necessary to investigate whether the concept of pseudo-labels could help **bridge the gap of feature Φ between translated source data D_S and actual target language data D_T** . Therefore, we attempted the following two phases to assess the impact of the generated pseudo-classifier, fine-tuned using translated datasets from the ABSA benchmark and pseudo-labeled actual review data, on Korean ABSA. Fig. 2 shows the two-phase pseudo-classifiers we will employ. In the first phase, similar to the findings of Hoshino et al. (2024), the optimal baseline model for Korean reasoning is identified from the pool of models trained and assessed utilizing the translation dataset. In Phase 2, we fine-tune the baseline model $\Psi_{pre}(\Phi(D_S); \theta_{D_S})$, which was effective in training on D_S , by additionally incorporating pseudo-labeled actual D_T . Employing the tuned model $\Psi_{post}(\Phi(D_T); \theta_{D_S \rightarrow D_T})$, we conduct predictions and evaluations on manually labeled actual Korean reviews. Throughout this process, LaBSE and confidence score filtering are performed to enhance implicit features $\Phi(D_T)$. Detailed description of our Language Adaptation for aligned ABSA task is provided in Appendix B.

2.2 LaBSE based Filtering

In this approach, we aim to extract good-quality sentences-pair from the pseudo-NLI corpus. Language Agnostic BERT Sentence Embedding model (Feng et al., 2022) is a multilingual embedding

Algorithm 1 Dual Filtering

```
1: function SAMPLING( $Target, \Psi_{pre}$ )
2:   for  $i = 1$  to  $Target$  do
3:      $x_s, x_a \leftarrow Target$  sample  $i$   $\triangleright attach\ aspect$ 
4:      $score_L \leftarrow LaBSE(x_s, x_a)$ 
5:     Add  $score_L$  to  $temp$ 
6:      $\hat{y} \leftarrow \Psi_{pre}(x_s, x_a)$   $\triangleright model\ from\ phase\ 1$ 
7:      $score_{MSP} \leftarrow MSP_{\Psi_{pre}}(\hat{y} | x_s, x_a)$ 
8:     if  $score_{MSP} > threshold_{MSP}$  then
9:       Add  $(x_s, x_a, \hat{y}, score_L)$  to  $batch$ 
10:    end if
11:  end for
12:   $avg_L \leftarrow \frac{1}{N} \sum_{i=1}^N score_L[i]$  in  $temp$ 
13:   $batch \leftarrow batch [batch.score_L > avg_L]$ 
14:  return  $\Phi(batch)$  for  $\Psi_{post, joint}$  Tuning
15: end function
```

model that supports 109 languages, including some Korean languages. Feng et al. (2022) suggested that the dual-encoder architecture of the LaBSE model, originally designed for machine translation in source-target language data (Batheja and Bhat-tacharyya, 2022, 2023), can be applied not only to other monolingual tasks like Semantic Textual Similarity (STS) but also to data (*i.e.*, sentence pair-set) filtering for creating high-quality training corpora in terms of meaning equivalence. Therefore, to mitigate performance degradation caused by the linguistic gap between translated D_S and actual Korean D_T during fine-tuning, we introduce the following filtering method that enables the identification of meaning equivalence or connotation (Ghadery et al., 2019) in actual Korean sentence-pairs, even when viewed from the perspective of model trained on bilingual translation pairs. We generate the sentence embeddings for the review text and aspect of the pseudo-NLI corpora using the LaBSE model. Then, we compute the cosine similarity between the review text and aspect sentence embeddings. After that, we extract good quality NLI sentences based on a threshold value of the similarity scores.

LaBSE scoring Let $D_T = \{(x_s^i, x_a^i)\}_{i=1}^N$ be a pseudo-NLI corpus with N examples, where x_s^i and x_a^i represents i^{th} review and aspect sentence respectively. We first feed all the review sentences present in the pseudo-parallel corpus as input to the LaBSE model², which is a Dual encoder model

²<https://huggingface.co/sentence-transformers/LaBSE>

Dataset	Count	LaBSE. S (mean)	Pred. Prob (mean)
PL (Baseline _{mBERT})	15.23K	0.22	0.986
PL > L _{0.15} \cap PL > TH _{0.5} (Baseline _{mBERT})	6.77K	0.24	0.988
PL (Baseline _{XLM-R})	15.23K	0.21	0.69
PL > L _{0.15} \cap PL > TH _{0.5} (Baseline _{XLM-R})	6.08K	0.24 (†)	0.74 (†)

Table 1: Number of instances and average scores (LaBSE, MSP in 4 classes) for KR3 fine-tuning set.

with BERT-based encoding modules to obtain review sentence embeddings (S_i). The sentence embeddings are extracted as the l2 normalized [CLS] token representations from the last transformer block. Then, we feed all the aspect sentences as input to the LaBSE model to obtain aspect sentence embeddings (A_i). We then compute cosine similarity ($score_i$) between the review and the corresponding aspect sentence embeddings.

$$S_i = LaBSE(x_s^i) \quad (1)$$

$$A_i = LaBSE(x_a^i) \quad (2)$$

$$score_i = cosine_similarity(S_i, A_i) \quad (3)$$

We aimed to apply the LaBSE scoring to the actual Korean data D_T , KR3, intending to facilitate flexible learning compared to the translated data D_S , Kor-SemEval (see Appendix§C.1).

2.3 Confidence score Filtering

Meanwhile, we need to develop a classifier Ψ_{post} capable of optimal predictions on the D_T test, which can be considered as out-of-distribution data separate from the D_S . Drawing on previous research (Arora et al., 2021), we expect that language shifts (*i.e.*, $D_S \leftrightarrow D_T$) embody both Background and Semantic shift characteristics. To ensure robust learning in both aspect detection and sentiment classification, we introduce additional thresholding on Maximum Softmax Probability (MSP ; Hendrycks and Gimpel 2017) after LaBSE-based filtering on the D_T train set. When considering an input $x = (x_s, x_a) \in \mathcal{X}$ and its corresponding pseudo-label $\hat{y} \in \mathcal{Y}$, the score $s(x)$ for MSP is expressed as:

$$s_{MSP}(x) = \max_{k \in \mathcal{Y}} p_{\text{model}}(\hat{y} = k | x). \quad (4)$$

Through this, we intended a dual scoring and filtering process to ensure that our Ψ_{post} does not retrain on misplaced confidence or subpar prediction outcomes for out-of-distribution data. The algorithm for calculate scores and filter with the target D_T batch set can be found in Algorithm 1.

Model	#Training Storage/Docs.	Task Type	Aspect Category			Polarity		
			Precision	Recall	Micro-F1	4-way acc	3-way acc	Binary
Baseline _{mBERT} +PL	4.74MB 15.23K	D_T	89.71	77.60	83.21	77.96	80.15	84.01
Baseline _{mBERT} +PL-CF	2.53MB 6.77K	D_T	87.45	76.28	81.46	78.49	80.69	84.70
Baseline _{XLM-R} +PL	4.60MB 15.23K	D_T	90.58	79.26	84.54	83.36	85.71	89.88
Baseline _{XLM-R} +PL-CF	2.15MB 6.08K	D_T	89.16	79.24	83.89	<u>83.89</u>	<u>86.25</u>	<u>90.40</u>
Baseline _{mBERT} +TR+PL	6.28MB 30.45K	$D_S \sqcup D_T$	92.15	78.28	84.64	80.45	82.71	86.57
Baseline _{mBERT} +TR+PL-CF	4.07MB 21.99K	$D_S \sqcup D_T$	90.15	81.20	85.42	80.88	83.15	86.96
Baseline _{mBERT} +TR+PL	6.28MB 30.45K	$D_S \rightarrow D_T$	91.08	77.48	83.73	78.37	80.58	84.60
Baseline _{mBERT} +TR+PL-CF	4.07MB 21.99K	$D_S \rightarrow D_T$	90.03	77.80	83.47	78.94	81.16	85.09
Baseline _{XLM-R} +TR+PL	6.14MB 30.45K	$D_S \sqcup D_T$	91.88	83.66	87.57	83.43	85.78	89.34
KPC-CF †	3.69MB 21.30K	$D_S \sqcup D_T$	92.72	83.30	87.75	83.52	85.90	89.56
Baseline _{XLM-R} +TR+PL	6.14MB 30.45K	$D_S \rightarrow D_T$	91.50	84.23	87.69	84.21	86.57	90.35
KPC-CF	3.69MB 21.30K	$D_S \rightarrow D_T$	92.46	84.53	88.29	84.34	86.72	90.89

Table 2: KR3 test set results for Aspect Category Detection (middle) and Aspect Category Polarity (right). We reported the computational requirements as **#Training**. Specifically, for Baseline+PL, it refers to total number (*i.e.*, equivalent to Kor-SemEval) and capacity of samples from KR3 Train. The performances where filtered models outperform non-filtered ones under the same training conditions are highlighted in **bold** & underline. KPC-CF†, is jointly fine-tuned on the Kor-SemEval & Filtered KR3 Train. Task Type is represented by Appendix§B.3.

3 Experiment

3.1 Main Experiment: KR3 Test Set

Based on the results from Kor-SemEval, we observed analogous patterns between mBERT and XLM-R_{Base}, notwithstanding their distinct properties (see Appendix§D). Accordingly, We opted for the Baseline-NLI approach (*i.e.*, Baseline_{mBERT}, XLM-R), which demonstrated the best performance, as the base model for Phase 2.

Main Results To investigate the effect of features $\Phi(D_T)$ for each corpus, we conduct baseline tuning comparisons between the PL and the PL-CF (see Tab. 1, 2 for details). The variants of our tuning framework includes:

- **Baseline+PL (Pseudo-Labeled data):** Fine-tuning Baseline-NLI with pseudo-KR3.
- **Baseline+PL-CF (Corpus Filtering):** Fine-tuning Baseline-NLI with the data obtained by truncating instance from pseudo-KR3, where the threshold of *MSP* (Hendrycks and Gimpel, 2017) is less than 0.5 and the cosine similarity between LaBSE embeddings is less than 0.15.
- **Baseline+TR (Translated data)+PL:** Fine-tuning Baseline-NLI (pre-tuned or jointly fine-tuned with Kor-SemEval) using pseudo-KR3.
- **KPC-CF (Baseline+TR+PL-CF):** Fine-tuning Baseline-NLI (pre-tuned or jointly fine-tuned with Kor-SemEval) using PL-CF.

Evaluation results on the KR3 test set are presented in Tab. 2 and Fig. 3. We find that the KPC-CF approach achieved adequately trained results in both subtasks for the actual korean data. The model pre-tuned with Kor-SemEval achieves the best performance in Aspect Category Detection (ACD).

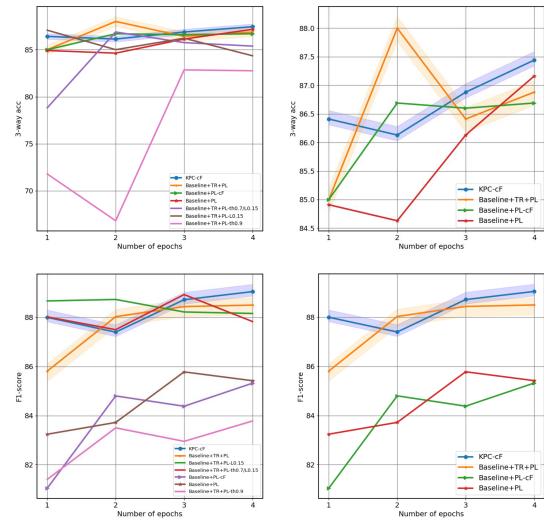


Figure 3: Performance of ACD and ACP on KR3 test set during adaptive fine-tuning (*e.g.*, D_T and $D_S \rightarrow D_T$). Left: results with the addition of other fine-tuned Baseline_{XLM-R}. **th** denotes the threshold for confidence of pseudo-labeling, and **L** denotes the threshold for filtering of LaBSE score; Right: Baseline_{XLM-R} tuning compared in this paper. Blue line represents our proposed model, KPC-CF.

For Aspect Category Polarity (ACP), it performs exceptionally well in the tuning of Pseudo-Labels,

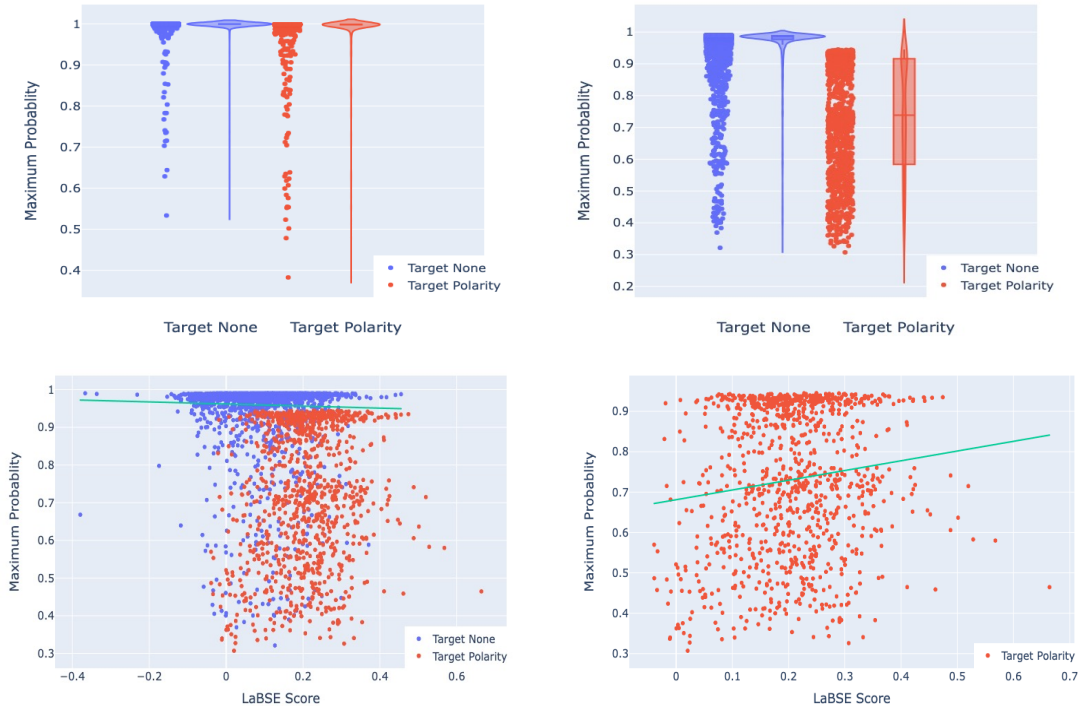


Figure 4: **Top** - Maximum Probability Distribution of the Fine-Tuned Model, KPC-CF (left) vs. Baseline_{XLM-R+TR} (right), **Bottom** - Maximum Probability Distribution of the Baseline_{XLM-R+TR} with LaBSE Score Distribution, All classes (left) vs. 4 classes (right).

especially in the Binary setting. Filtered Pseudo-Labels preserve this characteristic well and amplify the performance of all metrics within ACP.

4 Discussion

In Phase 1, XLM-R, known for its proficiency in capturing cross-lingual representations, exhibits an underfitting tendency concerning the contextual disparities in aspect vocabulary within a single task. This can be attributed to data scarcity relative to model availability for each classifier or viewed as a limitation in single task using SPM in low-resource Korean ABSA (Son et al., 2023). Nevertheless, in the NLI task, it showcases potential by outperforming mBERT, guided by "aspect". Conversely, mBERT demonstrates stable results in both single and NLI tasks, exhibiting an overall accuracy increase, particularly in the NLI task (Appendix§D).

Furthermore, Phase 2 reveals that the combination of the NLI approach and translation impacts the metrics of detection in aspects. Pseudo-labels in this phase contribute to enhancing the determination of sentiment, resulting in improved classifier performance. Notably, PL-CF, unlike a mere addition to translated data, play a crucial role in maintaining and enhancing accuracy and F1 score,

Model	Task Type	KorSTS	KLUE-STS* Zero-shot Inference
Baseline _{XLM-R}	\neg SFT	0.73	-0.4
Baseline _{XLM-R+TR}	D_S	4.53	1.18
Baseline _{XLM-R+PL}	D_T	-0.8	2.59
Baseline _{XLM-R+TR+PL}	$D_S \rightarrow D_T$	3.26	3.29
KPC-CF	$D_S \rightarrow D_T$	4.98	1.20

Table 3: Comparisons of intermediate layer features on general Korean STS. We report Spearman’s ρ (%). Higher is better. *KLUE-STS discussed in Appendix§E.

even with fewer samples. Essentially, the filtered pseudo-NLI set alleviates the bias of pre-trained model parameters during training and enhances performance. This impact of the quality of PL further trained on TR is manifested through the embeddings generated by our model and the ablation results via thresholding (see Fig. 1, 3).

Looking at Figure 4, In Baseline_{XLM-R+TR}, the Target None class exhibits relatively high softmax probabilities, while data with polarity show relatively low probabilities, indicating significant confidence in polarity and asymmetric learning between classes. The results of KPC-CF demonstrate that additional fine-tuning with filtered data significantly increases the maximum probability of the

Model	Joint Train Set*	TR+PL \rightarrow Δ TR+PL-CF	
		Micro-F1	4-way acc
XLM-R _{Base} I.T + LR	✓	+16.01	+6.29
mBERT I.T + LR	✓	+13.14	+5.19
TF-IDF I.T + LR	✓	+0.19	+0.19

Table 4: Performance variation of TR+PL vs. TR+PL-CF (generated by Baseline_{XLM-R}) utilizing Logistic Regression as a shallow feature classifier for different Input Token extraction. *We combined each fine-tuning set and trained all models.

model for Target Polarity. Simultaneously, with a reduction of over 40% in data, it prevents biased class learning, forming similar distributions among Target classes. Additionally, for polarity data where the target is detected, the regression line shows that higher LaBSE scores correspond to increased confidence. Enhancing this characteristic of the model, our KPC-CF demonstrates an improved ability to detect general semantic relationships in Korean, as shown in Tab. 3. In this experiment, we generated intermediate embeddings for KorSTS (?) sentence pairs in a zero-shot manner and measured their similarity, presenting the results in terms of Spearman’s correlation (ρ) with the Ground Truth similarities. On the other hand, by providing word level features as input to a low-complexity LR model, we further confirmed the efficacy of the basic characteristics of the filtered data through observed variations in training outcomes (see Tab. 4). Our framework suggests improving task stability and reliability by setting an optimal threshold to adjust biased classes or data with uncertain classification outcomes.

4.1 Further Analysis

To analyze the types of anticipatory effects that enable language models to exhibit improved performance in filtering corpora, we conducted a qualitative analysis by examining 116 cases where KPC-CF outputs matched Ground Truth but not those of the misaligned model (*i.e.*, Baseline_{XLM-R}+TR+PL). Interestingly, we identified the following four patterns that complement the predictive behavior of TR+PL further training: (1) **False Detection Refining**: TR+PL incorrectly predicted aspects not mentioned in the reviews with a specific polarity, but KPC-CF refined these to ‘None’. (2) **Mismatch Refining**: TR+PL incorrectly predicted aspects mentioned in the reviews with a completely different polarity, which KPC-CF refined to the correct polarity. (3) **Multi Context Detecting**: KPC-CF detected contexts within

Observed Instances % (GT-matched, not \hat{y}_{TR+PL})	
False Detection Refining*	34.38%
Mismatch Refining	31.25%
Multi Context Detecting	18.75%
Single Context Detecting	15.62%

Table 5: Qualitative assessment results of KPC-CF predictions on the KR3 test set; *We analyze aligned model outcomes with Refining and Detecting patterns.

a review with multiple aspects, correctly assigning the ‘None’ overlooked by TR+PL to the correct polarity. (4) **Single Context Detecting**: KPC-CF detected contexts within a single-aspect review and correctly assigned the polarity that TR+PL had overlooked as ‘None’.

Patterns 1 and 2 emphasize the role of KPC-CF in providing error feedback. The filtered PL corpus indicates the presence of more significant polarities, guiding responses from the model. In contrast, patterns 3 and 4 demonstrate that the filtering framework allows the language model to utilize aligned aspect information. This adaptation of cohesive contexts from the translation corpus optimizes problem-solving for the target task. The frequency of each pattern from our qualitative assessment is provided in Tab. 5. On the other hand, given the somewhat limited effectiveness compared to Refining, the Detecting patterns suggest that training initiated from TR still possesses both scalability limits and potential. Therefore, we propose additional analysis and directions in Appendix §E.

5 Conclusion

Aspect-Based Sentiment Analysis (ABSA) has been recognized as one of the most compelling subfields in text analytics and NLP. However, obtaining high quality labeled data has been one of the most important issues hindering the developments of ABSA. In this study, we addressed the language gap in ABSA by constructing a pseudo-classifier. This approach involved aligning implicit features through dual filtering and showcased its industrial and research potential via feature validation across various layers. Additionally, we presented Kor-SemEval, KR3 test (Gold) composed of Korean fine-grained set. We invite the community to extend Korean ABSA by providing new datasets, trained models, evaluation results, and metrics.

Acknowledgements

We thank Chanseo Nam for manually correcting and annotating the Kor-SemEval and KR3 testset used to test our model, during his undergraduate research internship. This research was supported by Brian Impact Foundation, a non-profit organization dedicated to the advancement of science and technology for all.

References

- Murtadha Ahmed, Shengfeng Pan, Jianlin Su, Xinxin Cao, Wenze Zhang, Bo Wen, and Yunfeng Liu. 2022. Bert-asc: Implicit aspect representation learning through auxiliary-sentence construction for sentiment analysis. *arXiv preprint arXiv:2203.11702*.
- Udit Arora, William Huang, and He He. 2021. [Types of out-of-distribution texts and how to detect them](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 10687–10701, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Annisa Nurul Azhar and Masayu Leylia Khodra. 2020. Fine-tuning pretrained multilingual bert model for indonesian aspect-based sentiment analysis. In *2020 7th International Conference on Advance Informatics: Concepts, Theory and Applications (ICAICTA)*, pages 1–6. IEEE.
- Alexandra Balahur and Marco Turchi. 2012. [Multilingual sentiment analysis using machine translation?](#) In *Proceedings of the 3rd Workshop in Computational Approaches to Subjectivity and Sentiment Analysis*, pages 52–60, Jeju, Korea. Association for Computational Linguistics.
- Byunghyun Ban. 2022. A survey on awesome korean nlp datasets. In *2022 13th International Conference on Information and Communication Technology Convergence (ICTC)*, pages 1615–1620. IEEE.
- Akshay Batheja and Pushpak Bhattacharyya. 2022. [Improving machine translation with phrase pair injection and corpus filtering](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 5395–5400, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Akshay Batheja and Pushpak Bhattacharyya. 2023. [“a little is enough”: Few-shot quality estimation based corpus filtering improves machine translation](#). In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 14175–14185, Toronto, Canada. Association for Computational Linguistics.
- Yihong Chen, Kelly Marchisio, Roberta Raileanu, David Adelani, Pontus Lars Erik Saito Stenetorp, Sebastian Riedel, and Mikel Artetxe. 2023. Improving language plasticity via pretraining with active forgetting. *Advances in Neural Information Processing Systems*, 36:31543–31557.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online. Association for Computational Linguistics.
- Fangxiaoyu Feng, Yinfei Yang, Daniel Cer, Naveen Arivazhagan, and Wei Wang. 2022. [Language-agnostic BERT sentence embedding](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 878–891, Dublin, Ireland. Association for Computational Linguistics.
- Erfan Ghadery, Sajad Movahedi, Masoud Jalili Sabet, Hesham Faily, and Azadeh Shakery. 2019. Licd: A language-independent approach for aspect category detection. In *Advances in Information Retrieval: 41st European Conference on IR Research, ECIR 2019, Cologne, Germany, April 14–18, 2019, Proceedings, Part I 41*, pages 575–589. Springer.
- Suchin Gururangan, Ana Marasović, Swabha Swayamdipta, Kyle Lo, Iz Beltagy, Doug Downey, and Noah A. Smith. 2020. [Don’t stop pretraining: Adapt language models to domains and tasks](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8342–8360, Online. Association for Computational Linguistics.
- Brian D Haig. 2003. What is a spurious correlation? *Understanding Statistics: Statistical Issues in Psychology, Education, and the Social Sciences*, 2(2):125–132.
- Dan Hendrycks and Kevin Gimpel. 2017. [A baseline for detecting misclassified and out-of-distribution examples in neural networks](#). In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net.
- Sho Hoshino, Akihiko Kato, Soichiro Murakami, and Peinan Zhang. 2024. [Cross-lingual transfer or machine translation? on data augmentation for monolingual semantic textual similarity](#). In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 4164–4173, Torino, Italia. ELRA and ICCL.
- Hamoon Jafarian, Amir Hossein Taghavi, Alireza Javaheri, and Reza Rawassizadeh. 2021. Exploiting bert to improve aspect-based sentiment analysis performance on persian language. In *2021 7th International Conference on Web Research (ICWR)*, pages 5–8. IEEE.

- Jiho Jin, Jiseon Kim, Nayeon Lee, Haneul Yoo, Alice Oh, and Hwaran Lee. 2024. [KoBBQ: Korean bias benchmark for question answering](#). *Transactions of the Association for Computational Linguistics*, 12:507–524.
- Akbar Karimi, Leonardo Rossi, and Andrea Prati. 2021. [Improving BERT performance for aspect-based sentiment analysis](#). In *Proceedings of the 4th International Conference on Natural Language and Speech Processing (ICNLSP 2021)*, pages 39–46, Trento, Italy. Association for Computational Linguistics.
- Hyunjae Lee, Jaewoong Yoon, Bonggyu Hwang, Seongho Joe, Seungjai Min, and Youngjune Gwon. 2021. [Korealbert: Pretraining a lite bert model for korean language understanding](#). In *2020 25th International Conference on Pattern Recognition (ICPR)*, pages 5551–5557. IEEE.
- Young-Jun Lee, Chae-Gyun Lim, and Ho-Jin Choi. 2020. [Korean-specific emotion annotation procedure using n-gram-based distant supervision and korean-specific-feature-based distant supervision](#). In *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pages 1603–1610.
- Xin Li, Lidong Bing, Wenxuan Zhang, Zheng Li, and Wai Lam. 2020. [Unsupervised cross-lingual adaptation for sequence tagging and beyond](#). *arXiv preprint arXiv:2010.12405*.
- Nankai Lin, Yingwen Fu, Xiaotian Lin, Dong Zhou, Aimin Yang, and Shengyi Jiang. 2023. [Cl-xabsa: Contrastive learning for cross-lingual aspect-based sentiment analysis](#). *IEEE/ACM Transactions on Audio, Speech, and Language Processing*.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized bert pretraining approach](#). *arXiv preprint arXiv:1907.11692*.
- Xu Ouyang, Shahina Mohd Azam Ansari, Felix Xiaozhu Lin, and Yangfeng Ji. 2023. [Efficient nlp model fine-tuning via multistage data filtering](#). In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence*, pages 4091–4099.
- Sungjoon Park, Jihyung Moon, Sungdong Kim, Won Ik Cho, Ji Yoon Han, Jangwon Park, Chisung Song, Junseong Kim, Youngsook Song, Taehwan Oh, Joohong Lee, Juhyun Oh, Sungwon Lyu, Younghoon Jeong, Inkwon Lee, Sangwoo Seo, Dongjun Lee, Hyunwoo Kim, Myeonghwa Lee, Seongbo Jang, Seungwon Do, Sunkyoung Kim, Kyungtae Lim, Jongwon Lee, Kyumin Park, Jamin Shin, Seonghyun Kim, Lucy Park, Alice Oh, Jung-Woo Ha, and Kyunghyun Cho. 2021. [KLUE: Korean language understanding evaluation](#). In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*.
- Khoa Thi-Kim Phan, Duong Ngoc Hao, Dang Van Thin, and Ngan Luu-Thuy Nguyen. 2021. [Exploring zero-shot cross-lingual aspect-based sentiment analysis using pre-trained multilingual language models](#). In *2021 International Conference on Multimedia Analysis and Pattern Recognition (MAPR)*, pages 1–6. IEEE.
- Maria Pontiki, Dimitris Galanis, John Pavlopoulos, Harris Papageorgiou, Ion Androutsopoulos, and Suresh Manandhar. 2014. [SemEval-2014 task 4: Aspect based sentiment analysis](#). In *Proceedings of the 8th International Workshop on Semantic Evaluation (SemEval 2014)*, pages 27–35, Dublin, Ireland. Association for Computational Linguistics.
- Chengwei Qin and Shafiq Joty. 2022. [LFPT5: A unified framework for lifelong few-shot language learning based on prompt tuning of t5](#). In *International Conference on Learning Representations*.
- Guijin Son, Hanwool Lee, Nahyeon Kang, and Moonjeong Hahm. 2023. [Removing non-stationary knowledge from pre-trained language models for entity-level sentiment classification in finance](#). *arXiv preprint arXiv:2301.03136*.
- Chi Sun, Luyao Huang, and Xipeng Qiu. 2019. [Utilizing BERT for aspect-based sentiment analysis via constructing auxiliary sentence](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 380–385, Minneapolis, Minnesota. Association for Computational Linguistics.
- Fan-Keng Sun, Cheng-Hao Ho, and Hung-Yi Lee. 2020. [{LAMAL}: {LA}nguage modeling is all you need for lifelong language learning](#). In *International Conference on Learning Representations*.
- Joanna Szolomicka and Jan Kocon. 2022. [Multiaspectemo: Multilingual and language-agnostic aspect-based sentiment analysis](#). In *2022 IEEE International Conference on Data Mining Workshops (ICDMW)*, pages 443–450. IEEE.
- Can Udomcharoenchaikit, Wuttikorn Ponwitayarat, Patomporn Payoungkhamdee, Kanruethai Masuk, Weerayut Buaphet, Ekapol Chuangsuwanich, and Sarana Nutanong. 2022. [Mitigating spurious correlation in natural language understanding with counterfactual inference](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 11308–11321, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Yequan Wang, Minlie Huang, Xiaoyan Zhu, and Li Zhao. 2016. [Attention-based LSTM for aspect-level sentiment classification](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 606–615, Austin, Texas. Association for Computational Linguistics.

- Zengzhi Wang, Qiming Xie, Zixiang Ding, Yi Feng, and Rui Xia. 2023. Is chatgpt a good sentiment analyzer? a preliminary study. *arXiv e-prints*, pages arXiv–2304.
- Tianyu Wu, Shizhu He, Jingping Liu, Siqi Sun, Kang Liu, Qing-Long Han, and Yang Tang. 2023. A brief overview of chatgpt: The history, status quo and potential future development. *IEEE/CAA Journal of Automatica Sinica*, 10(5):1122–1136.
- Yige Xu, Xipeng Qiu, Ligao Zhou, and Xuanjing Huang. 2020. [Improving bert fine-tuning via self-ensemble and self-distillation](#). *arXiv preprint arXiv:2002.10345*.
- Kichang Yang. 2021. Transformer-based korean pre-trained language models: A survey on three years of progress. *arXiv preprint arXiv:2112.03014*.
- Wenxuan Zhang, Ruidan He, Haiyun Peng, Lidong Bing, and Wai Lam. 2021. [Cross-lingual aspect-based sentiment analysis with aspect term code-switching](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 9220–9230, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Yan Zhou, Fuqing Zhu, Pu Song, Jizhong Han, Tao Guo, and Songlin Hu. 2021. An adaptive hybrid framework for cross-domain aspect-based sentiment analysis. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 14630–14637.

A Appendix

B Background and Related Work

mBERT Multilingual BERT is a BERT trained for multilingual tasks. It was trained on monolingual Wikipedia articles in 104 different languages. It is intended to enable mBERT finetuned in one language to make predictions for another. Azhar and Khodra (2020) and Jafarian et al. (2021) show that mBERT performs effectively in a variety of multilingual Aspect-based sentiment analysis. It is also actively used as a base model in other tasks of Korean NLP (Lee et al., 2021; Park et al., 2021), but is rarely confirmed in Korean ABSA tasks. Thus, our study used the pre-trained mBERT base model with 12 layers and 12 heads (*i.e.*, 12 transformer encoders). This model generates a 768-dimensional vector for each word. We used the 768-dimensional vector of the Extract layer to represent the comment. Like the English language subtasks, a single Dense layer was used as the classification model.

XLM-R XLM-RoBERTa (Conneau et al., 2020) is a cross-lingual model that aims to tackle the curse-of-multilingualism problem of cross-lingual models. It is inspired by RoBERTa (Liu et al., 2019), trained in up to 100 languages, and outperforms mBERT in multiple cross-lingual ABSA benchmarks (Zhang et al., 2021; Phan et al., 2021; Szołomicka and Kocon, 2022). However, like mBERT, Korean ABSA has yet to be actively evaluated, so we used it as a base model. We use the base version (XLM-R_{Base}) coupled with an attention head classifier, the same optimizer as mBERT.

B.1 Task description

In ABSA, Sun et al. (2019) set the task as equivalent to learning subtasks 3 (Aspect Category Detection) and subtask 4 (Aspect Category Polarity) of SemEval-2014 Task 4 simultaneously. A similar approach was adopted for Korean ABSA in food service reviews, aiming to develop a task-specific model through comparison of two PLMs, differing only in tokenization, vocabulary size, and model parameters (Conneau et al., 2020). Defining a unified-serving model using multi-label-multi-class classification from a task-oriented perspective was considered impractical due to challenges in modifying pre-training set and the ongoing injection of additional data, rendering implicit mapping unattainable (Sun et al., 2020; Ahmed et al., 2022; Qin and Joty, 2022). Consequently, the problem has

been redefined into two BERT-based classification tasks as outlined below.

B.2 Classification approach

Single sentence Classification BERT for single-sentence classification tasks. For ABSA, we finetune the pre-trained BERT model to train n_a (*i.e.*, number of aspect categories) classifiers for all aspects and then summarize the results. The input representation of the BERT can explicitly represent a pair of text sentences in a sequence of tokens. In the case of a single task, only one review text is tokenized and inputted as a sequence of tokens. A given token’s input representation is constructed by summing the corresponding token, segment, and position embeddings. For classification tasks, the first word of each sequence is a unique classification embedding [CLS]. Segment embeddings in single sentence classification use one.

Sentence-pair Classification Based on the auxiliary sentence constructed as aspect word text, we use the sentence-pair classification approach to solve ABSA. The input representation is typically the same with the single-sentence approach. The difference is that we have to add two separator tokens [SEP], the first placed between the last token of the first sentence and the first token of the second sentence. The other is placed at the end of the second sentence after its last token. This process uses both segment embeddings (In the case of XLM-RoBERTa, an additional one is placed in the first position, resulting in a total of three segment embeddings). For the training phase in the sentence-pair classification approach, we only need to train one classifier to perform both aspect categorization and sentiment classification. Add one classification layer to the Transformer output and apply the softmax activation function.

Ensemble Meanwhile, we additionally use a voting-based ensemble, a typical ensemble method. The ensemble can confirm generalized performance based on similarity of model results in NLI task (Xu et al., 2020). So, we add separate power-mean ensemble result to identify a metric that amplifies probabilities based on the Pre-trained Language Models (PLMs). we reported the ensemble results of the top-performing models trained on NLI tasks for each PLM.

Kor-SemEval Train	Aspect	Polarity
서비스는 평범했고 에어컨이 없어서 편안한 식사를 할 수 없었습니다. (The <u>service</u> was mediocre and the lack of <u>air conditioning</u> made for a less than <u>comfortable meal</u> .)	가격 (price)	없음 (None)
	일화 (anecdotes)	없음 (None)
	음식 (food)	없음 (None)
	분위기 (ambiance)	부정 (Negative)
	서비스 (service)	중립 (Neutral)
KR3 Train	Aspect	Polarity
가로수길에서 조금 멀어요 점심시간에 대기 엄청납니다 일행 모두 있어야 들어갈 수 있어요 <u>맛은 보통이에요</u> (It's a little far from <u>Garosu-gil</u> . There's a huge wait during lunch time. You have to have everyone in your group to get in. The <u>taste is average</u> .)	가격 (price)	없음 (None)
	일화 (anecdotes)	부정 (Negative)
	음식 (food)	없음 (None)
	분위기 (ambiance)	부정 (Negative)
	서비스 (service)	없음 (None)

Table 6: Samples of Kor-SemEval and KR3 train dataset.

B.3 Evaluation of Language Adaptation

In this paper, we focus on the language adaptation of ABSA. The input data includes a set of labeled sentences from a translated source data $D_S = \{(x_s^i, x_a^i, y^i)\}_{i=1}^N$ and a set of unlabeled sentences from a target language data $D_T = \{(x_s^i, x_a^i)\}_{i=1}^N$. Our goal is to validate our proposed filtering technique across three types of tasks: (1) training only pseudo-labeled D_T , (2) joint training using both D_S and D_T , (3) transfer learning from D_S to D_T .

Namely, unlike [Chen et al. \(2023\)](#), we fixed token embeddings and fine-tuned the transformer body & head. Contrary to [Gururangan et al. \(2020\)](#), we trained with $D_S = (x_s^i, x_a^i, y^i)_{i=1}^N$ and then reinitialized the classifier layer for further fine-tuning. This approach examines if the universal encoder and params θ aligned with D_S enhance implicit alignment via pseudo-labels of refined D_T . The $\Psi_{joint}(\Phi(D_S \sqcup D_T); \theta_{D_S \sqcup D_T})$ model was also evaluated, despite its inefficiency in terms of memory and computation, for data validation purposes.

C Experimental Setup

C.1 Dataset for Fine-Tuning and Test

Kor-SemEval We translate the SemEval-2014 Task 4 ([Pontiki et al., 2014](#)) dataset³. Moreover, it is evaluated for Korean aspect-based sentiment analysis. The training data was machine-translated (by Google Translate), and Test data was corrected manually only for fewer than 10 instances where abnormal translations occurred after machine translation. Each sentence contains a list of aspect x_a with the sentiment polarity y . Ultimately, given a

sentence x_s in the sentence, we need to:

- detects the mention of an aspect x_a ;
- determines the positive or negative sentiment polarity y for the detected aspect.

This setting allows us to jointly evaluate Subtask 3 (Aspect Category Detection) and Subtask 4 (Aspect Category Polarity).

KR3 Unlike the domains previously used for Korean sentiment classification ([Lee et al., 2020](#); [Yang, 2021](#); [Ban, 2022](#)), Korean Restaurant Review with Ratings (KR3) is a comprehensive dataset encompassing various food service establishments, constructed from actual certified map reviews. In the case of restaurant reviews, words and expressions that evaluate positive and negative are mainly included, and real users often infer what a restaurant is like by looking at its reviews. Accordingly, [Jung et al.](#)³ constructed the KR3 dataset by crawling and preprocessing user reviews and star ratings of websites that collect broad food service information and ratings. KR3 has 388,111 positive and 70,910 negative, providing a total of 459,021 data plus 182,741 unclassified data, and distributed to Hugging Face⁴.

We structured our training and test datasets to match the size of Kor-SemEval. Specifically, we addressed potential biases by randomly sampling indices from the original KR3, ensuring that evaluations for a specific restaurant were non-overlapping. Additionally, we maintained an even distribution of positive, negative, and neutral (ambiguous) classes,

³<http://alt.qcri.org/semeval2014/task4/>

⁴<https://huggingface.co/datasets/leey4n/KR3>

irrespective of the aspects indicated in the original KR3. This preprocessing step aimed to capture a comprehensive representation of sentiments across diverse attributes of sentences in the dataset. Subsequently, the data were configured to suit sentence pair classification. To allocate polarity labels for each aspect within the KR3 dataset, pseudo-labeling was conducted utilizing the optimal model identified during the Kor-SemEval performance evaluation. Pseudo-labels were assigned to the KR3 training data, and post pseudo-labeling, the test data underwent manual re-labeling by researchers.

Tab. 6 shows some Kor-SemEval and KR3 training data samples. In the case of KR3, the negative aspect is better reflected. Meanwhile, while Kor-SemEval gave neutrality to mediocre service, KR3 did not give neutrality to mediocre taste. While positive and negative data have been sufficiently accumulated and reflected, the tendency for a lack of neutral data can be confirmed in advance through some samples. We have organized both Kor-SemEval and KR3 data as open-source to facilitate their use in various training and evaluation scenarios.

C.2 Hyperparameter

All experiments are conducted on two pre-trained cross-lingual models. The XLM-RoBERTa-base and BERT-base Multilingual-Cased model are fine-tuned. The number of Transformer blocks is 12, the hidden layer size is 768, the number of self-attention heads is 12, and the total number of parameters for the XLM-RoBERTa-base model is 270M, and BERT base Multilingual-Cased is 110M. When fine-tuning, we keep the dropout probability at 0.1 and the initial learning rate is $2e-5$.

In the Preliminary Experiment (Appendix D), we set the batch size to 3, this setting was applied to both single and NLI tasks. The max length was set to 512, and for epochs beyond 3, no significant performance improvement was observed, so the results from epoch 2 were noted. Subsequently, in Main Experiment (Sec. §3.1), we fine-tuned with a batch size of 16, following the pattern of previous experiments (Karimi et al., 2021). However, no significant performance improvement was observed within 10 epochs, so we reported the results from epoch 4. Each reported metric is the average of runs with four different random seeds to mitigate the effects of random variation in the results.

Model	SemEval-14		
	Precision	Recall	Micro-F1
BERT-single	92.78	89.07	90.89
BERT-pair-NLI-M	93.15	90.24	91.67
<i>Models trained & evaluated on Kor-SemEval</i>			
mBERT-single	92.16	77.95	84.46
XLM-R _{Base} -single	91.01	49.37	64.01
mBERT-NLI	91.10	79.90	85.14
XLM-R _{Base} -NLI	91.37	83.71	87.37
NLI-ensemble	93.70	81.27	87.04

Table 7: Test set results for Aspect Category Detection. We use the results reported in BERT-single and BERT-pair-NLI-M (Sun et al., 2019) for English dataset together with our results.

Model	SemEval-14		
	4-way acc	3-way acc	Binary
BERT-single	83.7	86.9	93.3
BERT-pair-NLI-M	85.1	88.7	94.4
<i>Models trained & evaluated on Kor-SemEval</i>			
mBERT-single	68.20	71.84	79.52
XLM-R _{Base} -single	62.93	66.29	75.20
mBERT-NLI	73.95	77.90	84.87
XLM-R _{Base} -NLI	79.41	83.66	89.98
NLI-ensemble	78.24	82.43	89.65

Table 8: Test set accuracy (%) for Aspect Category Polarity. We use the results reported in BERT-single and BERT-pair-NLI-M (Sun et al., 2019) for English dataset together with our results.

C.3 Metrics

The benchmarks for SemEval-2014 Task 4 are the several best performing systems in Sun et al. (2019), Wang et al. (2016) and Pontiki et al. (2014). When evaluating Kor-SemEval and KR3 test data with subtask 3 and 4, following Sun et al. (2019), we also use Micro-F1 and accuracy respectively.

D Preliminary Experiment

D.1 Experiment: Kor-SemEval

We conducted evaluations for each of the mBERT-single, XLM-R_{Base}-single, mBERT-NLI, XLM-R_{Base}-NLI, and NLI-ensemble models. We included the results from the previous SemEval14 research and Kor-SemEval to compare and evaluate the performance in Korean.

Results Results on Kor-SemEval are presented in Tab. 7 and Tab. 8. Similar to the SemEval results, it was confirmed that tasks converted to NLI tasks tend to be better than single tasks, with mBERT

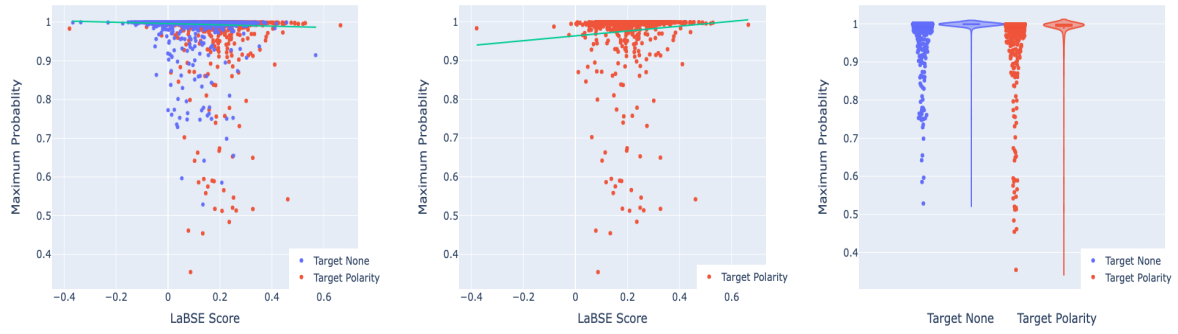


Figure 5: **Left & Middle** - Maximum Probability Distribution of the Baseline_{mBERT}+TR with LaBSE Score Distribution, All classes (left) vs. 4 classes (middle), **Right** - Maximum Probability Distribution of the Fine-Tuned Model, Baseline_{mBERT}+TR.

achieving better results in single and XLM-R_{Base} in NLI. The XLM-R_{Base}-NLI model performs best, excluding precision for aspect category detection. It also works best for aspect category polarity. The NLI-ensemble model was the best in precision but performed poorly in other metrics.

E Limitations and Future Work

Acknowledging limitations is crucial before delving into future work. While mBERT exhibits somewhat inadequate transfer effects, which can be attributed to its smaller model size. Due to pre-training solely on translation data, the scores are densely populated, resulting in limited performance improvement through additional training. Nevertheless, unlike jointly with Target None, the regression line of maximum probability for Target Polarity still trends upward according to LaBSE score (see Tab 1, Figure 5), indicating that ongoing evaluation of threshold points for the two scores can be done amidst more diverse and precise patterns. Meanwhile, we conducted direct inference on individual NLI inputs through a demo⁵. Upon detecting various aspects within the reviews, we observed a slight predominance towards the ‘None’ class within the class-wise similar probability distributions per sentence in TR training, while a more concentrated prediction tendency towards the binary class was observed in PL training. Furthermore, a tendency for one class to dominate over two or more aspect classes within review sentences was identified. This appears to stem from the class imbalance in TR and contextual differences (Jin et al., 2024) within all review data (*i.e.*, TR & PL).

Our analysis of the PL-CF thresholding reveals

⁵<https://huggingface.co/KorABSA>

Dataset	Count (T.None)	Ratio % (T.None/PL)
$PL > L_{0.15} \cap PL > TH_{0.5}$ (Baseline _{mBERT})	2891	19.02%
$PL < L_{0.15} \cap PL > TH_{0.5}$ (Baseline _{mBERT})	7634	50.12%
$PL > L_{0.15} \cap PL > TH_{0.5}$ (Baseline _{XLM-R})	2787	18.31%
$PL < L_{0.15} \cap PL > TH_{0.5}$ (Baseline _{XLM-R})	7470	49.06%

Table 9: Quality assessment results of PL filtering by two Baseline outputs; Target None ratio is 31.1% and 30.75% lower in the PL-CF threshold.

Dataset	Error Ratio % (Error/T.None)
$PL > L_{0.15} \cap PL > TH_{0.5}$	10.81%
$PL < L_{0.15} \cap PL > TH_{0.5}$	16.18%

Table 10: Qualitative assessment results of PL filtering (Baseline_{XLM-R}) outputs; Target None errors are 5.37% lower in the PL-CF threshold.

that while it reduces the number of predicted Target None classes resulting from extensive training on None class in TR, it also qualitatively explains why the error rate for Target None can be lower (see Tab. 9, 10). Contrary to experimental results that show it is reasonable to predict high-confidence Target Polarity labels when there is high surface similarity between sentences, cases where sentence similarity is less than 0.15 but predicted as Target None with confidence greater than 0.5 can hinder the model’s understanding of deeper semantic relationships. For instance, issues related to hygiene and cleanliness are not detected through the overall atmosphere, and in cases where multiple aspects overlap, the model fails to distinguish them clearly, incorrectly labeling them all as None. Additionally, aspects such as waiting space, waiting time, and waiting staff, where the boundary between service

Model	Task Type	KLUE-STS-Mid.* Zero-shot Eval.
Baseline _{XLM-R}	\neg SFT	-6.1
Baseline _{XLM-R} +TR	D_S	-9.0
Baseline _{XLM-R} +PL	D_T	3.24
Baseline _{XLM-R} +TR+PL	$D_S \rightarrow D_T$	-4.3
KPC-CF	$D_S \rightarrow D_T$	3.21

Table 11: Comparisons of intermediate layer features on KLUE-STS. We report Spearman’s ρ (%). Higher is better. *Data within the mid-range score were used.

and atmosphere is ambiguous or falls into general anecdotes, are consistently mislabeled as None.

Furthermore, our threshold filtering assigns a high-confidence Target None label for connotations with high similarity but lower errors, which supports a better distinction between semantic similarity and causal relationships. This is particularly effective when excluding personalized terms and Korean proper nouns, such as ‘Fixture (*i.e.*, local native)’ used by reviewers. Our current translation-based training does not sufficiently capture the tone of sentences composed of proper nouns and particles from various domains within Korea. This limitation is evident not only in the qualitative analysis of specific data point errors but also in the KLUE-STS (Park et al., 2021) results in Tab. 3. However, we have confirmed through various evaluations (Tab. 2, 4, 5, 10, 11 and Fig. 3) that our filtering approach aids in learning actual level of entailment relationships, moving beyond merely identifying similar relationships between sentences. To mitigate spurious correlations (Haig, 2003; Udomcharoenchaikit et al., 2022), we propose upper filtering that enables Target None predictions to function as data facilitating the model’s learning of true entailment relationships between sentences, without relying solely on surface-level similarity in NLI pairs.

Thus, future research will delve into the association between embeddings from Bi-Encoder and Cross-Encoder models, and explore alternative methods for filtering or joint representation of translated NLI set. Simultaneously, the KR3 test set effectively capture real-world imbalances, deliberately selecting sentences with a broader vocabulary is necessary for enhanced diversity. Fully constructing the KR3 dataset through human annotation, it will serve as a benchmark for assessing LMs in Korean ABSA. Furthermore, Korean data from other domains should be acquired and evaluated.

F Computational Resources

All experiments in this study were conducted using high-performance computing resources from a leading cloud platform. The computational infrastructure included instances with 50GB or more of RAM, featuring NVIDIA A100 and V100 GPUs, chosen for advanced parallel processing capabilities essential for our LMs.