

Brevity is the soul of wit: Pruning long files for code generation

Aaditya K. Singh
GATSBY UNIT, UCL

AADITYA.SINGH.21@UCL.AC.UK

Yu Yang
UCLA

YUYANG@CS.UCLA.EDU

Kushal Tirumala
META FAIR

KTIRUMALA@META.COM

Mostafa Elhoushi
META FAIR

M.ELHOUSHI@IEEE.ORG

Ari S. Morcos
DATOLOGYAI

ARI@DATOLOGYAI.COM

Abstract

Data curation is commonly considered a “secret-sauce” for LLM training, with higher quality data usually leading to better LLM performance. Given the scale of internet-scraped corpora, data pruning has become a larger and larger focus. Specifically, many have shown that de-duplicating data, or sub-selecting higher quality data, can lead to efficiency or performance improvements. Generally, three types of methods are used to filter internet-scale corpora: embedding-based, heuristic-based, and classifier-based. In this work, we contrast the former two in the domain of finetuning LLMs for code generation. We find that embedding-based methods are often confounded by length, and that a simple heuristic—pruning *long* files—outperforms other methods in compute-limited regimes. Our method can yield up to a 2x efficiency benefit in training (while matching performance) or a 3.5% absolute performance improvement on HumanEval (while matching compute). However, we find that perplexity on held-out long files can increase, begging the question of whether optimizing data mixtures for common coding benchmarks (HumanEval, MBPP) actually best serves downstream use cases. Overall, we hope our work builds useful intuitions about code data (specifically, the low quality of extremely long code files) provides a compelling heuristic-based method for data pruning, and brings to light questions in how we evaluate code generation models.

Keywords: large language models, data pruning, code generation, data quality

1 Introduction

Large language models (LLMs) trained on internet-scale corpora showcase impressive capabilities (Brown et al., 2020). With their increasing prevalence, one of the main paradigms has become training models on more and more data (Touvron et al., 2023a). In fact, some go on to argue that the biggest factor in modern LLM training pipelines is the data, rather than architectural differences or other hyperparameters (jbetker, 2023). One of the key findings of modern LLMs has been that mixing in large amounts of diverse, but lower quality, data with higher quality data sources (e.g., Wikipedia) leads to improved performance (Touvron et al., 2023a). Currently, the scale of internet-scale corpora (Together Computer,

2023) still exceeds the training token budgets of most models, begging the question of how to sub-select data to use for training given a fixed compute budget.

In answer to this question, many recent works have focused on *data pruning*. Data pruning aims to subselect data in order to 1. increase training efficiency (same number of epochs, but each epoch is smaller because it’s on a pruned dataset) or 2. increase performance (compute-controlled, meaning more epochs). The former may have more impact in low-resource or academic settings, whereas the latter may have more impact on frontier LLMs. While historically models have been trained in the sub-1-epoch regime, recent work has shown that multiple epochs can be performed without sacrificing performance (Muenighoff et al., 2023), and that perhaps sub-selecting data and epoch’ing on it outperforms training less than one epoch on the full dataset (Tirumala et al., 2023). These findings emphasize the need for good data pruning methodologies for training LLMs.

While the field of data pruning in machine learning has a long history with many types of methods (Wang et al., 2023), we focus here on data pruning approaches for large-scale language-like datasets,¹ which loosely fit into three categories. *Embedding*-based pruning instead uses a self-supervised pre-trained embedding network to embed all data points, and then a heuristic to prune examples based on their embeddings (e.g., points that are within ϵ of each other (Abbas et al., 2023)). *Heuristic*-based pruning involving using human intuition about datasets to prune data points, such as removing files containing “lorem ipsum” (Raffel et al., 2020) or removing nearly duplicated training data by comparing n-gram statistics (Lee et al., 2022). *Classifier*-based pruning trains a classifier to identify “good” data from “bad” data, and then prune the bad data. Of course, classifier-based pruning requires access to some form of label, which can make it difficult to apply; in practice, some heuristic is used to identify “good” data (e.g., webpages referenced on Wikipedia (Touvron et al., 2023a)) and a random sample of the rest is used as “bad” data.² Each of these methods comes with its own pros and cons: *embedding*-based methods rely on good embedding networks, *heuristic*-based methods rely on good human intuition, and *classifier*-based methods rely on labeled “good” data.

In this work, we illustrate a simple, yet strong, heuristic-based method in the domain of finetuning LLMs for code generation, which outperforms existing embedding-based methods. We choose code generation as our domain of study due to its increasing importance as an end use case for LLMs (Rozière et al., 2024) and in line with recent works on embedding-based data pruning (Yang et al., 2023). In this domain, we demonstrate that embeddings used in prior work are confounded by document length, which we use to motivate our length heuristic for data pruning. Surprisingly, we find that *long* files, which are often believed to be “higher quality” (Longpre et al., 2023), are often actually very low quality (in the domain of code), yet make up disproportionately large amounts of training datasets due to their length. By pruning long files, we show improvements in compute-limited regimes on the popular coding benchmarks of HumanEval (Chen et al., 2021) and MBPP (Austin et al., 2021). However, we find these benefits to be minimal in compute-rich regimes involving more than 2 epochs, with aggressive pruning methods overfitting to shorter files, thus emphasizing the recent emerging notion that data pruning methods may not be compute-agnostic (Goyal et al., 2024). We hope our findings motivate practitioners to consider simple heuristics

1. The scale of these datasets can make many classical pruning techniques infeasible.
2. One could consider improving this scheme by some version of self-distillation (Pham et al., 2022).

more, especially document length as it directly impacts prevalence in training data, and that our work adds to the increasing discourse on data pruning methodologies.

2 Related work

Embedding-based data pruning was first shown to work at scale by Sorscher et al. (2023), who introduced SSL-prototypes and demonstrated its efficacy on Imagenet-scale pretraining for vision. Subsequent work, SemDeDup (Abbas et al., 2023), applies the embedding-based data pruning paradigm to language modeling, showing gains when training OPT models (Zhang et al., 2022) up to 1.3B parameters on the C4 dataset (Raffel et al., 2020). D4 (Tirumala et al., 2023) combined Semdedup with SSL-prototypes at even larger scales (up to 6.7B parameter OPT models), showing persistent benefits for language modeling. More recently, SCIP (Yang et al., 2023) used embedding-based data pruning in the fine-tuning stage for code generation language models, showing performance benefits on common benchmarks (Chen et al., 2021; Austin et al., 2021).

Heuristic-based data pruning is perhaps the oldest approach in data curation for language models. Heuristics can range from simple string-based removal, such as removing documents containing boilerplate “lorem ipsum” or bad words³ (Raffel et al., 2020), to more sophisticated recent techniques for removing near-duplicates using MinHash (Lee et al., 2022). Recent work (Sharma et al., 2024) has shown that such heuristics can be combined to provide a useful notion of text quality to be used for pruning. One issue with heuristic-based methods is that they are often customized to the underlying data domain—for example, Raffel et al. (2020) remove all documents containing curly braces to purposefully *remove* code data. Obviously, such a method would not extend to domains such as code generation. Notably, it’s common for prior work (Raffel et al., 2020) to remove *short* documents (fewer than 3 sentences), but to our knowledge removing *long* documents has not been studied. Here, we show that long documents in code data are often “low quality” and that removing them can lead to efficiency and performance gains.

LLMs for code generation became popular with the advent of generally capable language models (Brown et al., 2020) which could be finetuned for domain-specific use cases (Chen et al., 2021). Recent work (Rozière et al., 2024) showed that finetuning a pretrained Llama model can outperform, at a fixed compute budget, training from scratch on code data (Li et al., 2022; Fried et al., 2023; Li et al., 2023a), which motivates our approach. In this setting, LLMs may be finetuned on domain-specific code datasets, such as The Stack (Kocetkov et al., 2022). Models are evaluated across many benchmarks, with HumanEval (Chen et al., 2021) and MBPP (Austin et al., 2021) being two of the most common. We refer readers to Xu and Zhu (2022) and Rozière et al. (2024) for more extensive related work on LLMs for code generation.

3 Motivating a length-based heuristic for code data

A common aphorism in software engineering is “Don’t Repeat Yourself” (DRY), which is linked to the often frowned upon notion of “spaghetti code”—long files with lots of repeated code. From a language modeling perspective, these tokens likely provide little-to-no signal

3. <https://github.com/LDNOOBW/List-of-Dirty-Naughty-Obscene-and-Otherwise-Bad-Words>

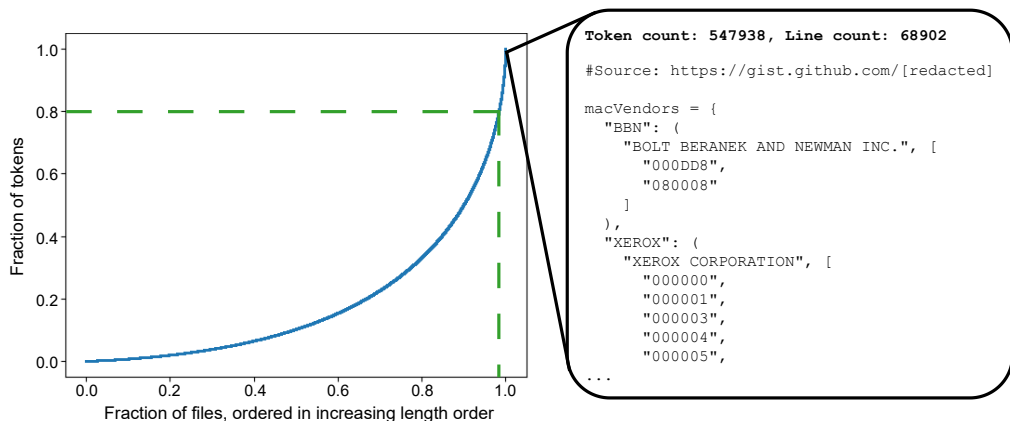


Figure 1: Cumulative distribution of document lengths in the Python subset of the Stack dataset (Kocetkov et al., 2022). Documents are ordered on the x-axis in increasing length order; y-axis shows fraction of whole dataset accounted for. Green lines highlight that the 2% of longest files account for the last 20% of tokens. Right shows an example long file (the second longest file). Long files tend to have very little useful signal, being full of large data arrays or “spaghetti code”.

for learning (similar to the decreased information when epoching (Muennighoff et al., 2023)), and thus waste valuable compute.

To get a sense of how such spaghetti code may be influencing our large-scale code datasets, we consider the distribution of document lengths in the Python subset of the popular Stack dataset (Kocetkov et al., 2022). Replicating recent findings on other language datasets (De Vries, 2023), we find the distribution to be extremely right-skewed, with e.g., the longest 2% of files making up a shocking 20% of tokens.

We qualitatively examine many of these files, with an example shown in Figure 1. We find that most long Python files consist of large data arrays or very bad “spaghetti code”: The longest file is *a single list* of names and phone numbers. Second longest is shown in Figure 1b. Third longest is *a single docstring* of chinese characters and anglicized pronunciations. Fourth longest is *a game of hangman*, but coded without for-loops it would seem, resulting in essentially the same if-statement repeated thousands of times (for each index and word). Fifth longest is *a single dictionary* of glyphs mapping to unicode characters. Each of these files has about 500,000 tokens.

Prior work has often pruned short files (e.g., shorter than 3 sentences as done by Raffel et al. (2020)), but we’re unaware of existing work that specifically prunes *long* files, which are often believed to be higher quality and useful for long-context training (Longpre et al., 2023). For the case of Python code, we see that this is false (at least for the longest files) motivating pruning long files as a heuristic.

Beyond this qualitative inspection of the data, we also find that existing state-of-the-art (SOTA) methods for data pruning in the domain of code generation (Yang et al., 2023) are actually confounded by file length. Specifically, the embedding space used for clustering by prior embedding-based methods is based off StarEncoder (Li et al., 2023a). Following the setup of Yang et al. (2023), we embedded all files in the Python subset of The Stack dataset using StarEncoder, and then performed K-means clustering with $K = 100$ using the

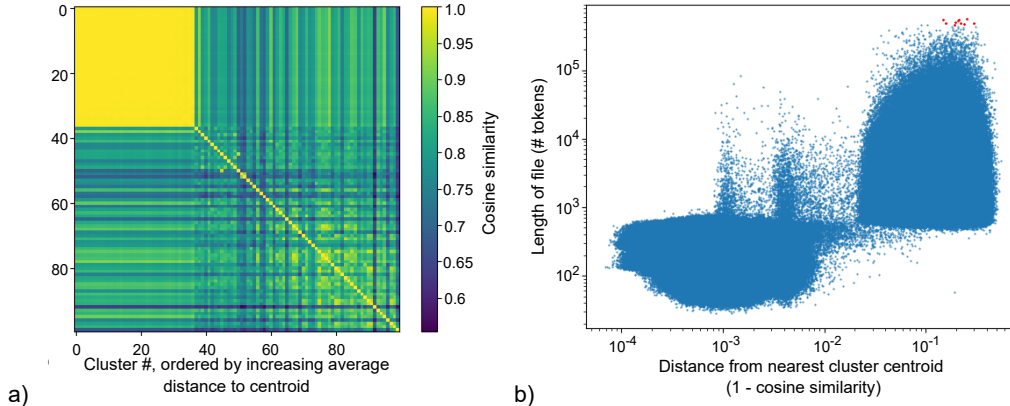


Figure 2: Visualizations of StarEncoder embedding space. **a)** Cosine similarity between every pair of cluster centroids. Oddly, the first 37 cluster centroids are all *very close* to each other. **b)** We visualize each document as an (x, y) pair where the x -axis is the distance to nearest cluster centroid (computed as one minus the cosine distance), and the y -axis is the length of the file in tokens (using the Llama tokenizer). We immediately see the reason for the 37 super close clusters – StarEncoder appears to tightly pack most documents below a certain length (bottom-left cloud of points), while longer documents tend to be more spread out in embedding space (top-right cloud of points). We also highlight the ten longest files in the dataset in red.

FAISS library (Johnson et al., 2019; Douze et al., 2024). In Figure 2a, we find that many of the clusters are actually very close together, in terms of cosine similarity. In Figure 2b, we see a strong correlation between these clusters and file length.⁴ Specifically, shorter files appear to be mapped to a very small and dense region of embedding space.⁵ As a result, well performing embedding-based methods, such as pruning points far from centroids (Yang et al., 2023), often correlate to pruning long files, further motivating the use of this heuristic.

4 Methods

We finetuned Llama2 7B models on pruned versions of the Python subset of The Stack dataset (which has 20.4B tokens). We start by separating a small validation set, controlling for document length, to use in Section 5.1. To get a notion of variance in the results, we employed a bootstrapping framework. Specifically, we conducted experiments on 3 random 50% subsets of The Stack Python dataset. We applied each pruning technique to each subset independently, then trained models on each subset. We then compute standard error bars over the 3 subsets to get a sense of performance differences between “different” datasets. We hope this form of dataset bootstrapping becomes more common in the field, as we found it useful to get a sense of inherent noise.

4. We discuss further implications of this for embedding-based methods in Appendix A.

5. We also qualitatively inspected these files. Besides finding hundreds of thousands ($\approx 3\%$ of The Stack Python) of short, auto-generated Django migrations, we could not discern any correlates besides length.

As baselines, we consider no pruning, as well as the best performing method from Yang et al. (2023), which prunes 16% of files from small clusters, and then 4% of files that lie farthest from centroids (which we refer to as “SCIP”).⁶ For our length pruning experiments, we consider pruning 10%, 20% or 50% of *tokens*, coming from the longest files.⁷ Note the distinction between tokens and files; pruning 20% of tokens from the longest files on the full dataset would correspond to pruning just 2% of files (Figure 1).

We train all models for 16,000 steps using a batch size of 1.3M tokens.⁸ This would correspond to just over 1 epoch on the full Stack dataset, which means it corresponds to just over 2 epochs for our baseline (recall: our bootstrapping uses random 50% subsets of the full dataset), and just over 4 epochs for our strictest pruning condition (50% of tokens). We evaluate intermediate checkpoints every 2,000 steps on the common code generation benchmarks HumanEval (Chen et al., 2021) and MBPP (Austin et al., 2021).

5 Results

In Figure 3, we provide three views on our results:⁹ for considering *training efficiency*, we look at performance after a single epoch on all conditions (left column). We see that the 50% length pruning run performs as well as no pruning, despite only seeing half the data, indicating a 2x training efficiency improvement. In the middle column (Figure 3), we provide a comparison targeted at looking for *performance improvements*. Namely, we consider the checkpoints after 8k steps in each condition (roughly 2 epochs for the 50% length pruning condition, and roughly 1 epoch for the no pruning baseline). In this plot, we can see strong improvements (absolute: 3.5%) from length pruning on HumanEval, and modest improvements on MBPP (absolute: 1.5%).¹⁰ When training for longer (Figure 3, third column), however, we see that the delta between length pruning and baselines does not persist, replicating the findings of prior work showing that data pruning cannot be compute agnostic (Goyal et al., 2024).

Notably, length pruning outperforms SOTA embedding-based pruning methods (SCIP) in this domain. SCIP does not perform well at smaller compute scales (single-epoch regime, or even 8k steps). At larger compute scales (rightmost column) it surpasses no pruning on HumanEval, and matches on MBPP. In the SCIP paper (Yang et al., 2023), models were trained for 60B tokens—it may be that SCIP performs better in these larger compute regimes. That said, we note that even in the larger compute regime, the length pruning method performs as well as SCIP.

6. See Appendix Table 1 for a reproduced table from Yang et al. (2023) comparing various embedding-based pruning methods.

7. As a sanity check, we also conducted some runs pruning from the shortest files, in smaller scale settings, and found that this was not effective.

8. Hyperparameters, compute requirements, etc. are provided in Appendix B.

9. Full training curves are provided in Appendix C, for maximum transparency.

10. Note, 8k steps corresponds to two epochs over the aggressively pruned dataset, which is a bit contrary to classical “sub-1-epoch” training recommendations. Our work is thus closer to more recent findings (Muennighoff et al., 2023) which show multiple epochs can be beneficial for language models.

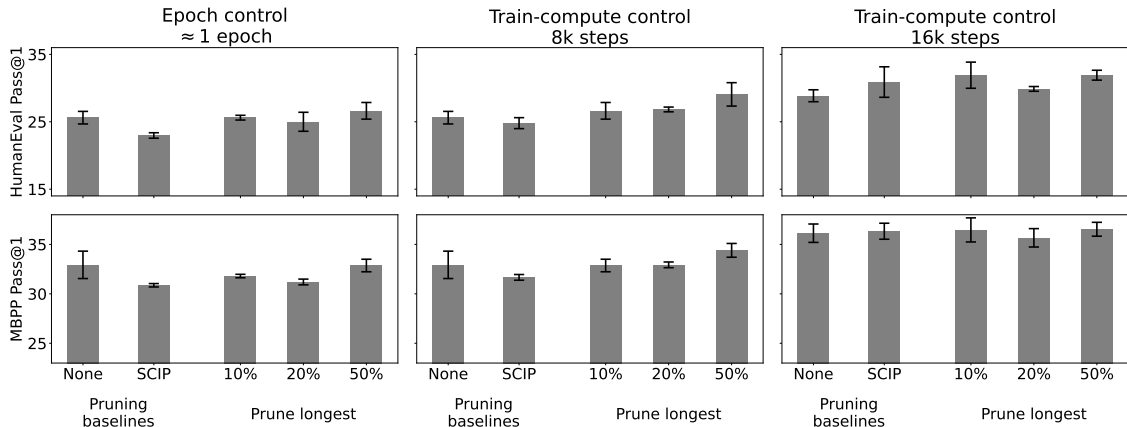


Figure 3: Results across baselines and length pruning. All plots show the same 5 conditions: no pruning (“none”) and the best performing (embedding-based) method from Yang et al. (2023) (“SCIP”) as baselines, and then pruning $P\%$ of tokens from the longest documents (our method) for $P = 10, 20, 50$. Leftmost column shows performance after roughly 1 epoch for each condition, which can be used to look at training efficiency. We note that aggressive length pruning ($P = 50\%$) matches the performance of no pruning, indicating a 2x efficiency improvement. The latter two columns show compute-controlled experiments, where all conditions are trained on the same number of tokens (but possibly more epochs, e.g., the 50% length pruning run will have seen twice as many epochs as no pruning). At 8000 steps (middle column), aggressive length pruning still seems to outperform no pruning and SCIP baselines, but this advantage diminishes at the larger compute scale (16000 steps, rightmost column). Error bars indicate standard error.

5.1 The importance of diverse evaluation

So far, we’ve considered standard downstream benchmarks, where we found pruning long files leads to training efficiency and performance improvements. However, we note that most code generation benchmarks tend to be *short-form* generation. When used as the sole signals of performance, these benchmarks could give us an overestimated benefit of pruning long files. To account for this, we look at perplexity on held out code, *binned by length*.

In Appendix Figure 5, we find that models can overfit to shorter code (indicated by increasing validation perplexity), especially for the most aggressive pruning strategies (where 50% of tokens are removed, coming from the longest files) in the largest compute regimes (and thus the most epochs¹¹). These results offer a nice counterpoint to the work of Rozière et al. (2024), who found that finetuning for long-context code generation often deteriorates performance on short-form code generation (as measured by HumanEval and MBPP). Both of these results taken together may point to an inherent tradeoff between short- and long-form code generation capabilities.¹²

11. Mirroring the findings of Sorscher et al. (2023), pruning long files could possibly perform *better* if the source corpus is larger, as more steps could be taken on the pruned dataset without epoch’ing.

12. Related, we note that the performance improvements seen in Li et al. (2023b) may also be partially explained by the introduction of short-form synthetic code data.

Depending on the downstream use case, such “overfitting” to short-form code generation may be okay—for example, if end users can only access a model up to its context length (4096 tokens, in our case), presumably practitioners will only care about generalization on code sequences up to the context length.

6 Discussion

In this work, we showed that a simple heuristic-based data pruning method outperforms SOTA embedding-based methods when finetuning LLMs for code generation. Specifically, we found that file lengths are right skewed, leading to a small percentage of (typically “low quality”) files making up a large percentage of code data. Removing these files from finetuning data yielded efficiency and performance improvements on downstream benchmarks in the compute-limited regime. We emphasize that these results were intended to introduce a new heuristic that we believe holds merit, and to contrast with embedding-based pruning methods; we are not asserting that length-based pruning is the “best” pruning method for general datasets and models. Overall, we hope our findings encourage practitioners to more carefully inspect subsets of data that have disproportionately large presence (i.e., long files), and also think about more principled ways of iterating on data pruning methodologies (e.g., bootstrapping for error bars, using a diverse suite of evaluations).

6.1 Limitations

While our experiments show compelling performance improvements in the finetuning setting, due to compute constraints, we were not able to perform data ablations for pretraining models. It could be that longer files (e.g., with a lot of repeated code) could be useful at earlier points of training in incentivizing in-context learning abilities. Beyond this pre-/finetuning distinction, we also did not consider the use of classifier-based pruning. Quality classifiers are typically only used on CommonCrawl text data (Touvron et al., 2023b). However, extending their usage to code data may end up filtering out many of the “useless” long files, such as those containing serial numbers (Figure 1), thus reducing the need and/or impact of an explicit length-based heuristic filter. Finally, we note that our results are limited to the domain of code generation models. Further work would be needed to see if long files are generally lower quality data—in fact, we suspect this is generally not the case (e.g., for natural language corpora), but may be a factor in web scrapes for other subdomains.

6.2 Finding “high quality” long-context code data

As LLMs are deployed more broadly, many model developers have focused on increasing the context length (Gemini Team, 2024). When increasing context length, to make sure the model effectively learns to “use it”, we need corresponding datasets with long documents. However, our findings on the low quality of longer Python files may beg the question of where such data could be found for the domain of code generation. To this end, we suggest the use of techniques such as In-context pretrain (Shi et al., 2023), whereby similar documents are concatenated within a single context, to boost long-context capabilities. Given that much of The Stack is sourced from Github, model practitioners could also consider concatenating files from a single repository into a training sequence—for codebases utilizing object-oriented

programming, this could be an especially compelling technique as some of the information needed to predict the next token in a given file may come from a different file.

Broader Impact Statement

Our work focuses on a simple new heuristic-based method for data pruning. We do not foresee negative societal consequences from this work, as our work does not unlock new capabilities. We believe the work has positive consequences for the research community, such as possibly enabling academic researchers to more efficiently train models and urging data pruning researchers to consider simple methods more commonly in their research.

Acknowledgments and Disclosure of Funding

The authors would like to thank William Held, Newsha Ardalani, Sho Yaida, Niladri Chatterji, Melanie Kambadur, Mike Rabbat, DJ Strouse, and Andrew Saxe for insightful discussions throughout the course of the work and feedback on the draft. All work was completed during A.K.S. and Y.Y.’s internships at Meta FAIR. The authors also thank Jeffery Yu for crucial latex help on earlier versions of the draft.

References

- A. Abbas, K. Tirumala, D. Simig, S. Ganguli, and A. S. Morcos. Semdedup: Data-efficient learning at web-scale through semantic deduplication, 2023.
- J. Austin, A. Odena, M. Nye, M. Bosma, H. Michalewski, D. Dohan, E. Jiang, C. Cai, M. Terry, Q. Le, and C. Sutton. Program synthesis with large language models, 2021.
- T. B. Brown, B. Mann, N. Ryder, M. Subbiah, J. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell, S. Agarwal, A. Herbert-Voss, G. Krueger, T. Henighan, R. Child, A. Ramesh, D. M. Ziegler, J. Wu, C. Winter, C. Hesse, M. Chen, E. Sigler, M. Litwin, S. Gray, B. Chess, J. Clark, C. Berner, S. McCandlish, A. Radford, I. Sutskever, and D. Amodei. Language models are few-shot learners. *CoRR*, abs/2005.14165, 2020. URL <https://arxiv.org/abs/2005.14165>.
- M. Chen, J. Tworek, H. Jun, Q. Yuan, H. P. de Oliveira Pinto, J. Kaplan, H. Edwards, Y. Burda, N. Joseph, G. Brockman, A. Ray, R. Puri, G. Krueger, M. Petrov, H. Khlaaf, G. Sastry, P. Mishkin, B. Chan, S. Gray, N. Ryder, M. Pavlov, A. Power, L. Kaiser, M. Bavarian, C. Winter, P. Tillet, F. P. Such, D. Cummings, M. Plappert, F. Chantzis, E. Barnes, A. Herbert-Voss, W. H. Guss, A. Nichol, A. Paino, N. Tezak, J. Tang, I. Babuschkin, S. Balaji, S. Jain, W. Saunders, C. Hesse, A. N. Carr, J. Leike, J. Achiam, V. Misra, E. Morikawa, A. Radford, M. Knight, M. Brundage, M. Murati, K. Mayer, P. Welinder, B. McGrew, D. Amodei, S. McCandlish, I. Sutskever, and W. Zaremba. Evaluating large language models trained on code, 2021.
- H. De Vries. Go smol or go home, 2023. URL <https://www.harmdevries.com/post/model-size-vs-compute-overhead/>.

- M. Douze, A. Guzhva, C. Deng, J. Johnson, G. Szilvasy, P.-E. Mazaré, M. Lomeli, L. Hosseini, and H. Jégou. The faiss library. 2024.
- D. Fried, A. Aghajanyan, J. Lin, S. Wang, E. Wallace, F. Shi, R. Zhong, W. tau Yih, L. Zettlemoyer, and M. Lewis. InCoder: A generative model for code infilling and synthesis, 2023.
- Gemini Team. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context, 2024.
- S. Goyal, P. Maini, Z. C. Lipton, A. Raghunathan, and J. Z. Kolter. Scaling laws for data filtering – data curation cannot be compute agnostic, 2024.
- jbetker. The “it” in ai models is the dataset., 2023. URL <https://nonint.com/2023/06/10/the-it-in-ai-models-is-the-dataset/>.
- J. Johnson, M. Douze, and H. Jégou. Billion-scale similarity search with GPUs. *IEEE Transactions on Big Data*, 7(3):535–547, 2019.
- D. Kocetkov, R. Li, L. B. Allal, J. Li, C. Mou, C. M. Ferrandis, Y. Jernite, M. Mitchell, S. Hughes, T. Wolf, D. Bahdanau, L. von Werra, and H. de Vries. The stack: 3 tb of permissively licensed source code, 2022.
- K. Lee, D. Ippolito, A. Nystrom, C. Zhang, D. Eck, C. Callison-Burch, and N. Carlini. Deduplicating training data makes language models better, 2022.
- R. Li, L. B. Allal, Y. Zi, N. Muennighoff, D. Kocetkov, C. Mou, M. Marone, C. Akiki, J. Li, J. Chim, Q. Liu, E. Zheltonozhskii, T. Y. Zhuo, T. Wang, O. Dehaene, M. Davaadorj, J. Lamy-Poirier, J. Monteiro, O. Shliazhko, N. Gontier, N. Meade, A. Zebaze, M.-H. Yee, L. K. Umaphathi, J. Zhu, B. Lipkin, M. Oblokulov, Z. Wang, R. Murthy, J. Stillerman, S. S. Patel, D. Abulkhanov, M. Zocca, M. Dey, Z. Zhang, N. Fahmy, U. Bhattacharyya, W. Yu, S. Singh, S. Luccioni, P. Villegas, M. Kunakov, F. Zhdanov, M. Romero, T. Lee, N. Timor, J. Ding, C. Schlesinger, H. Schoelkopf, J. Ebert, T. Dao, M. Mishra, A. Gu, J. Robinson, C. J. Anderson, B. Dolan-Gavitt, D. Contractor, S. Reddy, D. Fried, D. Bahdanau, Y. Jernite, C. M. Ferrandis, S. Hughes, T. Wolf, A. Guha, L. von Werra, and H. de Vries. StarCoder: may the source be with you!, 2023a.
- Y. Li, D. Choi, J. Chung, N. Kushman, J. Schrittwieser, R. Leblond, T. Eccles, J. Keeling, F. Gimeno, A. Dal Lago, T. Hubert, P. Choy, C. de Masson d’Autume, I. Babuschkin, X. Chen, P.-S. Huang, J. Welbl, S. Gowal, A. Cherepanov, J. Molloy, D. J. Mankowitz, E. Sutherland Robson, P. Kohli, N. de Freitas, K. Kavukcuoglu, and O. Vinyals. Competition-level code generation with alphacode. *Science*, 378(6624):1092–1097, Dec. 2022. ISSN 1095-9203. doi: 10.1126/science.abq1158. URL <http://dx.doi.org/10.1126/science.abq1158>.
- Y. Li, S. Bubeck, R. Eldan, A. D. Giorno, S. Gunasekar, and Y. T. Lee. Textbooks are all you need ii: phi-1.5 technical report, 2023b.

- S. Longpre, G. Yauney, E. Reif, K. Lee, A. Roberts, B. Zoph, D. Zhou, J. Wei, K. Robinson, D. Mimno, and D. Ippolito. A pretrainer’s guide to training data: Measuring the effects of data age, domain coverage, quality, & toxicity, 2023.
- I. Loshchilov and F. Hutter. Fixing weight decay regularization in adam. *CoRR*, abs/1711.05101, 2017. URL <http://arxiv.org/abs/1711.05101>.
- N. Muennighoff, A. M. Rush, B. Barak, T. L. Scao, A. Piktus, N. Tazi, S. Pyysalo, T. Wolf, and C. Raffel. Scaling data-constrained language models, 2023.
- A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga, A. Desmaison, A. Köpf, E. Z. Yang, Z. DeVito, M. Raison, A. Tejani, S. Chilamkurthy, B. Steiner, L. Fang, J. Bai, and S. Chintala. Pytorch: An imperative style, high-performance deep learning library. *CoRR*, abs/1912.01703, 2019. URL <http://arxiv.org/abs/1912.01703>.
- M. Pham, M. Cho, A. Joshi, and C. Hegde. Revisiting self-distillation, 2022.
- C. Raffel, N. Shazeer, A. Roberts, K. Lee, S. Narang, M. Matena, Y. Zhou, W. Li, and P. J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020. URL <http://jmlr.org/papers/v21/20-074.html>.
- B. Rozière, J. Gehring, F. Gloeckle, S. Sootla, I. Gat, X. E. Tan, Y. Adi, J. Liu, R. Sauvestre, T. Remez, J. Rapin, A. Kozhevnikov, I. Evtimov, J. Bitton, M. Bhatt, C. C. Ferrer, A. Grattafiori, W. Xiong, A. Défossez, J. Copet, F. Azhar, H. Touvron, L. Martin, N. Usunier, T. Scialom, and G. Synnaeve. Code llama: Open foundation models for code, 2024.
- V. Sharma, K. Padthe, N. Ardalani, K. Tirumala, R. Howes, H. Xu, P.-Y. Huang, S.-W. Li, A. Aghajanyan, G. Ghosh, and L. Zettlemoyer. Text quality-based pruning for efficient training of language models, 2024.
- W. Shi, S. Min, M. Lomeli, C. Zhou, M. Li, R. James, X. V. Lin, N. A. Smith, L. Zettlemoyer, S. Yih, and M. Lewis. In-context pretraining: Language modeling beyond document boundaries, 2023.
- B. Sorscher, R. Geirhos, S. Shekhar, S. Ganguli, and A. S. Morcos. Beyond neural scaling laws: beating power law scaling via data pruning, 2023.
- K. Tirumala, D. Simig, A. Aghajanyan, and A. S. Morcos. D4: Improving llm pretraining via document de-duplication and diversification, 2023.
- Together Computer. Redpajama: an open dataset for training large language models, 2023. URL <https://github.com/togethercomputer/RedPajama-Data>.
- H. Touvron, T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar, A. Rodriguez, A. Joulin, E. Grave, and G. Lample. Llama: Open and efficient foundation language models, 2023a.

- H. Touvron, L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Batra, P. Bhargava, S. Bhosale, D. Bikel, L. Blecher, C. C. Ferrer, M. Chen, G. Cucurull, D. Esiobu, J. Fernandes, J. Fu, W. Fu, B. Fuller, C. Gao, V. Goswami, N. Goyal, A. Hartshorn, S. Hosseini, R. Hou, H. Inan, M. Kardas, V. Kerkez, M. Khabsa, I. Kloumann, A. Korenev, P. S. Koura, M.-A. Lachaux, T. Lavril, J. Lee, D. Liskovich, Y. Lu, Y. Mao, X. Martinet, T. Mihaylov, P. Mishra, I. Molybog, Y. Nie, A. Poulton, J. Reizenstein, R. Rungta, K. Saladi, A. Schelten, R. Silva, E. M. Smith, R. Subramanian, X. E. Tan, B. Tang, R. Taylor, A. Williams, J. X. Kuan, P. Xu, Z. Yan, I. Zarov, Y. Zhang, A. Fan, M. Kambadur, S. Narang, A. Rodriguez, R. Stojnic, S. Edunov, and T. Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023b.
- Z. Wang, W. Zhong, Y. Wang, Q. Zhu, F. Mi, B. Wang, L. Shang, X. Jiang, and Q. Liu. Data management for large language models: A survey, 2023.
- Y. Xu and Y. Zhu. A survey on pretrained language models for neural code intelligence, 2022.
- Y. Yang, A. K. Singh, M. Elhoushi, A. Mahmoud, K. Tirumala, F. Gloeckle, B. Rozière, C.-J. Wu, A. S. Morcos, and N. Ardalani. Decoding data quality via synthetic corruptions: Embedding-guided pruning of code data, 2023.
- S. Zhang, S. Roller, N. Goyal, M. Artetxe, M. Chen, S. Chen, C. Dewan, M. Diab, X. Li, X. V. Lin, T. Mihaylov, M. Ott, S. Shleifer, K. Shuster, D. Simig, P. S. Koura, A. Sridhar, T. Wang, and L. Zettlemoyer. Opt: Open pre-trained transformer language models, 2022.
- Y. Zhao, A. Gu, R. Varma, L. Luo, C.-C. Huang, M. Xu, L. Wright, H. Shojanazeri, M. Ott, S. Shleifer, A. Desmaison, C. Balioglu, P. Damania, B. Nguyen, G. Chauhan, Y. Hao, A. Mathews, and S. Li. Pytorch fsdp: Experiences on scaling fully sharded data parallel, 2023.

Table 1: (Reproduced with minor edits and permission from Yang et al. (2023)) Pass@1 performance on HumanEval and MBPP for different pruning methods with 20% *documents* pruned. Each number here is the result of finetuning a 1.5B Llama1 (Touvron et al., 2023a) model on 67B tokens (multiple epochs). We refer readers to the original work for more detail. We add a **third row** quantifying the number of *tokens* pruned by each method. Different methods often prune vastly different amounts of tokens.

	No pruning	Random Pruning	SSL-Prototypes	SemDeDup	D4	Small Clusters	Far from Centroids	Combined Small+Far
HumanEval	25.0%	24.0%	23.8%	20.7%	23.2%	23.2%	26.8%	<u>28.0%</u>
MBPP	33.4%	31.9%	32.2%	32.4%	31.2%	<u>35.0%</u>	30.8%	33.0%
Tokens pruned	0.0%	20.0%	4.1%	5.7%	5.8%	25.1%	20.2%	24.6%

Appendix A. Embedding-based pruning methods on documents may prune vastly different numbers of tokens

In Table 1, we show the comparison of different embedding-based data pruning methods from Yang et al. (2023), where each method pruned 20% of *documents*. In the third row, we computed the percentage of *tokens* pruned in each case. These results emphasize the difference between pruning in terms of documents vs. in terms of tokens for natural language datasets. In our work, we prune $P\%$ of tokens, coming from the longest files.

Appendix B. Hyperparameters

All models were finetuned using the AdamW (Loshchilov and Hutter, 2017) optimizer ($\beta_1 = 0.9, \beta_2 = 0.95$) with weight decay of 0.1 and a learning rate of $1e-4$ that was cosine annealed down to $1e-5$. There was a linear warmup from 0 to $1e-4$ for the first 1000 steps, as is common practice. Model code was implemented using PyTorch (Paszke et al., 2019) and fully-sharded data parallel (Zhao et al., 2023) was used to accelerate training. Each run took about 26 hours on 64 A100 GPUs.

Appendix C. Additional results

Full curves for eval performance (HumanEval and MBPP) throughout the finetuning process are provided in Figure 4.

Validation perplexities are calculated in the standard way by packing documents together (as done during training), breaking up into context length chunks (in our case, $2^{12} = 4096$), and then calculating average per-token perplexity. We present two views on the results in Figure 5.

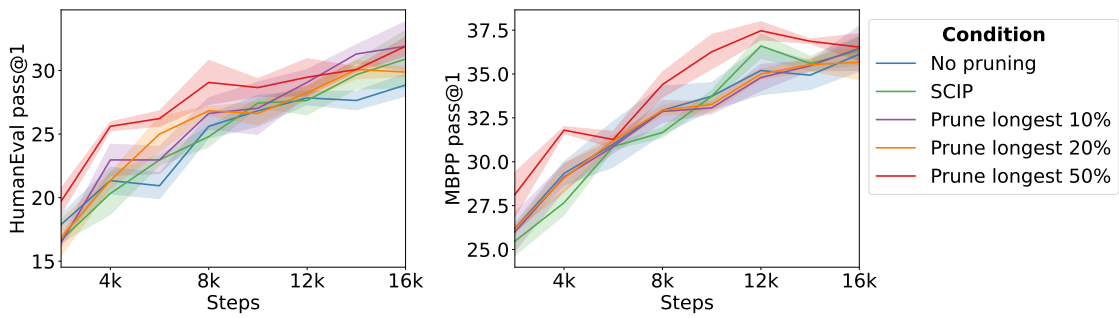


Figure 4: Raw curves of evaluation benchmark performance over training. Shaded area indicates standard error. Note the results in Figure 3 are taken from this plot, to more clearly show snapshots at various points during training.

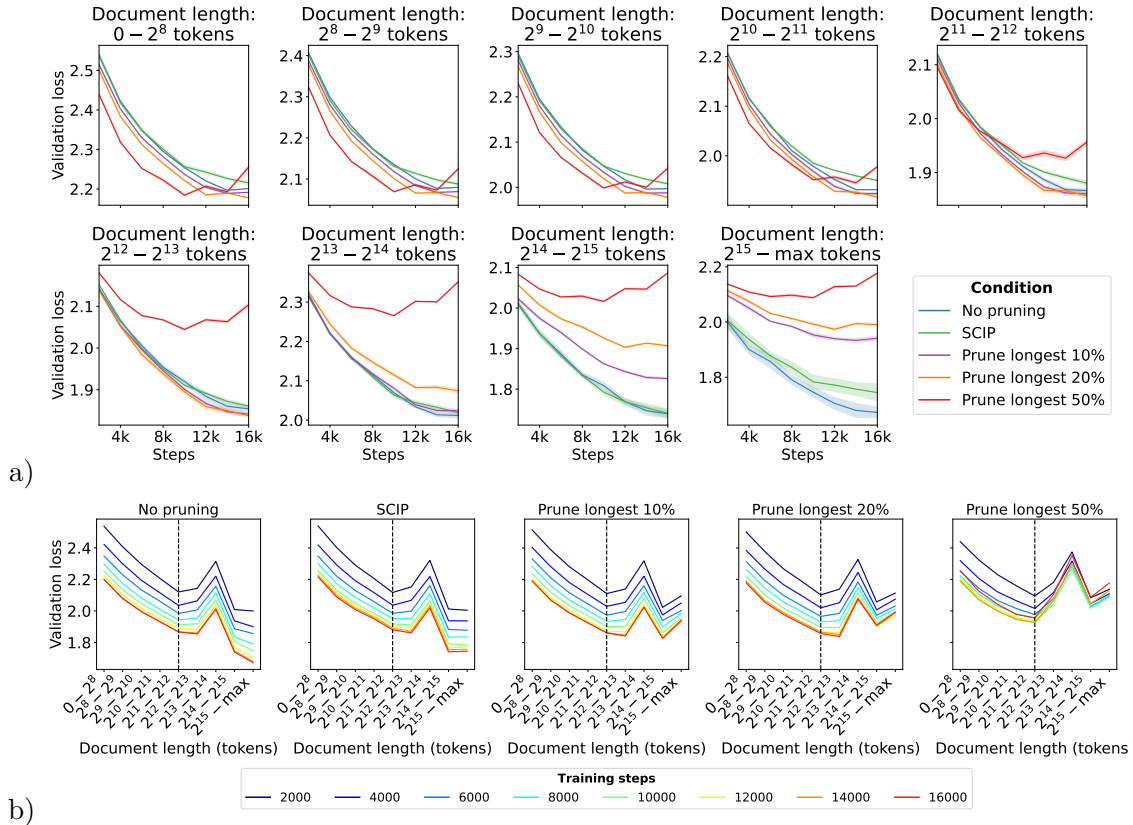


Figure 5: Two views on validation perplexity evolution on various length bins. **a)** We show the curves throughout training with each panel showing a different length bin. It’s clear that the most aggressively pruned setting (red curve, Prune longest 50%) overfits with multiple epochs (around 10k steps) on all lengths, and generally has worse perplexity on longer length documents—intuitively this makes sense since the longest file in the 50% pruned subset was only ≈ 3600 tokens. Mirroring our results from Figure 3, this most aggressive pruning setting performs best in the compute-limited regime (up to 8k steps) on shorter documents (more akin to the downstream benchmarks HumanEval and MBPP). **b)** We instead focus on the perplexities across length bins, with each color showing a different step. Considering any time step of the “no pruning” baseline, we see that perplexities decrease with longer files, up to the context length (black dotted line), as we’d expect since there’s more “useful” context enabling the model to lower perplexity. Beyond the context length, perplexities increase as expected (since all documents are being cut somewhere in the middle). Surprisingly, perplexities again decrease on the *longest documents*, seeming to indicate that being split isn’t affecting these documents. This is in line with our qualitative observations of repetitiveness in Section 3, and further motivates pruning these files.