

---

# MMEVALPRO: Calibrating Multimodal Benchmarks Towards Trustworthy and Efficient Evaluation

---

Jinsheng Huang<sup>1\*</sup>, Liang Chen<sup>1\*</sup>, Taian Guo<sup>1</sup>, Fu Zeng<sup>2</sup>, Yusheng Zhao<sup>1</sup>  
 Bohan Wu<sup>1</sup>, Ye Yuan<sup>1</sup>, Haozhe Zhao<sup>1</sup>, Zhihui Guo<sup>3</sup>, Yichi Zhang<sup>1</sup>, Jingyang Yuan<sup>1</sup>  
 Wei Ju<sup>1</sup>, Luchen Liu<sup>1</sup>, Tianyu Liu<sup>4</sup>, Baobao Chang<sup>1†</sup>, Ming Zhang<sup>1†</sup>

<sup>1</sup>National Key Laboratory for Multimedia Information Processing, Peking University

<sup>2</sup>Chinese Academy of Medical Sciences, <sup>3</sup>CUHK, <sup>4</sup>Alibaba Group

hjs@stu.pku.edu.cn leo.liang.chen@outlook.com

{chbb, mzhang\_cs}@pku.edu.cn

<https://mmevalpro.github.io>

 Code  Dataset

## Abstract

Large Multimodal Models (LMMs) exhibit impressive cross-modal understanding and reasoning abilities, often assessed through multiple-choice questions (MCQs) that include an image, a question, and several options. However, many benchmarks used for such evaluations suffer from systematic biases. Remarkably, Large Language Models (LLMs) without any visual perception capabilities achieve non-trivial performance, undermining the credibility of these evaluations. To address this issue while maintaining the efficiency of MCQ evaluations, we propose MMEVALPRO, a benchmark designed to avoid Type-I errors through a trilogy evaluation pipeline and more rigorous metrics. For each original question from existing benchmarks, human annotators augment it by creating one perception question and one knowledge anchor question through a meticulous annotation process. MMEVALPRO comprises 2,138 question triplets, totaling 6,414 distinct questions. Two-thirds of these questions are manually labeled by human experts, while the rest are sourced from existing benchmarks (MMMU, ScienceQA, and MathVista). Compared with the existing benchmarks, our experiments with the latest LLMs and LMMs demonstrate that MMEVALPRO is **more challenging** (the best LMM lags behind human performance by 31.73%, compared to an average gap of 8.03% in previous benchmarks) and **more trustworthy** (the best LLM trails the best LMM by 23.09%, whereas the gap for previous benchmarks is just 14.64%). Our in-depth analysis explains the reason for the large performance gap and justifies the trustworthiness of evaluation, underscoring its significant potential for advancing future research.

## 1 Introduction

Ever since the birth of standardized testing, the credibility of its conclusions has been a significant concern. The same problem goes for the evaluation of recently popular Large Multimodal Models (LMMs) such as GPT4-o [22], Gemini-1.5 [24], Qwen-VL [2] and LLaVA [16]. One classic composition of such an evaluation is the multiple-choice question (MCQ), which includes an image, a question, possible choices, and an answer. This form of evaluation has higher usability compared to other evaluation methods, such as text-based evaluation and human evaluation. Many benchmarks [9, 17–19, 28, 29, 3, 4, 11, 23] designed for multimodal foundation models include a large portion of

---

\* Equal contribution. † Corresponding authors.

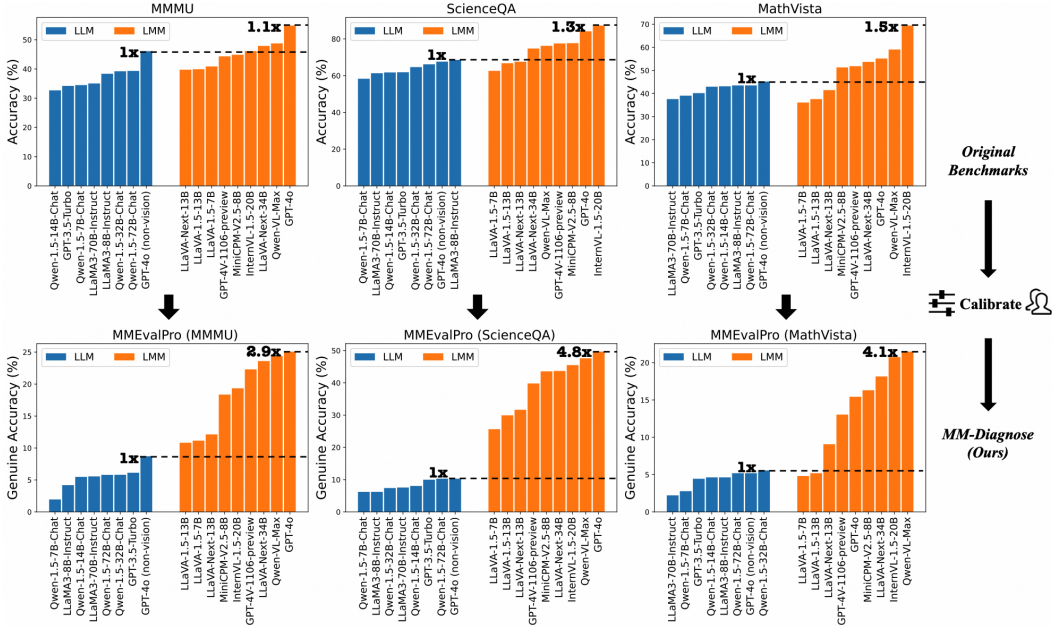


Figure 1: LLMs and LMMs’ performance comparison between original multimodal benchmarks and MMEVALPRO. Performance gap between LLM and LMM is much clearer in MMEVALPRO.

MCQs and are widely adopted in testing from basic to most advanced multimodal models [22, 2, 16], with some models reaching or even surpassing human scores on certain benchmarks [19, 11]. However, it is important to consider whether these evaluation results truly reflect the absolute capabilities of the models, especially when we are comparing them with human beings in the pursuit of AGI. In fact, several work such as PCA-Bench [4], MMStar [6] and MathVerse [30] have pointed out that the multimodal MCQ evaluation has intrinsic bias, which provides Large Language Models (LLMs) with shortcut to hack the question. FastV [5] finds that LMM could even achieve better performance on some benchmarks with only partial visual tokens. In this paper, we mainly study three popular multimodal benchmarks MMMU [28], ScienceQA [19] and MathVista [18].

In our preliminary Seeing-or-Not Comparison experiment, we found that LLMs could achieve high scores on the tested benchmarks without processing the visual data, attributed to possible data leakage, visual information problems being not related to answering the question or simply guessing the answer. Notably, the average performance gap between best LLM and best LMM is just 14.64%, which is even smaller than the gap within LMM themselves, revealing the unreliable problem of such evaluations.

Our further Answer Consistency Test into multiple choice questions (MCQ) reveals a prevalent Type-I Error in such evaluation’s conclusion, where models could output correct answers without actual comprehension. For example, the model could calculate the degree for a particular angle, but could not recognize the correct angle’s name in the figure, which is a prerequisite to compute the degree.

To this end, we propose MMEVALPRO to truthfully reflect the true multimodal capabilities of tested models and keep the simplicity of MCQ evaluation. We achieve this by augmenting the original MCQ with prerequisite perception and knowledge questions. We propose Genuine Accuracy as the main metric, which depends on whether the model answers the triplet questions concurrently. Overall, in MMEVALPRO we annotate 2, 138 question triplets, originating from MMMU, ScienceQA, and MathVista, resulting in 6, 414 individual questions.

We carry out experiments and analyses involving 17 different models and human experts. The findings indicate that MMEVALPRO offers a more precise reflection of the true capabilities of the tested LMMs and poses a more demanding challenge. We find MMEVALPRO is more trustworthy than the base benchmarks as the best LLM trails the best LMM by 23.09% in MMEVALPRO whereas the gap for previous benchmarks is just 14.64%. Significantly, even the most advanced models, including GPT-4o and Qwen-VL-Max, lag considerably behind human performance, with a notable gap of over

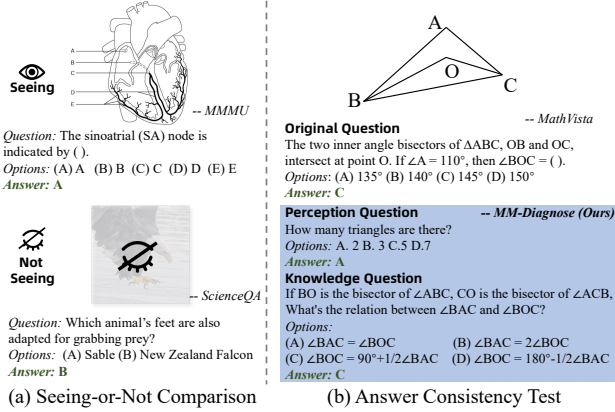


Figure 2: Examples of the probing experiments.

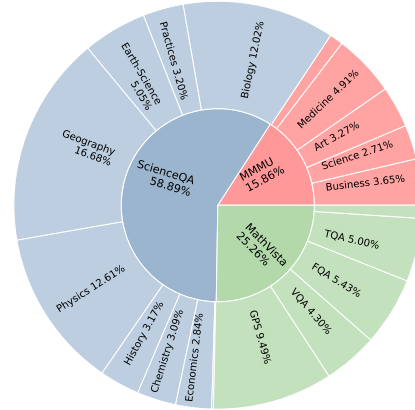


Figure 3: Topic distribution of MMEVALPRO's data.

30% in Genuine Accuracy (only 8.03% for the base benchmarks). Our investigation into the factors contributing to the consistency gap illuminates the existing disparities and supports the evaluation credibility of MMEVALPRO, supplying insights for future research endeavors.

## 2 Probing the Credibility of Multimodal Benchmarks

The fundamental assumption of any benchmark is that models achieving higher scores possess superior capabilities compared to those with lower scores. In this section, we question the credibility of such an assumption for existing benchmarks used to evaluate LLMs. We find that the multimodal benchmarks we tested are not trustworthy enough in either relative or absolute perspectives, which is concluded from two probing experiments: Seeing-or-Not Comparison and Answer Consistency Test. The processes are illustrated in Figure 2. We test the MCQ evaluation in three multimodal benchmarks across various domains including MMMU, ScienceQA-Image and MathVista. We provide the detail of dataset statistics in section 3.1, model inference hyper-parameters and prompts in Appendix-B.

### 2.1 Seeing-or-Not Comparison

As shown in Figure 2-(a), we prepare two data versions for each benchmark: “Seeing” (with image, question, options, and answer) and “Not-Seeing” (without image). We test leading LLMs on “Seeing” data and non-vision LLMs on “Not-Seeing” data, then compare the results. The outcomes are shown in the first row of Figure 1.

The figure indicates that the performance gap between LMMs and LLMs is significantly narrower than anticipated. Intuitively, one might assume that LLMs, which lack the ability to process visual information, would perform considerably worse on multimodal benchmarks. In fact, if we compare the scores between the best-performing LLM and LMM, we observe that for MMMU, the best LLM’s performance is only 1.1 times that of the best LLM. This performance gap is even smaller than the variability observed within LMMs themselves. Similar results go for the other tested benchmarks. What’s more surprising is that LLMs sometimes outperform their vision-enabled counterparts (GPT4-o without vision ability outperforms the LLaVA-1.5 series according to Figure 1) and there is not an apparent performance boundary between the two kinds of models. These results suggest that those benchmarks do not accurately reflect the true multimodal understanding capabilities of the tested models. The reason for this phenomenon is three-fold:

**1. Image is not needed:** Some benchmark questions can be answered solely through textual information, making visual input unnecessary. This diminishes the advantage of vision-enabled models (LMMs). For instance, as shown in the ScienceQA question in Figure 2, the knowledge that a falcon uses its feet to capture prey is common and does not require an image for verification.

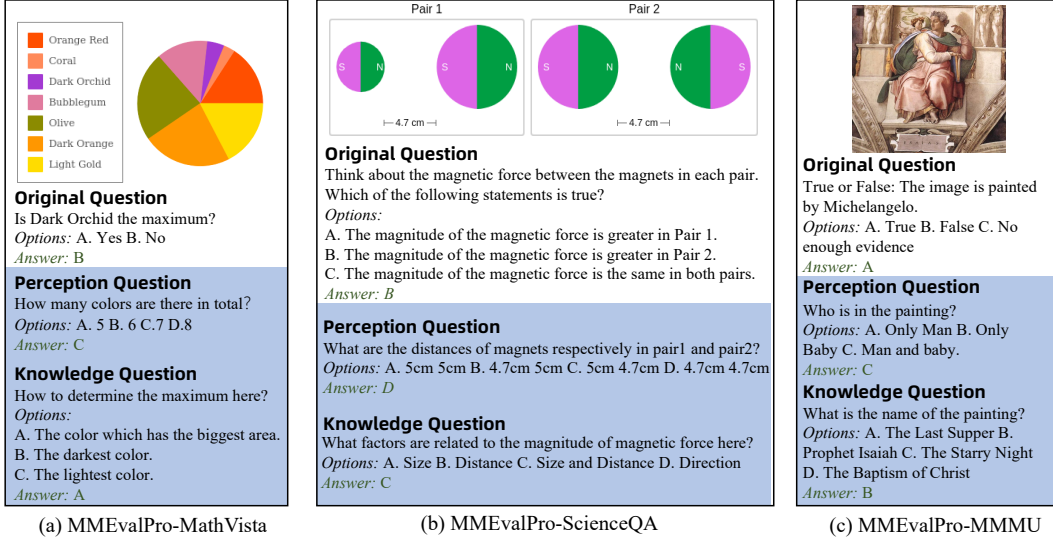


Figure 4: Examples from different splits in the MMEVALPRO dataset.

**2. Data leakage:** During training, LLMs may inadvertently encounter similar questions or datasets, leading to unfair advantages. The benchmarks often derive questions from textbooks [19, 28], online education resources, and research papers [18], which are also sources for training datasets [25, 8].

**3. Educated guessing:** LLMs are trained on extensive text datasets, enabling them to make educated guesses even without visual information, which narrows the performance gap with LMMs.

These factors collectively result in the unexpectedly narrow performance gap between LLMs and LMMs on multimodal benchmarks. To create a fair multimodal evaluation benchmark: (1) Ensure questions are intrinsically tied to the image details, making visual information essential for deriving the answer. (2) Prevent contamination of training data to ensure models are reasoning through problems instead of recalling memorized answers. (3) Design questions and answers to minimize the likelihood of the model making accurate guesses.

## 2.2 Answer Consistency Test

To determine whether a model truly understands a question or is simply "hacking" the answer, we simulate the human problem-solving process by creating "anchor questions" that must be answered before the main question. When humans tackle multimodal reasoning questions, they typically follow two key steps: (1) identifying relevant visual clues in the image, and (2) applying their knowledge to reason through the problem before arriving at the final answer. Omitting either step usually leads to an incorrect answer. Similarly, we create a perception anchor question and a knowledge anchor question related to the original question. If a model can answer both anchor questions and the final question, it demonstrates genuine comprehension and reasoning, rather than mere guessing.

An example is shown in Figure 2-(b), we set a perception question and a knowledge question to the MCQ from MathVista. For human examinees, the perception question and knowledge question are easier to answer than the original one since they are set to be the prerequisites in the solution path. We found that even the most advanced LMM such as GPT4o struggles at answering all related questions even if it answers the original question correctly, which is easy for human experts. A detailed case analysis is in Figure 5.

The phenomenon raises another concern for multiple-choice question (MCQ)-based multimodal evaluation benchmarks: correctly answering a question does not necessarily indicate that the model genuinely knows how to derive the final answer. A direct solution to accurately diagnose whether the model truly has the capability to solve the question is to let humans evaluate the model's reasoning process, as done in previous works like MathVista [18]. However, human evaluation is labor-intensive and not reproducible, which complicates the broader application of the method.

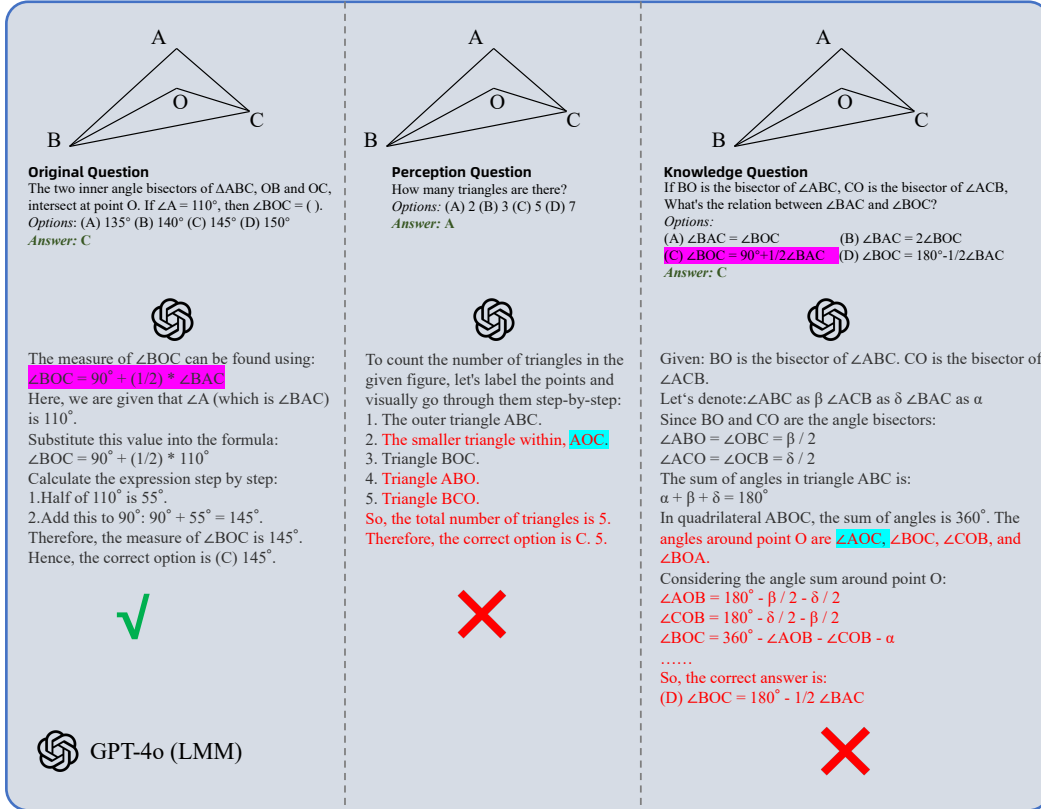


Figure 5: Case study on the answer in-consistency problem of LMMs. We could tell from the figure that GPT-4o could answer the original question however failed on the perception and knowledge question. The wrong reasoning process is marked red. The multiply mentioned items are marked with the same background color. In the reasoning process of original question, GPT-4o directly points out that  $\angle BOC = 90^\circ + (1/2) \angle BAC$ . However in the knowledge question while the " $\angle BOC = 90^\circ + (1/2) \angle BAC$ " is just one of the options, the model failed to figure it out, while human could easily achieve it. It shows the answer in-consistency problem of the LMM, which can not be pinpointed by single MCQ evaluation. If we further look at the reasoning process of the perception question, we could find that the model could not even recognize the correct number of triangles in the figure. For example it recognized  $AOC$  as a triangle, which is actually not. This also causes its problematic reasoning for the knowledge question.

Several related works use advanced LLMs like GPT-4 to replace humans in evaluating the reasoning process of LMMs [4, 30]. These methods show a strong correlation with human judgments in corresponding tests, but they result in unstable evaluation due to updates of proprietary models and inevitable API costs. Research in using LLMs as evaluators [26, 4] also finds systematic bias and a significant gap between open-source and proprietary models in terms of evaluation agreement with human experts. These drawbacks highlight the need for an economical, easy-to-use, and calibrated evaluation method for multimodal models.

### 3 MMEVALPRO: Calibrating Multimodal Evaluation

In this section, we delve into the detailed process of constructing the MMEVALPRO benchmark dataset and elucidate our methodologies for ensuring high-quality evaluation standards. Through these efforts, the MMEVALPRO framework sets a new paradigm in the assessment of multimodal models, aiming to foster both accuracy and efficiency in multimodal evaluation.



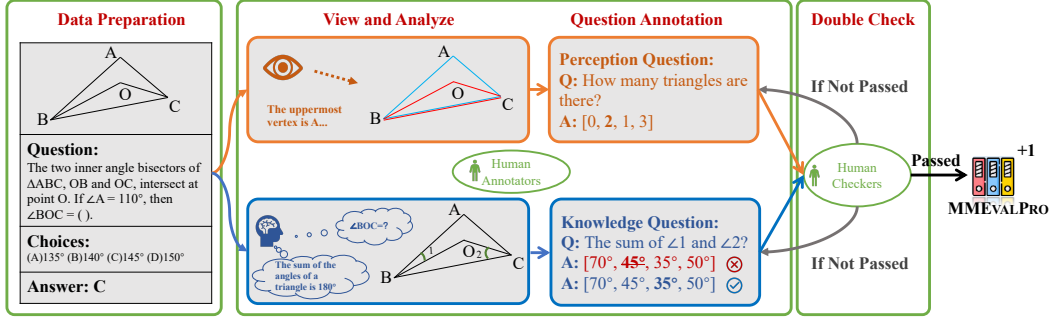


Figure 6: Annotation pipeline for MMEVALPRO.

### 3.1 Data Source

To enhance the diversity of our benchmark data, MMEVALPRO integrates content from three prominent multimodal evaluation benchmarks: MMMU, ScienceQA, and MathVista. These benchmarks span educational levels from junior high to undergraduate and cover various subjects including Science, Math, and Art. The detailed descriptions of the source datasets are in Appendix A.1. Considering annotator expertise and budget, we selected 328 questions from MMMU (dev), 1, 200 from ScienceQA-Image, and all 540 from MathVista (testmini), totaling 2, 138 distinct multimodal MCQs.

### 3.2 Annotation Pipeline

As illustrated in Figure 6, we design the following pipeline for MMEVALPRO to generate question triplets. The triplet consists of an original question, a perception question, and a knowledge question.

**1) Data Preparation:** Annotators begin by thoroughly reviewing the original question to ensure a deep understanding of the underlying concepts and the solution process.

**2) View and Analyze:** Annotators are tasked with extracting crucial visual information and the logical framework implicit in the original problem, paving the way for the creation of nuanced perception and knowledge questions.

**3) Question Annotation:** Building on the insights gathered, annotators then proceed to enrich the original question by formulating corresponding perception and knowledge questions, thereby expanding the scope of the evaluation.

**4) Double Check:** To maintain the integrity of the MMEVALPRO dataset, each annotated question triplet undergoes a rigorous verification process. Two independent checkers, who are not part of the annotation team, review each triplet for any errors or logical inconsistencies. Any issues identified prompt a re-annotation of the affected questions.

We provide the annotator guide in the supplement material. The final distribution of MMEVALPRO is shown in Figure 3. We list the key statistics of the benchmark in Table 3 from Appendix 3.1, the annotation guidelines in Appendix C and D.

### 3.3 Evaluation Metrics

We propose **Genuine Accuracy (GA)** as the primary metric for MMEVALPRO. GA equals 1 only if the model correctly answers the original question and the corresponding perception and knowledge prerequisite questions simultaneously. The second metric is the **Average Accuracy (AA)**, which treats all questions equally and computes the average accuracy.

MMEVALPRO can also be viewed as a multi-view evaluation process, where we naturally derive the **Perception Accuracy (PA)** score and the **Knowledge Accuracy (KA)** score by computing the average accuracy for the perception and knowledge anchor questions, respectively.

The **Consistency Gap (CG)** is measured by subtracting the Genuine Accuracy from the accuracy of the original question. This metric reflects the proportion of instances where the model correctly answers the original question but fails on more in-depth perception and knowledge ques-

tions, leading to inconsistency in its answers. To gain deeper insights into the answer consistency and generalization capabilities of the tested models, we define **Perception Consistency (PC)** and **Knowledge Consistency (KC)** as the conditional probabilities  $P(\text{Perception} = 1 \mid \text{Origin} = 1)$  and  $P(\text{Knowledge} = 1 \mid \text{Origin} = 1)$ , where  $(= 1)$  indicates correctly answering the corresponding question in a question triplet. PC and KC together reveal the answer consistency of the tested model.

### 3.4 Quality Evaluation

To ensure the precision and consistency of our annotations, all question triplets are annotated by graduate students. For specialized college-level subjects in the MMMU sub-set, we hire students in the corresponding major to ensure annotation accuracy. All annotators are required to thoroughly familiarize themselves with the guide before commencing their annotation tasks. During the annotation process, we assign a minimum of three annotators for one question triplet. These foundations ensure the quality of the new annotated 4,276 questions and there are only 47 questions that go through more than two double-check circles. Consensus was reached on all examples in the end.

## 4 Experiments

In this section, we evaluate a wide range of models on our MMEVALPRO benchmark. We first introduce the evaluation setup, and then present the quantitative results for both open-source and closed-source models. Finally we investigate the answer consistency gap among LLMs, LMMs and human experts with fine-grained analysis.

### 4.1 Setup

We test multiple LLMs and LMMs on the original benchmarks and MMEVALPRO. To streamline the evaluation process, all questions are converted into a multiple-choice format, prompting the models to directly provide the answers. This approach simplifies answer matching process and eliminates the need for external models like ChatGPT, which is commonly used in previous studies such as [18, 4, 30]. In line with prior research, we incorporate an in-context demonstration for LLMs to standardize the output format. This is important as we have observed that different LLMs tend to produce varying response formats when not provided with an example. The detailed prompt and demonstration template are listed in Appendix B. For the original benchmarks, we report the average accuracy on the MCQ questions the same as we sampled for creating MMEVALPRO for fair comparison. For MMEVALPRO, we report both the Genuine Accuracy and Average Accuracy.

### 4.2 Evaluated Models

In our evaluation, we evaluate a variety of both LLMs and LMMs. For LLMs, we implement a 1-Shot setting, where a single demonstration is utilized to guide the output format. Among the LLMs assessed are some of the most advanced open-source models, including four versions of Qwen-1.5-Chat [1] with sizes spanning from 7B to 72B, as well as the LLaMA3-Instruct [25] series (8B and 70B). We also tested API-only models, such as GPT-3.5-Turbo [20] and GPT4-o [22], which rely solely on language. On the other hand, LMMs are evaluated in a zero-shot manner due to their ability to follow instructions to produce valid answer choices. In the open-source category, we tested the LLaVA-1.5 [14] and LLaVA-Next [15] series, which include models of 7B, 13B, and 34B in size. We also evaluated two of the most cutting-edge LMMs, MiniCPM-V2.5-LLaMA3-8B [10] and InternVL-1.5-Chat-20B [7], both of which have recently been made available to the public. For proprietary models, we tested GPT-4V-1106-preview [21], the latest GPT-4o [22], and Qwen-VL-Max [2]. We provide the prompts for LLMs and the hyperparameters used for LMMs in Appendix B.

### 4.3 Experiment Results

As shown in Table 1, we compare the performance of different models including LLMs and LMMs on MMEVALPRO and the original benchmarks. We evaluated the performance of graduate students on the benchmarks as a strong baseline. The human evaluation guideline is in Appendix E. The details of human evaluation guide are in the supplement material. We also include random guess as a weak baseline performance.

Table 1: Main experiments result. For average, we report the macro average scores (the mean of different domains). Highest score is marked **bold** and the second highest is underlined. Best LMM still lags behind human with a substantial gap ( $-31.73\%$  average **GA**) on MMEVALPRO.

Model	Open?	Original Source (Average Accuracy)				MMEVALPRO (Genuine Accuracy / Average Accuracy)			
		MMMU	ScienceQA	MathVista	Average	MMMU	ScienceQA	MathVista	Average
<i>Large Language Models (1-Shot)</i>									
Qwen-1.5-7B-Chat	Yes	34.48%	58.32%	39.07%	43.96%	1.95% / 30.30%	6.21% / 41.08%	2.78% / 29.19%	3.65% / 33.52%
Qwen-1.5-14B-Chat	Yes	32.68%	61.75%	43.14%	45.86%	5.48% / 35.05%	8.05% / 43.74%	4.63% / 35.74%	6.05% / 38.18%
Qwen-1.5-32B-Chat	Yes	39.21%	64.66%	42.96%	48.94%	5.81% / 39.56%	7.40% / 45.31%	5.56% / 37.53%	6.26% / 40.80%
Qwen-1.5-72B-Chat	Yes	39.33%	66.18%	43.52%	49.68%	5.80% / 38.06%	10.30% / 41.09%	5.19% / 36.98%	7.10% / 38.71%
LLaMA3-8B-Instruct	Yes	38.36%	68.57%	43.51%	50.15%	4.19% / 34.09%	6.22% / 45.24%	4.63% / 34.32%	5.01% / 37.88%
LLaMA3-70B-Instruct	Yes	35.56%	63.47%	37.59%	45.54%	4.84% / 34.94%	8.05% / 44.06%	2.59% / 31.85%	5.16% / 36.95%
GPT-3.5-Turbo	No	34.21%	61.85%	40.18%	45.41%	6.13% / 38.28%	9.98% / 45.87%	4.44% / 33.58%	6.85% / 39.24%
GPT-4o (non-vision)	No	46.09%	67.62%	45.19%	52.97%	8.71% / 39.90%	10.30% / 48.18%	5.19% / 37.78%	8.07% / 41.95%
<i>Large Multimodal Models (Zero-Shot)</i>									
LLaVA-1.5-Vicuna-7B	Yes	40.86%	62.61%	36.11%	46.53%	11.15% / 43.06%	25.64% / 58.33%	4.81% / 37.10%	13.87% / 46.16%
LLaVA-1.5-Vicuna-13B	Yes	39.92%	66.76%	37.59%	48.09%	10.82% / 43.28%	29.94% / 63.20%	5.19% / 36.98%	15.32% / 47.82%
LLaVA-Next-Vicuna-13B	Yes	39.75%	67.57%	41.48%	49.60%	12.13% / 47.86%	31.65% / 64.88%	9.07% / 39.26%	17.62% / 50.67%
LLaVA-Next-Hermes-Yi-34B	Yes	47.89%	74.77%	53.70%	58.79%	23.60% / 59.34%	43.67% / 73.35%	18.15% / 54.75%	28.47% / 62.48%
MiniCPM-V2.5-LLaMA3-8B	Yes	44.86%	77.68%	51.32%	57.95%	18.36% / 54.86%	43.56% / 73.96%	16.30% / 52.28%	26.07% / 60.37%
InternVL-1.5-Chat-20B	Yes	46.12%	<b>87.27%</b>	<b>69.44%</b>	<b>67.61%</b>	19.34% / 55.63%	45.49% / 76.25%	20.74% / 57.78%	28.52% / 63.22%
GPT-4V-1106-preview	No	44.32%	77.54%	51.85%	57.90%	22.30% / 57.95%	39.81% / 71.34%	13.04% / 48.48%	25.05% / 59.26%
GPT-4o	No	<b>54.85%</b>	<b>84.13%</b>	55.16%	64.71%	<b>25.08%</b> / <b>60.29%</b>	<b>49.68%</b> / <b>76.86%</b>	15.43% / 52.63%	<u>30.06%</u> / <u>63.26%</u>
Qwen-VL-Max	No	<u>48.75%</u>	<u>76.22%</u>	<u>59.07%</u>	61.35%	<u>24.38%</u> / <u>59.45%</u>	<u>47.61%</u> / <u>75.02%</u>	<b>21.48%</b> / <b>59.19%</b>	<b>31.16%</b> / <b>64.55%</b>
Random Guess	-	26.04%	35.53%	32.41%	31.33%	1.94% / 28.60%	2.36% / 29.26%	3.32% / 29.14%	2.54% / 29.01%
Human (Graduate Student)	-	49.21%	76.92%	92.08%	72.74%	38.10% / 66.67%	64.42% / 81.09%	86.14% / 93.07%	62.89% / 80.28%

Table 2: Fine-grained scores on MMEVALPRO. **CG**: Consistency Gap, **PA**: Perception Accuracy, **KA**: Knowledge Accuracy, **PC**: Perception Consistency, **KC**: Knowledge Consistency

Model	Type	Open?	MMEVALPRO-MMMU				MMEVALPRO-ScienceQA				MMEVALPRO-MathVista						
			CG↓	PA↑	KA↑	PC↑	KC↑	CG↓	PA↑	KA↑	PC↑	KC↑	CG↓	PA↑	KA↑	PC↑	KC↑
Qwen-1.5-72B-Chat	LLM	Yes	33.53%	32.58%	41.29%	29.66%	41.52%	55.88%	20.17%	30.40%	30.32%	46.60%	38.33%	27.04%	44.43%	23.47%	45.07%
GPT-4o	LLM	No	37.38%	38.75%	43.24%	41.50%	41.51%	57.32%	46.87%	47.62%	46.43%	51.56%	40.00%	37.22%	38.15%	34.15%	41.46%
InternVL-1.5-Chat-20B	LMM	Yes	26.78%	63.87%	54.19%	63.57%	56.30%	41.78%	70.81%	71.46%	70.70%	70.95%	48.7%	51.67%	52.77%	52.69%	55.13%
GPT-4o	LMM	No	29.77%	63.07%	55.22%	63.33%	56.54%	34.45%	77.47%	75.21%	77.20%	75.39%	39.73%	57.32%	54.25%	53.63%	49.72%
Human	-	-	11.11%	80.65%	69.35%	93.56%	80.66%	12.50%	88.12%	83.17%	89.99%	88.77%	5.94%	94.06%	93.07%	95.70%	95.71%

We first evaluate LLMs and LMMs separately. For LLMs, all models perform poorly under the Genuine Accuracy metric in the MMEVALPRO evaluation. For example, the advanced GPT-4o model achieves 67.62% accuracy on the original ScienceQA-Image benchmark but drops to 10.30% on its calibrated version in MMEVALPRO, a decrease of 57.32 percentage points. Similar declines are observed in MMMU (down 37.38%) and MathVista (down 40%). These low scores more accurately reflect LLMs’ general multimodal capabilities due to their lack of visual perception abilities. Open-source LLMs also show drastic declines in Genuine Accuracy. The Qwen-1.5 series suggests that larger LLMs perform better on both benchmarks, supporting the idea that stronger LLMs are better at guessing. However, this trend does not hold for the LLaMA-3 series, indicating a need for our further investigation in the future. Generally, most LLMs score below 10% in Genuine Accuracy, highlighting the difficulty of the proposed benchmark for LLMs.

On the LMMs side, we also witness a large performance gap between the original benchmarks and MMEVALPRO. For proprietary models, GPT-4o and Qwen-VL-Max perform the best. If we compare the performance gap of best LLM and best LMM on the original benchmark and MMEVALPRO, we could find that the performance difference in scales is more clear on MMEVALPRO. For example, in original MMMU benchmark, GPT-4o with vision (54.85%) is only 1.1 times its non-vision LLM version (46.09%). While in MMEVALPRO, the LMM (25.08%) version’s performance is 2.9 times the LLM (8.71%) version of GPT-4o. A similar result also goes for the other tasks in MMEVALPRO. The enlarged performance discrepancy is more intuitive given the fundamental functionality difference between LLMs and LMMs. MMEVALPRO could better reflect the true abilities of examinees.

#### 4.4 Fine-grained Analysis

To better explain models’ performance on MMEVALPRO, we conducted a fine-grained analysis on the experiments’ result according to the metrics proposed in section 3.3. We select the best performing open-source and proprietary LLMs and LMMs to analyze. The results are shown in Table 2. A detailed case analysis is in Figure 5. More comparisons of different models are listed in Figure 18 from the Appendix.



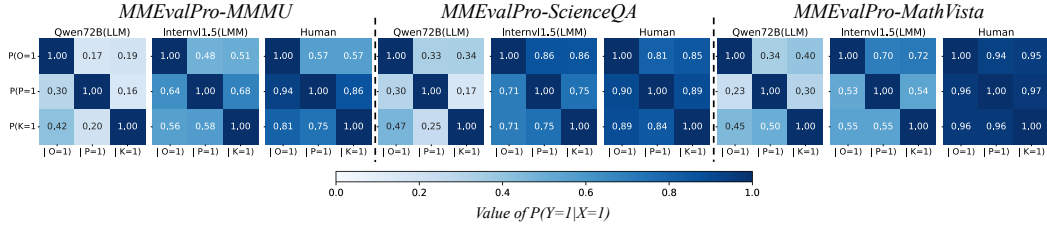


Figure 7: Heatmaps of conditional accuracy of MMEVALPRO.

**Why MMEVALPRO is challenging and more trustworthy?** When comparing human performance with that of LLMs and LMMs, we observe a more significant gap in MMEVALPRO evaluations than in original benchmarks. This indicates that MMEVALPRO is inherently a more challenging task. The primary difficulty stems from the issue of answer consistency, which demonstrates whether the model genuinely understands how to leverage perceptual abilities and knowledge to solve a given problem. To illustrate this, we compare the Consistency Gap (CG) scores among humans, the best-performing LLMs and LMMs. The results suggest that LLMs generally exhibit a larger Consistency Gap than LMMs, while human experts display a considerably smaller CG. This trend is consistent across both open-source and proprietary models. A large Consistency Gap indicates that a model’s robustness and generalization abilities are limited: it may be able to answer the original question but fails to respond accurately to related prerequisite questions based on the same image.

This weakness is difficult to capture for the original benchmarks due to the single MCQ format. In fact, if we only consider the Average Accuracy of MMEVALPRO, as shown in Table 1, we observe that the performance difference compared to the original benchmarks is much smaller than the difference in Genuine Accuracy (GA). This suggests that LLMs can often guess correct answers for questions even without image input. MMEVALPRO addresses this issue effectively through the GA metric, making it a more reliable evaluation method compared to previous benchmarks.

**Why the Consistency Gap is large?** The gap between Genuine Accuracy and Average Accuracy on the original benchmarks reveals the answer inconsistency problem. We are further interested in what causes the problem. There are two possible reasons for a large Consistency Gap, that the model correctly answer the original question however fails on the perception or knowledge one. We compare the **Perception Consistency (PC)** and **Knowledge Consistency (KC)** of the evaluated models and humans. We find that there is a clear performance border between humans and LMMs, LMMs and LLMs. Humans could reach at least 90%PC and 80%KC in various sub-tasks, showing strong answer consistency. While the numbers for LMMs are 50%PC and 55%KC, for LLMs are 23%PC and 41%KC according to Table 2.

PC and KC intuitively reflect the model’s likelihood of correctly answering perception and knowledge questions if it has already solved the original question. Low PC and KC scores lead to a significant consistency gap. Beyond PC and KC, we visualize all conditional probabilities for the best open-source LLM and LMM in Figure 7. Humans generally exhibit high probabilities of correctly answering one question given a correct answer to another, indicating consistent thinking. In contrast, LLMs show the lowest probabilities compared to LMMs and humans. This is expected, as LLMs lack consistent multimodal problem-solving paths due to their absence of visual perception, thus supporting the credibility of the benchmarks.

Examining the Perception Accuracy (PA) and Knowledge Accuracy (KA) in Table 2, we find that LMMs demonstrate a greater advantage in PA compared to KA when contrasted with LLMs. This is because PA depends directly on the models’ visual capabilities, which LLMs lack. The above conclusion explains why the tested models have larger CG compared to humans, which is a potential and promising direction for future LMMs to improve on.

## 5 Related Work

There have been several benchmarks built for evaluating LMMs, such as MMBench, MME, Seed-Bench [17, 9, 12] that assess LMMs performance from multiple fine-grained dimensions. LVLM-

eHub, M3IT [27, 13] focus on the general instruction following ability. MMMU, MathVista, ScienceQA [28, 18, 19] require perception from the vision part and knowledge in the language part.

Nonetheless, critiques have been raised regarding the limitations of these existing benchmarks in effectively evaluating LLMs. PCA-Bench, MathVerse [4, 30] adopt strong LLMs such as GPT4 and GPT4-Vision to score the reasoning process of LLMs in embodied-AI and math diagram questions, in order to pinpoint cases where the LLM gets the correct answer by a fluke. Yet, using a proprietary model to conduct evaluation hinders the broader usage of the method, moreover, the evaluation result has bias itself due to the proxy model and would change over time. MMStar [6] filters out the questions that do not rely on visual information in existing multimodal benchmarks. However, it does not address the issue inherent in MCQ, where models can potentially get the correct answer without truly understanding the content. Compared with those benchmarks, MMEVALPRO is more economical, easy-to-use, and calibrated for evaluating multimodal models.

## 6 Conclusion

We propose MMEVALPRO, a multimodal benchmark designed to address issues identified in previous evaluations and built upon MMMU, ScienceQA-Image, and MathVista. MMEVALPRO introduces twin perception and knowledge anchors to the original framework and defines Genuine Accuracy as its primary metric, thereby reducing the likelihood of LLMs manipulating the questions. Our extensive experiments and analyses on a wide array of models and human experts demonstrate that MMEVALPRO more accurately reflects the true capabilities of the tested LLMs and presents a more challenging task. Notably, even the most advanced models, such as GPT-4o and Qwen-VL-Max, trail behind human performance by a substantial gap of more than 30% in Genuine Accuracy. Our analysis into the reasons behind the consistency gap problem elucidates the disparity and provides valuable insights for future research.

## References

- [1] Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu, Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Hongfeng Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu. Qwen technical report, 2023.
- [2] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *ArXiv preprint*, abs/2308.12966, 2023.
- [3] Liang Chen, Yichi Zhang, Shuhuai Ren, Haozhe Zhao, Zefan Cai, Yuchi Wang, Peiyi Wang, Tianyu Liu, and Baobao Chang. Towards end-to-end embodied decision making via multi-modal large language model: Explorations with gpt4-vision and beyond. *ArXiv*, 2023.
- [4] Liang Chen, Yichi Zhang, Shuhuai Ren, Haozhe Zhao, Zefan Cai, Yuchi Wang, Peiyi Wang, Xiangdi Meng, Tianyu Liu, and Baobao Chang. Pca-bench: Evaluating multimodal large language models in perception-cognition-action chain, 2024.
- [5] Liang Chen, Haozhe Zhao, Tianyu Liu, Shuai Bai, Junyang Lin, Chang Zhou, and Baobao Chang. An image is worth 1/2 tokens after layer 2: Plug-and-play inference acceleration for large vision-language models, 2024.
- [6] Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Jiaqi Wang, Yu Qiao, Dahua Lin, et al. Are we on the right way for evaluating large vision-language models? *arXiv preprint arXiv:2403.20330*, 2024.
- [7] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv preprint arXiv:2312.14238*, 2023.

- [8] Colin B. Clement, Matthew Bierbaum, Kevin P. O’Keeffe, and Alexander A. Alemi. On the use of arxiv as a dataset, 2019.
- [9] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, Yunsheng Wu, and Rongrong Ji. Mme: A comprehensive evaluation benchmark for multimodal large language models, 2023.
- [10] Jinyi Hu, Yuan Yao, Chongyi Wang, Shan Wang, Yinxu Pan, Qianyu Chen, Tianyu Yu, Hanghao Wu, Yue Zhao, Haoye Zhang, Xu Han, Yankai Lin, Jiao Xue, Dahai Li, Zhiyuan Liu, and Maosong Sun. Large multilingual models pivot zero-shot multimodal learning across languages. [arXiv preprint arXiv:2308.12038](#), 2023.
- [11] Aniruddha Kembhavi, Michael Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A diagram is worth a dozen images. [ArXiv](#), abs/1603.07396, 2016.
- [12] Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension, 2023.
- [13] Lei Li, Yuwei Yin, Shicheng Li, Liang Chen, Peiyi Wang, Shuhuai Ren, Mukai Li, Yazheng Yang, Jingjing Xu, Xu Sun, Lingpeng Kong, and Qi Liu. M<sup>3</sup>IT: A large-scale dataset towards multi-modal multilingual instruction tuning. [ArXiv preprint](#), abs/2306.04387, 2023.
- [14] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning, 2023.
- [15] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024.
- [16] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. [ArXiv preprint](#), abs/2304.08485, 2023.
- [17] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, Kai Chen, and Dahua Lin. Mmbench: Is your multi-modal model an all-around player?, 2023.
- [18] Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts, 2024.
- [19] Pan Lu, Swaroop Mishra, Tony Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. In [The 36th Conference on Neural Information Processing Systems \(NeurIPS\)](#), 2022.
- [20] OpenAI. Introducing chatgpt. [Web](#), 2022.
- [21] OpenAI. Gpt-4v(ision) system card. [Web](#), 2023.
- [22] OpenAI. hello-gpt-4o, 2024.
- [23] Jianhao Shen, Ye Yuan, Srбуhi Mirzoyan, Ming Zhang, and Chenguang Wang. Measuring vision-language stem skills of neural models, 2024.
- [24] Gemini Team, Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lill-icrap, Jean baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, Ioannis Antonoglou, Rohan Anil, Sebastian Borgeaud, Andrew Dai, Katie Millican, Ethan Dyer, Mia Glaese, Thibault Sottiaux, Benjamin Lee, Fabio Viola, Malcolm Reynolds, Yuanzhong Xu, James Molloy, Jilin Chen, Michael Isard, Paul Barham, Tom Hennigan, Ross McIlroy, Melvin Johnson, Johan Schalkwyk, Eli Collins, Eliza Rutherford, Erica Moreira, Kareem Ayoub, Megha Goel, Clemens Meyer, Gregory Thornton, Zhen Yang, Henryk Michalewski, Zaheer Abbas, Nathan Schucher, Ankesh Anand, Richard Ives, James Keeling, Karel Lenc, Salem Haykal, Siamak Shakeri, Pranav Shyam, Aakanksha Chowdhery, Roman Ring, Stephen Spencer, Eren Sezener, Luke Vilnis, Oscar Chang, Nobuyuki Morioka, George Tucker, Ce Zheng, Oliver

Woodman, Nithya Attaluri, Tomas Kocisky, Evgenii Eltyshev, Xi Chen, Timothy Chung, Vittorio Selo, Siddhartha Brahma, Petko Georgiev, Ambrose Slone, Zhenkai Zhu, James Lottes, Siyuan Qiao, Ben Caine, Sebastian Riedel, Alex Tomala, Martin Chadwick, Juliette Love, Peter Choy, Sid Mittal, Neil Houlsby, Yunhao Tang, Matthew Lamm, Libin Bai, Qiao Zhang, Luheng He, Yong Cheng, Peter Humphreys, Yujia Li, Sergey Brin, Albin Cassirer, Yingjie Miao, Lukas Zilka, Taylor Tobin, Kelvin Xu, Lev Proleev, Daniel Sohn, Alberto Magni, Lisa Anne Hendricks, Isabel Gao, Santiago Ontanon, Oskar Bunyan, Nathan Byrd, Abhanshu Sharma, Biao Zhang, Mario Pinto, Rishika Sinha, Harsh Mehta, Dawei Jia, Sergi Caelles, Albert Webson, Alex Morris, Becca Roelofs, Yifan Ding, Robin Strudel, Xuehan Xiong, Marvin Ritter, Mostafa Deghani, Rahma Chaabouni, Abhijit Karmarkar, Guangda Lai, Fabian Mentzer, Bibo Xu, YaGuang Li, Yujing Zhang, Tom Le Paine, Alex Goldin, Behnam Neyshabur, Kate Baumli, Anselm Levskaya, Michael Laskin, Wenhao Jia, Jack W. Rae, Kefan Xiao, Antoine He, Skye Giordano, Lakshman Yagati, Jean-Baptiste Lepiau, Paul Natsev, Sanjay Ganapathy, Fangyu Liu, Danilo Martins, Nanxin Chen, Yunhan Xu, Megan Barnes, Rhys May, Arpi Vezer, Junhyuk Oh, Ken Franko, Sophie Bridgers, Ruizhe Zhao, Boxi Wu, Basil Mustafa, Sean Sechrist, Emilio Parisotto, Thanumalayan Sankaranarayanan Pillai, Chris Larkin, Chenjie Gu, Christina Sorokin, Maxim Krikun, Alexey Guseynov, Jessica Landon, Romina Datta, Alexander Pritzel, Phoebe Thacker, Fan Yang, Kevin Hui, Anja Hauth, Chih-Kuan Yeh, David Barker, Justin Mao-Jones, Sophia Austin, Hannah Sheahan, Parker Schuh, James Svensson, Rohan Jain, Vinay Ramasesh, Anton Briukhov, Da-Woon Chung, Tamara von Glehn, Christina Butterfield, Priya Jhakra, Matthew Wiethoff, Justin Frye, Jordan Grimstad, Beer Changpinyo, Charline Le Lan, Anna Bortsova, Yonghui Wu, Paul Voigtlaender, Tara Sainath, Shane Gu, Charlotte Smith, Will Hawkins, Kris Cao, James Besley, Srivatsan Srinivasan, Mark Omernick, Colin Gaffney, Gabriela Surita, Ryan Burnell, Bogdan Damoc, Junwhan Ahn, Andrew Brock, Mantas Pajarskas, Anastasia Petrushkina, Seb Noury, Lorenzo Blanco, Kevin Swersky, Arun Ahuja, Thi Avrahami, Vedant Misra, Raoul de Liedekerke, Mariko Iinuma, Alex Polozov, Sarah York, George van den Driessche, Paul Michel, Justin Chiu, Rory Blevins, Zach Gleicher, Adrià Recasens, Alban Rrustemi, Elena Gribovskaya, Aurko Roy, Wiktor Gworek, Sébastien M. R. Arnold, Lisa Lee, James Lee-Thorp, Marcello Maggioni, Enrique Piqueras, Kartikeya Badola, Sharad Vikram, Lucas Gonzalez, Anirudh Baddepudi, Evan Senter, Jacob Devlin, James Qin, Michael Azzam, Maja Trebacz, Martin Polacek, Kashyap Krishnakumar, Shuo yiin Chang, Matthew Tung, Ivo Penchev, Rishabh Joshi, Kate Olszewska, Carrie Muir, Mateo Wirth, Ale Jakse Hartman, Josh Newlan, Sheleem Kashem, Vijay Bolina, Elahe Dabir, Joost van Amersfoort, Zafarali Ahmed, James Cobon-Kerr, Aishwarya Kamath, Arnar Mar Hrafnkelsson, Le Hou, Ian Mackinnon, Alexandre Frechette, Eric Noland, Xiance Si, Emanuel Taropa, Dong Li, Phil Crone, Anmol Gulati, Sébastien Cevey, Jonas Adler, Ada Ma, David Silver, Simon Tokumine, Richard Powell, Stephan Lee, Kiran Vodrahalli, Samer Hassan, Diana Mincu, Antoine Yang, Nir Levine, Jenny Brennan, Mingqiu Wang, Sarah Hodgkinson, Jeffrey Zhao, Josh Lipschultz, Aedan Pope, Michael B. Chang, Cheng Li, Laurent El Shafey, Michela Paganini, Sholto Douglas, Bernd Bohnet, Fabio Pardo, Seth Odoom, Mihaela Rosca, Cicero Nogueira dos Santos, Kedar Soparkar, Arthur Guez, Tom Hudson, Steven Hansen, Chulayuth Asawaroengchai, Ravi Adanki, Tianhe Yu, Wojciech Stokowiec, Mina Khan, Justin Gilmer, Jaehoon Lee, Carrie Grimes Bostock, Keran Rong, Jonathan Caton, Pedram Pejman, Filip Pavetic, Geoff Brown, Vivek Sharma, Mario Lučić, Rajkumar Samuel, Josip Djolonga, Amol Mandhane, Lars Lowe Sjösund, Elena Buchatskaya, Elspeth White, Natalie Clay, Jiepu Jiang, Hyeontaek Lim, Ross Hemsley, Zeyncep Cankara, Jane Labanowski, Nicola De Cao, David Steiner, Sayed Hadi Hashemi, Jacob Austin, Anita Gergely, Tim Blyth, Joe Stanton, Kaushik Shivakumar, Aditya Siddhant, Anders Andreassen, Carlos Araya, Nikhil Sethi, Rakesh Shivanna, Steven Hand, Ankur Bapna, Ali Khodaei, Antoine Miech, Garrett Tanzer, Andy Swing, Shantanu Thakoor, Lora Aroyo, Zhufeng Pan, Zachary Nado, Jakub Sygnowski, Stephanie Winkler, Dian Yu, Mohammad Saleh, Loren Maggiore, Yamini Bansal, Xavier Garcia, Mehran Kazemi, Piyush Patil, Ishita Dasgupta, Iain Barr, Minh Giang, Thais Kagohara, Ivo Danihelka, Amit Marathe, Vladimir Feinberg, Mohamed Elhawaty, Nimesh Ghelani, Dan Horgan, Helen Miller, Lexi Walker, Richard Tanburn, Mukarram Tariq, Disha Shrivastava, Fei Xia, Qingze Wang, Chung-Cheng Chiu, Zoe Ashwood, Khuslen Baatarsukh, Sina Samangooei, Raphaël Lopez Kaufman, Fred Alcober, Axel Stjerngren, Paul Komarek, Katerina Tsihlias, Anudhyan Boral, Ramona Comanescu, Jeremy Chen, Ruibo Liu, Chris Welty, Dawn Bloxwich, Charlie Chen, Yanhua Sun, Fangxiaoyu Feng, Matthew Mauger, Xerxes Dotiwalla, Vincent Hellendoorn, Michael Sharman, Ivy Zheng, Krishna Haridasan, Gabe Barth-Maron, Craig Swanson, Dominika Rogozińska, Alek Andreev,

Paul Kishan Rubenstein, Ruoxin Sang, Dan Hurt, Gamaleldin Elsayed, Renshen Wang, Dave Lacey, Anastasija Ilić, Yao Zhao, Adam Iwanicki, Alejandro Lince, Alexander Chen, Christina Lyu, Carl Lebsack, Jordan Griffith, Meenu Gaba, Paramjit Sandhu, Phil Chen, Anna Koop, Ravi Rajwar, Soheil Hassas Yeganeh, Solomon Chang, Rui Zhu, Soroush Radpour, Elnaz Davoodi, Ving Ian Lei, Yang Xu, Daniel Toyama, Constant Segal, Martin Wicke, Hanzhao Lin, Anna Bulanova, Adrià Puigdomènech Badia, Nemanja Rakićević, Pablo Sprechmann, Angelos Filos, Shaobo Hou, Víctor Campos, Nora Kassner, Devendra Sachan, Meire Fortunato, Chimezie Iwuanyanwu, Vitaly Nikolaev, Balaji Lakshminarayanan, Sadegh Jazayeri, Mani Varadarajan, Chetan Tekur, Doug Fritz, Misha Khalman, David Reitter, Kingshuk Dasgupta, Shourya Sarcar, Tina Ornduff, Javier Snaider, Fantine Huot, Johnson Jia, Rupert Kemp, Nejc Trdin, Anitha Vijayakumar, Lucy Kim, Christof Angermueller, Li Lao, Tianqi Liu, Haibin Zhang, David Engel, Somer Greene, Anaïs White, Jessica Austin, Lilly Taylor, Shereen Ashraf, Dangyi Liu, Maria Georgaki, Irene Cai, Yana Kulizhskaya, Sonam Goenka, Brennan Saeta, Ying Xu, Christian Frank, Dario de Cesare, Brona Robenek, Harry Richardson, Mahmoud Alnahlawi, Christopher Yew, Priya Ponnappalli, Marco Tagliasacchi, Alex Korchemniy, Yelin Kim, Dinghua Li, Bill Rosgen, Kyle Levin, Jeremy Wiesner, Praseem Banzal, Praveen Srinivasan, Hongkun Yu, Çağlar Ünlü, David Reid, Zora Tung, Daniel Finchelstein, Ravin Kumar, Andre Elisseeff, Jin Huang, Ming Zhang, Ricardo Aguilar, Mai Giménez, Jiawei Xia, Olivier Dousse, Willi Gierke, Damion Yates, Komal Jalan, Lu Li, Eri Latorre-Chimoto, Duc Dung Nguyen, Ken Durden, Praveen Kallakuri, Yaxin Liu, Matthew Johnson, Tomy Tsai, Alice Talbert, Jasmine Liu, Alexander Neitz, Chen Elkind, Marco Selvi, Mimi Jasarevic, Livio Baldini Soares, Albert Cui, Pidong Wang, Alek Wenjiao Wang, Xinyu Ye, Krystal Kallarackal, Lucia Loher, Hoi Lam, Josef Broder, Dan Holtmann-Rice, Nina Martin, Bramandia Ramadhana, Mrinal Shukla, Sujoy Basu, Abhi Mohan, Nick Fernando, Noah Fiedel, Kim Paterson, Hui Li, Ankush Garg, Jane Park, DongHyun Choi, Diane Wu, Sankalp Singh, Zhishuai Zhang, Amir Globerson, Lily Yu, John Carpenter, Félix de Chaumont Quitry, Carey Radebaugh, Chu-Cheng Lin, Alex Tudor, Prakash Shroff, Drew Garmon, Dayou Du, Neera Vats, Han Lu, Shariq Iqbal, Alex Yakubovich, Nilesh Tripuraneni, James Manyika, Haroon Qureshi, Nan Hua, Christel Ngani, Maria Abi Raad, Hannah Forbes, Jeff Stanway, Mukund Sundararajan, Victor Ungureanu, Colton Bishop, Yunjie Li, Balaji Venkatraman, Bo Li, Chloe Thornton, Salvatore Scellato, Nishesh Gupta, Yicheng Wang, Ian Tenney, Xihui Wu, Ashish Shenoy, Gabriel Carvajal, Diana Gage Wright, Ben Bariach, Zhuyun Xiao, Peter Hawkins, Sid Dalmia, Clement Farabet, Pedro Valenzuela, Quan Yuan, Ananth Agarwal, Mia Chen, Wooyeol Kim, Brice Hulse, Nandita Dukkupati, Adam Paszke, Andrew Bolt, Kiam Choo, Jennifer Beattie, Jennifer Prendki, Harsha Vashisht, Rebeca Santamaria-Fernandez, Luis C. Cobo, Jarek Wilkiewicz, David Madras, Ali Elqursh, Grant Uy, Kevin Ramirez, Matt Harvey, Tyler Liechty, Heiga Zen, Jeff Seibert, Clara Huiyi Hu, Andrey Khorlin, Maigo Le, Asaf Aharoni, Megan Li, Lily Wang, Sandeep Kumar, Norman Casagrande, Jay Hoover, Dalia El Badawy, David Soergel, Denis Vnukov, Matt Miecnikowski, Jiri Simsa, Praveen Kumar, Thibault Sellam, Daniel Vlasic, Samira Daruki, Nir Shabat, John Zhang, Guolong Su, Jiageng Zhang, Jeremiah Liu, Yi Sun, Evan Palmer, Alireza Ghaffarkhah, Xi Xiong, Victor Cotruta, Michael Fink, Lucas Dixon, Ashwin Sreevatsa, Adrian Goedeckemeyer, Alek Dimitriev, Mohsen Jafari, Remi Crocker, Nicholas FitzGerald, Aviral Kumar, Sanjay Ghemawat, Ivan Philips, Frederick Liu, Yannie Liang, Rachel Sterneck, Alena Repina, Marcus Wu, Laura Knight, Marin Georgiev, Hyo Lee, Harry Askham, Abhishek Chakladar, Annie Louis, Carl Crous, Hardie Cate, Dessie Petrova, Michael Quinn, Denese Owusu-Afriyie, Achintya Singhal, Nan Wei, Solomon Kim, Damien Vincent, Milad Nasr, Christopher A. Choquette-Choo, Reiko Tojo, Shawn Lu, Diego de Las Casas, Yuchung Cheng, Tolga Bolukbasi, Katherine Lee, Saaber Fatehi, Rajagopal Ananthanarayanan, Miteyan Patel, Charbel Kaed, Jing Li, Shreyas Rammohan Belle, Zhe Chen, Jaclyn Konzelmann, Siim Pöder, Roopal Garg, Vinod Koverkathu, Adam Brown, Chris Dyer, Rosanne Liu, Azade Nova, Jun Xu, Alanna Walton, Alicia Parrish, Mark Epstein, Sara McCarthy, Slav Petrov, Demis Hassabis, Koray Kavukcuoglu, Jeffrey Dean, and Oriol Vinyals. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context, 2024.

- [25] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. [ArXiv preprint](#), abs/2302.13971, 2023.
- [26] Peiyi Wang, Lei Li, Liang Chen, Dawei Zhu, Binghuai Lin, Yunbo Cao, Qi Liu, Tianyu Liu, and Zhifang Sui. Large language models are not fair evaluators. [ArXiv](#), abs/2305.17926, 2023.



- [27] Peng Xu, Wenqi Shao, Kaipeng Zhang, Peng Gao, Shuo Liu, Meng Lei, Fanqing Meng, Siyuan Huang, Yu Qiao, and Ping Luo. Lvlm-ehub: A comprehensive evaluation benchmark for large vision-language models, 2023.
- [28] Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun, Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, Huan Sun, Yu Su, and Wenhua Chen. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi, 2023.
- [29] Ge Zhang, Xinrun Du, Bei Chen, Yiming Liang, Tongxu Luo, Tianyu Zheng, Kang Zhu, Yuyang Cheng, Chunpu Xu, Shuyue Guo, Haoran Zhang, Xingwei Qu, Junjie Wang, Ruibin Yuan, Yizhi Li, Zekun Wang, Yudong Liu, Yu-Hsuan Tsai, Fengji Zhang, Chenghua Lin, Wenhao Huang, Wenhua Chen, and Jie Fu. Cmmmu: A chinese massive multi-discipline multimodal understanding benchmark, 2024.
- [30] Renrui Zhang, Dongzhi Jiang, Yichi Zhang, Haokun Lin, Ziyu Guo, Pengshuo Qiu, Aojun Zhou, Pan Lu, Kai-Wei Chang, Peng Gao, and Hongsheng Li. Mathverse: Does your multi-modal llm truly see the diagrams in visual math problems?, 2024.

## Appendix

### A Details on MMEVALPRO

#### A.1 Data Source

**MMMU [28]:** The MMMU is a benchmark designed to evaluate multimodal models on massive multi-discipline tasks. The benchmark sources its questions from college examinations, quizzes, and textbooks, encompassing 30 subjects and 183 subfields across six core disciplines, i.e. Art & Design, Business, Science, Health & Medicine, Humanities & Social Science and Tech & Engineering. This benchmark is meticulously designed to assess models’ capabilities in handling multi-disciplinary tasks, drawing upon college-level subject knowledge.

**ScienceQA [19]:** The Science Question Answering (ScienceQA) is another pivotal resource, which consists of 21,208 multimodal multiple choice questions with diverse science topics. There are only 48.7% questions of ScienceQA that have an image context. It is renowned for its application in multimodal tasks and features a domain diversity spanning three primary science subjects, i.e., natural, language, and social. The dataset comprises multimodal science questions that are collated from elementary and high school science curricula, ensuring a breadth of scientific inquiry and comprehension. The subjects of the questions can be categorized by Biology, Physics, Chemistry, and others.

**MathVista [18]:** The MathVista benchmark is developed to evaluate the reasoning ability of the multimodal models, which consists of 6,141 examples from 31 datasets (28 mathematics and IQTest, FunctionQA, PaperQA). The dataset offers exclusively mathematical and visual tasks. This source enriches our dataset with rigorous computational and analytical problems, providing a robust framework for evaluating quantitative reasoning in multimodal contexts.

Finally, we select the validation set of MMMU (722 questions), the questions with images in ScienceQA (2,097 questions), and the testmini set of MathVista (540 questions) to construct the MMEVALPRO. From the 722 questions in the validation set of MMMU, we chose the questions with topics suited for the annotator’s major and other questions in easy-level to annotate, which resulted in 339 final questions. And we annotated all questions selected from the testmini set of MathVista and 1,259 of ScienceQA-Image.

The distribution of MMEVALPRO is shown in the Figure 3. There are 58.89% questions originating from ScienceQA, 25.26% from MathVista, and 15.86% from MMMU. We further categorize the problems by task categories, subjects, and domains, computing their relative percentages to the total questions. In the annotated questions originated from ScienceQA, there are 16.68% of them subject to Geography, 12.61% subject to Physics, 12.02% with the Biology topic, and the remaining questions distributed in History, Chemistry, Economics, etc. In MathVista, the annotated questions contain 5 tasks, including GPS(geometry problem solving), VQA(visual question answering), FQA(figure question answering), TQA(textbook question answering), and MWP(math word problem), the last one only accounted for a very small proportion and is not annotated in the figure. According to the subjects of questions from MMMU, there are 4.91% questions in Medicine, 3.27% in Art, 3.65% in Business, 2.71% in Science, and 1.32% from other subjects with easy-level.

#### A.2 License

We check all the datasets’ licenses and they all permit customization and redistribution for non-commercial use. MMMU is under Apache 2.0 License, ScienceQA is under MIT License and MathVista is covered by CC BY-SA 4.0.

MMEVALPRO can be used commercially as a test set, but using it as a training set is prohibited. By accessing or using this dataset, users acknowledge and agree to abide by these terms in conjunction with the CC BY-SA 4.0 license. We make sure there is no offensive content found during the whole annotation process.

### A.3 MMEVALPRO Examples

We list more examples of different splits of MMEVALPRO as shown in Figure 8, 9 and 10.


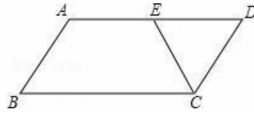

 <p><b>Original Question</b> Is Dark Orchid the maximum? <i>Options:</i> A. Yes B. No <i>Answer:</i> B</p> <p><b>Perception Question</b> How many colors are there in total? <i>Options:</i> A. 5 B. 6 C. 7 D. 8 <i>Answer:</i> C</p> <p><b>Knowledge Question</b> How to determine the maximum here? <i>Options:</i> A. The color which has the biggest area. B. The darkest color. C. The lightest color. <i>Answer:</i> A</p>	 <p><b>Original Question</b> As shown in the figure, in the parallelogram ABCD, CE bisects <math>\angle BCD</math> and it intersects the AD edge at point E, and <math>DE = 3.0</math>, then the length of AB is? <i>Options:</i> A. 1 B. 2 C. 3 D. 6 <i>Answer:</i> C</p> <p><b>Perception Question</b> How many sharp angles are there in total? <i>Options:</i> A. 1 B. 2 C. 3 D. 4 E. 5 <i>Answer:</i> E</p> <p><b>Knowledge Question</b> As shown in the figure, in the parallelogram ABCD, CE bisects <math>\angle BCD</math> and it intersects the AD edge at point E, and <math>DE = 3.0</math>, then which of the following statements is not true? <i>Options:</i> A. <math>DE=CD</math> B. <math>\angle B=\angle D</math> C. <math>\angle DEC=\angle DCE</math> D. <math>DE=CE</math> <i>Answer:</i> D</p>	 <p><b>Original Question</b> What is the range of this function? <i>Options:</i> A. [0,2] B. [-3,2] C. [2,0] D. [-3,4] <i>Answer:</i> A</p> <p><b>Perception Question</b> What is the domain of this function? <i>Options:</i> A. [-3,2] B. [-3,4] C. [0,2] D. [2,4] <i>Answer:</i> B</p> <p><b>Knowledge Question</b> What is y when x is 0? <i>Options:</i> A. 3 B. -3 C. 0 D. 2 <i>Answer:</i> D</p>
---	--	--

Figure 8: Examples of the MathVista subset of MMEVALPRO.




 <p><b>Original Question</b> Which leaf has the most veins? <i>Options:</i> A. Acuminate B. Truncate C. Mucronate D. Acute <i>Answer:</i> A</p> <p><b>Perception Question</b> How many leaves are there in total? <i>Options:</i> A. 5 B. 6 C. 7 D. 8 <i>Answer:</i> D</p> <p><b>Knowledge Question</b> What are the number of leaf veins for "Truncate" and "Obcordate"? <i>Options:</i> A. 6 and 7 B. 5 and 6 C. 7 and 6 D. 7 and 7 <i>Answer:</i> D</p>	 <p><b>Original Question</b> Think about the magnetic force between the magnets in each pair. Which of the following statements is true? <i>Options:</i> A. The magnitude of the magnetic force is greater in Pair 1. B. The magnitude of the magnetic force is greater in Pair 2. C. The magnitude of the magnetic force is the same in both pairs. <i>Answer:</i> B</p> <p><b>Perception Question</b> What are the distances of magnets respectively in pair1 and pair2? <i>Options:</i> A. 5cm 5cm B. 4.7cm 5cm C. 5cm 4.7cm D. 4.7cm 4.7cm <i>Answer:</i> D</p> <p><b>Knowledge Question</b> What factors are related to the magnitude of magnetic force here? <i>Options:</i> A. Size B. Distance C. Size and Distance D. Direction <i>Answer:</i> C</p>	 <p><b>Original Question</b> What is the capital of Iowa? <i>Options:</i> A. Cleveland B. Des Moines C. Grand Rapids D. Cedar Rapids <i>Answer:</i> B</p> <p><b>Perception Question</b> Who is the color of the image? <i>Options:</i> A. Yellow B. Green C. Red D. Blue <i>Answer:</i> B</p> <p><b>Knowledge Question</b> What country is the graph? <i>Options:</i> A. China B. Canada C. USA D. UK <i>Answer:</i> C</p>
--	--	---

Figure 9: Examples of the ScienceQA subset of MMEVALPRO.



 <p><b>Original Question</b> What is leading to the crinkling of this leaf's veins? <i>Options:</i> A. Bacterial pathogen B. Fungal C. Oomycete pathogen D. Physiological condition <i>Answer:</i> D</p> <p><b>Perception Question</b> What part of the plant is shown in this picture? <i>Options:</i> A. Root B. Stamens C. Leaf <i>Answer:</i> C</p> <p><b>Knowledge Question</b> What organisms are on this leaf? <i>Options:</i> A. Mosquito B. Aphid C. Bee D. Green leafhopper <i>Answer:</i> B</p>	<table border="1" data-bbox="698 1459 1023 1543"> <thead> <tr> <th>Portfolio</th> <th>Expected Return</th> <th>Beta</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>16%</td> <td>1.00</td> </tr> <tr> <td>Y</td> <td>12</td> <td>0.25</td> </tr> </tbody> </table> <p><b>Original Question</b> Assume that both X and Y are well-diversified portfolios and the risk-free rate is 8%. In this situation you would conclude that portfolios X and Y <i>Options:</i> A. Are in equilibrium. B. Offer an arbitrage opportunity. C. Are both underpriced. D. Are both fairly priced. <i>Answer:</i> B</p> <p><b>Perception Question</b> The Expected Return of Portfolio "X" is: <i>Options:</i> A. 12% B. 14% C. 16% D. 18% <i>Answer:</i> B</p> <p><b>Knowledge Question</b> The Beta of X is 0.75 higher than Y. True or False? <i>Options:</i> A. True B. False <i>Answer:</i> A</p>	Portfolio	Expected Return	Beta	X	16%	1.00	Y	12	0.25	 <p><b>Original Question</b> True or False: The image is painted by Michelangelo. <i>Options:</i> A. True B. False C. No enough evidence <i>Answer:</i> A</p> <p><b>Perception Question</b> Who is in the painting? <i>Options:</i> A. Only Man B. Only Baby C. Man and baby. <i>Answer:</i> C</p> <p><b>Knowledge Question</b> What is the name of the painting? <i>Options:</i> A. The Last Supper B. Prophet Isaiah C. The Starry Night D. The Baptism of Christ <i>Answer:</i> B</p>
Portfolio	Expected Return	Beta									
X	16%	1.00									
Y	12	0.25									

Figure 10: Examples of the MMMU subset of MMEVALPRO.

## A.4 Statistics of MMEVALPRO

The key statistics of MMEVALPRO is shown in the table 3. Figure 11 and 12 display the distribution of answers and the number of options in the MMEVALPRO.

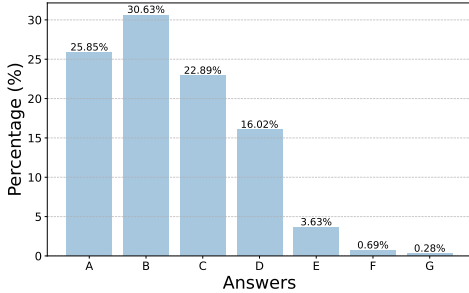


Figure 11: Distribution of Answer Choices in MMEVALPRO.

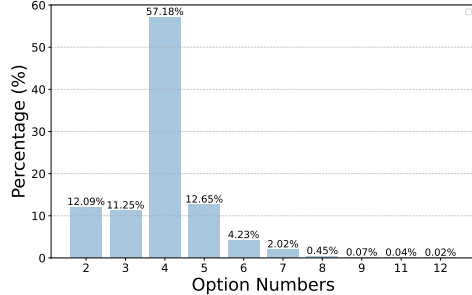


Figure 12: Distribution of Answer Choices in MMEVALPRO.

Statistic	Number
Source datasets	3
Number of question triplets	2,138
Number of unique questions	6,414
Triplets from MMMU	339
Triplets from ScienceQA	1259
Triplets from MathVista	540
Maximum question length	165
Maximum choice number	12
Average question length	9.60
Average choice number	3.94

Table 3: Key statistics of MMEVALPRO.

## B Experiment Setup

### B.1 Prompt Format for Different Models

**For LLM** "Given a question you need to choose the best answer from the given options. I will first give you an example, you need to follow the output format of the answer. Example: Question: {example question} Options: {example options} Output: {example answer}. Just answer the following question with only the letter of the correct option, or you will get no credit. Question: {question} Options: {options}"

We use a fixed demonstration for all inferences to format the output. The example is: "**Question:** Baxter Company has a relevant range of production between 15,000 and 30,000 units. The following cost data represents the average variable costs per unit for 25,000 units of production. If 30,000 units are produced, what are the per unit manufacturing overhead costs incurred? **Options:** (A) \$6 (B) \$7 (C) \$8 (D) \$9 **Output:** A".

**For LMM** "Analyse the image and choose the best answer for the following question: {question} Options: {options} Just output the letter of the correct answer."

### B.2 Model Hyper-parameters

For open-source models, we use the default inference script provided in corresponding papers and githubs. For proprietary models, we follow the official guide to call the API. In particular, we do not

use sampling techniques during generation to ensure our results are reproducible. All experiments are done on a local server with 4 NVIDIA-A100 GPUs.

## C MMEVALPRO Triplet Annotation Guideline

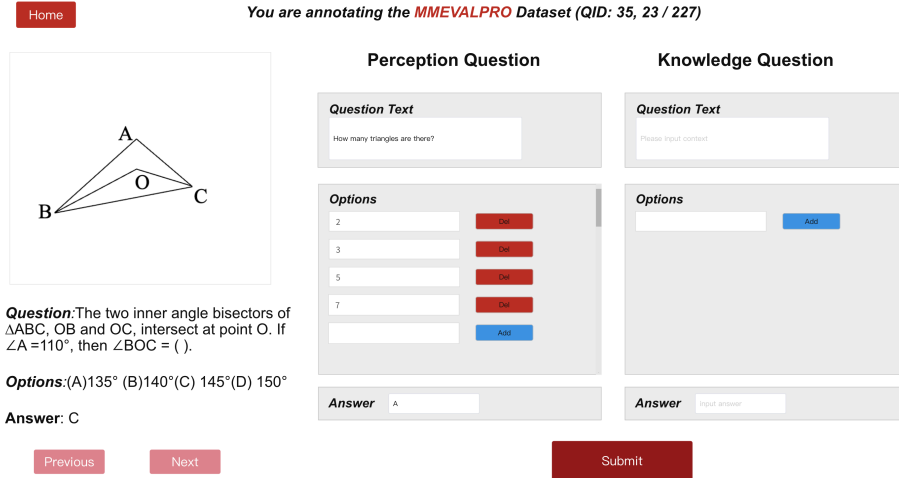


Figure 13: UI for annotations of MMEVALPRO.

*Our research requires the construction of a more trustable multimodal evaluation dataset. The collection and arrangement of original questions have been completed. You, as annotators, need to perform data annotations based on the original questions, expanding the original question into a set of three questions (original, perception, knowledge). Every annotators should carefully read the following content before embarking on the annotation task.*

- The data annotation task will be completed on the annotation UI interface we have built.
  - Each annotator will be allocated an account and password.
  - Each account corresponds to an independent subset of questions needing annotation.
- Each original question to be annotated includes an image, a question text, possible answers, and the correct answer. You need to *read the original question and understand the logic of solution* firstly.
- You need to provide two entirely new questions, a **perceptual question**, and a **knowledge question** based on step 2.
  - The perceptual question should be a question *related to the content of the image* corresponding to the original question.
  - The knowledge question should be *related to the logic of solving* the original question.
  - You should input *the text of the question, the variable options, and the correct answer*. Each question must be a **multiple-choice question**. Once confirmed to be correct, you can click to submit.

Figure 14: Annotation Guideline of MMEVALPRO.

We developed an annotation Web UI to enable expert annotators to construct question triplets of MMEVALPRO. The Web UI is shown in the figure 13. The annotators of MMEVALPRO were trained with the guideline shown in figure 14 before formal work.



## D MMEVALPRO Triplet Checking Guideline

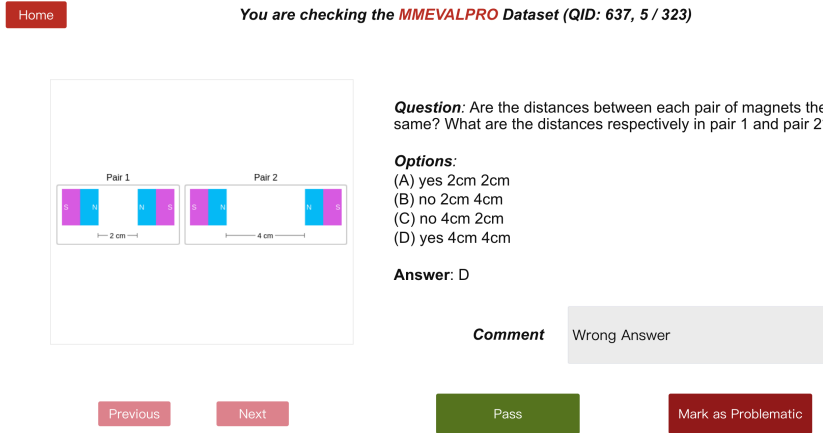


Figure 15: UI for checking of MMEVALPRO.

*Our research requires the construction of a more trustable multimodal evaluation dataset. The data annotation process has been completed. The reviewers need to check the questions annotated by the annotators, and see if there are any issues with the corresponding question descriptions and the provided correct answers. Please read the following content before starting your review.*


1. The review process of the dataset will be carried out on a dedicated webpage. You will be assigned a corresponding account and password.
2. During the review of the questions, please check all the content annotated by the annotators, including:
  - **Question Text** (Ambiguous description, mismatch with the image, grammatical errors, etc.)
  - **Question Options** (Duplication, ambiguity, and other problems.)
  - **Answer** (Is the answer correct?)
3. You need to mark the questions without problems as **Pass** and mark problematic questions as **Problematic**. Appropriate comments also need to be made on the problematic questions for the data annotator to correct (for example, “ambiguous”, “the answer is incorrect”, etc.)

Figure 16: Checking Guideline of MMEVALPRO.

In our study, we employed double checking to maintain the quality of MMEVALPRO. We also developed a web page shown in figure 15 for checking. The checkers were trained with checking instructions shown in figure 16.

## E Human Evaluation Guide

Home Doing exams! (23 / 6,204)



**Question:** What animal is shown in the image?

**Options:**  
(A) Panda  
(B) Grizzly Bear  
(C) Polar Bear  
(D) Koala

Previous Next

**Answer**

Submit

Figure 17: UI for human evaluation of MMEVALPRO.

To ensure the comprehensiveness of our study, we employed five graduates with special knowledge to do human evaluation in MMEVALPRO. The designed web ui of human evaluation is shown in figure 17.

## F Comparison of Different Models

We list three cases comparing the output of GPT-4o [22], GPT-4o (non-vision) [22], InternVL-Chat [7] and LLaVA-1.5 [16]. We observed that, while both GPT-4o (non-vision) and LLaVA-1.5 could answer all the origin questions correctly, they struggled with most perception and knowledge questions. This highlights a Type-I error in current evaluation benchmarks: correctly answering a question does not necessarily indicate genuine understanding by the model. On the other hand, more advanced models like GPT-4o and InternVL-Chat demonstrate higher consistency in answering different types of questions.




	<p><b>Original Question</b> Is Dark Orchid the maximum? Options: A. Yes B. No Answer: B</p>	<p><b>Perception Question</b> How many colors are there in total? Options: A. 5 B. 6 C.7 D.8 Answer: C</p>	<p><b>Knowledge Question</b> How to determine the maximum here? Options: A. The color which has the biggest area. B. The darkest color. C. The lightest color. Answer: A</p>	<u>1</u>
<p>GPT4-o: B/C/A GPT4-o (non-vision): B/A/A InternVL-Chat: B/D/A LLaVA-1.5-7B: B/A/B</p>				
	<p><b>Original Question</b> Which leaf has the most veins? Options: A. Acuminate B. Truncate C. Mucronate D. Acute Answer: A</p>	<p><b>Perception Question</b> How many leaves are there in total? Options: A. 5 B. 6 C.7 D.8 Answer: D</p>	<p><b>Knowledge Question</b> What are the number of leaf veins for "Truncate" and "Obcordate"? Options: A. 6 and 7 B. 5 and 6 C. 7 and 6 D. 7 and 7 Answer: D</p>	<u>2</u>
<p>GPT4-o: A/D/C GPT4-o (non-vision): A/A/A InternVL-Chat: B/D/A LLaVA-1.5-7B: A/A/A</p>				
	<p><b>Original Question</b> What would be impacted by an increase in owls? Options: A. Sun B. Grass C. Grasshoppers D. Mouse Answer: D</p>	<p><b>Perception Question</b> What creatures are next to mouse? Options: A. Sun and Grass B. Grasshopper and Owl C. Mouse and Grass D. Sun and Owl Answer: B</p>	<p><b>Knowledge Question</b> What would happen if the number of owls increase? Options: A. The mouse would increase B. The grass would increase C. The mouse would decrease D. The grasshopper would decrease Answer: C</p>	<u>3</u>
<p>GPT4-o: D/B/C GPT4-o (non-vision): D/A/C InternVL-Chat: D/B/C LLaVA-1.5-7B: D/A/B</p>				

Figure 18: Cases of different models' comparison for MMEVALPRO.