

# HRDE: Retrieval-Augmented Large Language Models for Chinese Health Rumor Detection and Explainability

YANFANG CHEN\*, Renmin University of China, China

DING CHEN\*, Institute for Advanced Algorithms Research, Shanghai, China

SHICHAO SONG, SIMIN NIU, and HANYU WANG, Renmin University of China, China

ZEYUN TANG, FEIYU XIONG, and ZHIYU LI<sup>†</sup>, Institute for Advanced Algorithms Research, Shanghai, China

As people increasingly prioritize their health, the speed and breadth of health information dissemination on the internet have also grown. At the same time, the presence of false health information (health rumors) intermingled with genuine content poses a significant potential threat to public health. However, current research on Chinese health rumors still lacks a large-scale, public, and open-source dataset of health rumor information, as well as effective and reliable rumor detection methods. This paper addresses this gap by constructing a dataset containing 1.12 million health-related rumors (HealthRCN) through web scraping of common health-related questions and a series of data processing steps. HealthRCN is the largest known dataset of Chinese health information rumors to date. Based on this dataset, we propose retrieval-augmented large language models for Chinese health rumor detection and explainability (HRDE<sup>1 2</sup>). This model leverages retrieved relevant information to accurately determine whether the input health information is a rumor and provides explanatory responses, effectively aiding users in verifying the authenticity of health information. In evaluation experiments, we compared multiple models and found that HRDE outperformed them all, including GPT-4-1106-Preview, in rumor detection accuracy and answer quality. HRDE achieved an average accuracy of 91.04% and an F1 score of 91.58%.

CCS Concepts: • **Applied computing** → **Health informatics**.

Additional Key Words and Phrases: Health Rumors, Large Language Models, Rumor Dataset, Rumor Detection

## ACM Reference Format:

Yanfang Chen, Ding Chen, Shichao Song, Simin Niu, Hanyu Wang, Zeyun Tang, Feiyu Xiong, and Zhiyu Li. 2024. HRDE: Retrieval-Augmented Large Language Models for Chinese Health Rumor Detection and Explainability. 1, 1 (July 2024), 30 pages. <https://doi.org/XXXXXXXX.XXXXXXX>

## 1 INTRODUCTION

With the development of socio-economic conditions and the improvement of living standards, health has gradually garnered people's attention, becoming a crucial aspect of modern people's pursuit of a high-quality life [37, 58].

\*Both authors contributed equally to this research.

<sup>†</sup>Corresponding author.

<sup>1</sup>HRDE is currently deployed at <http://www.rumors.icu/>.

<sup>2</sup>The source code is available at GitHub: <https://github.com/hush-cd/HRDE>

---

Authors' addresses: Yanfang Chen, [cyf@ruc.edu.cn](mailto:cyf@ruc.edu.cn), Renmin University of China, Beijing, China; Ding Chen, Institute for Advanced Algorithms Research, Shanghai, Shanghai, China; Shichao Song; Simin Niu; Hanyu Wang, Renmin University of China, Beijing, China; Zeyun Tang; Feiyu Xiong; Zhiyu Li, Institute for Advanced Algorithms Research, Shanghai, Shanghai, China.

---

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM XXXX-XXXX/2024/7-ART

<https://doi.org/XXXXXXXX.XXXXXXX>

At the same time, in the face of emerging health challenges, such as the increase in global pandemics and chronic diseases, public health awareness has been further stimulated, leading to a surge in the demand for reliable online health information. However, the grassroots and anonymous nature of the internet has directly or indirectly resulted in an explosive growth of health rumors in recent years. These health rumors may include unverified treatments, unscientific health advice, and even incorrect medical information, all of which can have serious negative impacts on public health [9]. Therefore, there is an urgent need for effective methods to detect health rumors in online media.

In the current landscape of health rumor detection research, one of the primary limiting factors is the lack of publicly available health rumor corpora, particularly those involving long-text health rumors. Most existing studies rely on self-collected data for identification methods and predominantly focus on short-text datasets such as those from Twitter [43]. However, health rumors differ from general rumors in that they are not merely expressions of opinions. They often consist of mid-to-long narratives that interweave rumor information with factual content, enhancing their spreadability. This characteristic contributes significantly to the popularity of health rumors on platforms like WeChat<sup>3</sup>. Consequently, there has been increasing attention on the detection of long-text health rumors [38].

Another critical shortcoming in current health rumor detection methods is the lack of interpretability in the results. Given the informative and scientific nature of health information, it is essential that the detection results extend beyond a simple binary classification of "true" or "false." Similar to manual refuting, the detection outcomes should provide comprehensive explanations and authoritative sources to gain users' trust.

In recent years, the emergence and development of large language models (LLMs) have presented new opportunities for applications across various industries. The application of several LLMs in the health domain has also been proposed [56]. For example, Bao et al. proposed DISC-MedLLM, which utilizes LLMs to achieve end-to-end conversational medical services [2]. However, it is important to note that while these models offer exceptional natural language processing and comprehension capabilities, they also introduce certain hallucination issues [6]. Considering the technical capabilities of LLMs in handling health information, and the specific requirements for accuracy and reliability in the health information field, we face a challenge: although LLMs excel in natural language understanding, they may introduce misleading information when generating content, known as the "hallucination" problem. This necessitates more precise adjustments and optimizations in the detection and explainability of health-related rumors.

Concretely, we constructed a Chinese rumor dataset containing over 1.12 million data points, named Health Rumor CN (HealthRCN), to fill the gap of Chinese rumor datasets in the health domain. Simultaneously, we propose a novel model called Retrieval-Augmented Large Language Models for Chinese Health Rumor Detection and Explainability (HRDE). This model comprises four components: health information collection and storage, health information retrieval, retrieval information re-ranking, and the LLM generating the rumor detection answer (including rumor detection and analysis). The main contributions of this work are summarized as follows:

- We have constructed the Health Rumor CN (HealthRCN) dataset, filling the gap in Chinese rumor datasets in the health information domain.
- We proposed a unified framework for rumor detection that enables real-time access to the latest health information and performs rumor detection on user-input health information, providing an interpretable analysis process.
- We evaluated HRDE and multiple models on the HealthRCN dataset, surpassing all models in terms of rumor detection accuracy and answer quality metrics.

<sup>3</sup>WeChat is a Chinese multi-purpose messaging, social media, and mobile payment app developed by Tencent. It is widely used for instant messaging, voice and video calls, social networking, and various services like news, games, and financial transactions.

The structure of the remaining sections of this paper is as follows: Section 2 examines the related works; Section 3 provides a detailed description of the HRDE framework and its implementation process; Section 4 presents the evaluation experiments conducted with HRDE and multiple models, along with the analysis of the experimental results; Section 5 analyzes three practical cases of rumor detection and answer using HRDE; Section 6 concludes the paper with a summary.

## 2 RELATED WORKS

### 2.1 Health Rumor Detection

*2.1.1 Machine Learning-Based Rumor Detection Methods.* These methods primarily rely on traditional machine learning theories, using manually defined features as model inputs. Such features may include rumor text features [11, 65], user behavior features [5, 52], network features [31], among others, which are then combined with relevant classification algorithms for screening. For example, Marco L et al. propose a novel ML fake news detection method that combines news content and social context features [20]. Ma J et al. propose a kernel-based method called Propagation Tree Kernel, which captures high-order patterns differentiating different types of rumors by evaluating the similarities between their propagation tree structures [34]. The advantage of machine learning-based rumor detection methods lies in their relative simplicity and lower computational complexity. However, they depend on manually designed features, which can somewhat limit the model's generalization capability and adaptability to new types of rumors.

*2.1.2 Deep Learning-Based Rumor Detection Methods.* These methods utilize deep neural networks (such as CNN [24], RNN [33], LSTM [45]) to automatically learn complex feature representations from rumor information, thereby improving the accuracy and robustness of rumor detection and overcoming the limitations of manually extracted features. For example, Bian T. et al. propose a bi-directional graph model, named Bi-Directional Graph Convolutional Networks (Bi-GCN), to explore both characteristics by operating on both top-down and bottom-up propagation of rumors [3]. Liu T. et al. introduce a new detection model that jointly learns both the representations of user correlation and information propagation to detect rumors on social media [30]. Deep learning-based methods are better at capturing complex features and patterns, but their model interpretability is relatively poor. Additionally, they consume substantial computational resources, and the training process can be time-consuming.

*2.1.3 Health Rumor Detection Methods.* The mainstream methods still primarily utilize machine learning techniques, focusing on the unique characteristics of health rumors compared to general rumors. These characteristics include linguistic statistical features [32], network features [42], user features [18, 60], interaction features [60], and sentiment features [23], each possessing distinct traits. Small datasets collected autonomously are used for classification testing. Meanwhile, deep learning-based methods are also gradually gaining attention from researchers in the field of health rumor detection. For instance, Yang J. et al. propose and verify the rumor detection method based on content and user responses within a limited time, named CRLSTM-BE [55]. Rani P. et al. use the Bi-directional Long Short Term Memory (Bi-LSTM) model to prevent the spread of new rumors by continuously monitoring incoming messages in the network [41].

### 2.2 Large Language Models

Since the release of ChatGPT by OpenAI [4], large language models (LLMs) have gained significant attention for their capabilities in natural language processing. Currently, LLMs are typically defined as Transformer-based neural network language models containing billions or more parameters and trained on massive datasets [36, 59], such as GPT-4 [39], LLaMA [46], and Qwen [1]. Compared to earlier neural language models (NLMs) and pre-trained language models (PLMs), LLMs follow scaling laws [19, 27], and certain capabilities significantly improve when the model's parameter size exceeds a certain threshold, known as emergent abilities [50]. The main emergent

abilities of LLMs include (1) in-context learning (ICL) [4, 12], where LLMs can learn new tasks from a few examples provided in the prompt without needing retraining, (2) instruction following, where LLMs can understand and execute tasks based on natural language instructions, (3) multi-step reasoning, where LLMs can perform complex reasoning tasks by breaking them down into steps using methods like chain-of-thought (CoT) [51]. Additionally, LLMs can be enhanced through techniques such as Retrieval-Augmented Generation (RAG) [16], supervised fine-tuning (SFT) [49], reinforcement learning from human feedback (RLHF) [8], making them more robust and reliable for handling complex tasks in specialized fields. Consequently, numerous specialized LLMs have emerged in various vertical domains, such as Med-PaLM in the medical field [44], BloombergGPT in finance [53], and ChatLaw in legal applications [10].

### 2.3 Retrieval Augmented Generation

Although LLMs currently demonstrate powerful language understanding and generation capabilities, they still struggle to adequately address questions requiring specialized domain knowledge or long-tail knowledge [25], and often exhibit hallucination issues [57]. Retrieval Augmented Generation (RAG) can effectively enhance LLMs and mitigate these problems [26]. The RAG process mainly consists of three steps: indexing, retrieval, and generation. This involves collecting and processing external knowledge documents to construct a database, then using retrieval algorithms to recall documents relevant to the query from the database, and finally inputting the documents along with the original query into the LLM to generate a response [16]. Currently, researchers have proposed methods such as Query Optimization [15, 35, 61] and Re-ranking [17, 64] to optimize the retrieval of relevant documents, thereby further enhancing the performance of RAG.

The evaluation of RAG is divided into two main aspects: retrieval-based and generation-based [22]. The retrieval-based aspect focuses on the relevance and supportiveness of retrieved documents, using metrics such as Hit Rate, Context Relevance [14], Error Detection Rate [7]. The generation-based aspect focuses on the quality of the generated answers, with common metrics including BLEU [40], ROUGE [29], EM, Micro-F1, Answer Relevance [14].

## 3 HRDE

### 3.1 Framework of HRDE

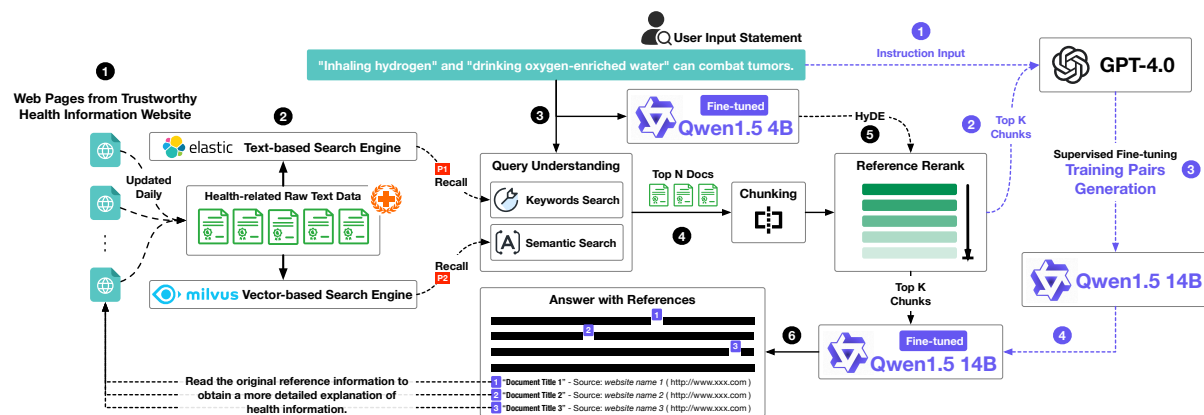


Fig. 1. Framework of HRDE. The sections labeled with black numbers correspond to the process of health rumor detection, while the sections labeled with purple numbers correspond to the process of fine-tuning the large model.

The proposed retrieval-augmented large language models for Chinese health rumor detection and explainability (HRDE) mainly consists of four parts: collection and storage of reference documents (①②), the retrieval of reference document (③④), the re-ranking of reference document (⑤), and rumor detection answer generation by LLMs (⑥). These components correspond to the processes labeled with black numbers in Figure 1.

Firstly, the framework retrieves health-related information from multiple trustworthy websites and stores it in two reference databases (Elasticsearch and Milvus), which are updated daily (see Section 3.4.1 for details). Then, based on the keywords and embedding vector of the user’s input content, relevant reference documents are recalled from Elasticsearch and Milvus, respectively. Subsequently, Qwen1.5-4B-Chat is used to generate a hypothetical document to re-rank the recalled document chunks, and the top-k document chunks are selected as the final reference content (see Section 3.4.2 for details). Finally, the user input and the reference document chunks are input into Qwen1.5-14B-Chat to generate a response, which undergoes necessary post-processing.

The sections labeled with purple numbers in Figure 1 correspond to the model fine-tuning process, which includes collecting and integrating input information (①) and reference documents (②), generating a fine-tuning dataset based on GPT-4 (③), and performing model fine-tuning (④). Both Qwen1.5-4B-Chat and Qwen1.5-14B-Chat will be fine-tuned through these steps.

In the subsequent sections, we will introduce the construction of the HealthRCN dataset in Section 3.2, which will serve as the source for the subsequent fine-tuning and evaluation datasets. Section 3.3 will describe the fine-tuning process of Qwen1.5-4B-Chat and Qwen1.5-14B-Chat, with the fine-tuned models becoming core components of HRDE. Section 3.4 will detail the construction process of HRDE.

### 3.2 Data Preparation

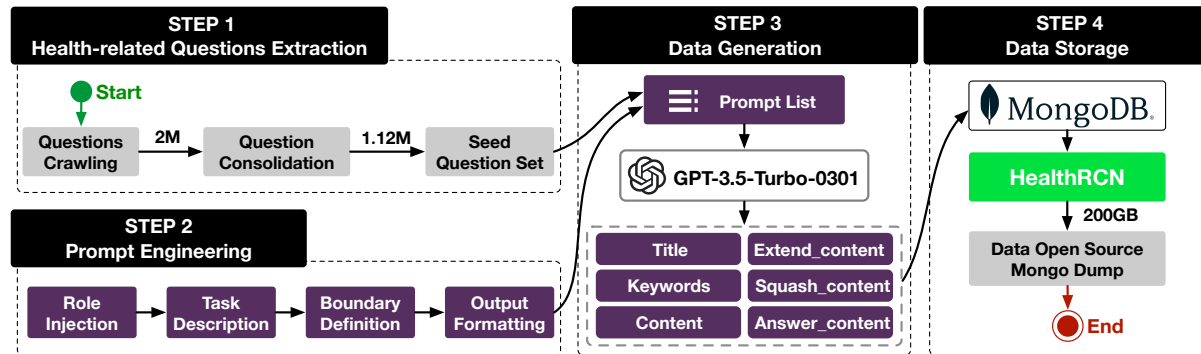


Fig. 2. The Construction Process of HealthRCN

To address the gap in Chinese rumor datasets within the health domain, this paper constructs a dataset containing 1.12 million Chinese health-related rumors, named Health Rumor CN (HealthRCN, as shown in Figure 2). This dataset is the largest Chinese health information rumor dataset known to date.

To construct the HealthRCN dataset, we first gathered approximately 2 million user inquiries by crawling common questions from health-related websites<sup>4</sup>. After consolidating these inquiries, we obtained 1.12 million health questions. Based on these health questions, we designed appropriate prompts (including role definitions, task descriptions, boundary definitions, and output formats) and used the GPT-3.5-Turbo-0301 model to sequentially generate corresponding rumor titles, keywords, short rumor content, long rumor content, refutation responses,

<sup>4</sup>We primarily obtain health-related questions posted by users from <https://www.39.net/>.

and correct answers for each health question, consuming a total of approximately 3.36 billion tokens. The detailed information of the HealthRCN dataset fields is shown in Table 1. In Appendix A.1, we show the prompts used to generate the corresponding fields, while in Appendix A.2, we present a sample from this dataset.

Among these, the rumor titles, short rumor content, and long rumor content are health rumor titles and content generated by the GPT-3.5 based on the original health questions, with the long rumor content being an extended version of the short rumor content. The keywords field consists of all keywords extracted from the original health questions, separated by commas. The refutation responses clarify and explain the generated rumor content, while the correct answers address the original health questions accurately.

Table 1. Fields of HealthRCN

Fields	Description	Average length
Original_question	Original health question	11.1
Title	The title of the generated rumor	18.3
Keywords	Keywords list	22.2/5.1
Content	Generated short rumor content	194.2
Extend_content	Generated extended rumor content	579.1
Squash_content	Refutation response to generated rumor	366.5
Answer_content	The correct response to the original health question	606.2

*Note:* The "Average length" field indicates the average character length of the corresponding field text content, with the "Keywords" field specifying both the average length of keyword texts and the average number of keywords.

### 3.3 Supervised Fine-tuning

To enable Qwen1.5-4B-Chat and Qwen1.5-14B-Chat to detect and respond to health-related rumors from user input in a coherent format, it is necessary to fine-tune both models in a supervised manner. This section will provide a detailed introduction to the datasets used for fine-tuning and the specifics of the fine-tuning process.

**3.3.1 Data for Fine-tuning.** The SFT dataset we used primarily consists of two categories of instruction data: question-answer data aimed at rumor detection and analysis, and conventional medical knowledge question-answer data. The former is used to guide the LLMs on how to perform the task of identifying health rumor and respond in a predetermined format. The latter serves to enhance the model's inherent medical knowledge and, on the other hand, to prevent overfitting of the question-answer format for rumor detection during the fine-tuning process.

The question-answer data for rumor detection and analysis is sourced from the HealthRCN dataset, which includes 21,246 question-answer pairs with reference documents and 10,000 question-answer pairs without reference documents. We randomly selected 31,246 health-related questions (original\_question) from the HealthRCN dataset and used GPT-4-1106-Preview to generate corresponding answers for rumor detection and analysis. The prompt template used to query GPT-4-1106-Preview is essentially the same as the one used for generating answers in the HRDE framework (see Section 3.4.3 for details). However, to ensure the responses generated by GPT-4-1106-Preview meet our expectations, we included an additional question-answer example (1-shot) in the prompt. The reference document retrieval strategy is also consistent with the method used in the HRDE framework. Due to the absence of a fine-tuned Qwen1.5-4B-Chat model, the re-ranking process was simplified. The complete method is detailed in Section 3.4.2.

The conventional medical knowledge question-answering data comes from the following five open-source Chinese medical instruction datasets: ChatMed Consult Dataset [62], ShenNong TCM Dataset [63], Chinese medical dialogue data<sup>5</sup>, Huatuo-Llama-Med-Chinese Dataset [47], and Med-ChatGLM Dataset [48]. These five open-source instruction sets consist of simple medical knowledge question-answer instructions. We randomly selected 6,000 data entries from each dataset, resulting in a total of 30,000 conventional medical knowledge question-answer data entries.

Finally, the aforementioned two types of data are processed into a unified format, then merged and shuffled to form the final SFT dataset (see Table 2 for details), which contains 61,246 question-answer pairs.

Table 2. Fine-tuning Dataset

Data type	Sample size
Refutation Q&A with references	21246
Refutation Q&A without references	10000
ChatMed Consult Dataset	6000
ShenNong TCM Dataset	6000
Chinese medical dialogue data	6000
Huatuo-Llama-Med-Chinese Dataset	6000
Med-ChatGLM Dataset	6000

**3.3.2 Model Fine-tuning.** To enable the model to better detect and analyze health-related rumors from user inputs and output responses in a predefined format, we fine-tuned Qwen1.5-4B-Chat and Qwen1.5-14B-Chat models using the dataset constructed in Section 3.3.1.

For the Qwen1.5-14B-Chat model, we employed the LoRA method [21] for efficient fine-tuning, setting the rank of LoRA to 16. Specifically, we fine-tuned the Qwen1.5-14B-Chat model on seven NVIDIA A800-SXM4-40GB GPUs for 3 epochs, which took approximately 4.5 hours (16264.3 seconds).

For the Qwen1.5-4B-Chat model, we adopted a full fine-tuning approach. Specifically, we fine-tuned the Qwen1.5-4B-Chat model on two NVIDIA H800 PCIe GPUs for 2 epochs, which took approximately 4.7 hours (16904.7 seconds).

## 3.4 Retrieval-Augmented Generation

**3.4.1 Data for Retrieval-Augmented Generation.** To build the reference database required for RAG, we primarily used Elasticsearch and Milvus to store and retrieve health-related reference documents. We sourced information to construct the reference database from 19 trustworthy websites or professional organizations (as detailed in the Appendix B). To ensure the timeliness and accuracy of the reference database, we regularly update it by fetching new data daily from websites that maintain updated information.

For each health information article from these sources, we capture the title, body content, publication date, source name, and URL. This data is then duplicated and stored in both Elasticsearch and Milvus databases, providing comprehensive information and traceability for subsequent use. In the Elasticsearch, we store the complete article as a single record (i.e., a document in Elasticsearch). However, for Milvus, due to the context window length limitation of the m3e embedding model we use (512 tokens), we segment the body of each article into chunks (ensuring each chunk is less than 512 tokens in length) and generate corresponding embedding

<sup>5</sup><https://github.com/Toyhom/Chinese-medical-dialogue-data>

vectors using the embedding model. Each chunk, along with its embedding vector, article title, publication date, and URL, is then sequentially stored in Milvus.

As of the completion of this paper, Elasticsearch stores information on 358,114 reference documents, while Milvus stores information on 1,347,976 reference document chunks.

**3.4.2 Evidence Recall.** The recall of reference documents in the HRDE method primarily consists of two parts: the recall and re-ranking of reference documents.

First, we recall reference documents related to the user input from both the Elasticsearch and Milvus databases simultaneously. For Elasticsearch, we extract keywords from the user input to recall reference documents. As a traditional database, Elasticsearch uses inverted indexing and the BM25 algorithm, which effectively supports keyword-based document retrieval. For the vector database Milvus, we use the embedding vector of the user input (generated by the m3e embedding model) to recall reference document chunks. Using both keywords and embedding vectors for recall ensures both the accuracy and coverage of the recalled documents, thereby fully leveraging the effective information in the reference database to assist the LLM in generating answers. Since the reference documents recalled from Elasticsearch are complete articles, they need to be chunked. Then, the reference document chunks recalled from both sources are merged to form the Top-N chunks.

Next, for the Top-N document chunks recalled from both sources, we use HyDE (Hypothetical Document Embeddings) [15] for re-ranking. Re-ranking is necessary for two main reasons: LLM’s context window length is limited, preventing it from processing too many reference document chunks at once, and there is a need to further filter the reference document chunks to remove less relevant or noisy chunks.

Specifically, we used the fine-tuned Qwen1.5-4B-Chat to independently generate a response to the user input’s health information query without using reference documents as a hypothetical document. We then calculate the semantic similarity between all the recalled document chunks and the hypothetical document (evaluated using cosine similarity) and rank them, selecting the Top-K document chunks as the final reference content. Re-ranking based on HyDE helps eliminate some document chunks that are related to the user input but do not contribute to rumor analysis, thereby ensuring the quality of the final reference document chunks. Additionally, we set a semantic similarity threshold in the re-ranking process to directly exclude document chunks with very low similarity to the hypothetical document.

**3.4.3 Interpretation Generation.** To enable the LLM to better identify rumors based on user input, we designed two types of prompts to guide the model in providing rumor detection responses, both with and without reference documents. The non-referenced prompt is also used by Qwen1.5-4B-Chat to generate the hypothetical document. Each type of prompt consists of four parts: task description, input information, detailed task requirements, and answer output format.

The task description briefly outlines the content of the rumor detection task. We use the identifiers [Rumor Detection Task] and [Rumor Detection Task with References] to indicate whether the current task will include reference documents. In the input information section, the user’s health information input is embedded. If the current task requires reference documents, the recalled reference documents are also embedded sequentially in this section. The final two parts provide detailed task requirements and the specific format for the response, ensuring standardized answers from the model (see Figure 3 for the English translations of the prompts, with the original Chinese versions available in the Appendix C).

After obtaining the reference documents, we will embed the user’s input and the reference documents (if needed) into a designed prompt, which will then be processed by the fine-tuned Qwen1.5-4B-Chat to provide a response for rumor detection. Additionally, if no valid documents are retrieved or all retrieved documents are excluded during the re-ranking phase, it indicates that there is no available information in the database. In this case, we will use the prompt without reference documents to guide the LLM, allowing it to respond directly based on its internal knowledge.



The response for rumor detection will include three sections: conclusion, analysis, and references. According to the requirements in the prompt, the labels in the conclusion can only include "Rumor," "Not rumor," and "Not related to health information." The analysis section will analyze the input health information, providing a complete reasoning and analysis process. If there are reference documents available, the model will use content from the reference documents for reasoning and validation in the analysis section, with citations indicated in the text (e.g., "[1]"). Finally, if the analysis section uses content from the reference documents, the source information for these references will be provided in the references section at the end of the response. The first two sections are generated directly by the model, while the third section will be supplemented during post-processing based on the model's response and the reference documents. Specific Q&A examples can be found in the Section 5.

## 4 EXPERIMENT

### 4.1 Base Model Selection

The LLMs utilized in the experiment include ChatGLM3-6B [13], Baichuan2-13B-Chat [54], Qwen1.5-14B-Chat [1], GPT-3.5-Turbo<sup>6</sup>, and GPT-4-1106-Preview<sup>7</sup>. These models encompass both open-source and proprietary models that are currently representative in the field.

The experiments in this paper primarily designed the following four types of models for comparative analysis:

**LLM.** The model utilizes the original LLM for rumor detection and analysis tasks, serving as a baseline for comparison with other models.

**LLM + RAG.** The model extends the LLM by incorporating the RAG framework designed in this paper, enabling the model to reference recalled relevant documents for refuting rumors.

**LLM + SFT.** The model utilizes a fine-tuned LLM. LLMs of similar parameter scale are fine-tuned using identical methods and parameters, as detailed in Section 3.3. Through this fine-tuning process, the model learns rumor detection techniques and acquires some knowledge specific to the healthcare domain from the fine-tuning dataset. Additionally, its output becomes more standardized.

**LLM + SFT + RAG.** The model utilizes a fine-tuned LLM, integrated with the RAG framework designed in this paper. It will be compared with the three preceding models in ablation experiments, thereby validating the effectiveness and necessity of the fine-tuning and RAG components designed in this paper.

The HRDE model proposed in this paper is Qwen1.5-14B-Chat + SFT + RAG. For models requiring RAG, the hypothetical documents in the RAG process are generated by the fine-tuned Qwen1.5-4B-Chat. Additionally, we configure the retrieval of 5 complete reference documents from Elasticsearch, and 25 reference document chunks from Milvus. During the re-ranking phase, we select the final five reference document chunks, with a semantic similarity threshold (based on cosine similarity) set at 0.5.

### 4.2 Datasets

The evaluation dataset primarily comes from the HealthRCN dataset, supplemented with some evaluation samples unrelated to health information (constructed manually), totaling 2500 evaluation samples. The sample labels in the evaluation dataset are categorized into three types: "Rumor" (1497), "Not rumor" (855), and "Not related to health information" (148). For samples from the HealthRCN dataset, we employed a random sampling strategy. We ensured that the selected samples did not overlap with those used for fine-tuning, thereby maintaining the independence of the evaluation dataset. For rumor samples, we use the "Content" field as the input content, and for non-rumor samples, we use the "Answer\_content" field as the input content.

<sup>6</sup><https://openai.com>

<sup>7</sup><https://openai.com/blog/new-models-and-developer-products-announced-at-devday>

### Prompt for Rumor Detection Task

**[Rumor Identification Task]** You are an extremely stringent health information refutation expert and need to determine whether the "user input" is a rumor. Your answer must include two parts: **[Conclusion]** and **[Analysis]**.

User Input: { **Input** }

**Please pay attention to the following points:**

- The **[Conclusion]** has only three options: Rumor, Not rumor, Not related to health information. The **[Analysis]** includes the analysis and argumentation process.
- Only output **[Conclusion]** and **[Analysis]**, with no need to attach input information. Also, ensure the consistency between **[Conclusion]** and **[Analysis]**, as well as the organization of the **[Analysis]**.

**Output format is as follows:**

**[Conclusion]**

Rumor / Not rumor / Not related to health information

**[Analysis]**

Analysis of the input health information

### Prompt for Rumor Detection Task with References

**[Rumor Identification Task with References]** You are an extremely stringent health information refutation expert and need to determine whether the "user input" is a rumor **based on the Reference Documents**. Your answer must include two parts: **[Conclusion]** and **[Analysis]**.

User Input: { **Input** }

**Reference documents:**

{ **Reference Documents** }

**Please pay attention to the following points:**

- The **[Conclusion]** has only three options: Rumor, Not rumor, Not related to health information. The **[Analysis]** includes the analysis and argumentation process.
- You need to insert reference numbers in the **[Analysis]**, with the format **[number]**, preferably placing the number closest to the referenced information rather than just at the end of the sentence, but within punctuation marks.
- Only output **[Conclusion]** and **[Analysis]**, with no need to attach input information. Also, ensure the consistency between **[Conclusion]** and **[Analysis]**, as well as the organization of the **[Analysis]**.
- In your response, use phrases like "relevant knowledge", "related studies show", "in fact", "there is scientific evidence to show" to replace "reference materials", "evidence from **[number]** shows", "material **[number]** points out", etc.
- Pay attention to the correlation between each reference document and user input, and irrelevant content will not be accepted.

**Output format is as follows:**

**[Conclusion]**

Rumor / Not rumor / Not related to health information

**[Analysis]**

Analysis of the input health information

Fig. 3. Prompts for Refutation

## 4.3 Model Deployment and Inference

This paper employs the vLLM framework for deploying LLMs. vLLM is an open-source framework for LLM deployment that supports fast inference and serving of LLMs [28]. vLLM utilizes a novel attention algorithm called PagedAttention, which efficiently manages the keys and values of attention. Additionally, this framework supports the deployment of numerous LLMs, including the Qwen1.5-14B-Chat and Qwen1.5-4B-Chat models used in this paper.

And the Qwen1.5-4B-Chat model and the Qwen1.5-14B-Chat model were deployed using the vLLM framework on the NVIDIA H800 PCIe. The inference speeds reached 698.5 tokens per second and 143.6 tokens per second, respectively, while the serving throughput, with each request asking for ten parallel output completions, achieved 153.8 requests per minute and 68.6 requests per minute, respectively.

#### 4.4 Evaluation Metrics

The core evaluation metrics in this study include accuracy, F1 score, relevance, reliability, and richness. Accuracy and F1 score measure the accuracy of the model's predicted labels, assessing whether the model correctly classifies the input health information. The F1 score considers both precision and recall to provide a balanced evaluation. Relevance, reliability, and richness primarily assess the quality of the model's answer.

Relevance evaluates whether the model's answer focuses on the input health information and addresses whether the information is a rumor. Reliability assesses whether the model's analysis content is convincing, supporting the predicted label with scientific evidence and reasonable inferences, avoiding language that could cause new misunderstandings or confusion. Richness evaluates the diversity and coverage of the model's analysis content, determining if the analysis includes comprehensive information and arguments, and if it covers all key points or aspects mentioned in the input.

Additionally, this study records the proportion of valid responses from each model. A valid response follows the format given in the prompt and provides a predicted label within the specified range. The calculations for accuracy and F1 score only consider the evaluation samples with valid responses, excluding those with invalid responses. However, relevance, reliability, and richness evaluations include all model responses, regardless of their validity.

The objective of the rumor refutation task in this paper is two-fold: to determine whether the input information is a rumor and to provide an analysis for the judgment. Consequently, different evaluation metrics are required to measure the model's performance in achieving these two goals. Accuracy and F1 score are used to gauge the model's success in detecting rumors, while relevance, reliability, and richness are employed to assess the model's effectiveness in providing the analysis. Additionally, the proportion of valid responses can be used to evaluate the model's ability to comply with instructions.

Due to the difficulty of calculating relevance, reliability, and richness through explicit formulas, we used the GPT-4-1106-Preview model to evaluate the model's responses. We designed specific prompts (detailed in the Appendix D) for GPT-4-1106-Preview to sequentially score each response on relevance, reliability, and richness. Each metric is scored on a scale of 0-10, with higher scores indicating better performance on the respective metric. Finally, we calculate the average score to serve as the model's final rating for each metric.

#### 4.5 Evaluation Results

Table 3 and Table 4 present all evaluation results, including the ablation experiment results and the comparative evaluation results of multiple LLMs. Overall, our proposed HRDE model outperforms all other models in nearly all evaluation metrics, validating its effectiveness and superiority. In terms of rumor detection accuracy, HRDE achieves an average accuracy of 91.04% and an F1 score of 91.58%, significantly surpassing the other models. Additionally, HRDE exceeds GPT-4-1106-Preview by more than 2% in both of these metrics. This indicates that HRDE can classify and identify rumors more accurately, maintaining a good balance between precision and recall. Regarding answer quality, the HRDE model consistently ranks either first or second across the relevance, reliability, and richness metrics. This demonstrates that HRDE's answer can better incorporate reference documents to analyze user input effectively. In terms of relevance, HRDE is second only to GPT-4-1106-Preview and Qwen1.5-14B-Chat + SFT. This is mainly because HRDE relies more on the reference documents provided by RAG, significantly enhancing the richness of the answers, which slightly lowers the relevance score. Furthermore, in

terms of valid answer rate, HRDE can perfectly output answers in the format specified by the prompt, ensuring the consistency of each answer.

Table 3. Ablation Experiment

Model	SFT	RAG	Avg Accuracy	F1 Score	Valid Answer Rate	Relevance	Reliability	Richness
Qwen1.5-14B-Chat			57.37%	46.93%	62.68%	8.77	8.16	6.86
Qwen1.5-14B-Chat	✓		89.64%	90.80%	<b>100.00%</b>	<b>9.27</b>	8.89	6.93
Qwen1.5-14B-Chat		✓	56.79%	46.40%	<u>82.76%</u>	7.92	7.88	6.65
HRDE	✓	✓	<b>91.04%</b>	<b>91.58%</b>	<b>100.00%</b>	<u>9.25</u>	<b>8.99</b>	<b>7.3</b>

Note: "HRDE" specifically refers to Qwen1.5-14B-Chat + SFT + RAG. The best performance in each column will be bolded, and the second-best performance will be underlined.

In the ablation experiment (Table 3), HRDE achieves the best performance on almost all metrics compared to the Qwen1.5-14B-Chat model that does not use SFT and RAG simultaneously. This indicates that using SFT or RAG alone is not the optimal strategy. When only RAG is used, the model, lacking fine-tuning, cannot effectively leverage information from reference documents to improve answer quality. In fact, it may be misled by the information, leading to a decline in most metrics compared to the model without RAG. On the other hand, when only SFT is employed, the model's rumor detection accuracy and valid answer rate significantly improve (though still not surpassing HRDE), and the relevance of answers even exceeds that of HRDE. However, the model exhibits deficiencies in reliability and richness, as the absence of external information from reference documents means it cannot provide more credible evidence and knowledge to support and enrich its answers. Therefore, combining SFT and RAG ensures significant improvements in both rumor detection and answer quality. Additionally, in terms of the valid answer rate, models using RAG show a significant enhancement compared to the original Qwen1.5-14B-Chat. This improvement is mainly due to the HyDE method used in RAG for filtering reference documents, where the hypothetical documents are generated by the fine-tuned Qwen1.5-4B-Chat model. This ensures that the re-ranked reference documents are primarily responses to the input query regarding the veracity of health information, thereby significantly improving the model's valid answer rate.

Table 4. Multiple LLM Evaluation Experiments

Model	SFT	RAG	Avg Accuracy	F1 Score	Valid Answer Rate	Relevance	Reliability	Richness
GPT-3.5-Turbo		✓	63.18%	53.68%	99.52%	7.06	6.53	3.18
GPT-4-1106-Preview		✓	88.20%	88.15%	<b>100.00%</b>	<b>9.27</b>	8.97	6.71
ChatGLM3-6B	✓	✓	88.01%	85.24%	<u>99.76%</u>	9.03	8.59	6.16
Baichuan2-13B-Chat	✓	✓	<u>88.47%</u>	85.22%	92.64%	8.36	8.29	5.61
HRDE	✓	✓	<b>91.04%</b>	<b>91.58%</b>	<b>100.00%</b>	<u>9.25</u>	<b>8.99</b>	<b>7.3</b>

Note: "HRDE" specifically refers to Qwen1.5-14B-Chat + SFT + RAG. The best performance in each column will be bolded, and the second-best performance will be underlined.

Table 4 presents the comparative evaluation results among several different LLMs. Compared to ChatGLM3-6B and Baichuan2-13B-Chat models, which also employ both SFT and RAG, HRDE demonstrates significant advantages across all evaluation metrics. This is primarily due to the superior baseline performance of Qwen1.5-14B-Chat, which excels in natural language processing capabilities relative to ChatGLM3-6B and Baichuan2-13B-Chat. Consequently, Qwen1.5-14B-Chat, after fine-tuning, is better equipped to handle and utilize information from reference documents for health information detection and analysis.

Furthermore, HRDE significantly outperforms GPT-3.5-Turbo across all evaluation metrics, despite GPT-3.5-Turbo having a much larger parameter size than Qwen1.5-14B-Chat. Compared to the more advanced

GPT-4-1106-Preview, HRDE still excels in almost all evaluation metrics, with the exception of being slightly lower in relevance of answers than GPT-4-1106-Preview. This demonstrates the effectiveness of the SFT and RAG designs proposed in this paper, which can significantly enhance the overall performance of Qwen1.5-14B-Chat in handling health rumor tasks.

Table 5. Effect of Semantic Similarity Threshold on HRDE

Model	Similarity Threshold	Avg Accuracy	F1 Score	Relevance	Reliability	Richness
HRDE	0.1	<u>91.44%</u>	90.39%	<b>9.2728</b>	<b>9.0118</b>	<b>7.7130</b>
HRDE	0.3	<b>91.52%</b>	90.88%	<b>9.2728</b>	<b>9.0118</b>	<u>7.6996</u>
HRDE	0.5	91.04%	<b>91.58%</b>	9.2544	<u>8.9912</u>	<u>7.3399</u>
HRDE	0.7	89.64%	90.50%	<u>9.2733</u>	8.8892	6.9323
HRDE	0.9	89.76%	<u>90.99%</u>	9.2725	8.8884	6.9295

Note: "HRDE" specifically refers to Qwen1.5-14B-Chat + SFT + RAG. The best performance in each column will be bolded, and the second-best performance will be underlined.

In HRDE, an important parameter is the semantic similarity threshold, which filters out reference documents with low semantic similarity to the input information (see Section 3.4.2), thereby adjusting the quality of the reference documents provided to the LLM. In previous experiments, this parameter was set to 0.5 (see Section 4.1), meaning that reference documents with a semantic similarity less than 0.5 to the input information were excluded. In Table 5, we present the performance of HRDE under different semantic similarity thresholds. As the semantic similarity threshold decreases, the model's average accuracy shows an upward trend, but the F1 score exhibits a downward trend. This indicates that a lower semantic similarity threshold can provide more relevant reference documents, improving the model's average accuracy. Still, the recall rate decreases, leading to a lower F1 score. Similarly, under stricter semantic similarity thresholds, the reference documents obtained by the model contain less noise, improving the quality of the answers, albeit to a lesser extent. Considering all evaluation metrics, a semantic similarity threshold of 0.5 will be an appropriate default value.

## 5 CASE STUDY

This section will select three real-world Q&A examples to demonstrate HRDE's ability to detect health rumor and provide corresponding interpretability analysis. The input information for these three cases consists of widely spread or highly impactful Chinese health rumors or medical common knowledge. In practice, both the health information and the original responses in the three examples are in Chinese. We have translated them into English for the convenience of the readers, and the original Chinese text will be presented in the Appendix E.

*5.0.1 Case One: mobile phone radiation can cause cancer.* The statement "mobile phone radiation can cause cancer" is a widely circulated health rumor. After inputting this statement into the HRDE model, the model's response, after post-processing, is shown in Figure 4. The final response is divided into three main parts: the conclusion of the rumor detection, the analysis of the user's input information, and the source information of the reference documents.

The HRDE model explicitly states in the conclusion that it is a rumor, which is a correct judgment. In the analysis section, the model first emphasizes that such health information requires scientific evidence for support and should not be blindly trusted. It then cites content from the first and second reference documents to explain



User Input Statement

Mobile phone radiation can cause cancer.



HRGPT

**[Conclusion]**

**Rumor**

**[Analysis]**

The user input claims that "mobile phone radiation can cause cancer." This statement requires scientific evidence to support it. Relevant information indicates that mobile phone radiation is non-ionizing radiation, and the energy from non-ionizing radiation is insufficient to ionize atoms or molecules, hence it does not cause cancer[1]. Additionally, the World Health Organization classifies "radiofrequency electromagnetic fields" including mobile phone radiation as Group 2B carcinogens, which means there is limited evidence of carcinogenicity in humans and insufficient evidence in experimental animals[2]. Therefore, although there may be some association between mobile phone radiation and cancer, current scientific evidence is not sufficient to prove that mobile phone radiation causes cancer.

In fact, the frequency of mobile phone radiation is much lower than that of ionizing radiation, such as X-rays, so there is no need to be overly concerned about mobile phone radiation[2]. Furthermore, China has stringent regulations on the management of electromagnetic radiation from base stations, and the national standards currently in force are far below the international limit values, meaning the radiation produced by base stations is not a cause for concern[3].

In summary, the user's input lacks scientific basis, and the statement linking mobile phone radiation directly to cancer is inaccurate. Therefore, it can be concluded that this information is a rumor.

**[References]**

[1] "Can Mobile Phone Radiation Cause Cancer? Is This Really the Case?" - Source: *Science China - Rumor Dispelling Articles* ( <https://piyao.kepuchina.cn/rumor/rumordetail?id=nRRE> )


[2] "How Far Should You Keep Your Phone While Sleeping to Avoid Radiation? Does Radiation Increase When Using Phone While Charging? Finally, an Answer." - Source: *WeChat Official Account - Rumor Dispelling Assistant* ( [https://mp.weixin.qq.com/s?\\_\\_biz=MzI0Njg1Njc5MA==&mid=2247538982&idx=1&sn=a30da688d2b83525c7e4aa7679b45a3a&chksm=e9baf41fdecd7d0966ded11af0a00230fceb0ae6c6a04e6f23f17a2e580f9f989692e5fa448c#rd](https://mp.weixin.qq.com/s?__biz=MzI0Njg1Njc5MA==&mid=2247538982&idx=1&sn=a30da688d2b83525c7e4aa7679b45a3a&chksm=e9baf41fdecd7d0966ded11af0a00230fceb0ae6c6a04e6f23f17a2e580f9f989692e5fa448c#rd) )

[3] "Is It Necessary to Dismantle Communication Base Stations to Prevent Radiation?" - Source: *Science China - Rumor Dispelling Articles* ( <https://piyao.kepuchina.cn/rumor/rumordetail?id=raaM> )

Fig. 4. Case one: Mobile phone radiation can cause cancer.


the principles of cell phone radiation and the viewpoint of professional organizations (World Health Organization) regarding cell phone radiation, arguing that there is currently insufficient scientific evidence to prove that cell phone radiation necessarily causes cancer. In the second paragraph, the model again references literature to indicate that the harm from cell phone radiation is much less than that from ionizing radiation, suggesting there is no need for excessive panic. Additionally, it explains that China has strict regulations for the base stations that transmit cell phone signals, alleviating concerns about the radiation they produce. In the third paragraph, the model provides a summary of the entire analysis, concluding that the health information is not credible and is a rumor. At the end of the response, it lists the sources of all reference documents, including three related articles from two websites.

In the model's response, we can observe that the analysis section mentions base stations related to mobile phone radiation, which were not referenced in the user's input (sourced from the third reference document). This type of information enhances the richness of the model's response and provides the user with additional relevant knowledge, helping them further understand related health information. At the same time, this is the reason why the HRDE model scores slightly lower in relevance compared to the LLM + SFT model. However, this does not negatively impact the user's reading experience; instead, the inclusion of extensive relevant knowledge increases the overall reliability of the response.



**User Input Statement**

Vitamin C can prevent colds.



**HRGPT**

**[Conclusion]**

**Rumor**

**[Analysis]**

The user input claims that vitamin C can prevent colds. Relevant knowledge indicates that vitamin C is indeed beneficial to human health, enhancing immune function and improving the body's resistance to environmental stress and immunity[1]. However, for the vast majority of healthy individuals who do not have a vitamin C deficiency, there is currently no scientific evidence to suggest that vitamin C can prevent colds[1]. Additionally, a review of 29 studies concluded that vitamin C supplements are ineffective in reducing the incidence of the common cold[2]. In terms of preventing viral influenza, there are no high-quality clinical studies proving that regular supplementation with vitamin C can play a preventive role[2]. Clinical research from Zhongnan Hospital of Wuhan University also confirmed that vitamin C does not reduce the incidence of colds nor cure them[3]. Therefore, although vitamin C has a positive effect on boosting immunity, it does not mean it can prevent colds. In summary, the user's input lacks scientific basis and can be considered a rumor.

**[References]**

[1] "Can Vitamin C Prevent Colds? It Only Shortens the Duration of a Cold" - Source: *Science China - Rumor Dispelling Articles* ( <https://piyao.kepuchina.cn/rumor/rumordetail?id=BLEY> )

[2] "Vinegar Fumigation and Vitamin C Tablets Cannot Prevent COVID-19! Here's How to Prevent It" - Source: *China Food Information Center* ( <http://www.kexinzhongxin.com/html/kepu/3745.html> )

[3] "Can Vitamin C Prevent COVID-19? Should We Supplement Vitamin C During Special Times?" - Source: *China Food Information Center* ( <http://www.kexinzhongxin.com/html/kepu/3744.html> )

Fig. 5. Case Two: Vitamin C can prevent colds.

5.0.2 *Case Two: vitamin C can prevent colds.* "Vitamin C can prevent colds" is also an extremely widespread health myth. Figure 5 shows the response of the HRDE model to this health information.

In the conclusion, the HRDE model gives the correct conclusion that this health information is a rumor. In the analysis section, the model first cites the first reference document to provide the general effects and benefits of vitamin C, but also explicitly states that for healthy individuals, vitamin C does not have the ability to prevent colds. It then cites the second reference document which explains that currently there is no professional evidence proving that vitamin C can effectively prevent common colds or viral influenza. Next, it cites the third reference document which provides the research conclusion of a professional medical institution (Wuhan

University Zhongnan Hospital), stating that vitamin C cannot effectively prevent or treat colds. Finally, the model summarizes that while vitamin C can indeed boost the immune system, there is no clear evidence indicating that it can prevent colds. In the references section, the model’s response provides the source information of the three reference documents used.

From the model’s response, we can see that the model effectively utilizes and organizes information from all reference documents, explaining to the user in a clear and convincing manner, from the original efficacy of vitamin C to the research conclusions given by authoritative institutions, that vitamin C cannot prevent colds.



**User Input Statement**

The main cause of diabetes is not eating too much sugar.



**HRGPT**

**[Conclusion]**

**Not rumor**

**[Analysis]**

The user's input indicating that "The main cause of diabetes is not eating too much sugar" is consistent with relevant knowledge. In fact, the pathogenesis of diabetes is complex, involving insufficient insulin secretion and decreased insulin sensitivity, and is not merely a matter of consuming too much sugar[1]. Research indicates that high-risk factors for diabetes include genetic predisposition, aging, high-calorie diets, lack of exercise, being overweight, obesity, and harmful habits such as smoking and drinking[2]. Moreover, the World Health Organization, after assessing the relationship between sugar intake and health, concluded that excessive intake of added sugars is not directly related to cancer[2]. The evidence above indicates that the onset of diabetes is related to multiple factors, rather than solely to "eating too much sugar."

Additionally, there is scientific evidence that people with diabetes do not necessarily develop the disease because of eating too much sugar. Diabetics can, under medical guidance, consume sugar-containing foods in moderation[3]. Therefore, the user's input is scientifically based and does not constitute a rumor.

**[References]**

[1] "Why Do I Get Diabetes If I Don't Like Eating Sugar?" - Source: Bohu Doctor - Health Consultation ( <https://www.bohe.cn/zx/39597.html> )

[2] "Do Chinese People Eat Too Much Sugar, 'Sugar Causes All Diseases'—Is This True?" - Source: China Food Information Center ( <http://www.kexinzhongxin.com/html/kepu/4750.html> )

[3] "Afraid of Sugar? Can Diabetics Still Eat Sugar?" - Source: China Science Communication ( [https://www.kepuchina.cn/article/articleinfo?business\\_type=100&classify=0&ar\\_id=88780](https://www.kepuchina.cn/article/articleinfo?business_type=100&classify=0&ar_id=88780) )

Fig. 6. Case Three: The main cause of diabetes is not eating too much sugar.

5.0.3 *Case Three: the main cause of diabetes is not eating too much sugar.* "The main cause of diabetes is not eating too much sugar" is a widely disseminated and controversial health information. However, this statement is correct medical knowledge. We hope to explore the pattern of responses from the HRDE model when faced with accurate health information through this case.

In the conclusion section, the HRDE model gives the correct judgment that the input health information is not a rumor. In the analysis section, the model first indicates that the pathogenesis of diabetes is complex and lists some high-risk factors that can trigger diabetes, thus indicating that excessive sugar intake is not the main cause.



Subsequently, the model cites a second reference document and provides additional information, stating that the World Health Organization believes that excessive consumption of added sugar is not directly related to cancer, further alleviating users' concerns about sugar consumption. Then, the model also explains, based on the third reference document, that even if someone has diabetes, they can still consume sugary foods in moderation under the guidance of a doctor. Finally, the model concludes the analysis by stating that the input health information is not a rumor. In the references section, the model's response provides the source information for the three reference documents used.

For health information that is not a rumor, the model does not simply indicate that the information is correct but combines the explanation and analysis of the health information with the referenced documents recalled by RAG. At the same time, the model also provides users with relevant knowledge from the reference documents ("excessive consumption of added sugar is unrelated to cancer"), increasing the amount of information in the response and helping users further understand the related medical knowledge of the health information.

## 6 CONCLUSION

In this paper, we constructed a dataset of 1.12 million Chinese health-related rumors (HealthRCN) based on user query information from health websites and GPT-3.5-Turbo-0301. This dataset provides a large-scale, open-source collection of Chinese health rumors, which is currently the largest known dataset of its kind for health rumor research. To accurately identify health rumors and provide interpretable analysis, we proposed the HRDE model. The core of this model is the Qwen1.5-14B-Chat model, which has been fine-tuned on a carefully designed instruction dataset based on the HealthRCN, significantly enhancing its ability to identify and analyze health rumors.

To mitigate the hallucination problem common in LLMs and to further improve its capability to access the latest external information, we designed a RAG process that includes a dual retrieval and re-ranking mechanism. This process allows the model to retrieve relevant documents from a reference database, which can be updated daily with the latest data from multiple trustworthy health information websites. In evaluation experiments across multiple models, HRDE surpassed all other models, including GPT-4-1106-Preview, in overall performance for rumor recognition accuracy and answer quality. It exhibited outstanding rumor detection capabilities and effectively analyzed input health information by integrating reference documents, thus providing reliable and comprehensive analysis content. Furthermore, experiments investigated the influence of various semantic similarity thresholds on the HRDE model's performance, offering valuable guidance for parameter optimization. In case studies, we used three real-world question-answer examples to visually demonstrate HRDE's effectiveness in identifying and analyzing health rumors.

Despite the significant achievements of this study, there are still some limitations. For example, the proportion of non-health information samples in the instruction dataset used for fine-tuning is relatively small, which sometimes causes HRDE to misinterpret non-health-related user inputs. Additionally, the document retrieval process is time-consuming, which slows down HRDE's response speed. In the future, we plan to further refine the instruction dataset used for fine-tuning and optimize the RAG process to further enhance HRDE's overall performance.

## REFERENCES

- [1] Jinze Bai, Shuai Bai, Yunfei Chu, et al. 2023. Qwen Technical Report. arXiv:2309.16609 [cs.CL]
- [2] Zhijie Bao, Wei Chen, Shengze Xiao, et al. 2023. DISC-MedLLM: Bridging General Large Language Models and Real-World Medical Consultation. arXiv:2308.14346 [id='cs.CL' full\_name='Computation and Language' is\_active=True alt\_name='cmp-lg' in\_archive='cs' is\_general=False description='Covers natural language processing. Roughly includes material in ACM Subject Class I.2.7. Note that work on artificial languages (programming languages, logics, formal systems) that does not explicitly address natural-language issues broadly construed (natural-language processing, computational linguistics, speech, text retrieval, etc.) is not appropriate for this area.']

- [3] Tian Bian, Xi Xiao, Tingyang Xu, et al. 2020. Rumor detection on social media with bi-directional graph convolutional networks. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 34. 549–556.
- [4] Tom Brown, Benjamin Mann, Nick Ryder, et al. 2020. Language Models are Few-Shot Learners. In *Advances in Neural Information Processing Systems*, H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (Eds.), Vol. 33. Curran Associates, Inc., 1877–1901. [https://proceedings.neurips.cc/paper\\_files/paper/2020/file/1457c0d6bfc4967418bfb8ac142f64a-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2020/file/1457c0d6bfc4967418bfb8ac142f64a-Paper.pdf)
- [5] Cheng Chang, Yihong Zhang, Claudia Szabo, et al. 2016. Extreme User and Political Rumor Detection on Twitter. In *Advanced Data Mining and Applications*, Jinyan Li, Xue Li, Shuliang Wang, Jianxin Li, and Quan Z. Sheng (Eds.). Springer International Publishing, Cham, 751–763.
- [6] Yupeng Chang, Xu Wang, Jindong Wang, et al. 2024. A Survey on Evaluation of Large Language Models. *ACM Trans. Intell. Syst. Technol.* 15, 3, Article 39 (mar 2024), 45 pages. <https://doi.org/10.1145/3641289>
- [7] Jiawei Chen, Hongyu Lin, Xianpei Han, et al. 2023. Benchmarking Large Language Models in Retrieval-Augmented Generation. arXiv:2309.01431 [cs.CL]
- [8] Paul F Christiano, Jan Leike, Tom Brown, et al. 2017. Deep Reinforcement Learning from Human Preferences. In *Advances in Neural Information Processing Systems*, I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (Eds.), Vol. 30. Curran Associates, Inc. [https://proceedings.neurips.cc/paper\\_files/paper/2017/file/d5e2c0adad503c91f91df240d0cd4e49-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2017/file/d5e2c0adad503c91f91df240d0cd4e49-Paper.pdf)
- [9] Alton Y.K. Chua and Snehasish Banerjee. 2017. To share or not to share: The role of epistemic belief in online health rumors. *International Journal of Medical Informatics* 108 (2017), 36–41. <https://doi.org/10.1016/j.ijmedinf.2017.08.010>
- [10] Jiayi Cui, Zongjian Li, Yang Yan, et al. 2023. ChatLaw: Open-Source Legal Large Language Model with Integrated External Knowledge Bases. arXiv:2306.16092 [cs.CL]
- [11] Raveena Dayani, Nikita Chhabra, Taruna Kadian, et al. 2015. Rumor detection in twitter: An analysis in retrospect. In *2015 IEEE International Conference on Advanced Networks and Telecommunications Systems (ANTS)*. 1–3. <https://doi.org/10.1109/ANTS.2015.7413660>
- [12] Qingxiu Dong, Lei Li, Damai Dai, et al. 2023. A Survey on In-context Learning. arXiv:2301.00234 [cs.CL]
- [13] Zhengxiao Du, Yujie Qian, Xiao Liu, et al. 2022. GLM: General Language Model Pretraining with Autoregressive Blank Infilling. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. 320–335.
- [14] Shahul Es, Jithin James, Luis Espinosa Anke, et al. 2024. RAGAs: Automated Evaluation of Retrieval Augmented Generation. In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations*, Nikolaos Aletras and Orphee De Clercq (Eds.). Association for Computational Linguistics, St. Julians, Malta, 150–158. <https://aclanthology.org/2024.eacl-demo.16>
- [15] Luyu Gao, Xueguang Ma, Jimmy Lin, et al. 2023. Precise Zero-Shot Dense Retrieval without Relevance Labels. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki (Eds.). Association for Computational Linguistics, Toronto, Canada, 1762–1777. <https://doi.org/10.18653/v1/2023.acl-long.99>
- [16] Yunfan Gao, Yun Xiong, Xinyu Gao, et al. 2024. Retrieval-Augmented Generation for Large Language Models: A Survey. arXiv:2312.10997 [cs.CL]
- [17] Michael Glass, Gaetano Rossiello, Md Faisal Mahbub Chowdhury, et al. 2022. Re2G: Retrieve, Rerank, Generate. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, Marine Carpuat, Marie-Catherine de Marneffe, and Ivan Vladimir Meza Ruiz (Eds.). Association for Computational Linguistics, Seattle, United States, 2701–2715. <https://doi.org/10.18653/v1/2022.naacl-main.194>
- [18] César González-Fernández, Alberto Fernández-Isabel, Isaac Martín de Diego, et al. 2021. Experts perception-based system to detect misinformation in health websites. *Pattern Recognition Letters* 152 (2021), 333–339. <https://doi.org/10.1016/j.patrec.2021.11.008>
- [19] Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, et al. 2022. Training Compute-Optimal Large Language Models. arXiv:2203.15556 [cs.CL]
- [20] Benjamin D. Horne and Sibel Adali. 2017. This Just In: Fake News Packs a Lot in Title, Uses Simpler, Repetitive Content in Text Body, More Similar to Satire than Real News. arXiv:1703.09398 [cs.SI] <https://arxiv.org/abs/1703.09398>
- [21] Edward J Hu, Yelong Shen, Phillip Wallis, et al. 2022. LoRA: Low-Rank Adaptation of Large Language Models. In *International Conference on Learning Representations*. <https://openreview.net/forum?id=nZeVKeeFYf9>
- [22] Yizheng Huang and Jimmy Huang. 2024. A Survey on Retrieval-Augmented Text Generation for Large Language Models. arXiv:2404.10981 [cs.IR]
- [23] Anoop K, Deepak P, and Lajish V L. 2020. Emotion cognizance improves health fake news identification. In *Proceedings of the 24th Symposium on International Database Engineering & Applications (Seoul, Republic of Korea) (IDEAS '20)*. Association for Computing Machinery, New York, NY, USA, Article 12, 10 pages. <https://doi.org/10.1145/3410566.3410595>
- [24] Rohit Kumar Kaliyar, Anurag Goswami, Pratik Narang, et al. 2020. FNDNet – A deep convolutional neural network for fake news detection. *Cognitive Systems Research* 61 (2020), 32–44. <https://doi.org/10.1016/j.cogsys.2019.12.005>
- [25] Nikhil Kandpal, Haikang Deng, Adam Roberts, et al. 2023. Large language models struggle to learn long-tail knowledge. In *Proceedings of the 40th International Conference on Machine Learning (<conf-loc>, <city>Honolulu</city>, <state>Hawaii</state>, <country>USA</country>, </conf-loc>) (ICML '23)*. JMLR.org, Article 641, 12 pages.

- [26] Mintong Kang, Nezihe Merve Gürel, Ning Yu, et al. 2024. C-RAG: Certified Generation Risks for Retrieval-Augmented Language Models. arXiv:2402.03181 [cs.AI]
- [27] Jared Kaplan, Sam McCandlish, Tom Henighan, et al. 2020. Scaling Laws for Neural Language Models. arXiv:2001.08361 [cs.LG]
- [28] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, et al. 2023. Efficient Memory Management for Large Language Model Serving with PagedAttention. In *Proceedings of the 29th Symposium on Operating Systems Principles* (<conf-loc>, <city>Koblenz</city>, <country>Germany</country>, </conf-loc>) (SOSP '23). Association for Computing Machinery, New York, NY, USA, 611–626. <https://doi.org/10.1145/3600006.3613165>
- [29] Chin-Yew Lin. 2004. ROUGE: A Package for Automatic Evaluation of Summaries. In *Text Summarization Branches Out*. Association for Computational Linguistics, Barcelona, Spain, 74–81. <https://aclanthology.org/W04-1013>
- [30] Tianrui Liu, Qi Cai, Changxin Xu, et al. 2024. Rumor Detection with a novel graph neural network approach. arXiv:2403.16206 [cs.AI] <https://arxiv.org/abs/2403.16206>
- [31] Yang Liu, Songhua Xu, and Georgia Tourassi. 2015. Detecting Rumors Through Modeling Information Propagation Networks in a Social Media Environment. *Social Computing, Behavioral-Cultural Modeling, and Prediction: 8th International Conference, SBP 2015, Washington, DC, USA, March 31-April 3, 2015. Proceedings* 9021 (March-April 2015), 121–130. [https://doi.org/10.1007/978-3-319-16268-3\\_13](https://doi.org/10.1007/978-3-319-16268-3_13) Journal Article.
- [32] Yue Liu, Ke Yu, Xiaofei Wu, et al. 2019. Analysis and Detection of Health-Related Misinformation on Chinese Social Media. *IEEE Access* 7 (2019), 154480–154489. <https://doi.org/10.1109/ACCESS.2019.2946624>
- [33] Jing Ma, Wei Gao, Prasenjit Mitra, et al. 2016. Detecting rumors from microblogs with recurrent neural networks. In *Proceedings of the Twenty-Fifth International Joint Conference on Artificial Intelligence (New York, New York, USA) (IJCAI'16)*. AAAI Press, 3818–3824.
- [34] Jing Ma, Wei Gao, and Kam-Fai Wong. 2017. Detect Rumors in Microblog Posts Using Propagation Structure via Kernel Learning. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Regina Barzilay and Min-Yen Kan (Eds.). Association for Computational Linguistics, Vancouver, Canada, 708–717. <https://doi.org/10.18653/v1/P17-1066>
- [35] Xinbei Ma, Yeyun Gong, Pengcheng He, et al. 2023. Query Rewriting in Retrieval-Augmented Large Language Models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, Houda Bouamor, Juan Pino, and Kalika Bali (Eds.). Association for Computational Linguistics, Singapore, 5303–5315. <https://doi.org/10.18653/v1/2023.emnlp-main.322>
- [36] Shervin Minaee, Tomas Mikolov, Narjes Nikzad, et al. 2024. Large Language Models: A Survey. arXiv:2402.06196 [cs.CL]
- [37] Janet M. Morahan-Martin. 2004. How internet users find, evaluate, and use online health information: a cross-cultural review. *Cyberpsychology & Behavior* 7, 5 (October 2004), 497–510. <https://doi.org/10.1089/cpb.2004.7.497> Comparative Study, Journal Article, Review.
- [38] XU Nuo, ZHAO Wei, SHANG Keyuan, et al. 2022. Health Rumor Detection based on Pre-Trained Language Model. *Journal of System Science and Mathematical Science Chinese Series* 42, 10, Article 2582 (2022), 2582-2589 pages. <https://doi.org/10.12341/jssms22646KSS>
- [39] OpenAI, Josh Achiam, Steven Adler, et al. 2024. GPT-4 Technical Report. arXiv:2303.08774 [cs.CL]
- [40] Kishore Papineni, Salim Roukos, Todd Ward, et al. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*. 311–318.
- [41] Poonam Rani, Vibha Jain, Jyoti Shokeen, et al. 2024. Blockchain-based rumor detection approach for COVID-19. *Journal of Ambient Intelligence and Humanized Computing* 15, 1 (2024), 435–449. <https://doi.org/10.1007/s12652-022-03900-2>
- [42] Lida Safarnejad, Qian Xu, Yaorong Ge, et al. 2021. A Multiple Feature Category Data Mining and Machine Learning Approach to Characterize and Detect Health Misinformation on Social Media. *IEEE Internet Computing* 25, 5 (2021), 43–51. <https://doi.org/10.1109/MIC.2021.3063257>
- [43] Rosa Sicilia, Stella Lo Giudice, Yulong Pei, et al. 2018. Twitter rumour detection in the health domain. *Expert Systems with Applications* 110 (2018), 33–40. <https://doi.org/10.1016/j.eswa.2018.05.019>
- [44] Karan Singhal, Shekoofeh Azizi, Tao Tu, et al. 2023. Large language models encode clinical knowledge. *Nature* 620, 7972 (2023), 172–180.
- [45] Amin Saradar Torshizi and Adel Ghazikhani. 2019. Automatic Twitter Rumor Detection Based on LSTM Classifier. In *High-Performance Computing and Big Data Analysis*, Lucio Grandinetti, Seyedeh Leili Mirtaheri, and Reza Shahbazian (Eds.). Springer International Publishing, Cham, 291–300.
- [46] Hugo Touvron, Thibaut Lavril, Gautier Izacard, et al. 2023. LLaMA: Open and Efficient Foundation Language Models. arXiv:2302.13971 [cs.CL]
- [47] Haochun Wang, Chi Liu, Nuwa Xi, et al. 2023. HuaTuo: Tuning LLaMA Model with Chinese Medical Knowledge. arXiv:2304.06975 [cs.CL]
- [48] Haochun Wang, Chi Liu, Sendong Zhao, et al. 2023. ChatGLM-Med: Fine-tuning ChatGLM model based on Chinese medical knowledge. <https://github.com/SCIR-HI/Med-ChatGLM>.
- [49] Jason Wei, Maarten Bosma, Vincent Y. Zhao, et al. 2022. Finetuned Language Models Are Zero-Shot Learners. arXiv:2109.01652 [cs.CL]
- [50] Jason Wei, Yi Tay, Rishi Bommasani, et al. 2022. Emergent Abilities of Large Language Models. arXiv:2206.07682 [cs.CL]
- [51] Jason Wei, Xuezhi Wang, Dale Schuurmans, et al. 2022. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. In *Advances in Neural Information Processing Systems*, S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (Eds.), Vol. 35. Curran Associates, Inc., 24824–24837. [https://proceedings.neurips.cc/paper\\_files/paper/2022/file/9d5609613524ecf4f15af0f7b31abca4-](https://proceedings.neurips.cc/paper_files/paper/2022/file/9d5609613524ecf4f15af0f7b31abca4-)

Paper-Conference.pdf

- [52] Ke Wu, Song Yang, and Kenny Q. Zhu. 2015. False rumors detection on Sina Weibo by propagation structures. In *2015 IEEE 31st International Conference on Data Engineering*. 651–662. <https://doi.org/10.1109/ICDE.2015.7113322>
- [53] Shijie Wu, Ozan Irsoy, Steven Lu, et al. 2023. BloombergGPT: A Large Language Model for Finance. [arXiv:2303.17564](https://arxiv.org/abs/2303.17564) [cs.LG]
- [54] Aiyuan Yang, Bin Xiao, Bingning Wang, et al. 2023. Baichuan 2: Open Large-scale Language Models. *arXiv preprint arXiv:2309.10305* (2023).
- [55] Jianliang Yang and Yuchen Pan. 2021. COVID-19 Rumor Detection on Social Networks Based on Content Information and User Response. *Frontiers in Physics* 9 (2021). <https://doi.org/10.3389/fphy.2021.763081>
- [56] Xi Yang, Aokun Chen, Nima PourNejatian, et al. 2022. A large language model for electronic health records. *npj Digital Medicine* 5, 1 (Dec 2022), 194. <https://doi.org/10.1038/s41746-022-00742-2>
- [57] Yue Zhang, Yafu Li, Leyang Cui, et al. 2023. Siren’s Song in the AI Ocean: A Survey on Hallucination in Large Language Models. [arXiv:2309.01219](https://arxiv.org/abs/2309.01219) [cs.CL]
- [58] Zili Zhang, Ziqiong Zhang, and Hengyun Li. 2015. Predictors of the authenticity of Internet health rumours. *Health Information and Libraries Journal* 32, 3 (September 2015), 195–205. <https://doi.org/10.1111/hir.12115> Journal Article, Research Support, Non-U.S. Gov’t.
- [59] Wayne Xin Zhao, Kun Zhou, Junyi Li, et al. 2023. A Survey of Large Language Models. [arXiv:2303.18223](https://arxiv.org/abs/2303.18223) [cs.CL]
- [60] Yuehua Zhao, Jingwei Da, and Jiaqi Yan. 2021. Detecting health misinformation in online health communities: Incorporating behavioral features into machine learning based approaches. *Information Processing & Management* 58, 1 (2021), 102390. <https://doi.org/10.1016/j.ipm.2020.102390>
- [61] Denny Zhou, Nathanael Schärli, Le Hou, et al. 2023. Least-to-Most Prompting Enables Complex Reasoning in Large Language Models. [arXiv:2205.10625](https://arxiv.org/abs/2205.10625) [cs.AI]
- [62] Wei Zhu. 2023. ChatMed-Dataset: An GPT generated medical query-response datasets for medical large language models. <https://github.com/michael-wzhu/ChatMed>.
- [63] Wei Zhu, Wenjing Yue, and Xiaoling Wang. 2023. ShenNong-TCM: A Traditional Chinese Medicine Large Language Model. <https://github.com/michael-wzhu/ShenNong-TCM-LLM>.
- [64] Shengyao Zhuang, Bing Liu, Bevan Koopman, et al. 2023. Open-source Large Language Models are Strong Zero-shot Query Likelihood Models for Document Ranking. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, Houda Bouamor, Juan Pino, and Kalika Bali (Eds.). Association for Computational Linguistics, Singapore, 8807–8817. <https://doi.org/10.18653/v1/2023.findings-emnlp.590>
- [65] Arkaitz Zubiaga, Maria Liakata, and Rob Procter. 2016. Learning Reporting Dynamics during Breaking News for Rumour Detection in Social Media. [arXiv:1610.07363](https://arxiv.org/abs/1610.07363) [cs.CL] <https://arxiv.org/abs/1610.07363>

## A HEALTHRCN

### A.1 Prompt Used for Constructing the HealthRCN

Figure 6 shows the prompts used to generate the six fields: "title," "keywords," "content," "extend\_content," "squash\_content," and "answer\_content." The fields "title," "keywords," "content," and "answer\_content" are all generated based on the "original\_question" (the original question posted by the user on the website), while "extend\_content" and "squash\_content" are generated based on the "content" (the generated rumor field). The prompts in Figure 6 are originally in Chinese, and here the corresponding English translations are displayed.

### A.2 Example of the HealthRCN

In Table 7, we present a sample of the HealthRCN dataset as an example, including seven fields: original\_question, title, keywords, content, extend\_content, squash\_content, and answer\_content. The original content of each field is in Chinese, and what is shown here is the corresponding English translation.

## B TRUSTWORTHY HEALTH INFORMATION WEBSITE

Table 8 lists the names and URLs of the trustworthy websites from which health information was obtained for this study, totaling 19 information sources. Moving forward, we will daily retrieve updates from these sources in the health domain to ensure the timeliness and authenticity of the reference document databases in Elasticsearch and Milvus.

Table 6. Prompt Used for Constructing the HealthRCN

Fields	Prompt
Title Keywords Content	<p>Assuming you are a professional rumor expert, please extract the keywords from the sentence "{Original_question}" and write a rumor content based on that theme, referring to the following writing techniques:</p> <p>(1) Exaggeration and Amplification: Exaggerate the effects to make them look very miraculous. Use adjectives, adverbs, and other modifiers to increase sensationalism and attractiveness.</p> <p>(2) Social Media Spread: Encourage users to share, like, etc., the content on social media.</p> <p>(3) Objective and Authoritative: Use objective, authoritative descriptive language. Quote institutions or expert opinions, and add some scientific terms to make the content seem well-founded.</p> <p>(4) Citing Evidence: Write about some research or statistics to prove the validity of the content. Use numbers and specific cases to increase persuasiveness.</p> <p>(5) Benefit-Driven: Emphasize beneficial outcomes, such as improved health, anti-aging, disease prevention, etc. Emphasizing these benefits can attract more people to believe the content.</p> <p>Note: The word count should be more than 200 Chinese characters. Refer to the following output format:</p> <p>[Rumor Title] xxxxx SEPCODE [Rumor Content] xxxxx SEPCODE [Keywords] xxx,xxx,xxx</p>
Extend_content	<p>Assume you are a health expert. Please expand the following text to make it look more credible, and the length should be between 500-800 words.</p> <p>{Content}</p>
Squash_content	<p>Assume you are a health expert, and here is a rumor text related to health information. Please refute it specifically, within 500 words.</p> <p>{Content}</p>
Answer_content	<p>Please answer the following questions in 400-800 words.</p> <p>{Original_question}</p>

### C ORIGINAL PROMPTS FOR REFUTATION

Figure 7 shows two original prompts used in this paper for generating refutation responses. Because the main task of the HRDE model is rumor detection for Chinese health information, the original prompts are described in Chinese. The prompt shown in Figure 3 in the main text is a direct translation of the prompt in Figure 7.

### D PROMPT FOR EVALUATION

Figure 8 shows the original prompts used for assessing relevance, reliability, and richness in answers. We will sequentially embed user input information and corresponding model responses into these prompts, and then input them to GPT-4-1106-Preview for scoring. The basic structure of the three prompts is the same. First, each prompt indicates instructing GPT-4 to act as a health information Q&A consultant and provides a user input of health



Fig. 7. Original Prompts for Refutation

information along with a corresponding rumor detection response, requiring GPT-4 to score the response on a certain evaluation metric. Then the prompt reserves two slots to insert health information and rumor detection responses. The prompt then elaborates on the key points and criteria for evaluating the metric (highlighted in red in Figure 8). Finally, the prompt standardizes the output format of the evaluation results, for example, "Relevance Score": "X", making it convenient for subsequent extraction and statistical analysis of the evaluation metric scores.

In the prompt for evaluating relevance of responses, the main assessment points include two aspects. On one hand, it is necessary to assess whether the response matches the user’s input health information. On the other

hand, it is necessary to evaluate whether the content of the response primarily discusses the issue of whether the user's input health information is a rumor.

In the prompt for evaluating reliability of responses, the main assessment points include accuracy, authoritativeness, reasonableness, and non-misleading nature. Accuracy refers to whether the information in the response is correct. Authoritativeness refers to whether the response is based on scientific facts and has credible sources of information. Reasonableness refers to whether the arguments and reasoning in the analysis part are logical, and whether the analysis part supports the conclusions. Non-misleading nature refers to whether the response avoids using language that could cause misunderstanding or confusion.

In the prompt for evaluating richness of responses, the main assessment points include diversity, completeness, and creativity. Diversity refers to whether the response provides a wealth of information and arguments for demonstration. Completeness refers to whether the response fully covers all aspects of the user's input health information and conducts relevant analysis. Creativity refers to whether the response offers novel viewpoints or solutions.

## E ORIGINAL Q&A TEXT OF THE CASE STUDY

Figures 9 - 11 show the original Q&A text (in Chinese) of the three cases presented in Section 5.

Table 7. Example of the HealthRCN

<b>Fields</b>	<b>Text</b>
Original_question	What is a thyroid cyst?
Title	Thyroid cysts can heal on their own!
Keywords	thyroid cyst, self-healing, social media, healthcare
Content	<p>Thyroid cysts are a common neck condition that many people may experience. However, there is no need to worry too much, as thyroid cysts can heal on their own! Research data indicates that most thyroid cysts can gradually shrink or disappear through self-regulation. Additionally, some simple lifestyle changes, such as increasing iodine intake, reducing smoking, and limiting alcohol consumption, can also help promote the self-healing of cysts. Furthermore, some authoritative experts point out that thyroid cysts are not rare and usually do not cause significant symptoms, so there is no need to be overly anxious. If your thyroid cyst does not exhibit obvious symptoms, regular monitoring and check-ups, along with lifestyle adjustments and health maintenance, can aid in the self-healing of the cyst. Finally, to help more people understand the self-healing characteristics of thyroid cysts, we encourage you to share this information and join our social media group to share natural remedies and lifestyle tips for managing thyroid cysts.</p>
Extend_content	<p>Thyroid cysts are a common neck condition, the exact causes of which remain unclear. However, most thyroid cysts can gradually shrink or disappear through self-regulation. According to authoritative medical research data, thyroid cysts generally do not pose life-threatening symptoms for the majority of patients, so there is no need to be overly anxious. In terms of treatment, natural therapies and lifestyle adjustments may be more beneficial. Firstly, increasing iodine intake can promote the synthesis and secretion of thyroid hormones. Iodine is one of the essential elements for the thyroid, and patients with thyroid cysts often have iodine deficiency. Therefore, incorporating iodine-rich foods such as seaweed, milk, and fish into the diet can help the self-healing of thyroid cysts. Additionally, reducing bad habits like smoking and drinking can minimize damage to the thyroid, aiding in the recovery and self-healing of the cysts.</p> <p>Secondly, certain daily health practices can help alleviate thyroid cysts. For instance, avoiding prolonged head-down positions and preventing dry eye can be beneficial, and practicing regular eye exercises and massages can help. Regular neck relaxation exercises and warm compresses can also promote blood circulation and lymphatic drainage, aiding in the natural resolution of cysts. Additionally, engaging in aerobic exercises such as yoga can enhance the immune system and regulate the nervous system, contributing to overall health and the self-healing of thyroid cysts.</p> <p>Finally, natural therapies and lifestyle adjustments for thyroid cysts offer a low-risk, convenient, and drug-free treatment option. If you find that your thyroid cyst is not presenting significant symptoms, regular observation and check-ups can help monitor the condition and treatment effects. Combining these with the aforementioned lifestyle adjustments and health practices can facilitate self-healing thyroid cysts. We also hope that more people will share natural therapies and practical tips on social media groups, collectively promoting the safe and healthy treatment of thyroid cysts.</p>



Note: continued from previous page

Fields	Text
Squash_content	<p>Unfortunately, the above rumors are completely false. Thyroid cysts cannot heal on their own. A thyroid cyst is a thyroid disease caused by the proliferation of nodules or cysts within the thyroid gland. If not treated on time, a thyroid cyst will gradually enlarge, leading to thyroid dysfunction and potentially inducing other serious diseases, such as cancer. Although thyroid cysts do not cause many symptoms, they are still a disease that requires early treatment. Additionally, while iodine intake can help in the treatment of thyroid cysts, more is not necessarily better. Excessive iodine intake can cause thyroid dysfunction and harm your health.</p> <p>Finally, we strongly advise against believing in rumors or trusting information from self-proclaimed "authoritative experts." If you suspect you have a thyroid cyst, you should go to the hospital for examination and treatment as soon as possible. Follow your doctor's guidance for health care and maintain a healthy lifestyle. We also recommend against spreading unverified information on social media to avoid misleading others.</p>
Answer_content	<p>A thyroid cyst is a cystic formation on the thyroid gland that can be filled with fluid or mucus from the thyroid. These cysts typically do not cause pain or discomfort, but in some cases, they may enlarge, become abnormally large, or lead to thyroid dysfunction and other issues. The formation of cysts may be related to thyroid tissue degeneration or inflammation. Thyroid cysts can also be a hereditary condition or result from poor nutrition, environmental pollution, and radiation exposure.</p> <p>Diagnosis of a thyroid cyst usually requires medical examinations such as ultrasound, MRI, and thyroid function tests. In general, thyroid cysts do not require treatment as they rarely cause symptoms. However, for abnormally large cysts or those causing thyroid dysfunction, surgical intervention or other treatments may be necessary.</p> <p>Certain precautions can help prevent the occurrence of thyroid cysts, such as limiting the intake of iodine-rich foods, reducing exposure to cooking fumes, and protecting against environmental radiation.</p> <p>In summary, thyroid cysts do not always require treatment and can often be managed with regular monitoring. If you experience symptoms of a thyroid cyst, it is advisable to seek medical attention promptly and follow the doctor's recommendations for examination and treatment.</p>

Table 8. Trustworthy health information website

Source	URL
Weibo Rumor Refutation	<a href="https://weibo.com/u/1866405545">https://weibo.com/u/1866405545</a>
Rumor Assistant (WeChat official account)	-
Rumor Filter (WeChat official account)	-
Toutiao - Toutiao Rumor Refutation	<a href="https://www.toutiao.com/c/user/token/MS4wLjABAAAAC6iKyx7z-k1NhYbBohkLPYdPcJTXQID2Z-bm2sE9u_U/?tab=article">https://www.toutiao.com/c/user/token/MS4wLjABAAAAC6iKyx7z-k1NhYbBohkLPYdPcJTXQID2Z-bm2sE9u_U/?tab=article</a>
Baidu - Baidu Rumor Refutation Platform	<a href="https://author.baidu.com/home?from=bjh_article&amp;app_id=15060">https://author.baidu.com/home?from=bjh_article&amp;app_id=15060</a>
The Paper - "Official Rumor Refutation"	<a href="https://www.thepaper.cn/searchResult?id=%E5%AE%98%E6%96%B9%E8%BE%9F%E8%B0%A3">https://www.thepaper.cn/searchResult?id=%E5%AE%98%E6%96%B9%E8%BE%9F%E8%B0%A3</a>
People's Daily Truth-Seeking Column	<a href="http://society.people.com.cn/GB/229589/index1.html">http://society.people.com.cn/GB/229589/index1.html</a>
Sina News - "Rumor Buster" Column	<a href="https://piyao.sina.cn/">https://piyao.sina.cn/</a>
Tencent News - "Tencent Fact-Checking" Column	<a href="https://new.qq.com/omn/author/8QM2Xde5YQfvTbd?tab=om_article">https://new.qq.com/omn/author/8QM2Xde5YQfvTbd?tab=om_article</a>
Guokr - "Rumor Buster"	<a href="https://www.guokr.com/science/channel/fact">https://www.guokr.com/science/channel/fact</a>
China Food Rumor-Refuting	<a href="http://www.xinhuanet.com.cn/food/sppy/qwpy/index.html">http://www.xinhuanet.com.cn/food/sppy/qwpy/index.html</a>
China Internet United Rumor Refutation Platform	<a href="https://www.piyao.org.cn/ld.htm">https://www.piyao.org.cn/ld.htm</a>
Science Facts	<a href="https://piyao.kepuchina.cn/rumor/rumorajaxlist">https://piyao.kepuchina.cn/rumor/rumorajaxlist</a>
People's Daily Online - Healthy Living	<a href="http://health.people.com.cn/">http://health.people.com.cn/</a>
China Science Communication	<a href="https://www.kepuchina.cn/">https://www.kepuchina.cn/</a>
China Food Information Center	<a href="http://www.kexinzhongxin.com/html/kepu/">http://www.kexinzhongxin.com/html/kepu/</a>
Bohe	<a href="https://www.bohe.cn/zx/">https://www.bohe.cn/zx/</a>
Chinese Medical Health Popularization Knowledge Base	<a href="https://cmhadb.cma-cmc.com.cn/">https://cmhadb.cma-cmc.com.cn/</a>
China Medical Information Platform	<a href="https://www.dayi.org.cn/">https://www.dayi.org.cn/</a>

Note: In the table, both "Rumor Assistant" and "Rumor Filter" are WeChat official accounts, and they do not have homepage URLs similar to other information sources.

**Prompt for Relevance Evaluation**

你是一个健康信息问答专家，下面会给出用户输入的健康信息以及针对该健康信息的谣言分析回答，请给出回答与用户输入之间的相关性得分（分值范围为 0-10 分）：

用户输入：{ **Input** }

回答：{ **answer** }

请重点考虑以下评估指标进行评分：

1. 信息匹配度：回答是否针对输入的健康信息进行展开的。
2. 谣言识别与分析：回答是否重点分析和回答输入的健康信息是否为谣言这一问题。

请严格按照如下格式输出相关性得分：

```
{
  "相关性得分": "X"
}
```

**Prompt for Reliability evaluation**

你是一个健康信息问答专家，下面会给出用户输入的健康信息以及针对该健康信息的谣言分析回答，请你给出该谣言分析回答的可信度得分（分值范围为 0-10 分）：

用户输入：{ **Input** }

回答：{ **answer** }

请重点考虑以下评估指标进行评分：

1. 准确性：回答是否提供了准确的事实和信息。
2. 权威性：回答是否基于科学的证据和研究，并表明了信息来源。
3. 合理性：[分析过程]的论述和推理过程是否合理，[分析过程]是否支持[结论]。
4. 非误导性：回答是否避免了使用可能产生新误解或混淆的语言。

请严格按照如下格式输出可信度得分：

```
{
  "可信度得分": "X"
}
```

**Prompt for Richness evaluation**

你是一个健康信息问答专家，下面会给出用户输入的健康信息以及针对该健康信息的谣言分析回答，请你给出该谣言分析回答的丰富度得分（分值范围为 0-10 分）：

用户输入：{ **Input** }

回答：{ **answer** }

请重点考虑以下评估指标进行评分：

1. 多样性：回答中是否提供了多个角度、观点或者信息来源，可以通过检查回答中的论点、观点、例子或者来源的数量和多样性来评估。
2. 完整性：回答是否全面，是否覆盖了用户输入中提及的所有关键点或方面，并进行了相关分析。
3. 创造性：回答是否提供了新颖的观点、想法或者分析方案。

请严格按照如下格式输出可信度得分：

```
{
  "可信度得分": "X"
}
```

Fig. 8. Prompt for Evaluation



### User Input Statement

手机辐射会导致癌症



HRGPT

#### [结论]

是谣言

#### [分析过程]

用户输入声称“手机辐射会导致癌症”，这一说法需要科学依据来支持。相关知识表明，手机辐射属于非电离辐射，而非电离辐射的能量不足以使物质原子或分子产生电离，因此不会引发癌症[1]。此外，世界卫生组织将包括手机辐射在内的“射频电磁波”划定为2B类致癌物，这意味着对人类致癌性证据有限，对实验动物致癌性证据并不充分[2]。因此，尽管手机辐射可能与癌症存在一定的关联，但目前的科学证据并不充分，不足以证明手机辐射会导致癌症。

事实上，手机辐射的频率远低于电离辐射，如X射线等，因此没有必要对手机辐射过于恐慌[2]。此外，我国对基站电磁辐射管理有着严格要求，目前执行的国家标准远远低于国际标准限值，因此基站产生的辐射完全不足为虑[3]。

综上所述，用户输入的信息缺乏科学依据，将手机辐射与癌症直接关联的说法是不准确的。因此，可以判断该信息是谣言。

#### [参考资料]

[1] 《手机辐射能引发癌症，事实真的如此吗？》 - 来源：科普中国-辟谣文章 ( <https://piyao.kepuchina.cn/rumor/rumordetail?id=nRRE> )

[2] 《睡觉时手机放多远没辐射？边充电边玩，辐射更大？终于有答案了》 - 来源：公众号-辟谣助手 ( [https://mp.weixin.qq.com/s?\\_biz=Mzl0Njg1Njc5MA==&mid=2247538982&idx=1&sn=a30da688d2b83525c7e4aa7679b45a3a&chksm=e9baf41fdecd7d0966ded11af0a00230fceb0ae6c6a04e6f23f17a2e580f9f989692e5fa448c#rd](https://mp.weixin.qq.com/s?_biz=Mzl0Njg1Njc5MA==&mid=2247538982&idx=1&sn=a30da688d2b83525c7e4aa7679b45a3a&chksm=e9baf41fdecd7d0966ded11af0a00230fceb0ae6c6a04e6f23f17a2e580f9f989692e5fa448c#rd) )

[3] 《拆除通信基站以防辐射，真的有必要吗？》 - 来源：科普中国-辟谣文章 ( <https://piyao.kepuchina.cn/rumor/rumordetail?id=raaM> )

Fig. 9. Original Case one: Mobile phone radiation can cause cancer.

 User Input Statement

维生素C可以预防感冒

 HRGPT

[结论]

是谣言

[分析过程]

用户输入声称维生素C可以预防感冒。相关知识表明，维生素C确实对人体健康有益，具有提高免疫力的作用，能增强人体对外界环境的抗应激能力和免疫力[1]。然而，对于绝大多数并不缺乏维生素C的健康人来说，目前没有科学依据表明维生素C能预防感冒[1]。此外，有研究分析了29项试验，结论是维生素C补充剂在降低普通感冒发病率方面无效[2]。在预防病毒性流感方面，目前也没有高质量的临床研究证明常规补充维C能起到预防作用[2]。武汉大学中南医院的临床研究也证实，维生素C并不能降低感冒的发病率，也不能治疗感冒[3]。因此，尽管维生素C对提高免疫力有积极作用，但并不意味着它可以预防感冒。综上所述，用户输入的信息缺乏科学依据，可以判断为谣言。

[参考资料]

- [1] 《维生素C能抗感冒？只是能缩短感冒病程》 - 来源：科普中国-辟谣文章 ( <https://piyao.kepuchina.cn/rumor/rumordetail?id=BLEY> )
- [2] 《熏白醋、吃VC片不能预防新型肺炎！预防新型肺炎应该这样做》 - 来源：科信食品与健康信息交流中心 ( <http://www.kexinzhongxin.com/html/kepu/3745.html> )
- [3] 《维生素C能预防新冠肺炎吗？特殊时期到底要不要补充维生素C？》 - 来源：科信食品与健康信息交流中心 ( <http://www.kexinzhongxin.com/html/kepu/3744.html> )

Fig. 10. Original Case Two: Vitamin C can prevent colds.



### User Input Statement

糖尿病的主要原因并非吃糖多



HRGPT

#### [结论]

不是谣言

#### [分析过程]

用户输入指出“糖尿病的主要原因并非吃糖多”，这与相关知识是一致的。事实上，糖尿病的发病机制复杂，包括胰岛素分泌的不足和胰岛素敏感性的下降，而不仅仅是吃糖多的问题[1]。相关研究表明，糖尿病的高风险因素包括家族遗传、年龄增长、高热量饮食、缺乏运动、超重、肥胖和吸烟饮酒等不良嗜好[2]。此外，世界卫生组织在评估糖摄入与健康的关系后认为，过量摄入添加糖与癌症没有直接关系[2]。这表明糖尿病的发病与多种因素有关，而不是单一的“吃糖多”问题。

另外，有科学依据表明，糖尿病患者并不一定是因为吃糖多才得上病，而且糖尿病患者是在医生的指导下，可以适量摄入含糖食物[3]。因此，用户输入的信息是基于科学的，不构成谣言。

#### [参考资料]

[1] 《不喜欢吃糖 为什么会得糖尿病?》 - 来源: 博禾医生-健康咨询 (<https://www.bohe.cn/zx/39597.html>)

[2] 《中国人吃糖太多,“糖致百病”——这是真的吗?》 - 来源: 科信食品与健康信息交流中心 (<http://www.kexinzhongxin.com/html/kepu/4750.html>)

[3] 《“谈糖色变”?糖尿病患者还能吃糖吗?》 - 来源: 科普中国网 ([https://www.kepuchina.cn/article/articleinfo?business\\_type=100&classify=0&ar\\_id=88780](https://www.kepuchina.cn/article/articleinfo?business_type=100&classify=0&ar_id=88780))

Fig. 11. Original Case Three: The main cause of diabetes is not eating too much sugar.