arXiv:2407.01687v1 [cs.CL] 1 Jul 2024

Deciphering the Factors Influencing the Efficacy of Chain-of-Thought: Probability, Memorization, and Noisy Reasoning

Akshara Prabhakar¹, Thomas L. Griffiths^{1,2}, R. Thomas McCoy^{3,4}

¹Department of Computer Science, Princeton University ²Department of Psychology, Princeton University ³Department of Linguistics, Yale University ⁴Wu Tsai Institute, Yale University Correspondence: akshblr555@gmail.com

Abstract

Chain-of-Thought (CoT) prompting has been shown to enhance the multi-step reasoning capabilities of Large Language Models (LLMs). However, debates persist about whether LLMs exhibit abstract generalization or rely on shallow heuristics when given CoT prompts. To understand the factors influencing CoT reasoning we provide a detailed case study of the symbolic reasoning task of decoding shift ciphers, where letters are shifted forward some number of steps in the alphabet. GPT-4 achieves zero accuracy on most shift ciphers with standard prompting, but with CoT its accuracy improves to an average of 32%. By focusing on a single relatively simple task, we are able to identify three factors that systematically affect CoT performance: the probability of the task's expected output (probability), what the model has implicitly learned during pre-training (memorization), and the number of intermediate operations involved in reasoning (noisy reasoning). We show that these factors can drastically influence the task accuracy; e.g., varying the output's probability of occurrence can shift accuracy from $26\% \rightarrow 70\%$. We also demonstrate that it is essential for the model to explicitly produce intermediate steps as output that can be conditioned on to increase the probability of the correct answer. Our experiments indicate that as long as the model does so, the validity of the demonstrations in the prompt does not matter. Overall, we conclude that CoT prompting performance reflects both memorization and a probabilistic version of genuine reasoning.¹

1 Introduction

Reasoning, one of the key aspects of human intelligence, is the process of thinking about something logically and systematically using evidence and past experiences to make a decision (Wason, 1968; Wason and Johnson-Laird, 1972; Fagin et al., 2004). The impressive performance of Large Language Models (LLMs) across a wide range of tasks has spurred extensive research into their reasoning capabilities (Huang and Chang, 2022; Qiao et al., 2022). It remains unclear whether the behavior of these systems is based on true reasoning or other heuristics. Some results provide evidence that LLMs are able to reason (Suzgun et al., 2022; Dasgupta et al., 2023; Saparov and He, 2022), while others show that they still struggle on tasks that humans can easily solve through reasoning (Han et al., 2022; Valmeekam et al., 2023; McCoy et al., 2023; Razeghi et al., 2022; Cao et al., 2023).

The Chain-of-Thought (CoT; Wei et al., 2022) prompting strategy has played a significant role in this debate. CoT involves prompting an LLM to generate a sequence of intermediate reasoning steps before producing the final answer, given a few in-context exemplar(s) of how to break the task into steps. CoT and its several variants (Kojima et al., 2023; Zhou et al., 2022; Wang et al., 2023b) have been shown to substantially improve performance over standard prompting. Recent works have tried to identify which aspects of the demonstration contribute to CoT's enhanced performance (Huang and Chang, 2022; Madaan and Yazdanbakhsh, 2022; Jin et al., 2024), typically relying on assessing performance across a wide range of tasks.

In this work, we take a different approach: we present an extensive case study on a single task that allows us to disentangle reasoning from memorization. The task we selected is solving shift ciphers, a simple type of code in which each letter is shifted forward a certain number of positions in the alphabet (Figure 1, panel 1). We choose this task because it allows us to independently manipulate several factors that could be relevant for characterizing how LLMs solve reasoning tasks when prompted with CoT: difficulty, frequency, and answer probability.

Our results suggest that CoT performance reflects three factors: probability, memorization, and

¹Preprint. Code and data are available at https://github. com/aksh555/deciphering_cot.

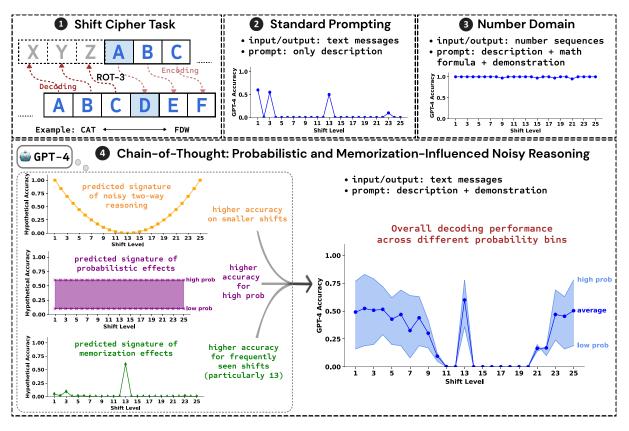


Figure 1: Overview. (1) Task: We have GPT-4 decode messages written in a shift cipher, in which each letter is shifted a fixed number of positions forward in the alphabet. (2) With standard prompting, GPT-4 performs poorly across most shift levels. (3) However, GPT-4 scores nearly perfectly on an isomorphic task based on numbers rather than letters. (4) With CoT prompting, GPT-4 adopts probabilistic and memorization-influenced noisy reasoning. That is, its performance (right) combines the trends we have hypothesized for each of the three factors on the left.

noisy reasoning. First, the accuracy of CoT is affected by the probability of the correct output, with more probable outputs resulting in a stronger effect of CoT. Second, performance is higher when memorization is possible, as indicated by the frequency of encountering different shift cipher variants during pre-training. The effects of probability and memorization show that CoT performance is not fully systematic abstract reasoning. Nonetheless, CoT performance is not solely driven by superficial heuristics: it also shows some hallmarks of true reasoning-albeit a noisy version of true reasoning, in which the error rate increases along with task difficulty (where we quantify task difficulty by the number of implicit reasoning steps involved). In addition, we find evidence that the effect of CoT fundamentally depends on generating sequences of words that increase the probability of the correct answer when conditioned upon; as long as this is the case, CoT can thus succeed even when the demonstrations in the prompt are invalid. In the ongoing debate about whether LLMs reason or memorize, our results thus support a reasonable

middle-ground: LLM behavior displays aspects of both memorization and reasoning, and also reflects the probabilistic origins of these models.

2 Related Work

In-Context Learning in Language Models. It has been argued that LLMs can *learn* a task purely from demonstrations given in their context without any additional training (Brown et al., 2020), a phenomenon known as in-context learning (ICL). There have been many investigations into how ICL operates. Theoretical frameworks have modeled the pretraining data as a mixture of Hidden Markov Models (Xie et al., 2022) have argued that ICL is the result of implicit Bayesian inference (Zhang et al., 2023), an argument supported with evidence from synthetic data and tasks (Chiang and Yogatama, 2024). The emergence of ICL has been attributed to factors including data distributional properties (Chan et al., 2022), pretraining term frequencies (Razeghi et al., 2022), and the creation of task vectors (Hendel et al., 2023). However, the extent to which ICL is true learning is unclear (Pan

et al., 2023; Min et al., 2022). For example, Kossen et al. (2024) shows that ICL relies on in-context label information but cannot fully overcome preferences acquired during pre-training, which is evidence against the view that ICL is true learning.

Understanding CoT. Theoretical arguments have been formulated about how CoT improves the expressivity (Feng et al., 2023; Li et al., 2024) and sample complexity (Li et al., 2023) of ICL. Empirical studies have shown that CoT performance can be dramatically influenced by many features of the CoT prompt (Madaan and Yazdanbakhsh, 2022; Wu et al., 2023; Jin et al., 2024); for example, the relevance and ordering of reasoning fragments is more important than their accuracy (Wang et al., 2023a,b; Ye and Durrett, 2022), and minor input perturbations can substantially bias models' answers (Turpin et al., 2024), indicating a lack of general reasoning ability (Stechly et al., 2024).

Our high-level goal in this work is to characterize what *type* of reasoning happens in LLMs when they are prompted with CoT prompting: to what extent is CoT performance driven by abstract reasoning vs. simple heuristics such as memorization? This question also implicitly underlies many of the papers discussed above, but directly focusing on this question leads us to investigate probability, frequency, and difficulty (see Section 4)—a different set of factors than those studied in prior work.

3 Approach

One challenge of evaluating the role of memorization and reasoning in the performance of LLMs is that these models are typically evaluated on a wide range of complex reasoning tasks, whose variety and complexity can obscure the factors that drive performance. By contrast, we propose to tease apart the factors behind the efficacy of CoT prompting by focusing on a single relatively simple task: deciphering text encoded with a shift cipher.

Encoding a message with a shift cipher involves replacing every letter with another letter that is some fixed number of positions (called $shift_level$) forward in the alphabet; decoding is the reverse (shifting backward) as shown in Figure 1. These are also known as rotation ciphers, since they rotate the alphabet forward some number of steps, and are given the name rot-k where k corresponds to $shift_level$. For example, given the test word "FDW" and that rot-3 encryption has been used ($shift_level = 3$), decoding involves shifting every letter 3 steps backward—i.e., $F \rightarrow C$, $D \rightarrow A$, and $W \rightarrow T$ to obtain "CAT" as the output. In our experiments, we give an LLM a single word encoded with a shift cipher and ask it to decode this text to recover the original word.

3.1 Motivation for using shift ciphers

Our main reason for using shift ciphers is because they involve a sharp dissociation between task complexity and task frequency (a key factor in memorization). The complexity of the decipherment task is determined by the shift level-ciphers that require more intermediate steps are more complex. Different shift levels also vary in their frequency in internet text, and hence in the training data of large language models. Specifically, rot-13 is widely used in internet forums to conceal text such as puzzle solutions and spoilers, and rot-3 and rot-1 commonly appear in tutorials on decipherment (rot-3 is also known as the Caesar cipher, having apparently been used by the eponymous Caesar to encrypt his messages). In addition, shift ciphers facilitate investigation of the effect of probability because the correct answer can be any string, allowing us to modulate the probability of that string easily. Further, the systematic nature of the task makes it easy to generate examples and to verify correctness. Finally, decoding each letter in the message is an independent step, allowing us to easily analyze these individual steps.

McCoy et al. (2023) previously evaluated LLMs on shift ciphers, focusing on standard prompting along with some initial results using CoT. We conduct a much more extensive investigation into LLM behavior when prompted with CoT.

3.2 The effect of CoT on shift ciphers

To provide an initial exploration of the ef-Data. fect of CoT and other aspects of prompting on shift ciphers, we constructed a dataset comprising 7-letter words having exactly 2 tokens (measured using the tokenizer used by GPT-4) to control for confounding factors relating to tokenization. The words were scored by their log probability and arranged in descending order. Subsequently, five bins were formed by selecting equidistant log probability values as centers, with bin1 having the highest probability and bin5 having the lowest probability. For each bin, we constructed a set of 150 words by choosing the words with log probability values nearest to each respective center (refer to Appendix A.1 for further details).

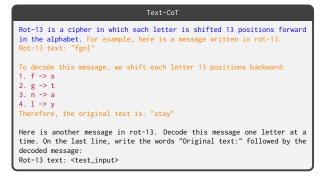


Figure 2: Text-CoT prompt consisting of a description and demonstration that includes several reasoning steps.

We then assessed performance on this dataset using a variety of different prompts:

- **Standard.** This is a prompt with just the description of the task and demonstration but no reasoning steps. (Appendix A.2 Figure 5).
- Text-based CoT (Text-CoT). This prompt encourages the model to decode a message one letter at a time (Figure 2). We chose this way of framing the CoT prompt following McCoy et al. (2023), which tried several variants and found this to be the best. To get a reasoning step correct, the model must have learned the alphabet during pre-training.
- Math-based CoT (Math-CoT). The prompt (Appendix A.2 Figure 7) encourages a reasoning pipeline that involves translating each letter to a number, performing the shift by applying arithmetic to this number, then converting the result back to a letter. The prompt also specifies the mapping between letters and positions, eliminating the need for the model to have internalized the positions of the letters in the alphabet.
- Number-sequence CoT (Number-CoT). This prompt (Appendix A.2 Figure 6) makes use of an alternative task that is isomorphic to shift ciphers but based in the number domain—the input and output are number sequences instead of letter sequences. Reasoning involves applying arithmetic to the input elements in the number sequence to get a corresponding output sequence.

We ran experiments using GPT-4 (gpt-4-0613 version) (OpenAI, 2024) because it is state-of-theart in many areas. We set temperature to 0 and max_new_tokens to 200. Using GPT-4 helps us to control several sources of extraneous errors making it easier to focus on the task itself and isolate the factors affecting CoT: It ensures that the format of the demonstration is closely followed, and that copy errors (errors in copying information from the prompt such as letters from encoded text and letter-position mappings) are rare.

Figure 1 provides some initial results. Using standard prompts, GPT-4 gets zero accuracy across most shift levels, but it improves substantially (to an average accuracy of 32%) when Text-CoT is used; this result replicates the finding in Mc-Coy et al. (2023) that CoT is helpful for shift ciphers, but still remains far from perfect. However, with Number-CoT, GPT-4's performance becomes nearly perfect (more details are in Appendix A.2).

These results paint CoT prompting in a puzzling light. Prompting with Number-CoT showed that GPT-4 has the core reasoning abilities that would be needed to decode shift ciphers nearly perfectly. Thus, if CoT prompting led to symbolic reasoning, GPT-4 would score perfectly. The fact that it does not shows that CoT reasoning is not pure symbolic reasoning. Nonetheless, it is also clear that CoT does substantially improve over standard prompting, so it is unlikely that CoT reasoning can be explained away as simple memorization. If CoT reasoning is neither simple memorization nor pure symbolic reasoning, what is it? This question motivates our experiments in the next section.

4 Disentangling the factors influencing CoT performance

We consider four types of reasoning processes that GPT-4 might be adopting.

- (a) **Symbolic reasoning** is the use of discrete, deterministic inference rules. Shift ciphers can be perfectly decoded with a simple symbolic algorithm, so a system using fully systematic reasoning should attain 100% accuracy.
- (b) Noisy reasoning is like symbolic reasoning but with the addition of noise that introduces some possibility of each intermediate operation in a reasoning step being wrong. Thus, if the system uses noisy reasoning, we should see accuracy decrease as we increase the number of operations that need to be performed. Shift ciphers let us test this possibility: by varying *shift_level*, we can modulate the number of operations that need to be performed in every reasoning step, and observe if accuracy varies accordingly.
- (c) **Memorization** is a strategy in which a system memorizes the tasks it has encountered in pre-training but does not generalize to new tasks.

If memorization is all that GPT-4 does, we should see higher performance in the cases that are frequently encountered during pretraining than the ones that are not. McCoy et al. (2023) show that 13 is by far the most common shift level in natural corpora because this shift level (sometimes called rot-13) is popular in some online communities. Thus, a hallmark of memorization would be much higher accuracy at 13 than other shift levels.

(d) Probabilistic reasoning frames a task as choosing the output that is most probable given the input. Such reasoning would be influenced by the prior probability of the output: a probabilistic reasoner should show accuracy that increases as the prior probability of the correct answer increases.

Figure 3 illustrates the hypothetical performance trends that would be observed in a system adopting each reasoning approach. These approaches are not mutually exclusive; e.g., a reasoner could be influenced by both probability and memorization. Indeed, as discussed in the next two paragraphs, we find that GPT-4's performance when prompted with CoT displays hallmarks of several different types of reasoning (Figure 1, panel 4).

First, accuracy generally decreases as the shift level increases, a hallmark of noisy reasoning. GPT-4's performance is, in particular, indicative of a two-way version of noisy reasoning in which it can decode a message by shifting letters forward or backward (e.g., instead of decoding a shift of 25 by shifting back 25 letters, it could instead shift forward 1 letter, as doing so requires fewer steps); this two-way nature shows up in the way that accuracy

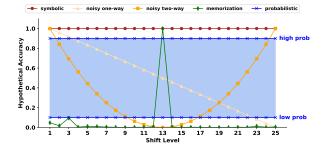


Figure 3: **Hypothetical** accuracy vs. shift-level for various types of reasoning. Under noisy one-way, the model only shifts letters backward; under noisy two-way, it adopts the shorter path between going forward and backward. The hypothetical memorization accuracy is based on shift level frequencies in internet corpora. Probabilistic would involve much higher scores on high probability than low probability.

increases as the shift level changes from 20 to 25.

Second, evidence of probabilistic reasoning can be seen in the fact that accuracy is substantially higher for bin 1 (the highest-probability bin) than bin 5 (the lowest-probability bin). Finally, although a shift level of 13 requires the most reasoning steps of any shift level (assuming decoding can be done forward or backward), there is a spike in accuracy at a shift level of 13. As discussed above, this spike is a hallmark of memorization since 13 is the most common shift level in natural corpora.

4.1 A simple probabilistic approach to modeling the reasoning process

To make these intuitively-stated observations more rigorous, we perform a logistic regression to determine the statistical significance of several factors. The outcome variable is a binary variable indicating whether GPT-4 got the correct answer on each example. We include the following predictors:

- *input_logprob*: log probability of the encoded input text as measured by GPT-2 (Radford et al., 2019). The inputs tend to have a very low probability because they are enciphered.
- *output_logprob*: log probability of the ground-truth output text as measured by GPT-2.
- *shift_freq*: we used the frequency of occurrence of all shift levels that McCoy et al. (2023) provided based on analysis of the C4 corpus (Raffel et al., 2020). The assumption is that the distribution of shifts in C4 is similar to the distribution in the training data for GPT-4.
- min(shift_level, 26 shift_level): this value is the minimum number of steps that must be performed to decode each letter, under the assumption that decoding can be done by moving shift_level steps backward or (26 shift_level) steps forward; as discussed above, GPT-4 indeed shows evidence of using both of these decoding directions.

Several of these variables correspond to the critical properties that are indicative of our hypothesized reasoning processes: $output_logprob$ should have a significant effect if probabilistic reasoning is used, $shift_freq$ should have a significant effect if memorization is used, and $min(shift_level, 26 - shift_level)$ quantifies the difficulty of the task, which should have a significant effect if noisy reasoning is used. The remaining factors are included as potential confounds to control for. The overall

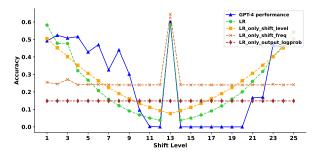


Figure 4: The logistic regression curve captures the overall trend exhibited by GPT-4.

logistic regression thus took the following form:

$$correct \sim \min(shift_level, 26 - shift_level)$$

+ $input_logprob$ + $output_logprob$
+ $shift_freq$

Logistic regression results. The following features had a statistically significant effect on model performance: *output_logprob*, *shift_frequency*, and min(*shift_level*, 26 – *shift_level*) ($p < 10^{-15}$ in all cases). These results therefore quantitatively support the conclusion that GPT-4 incorporates processes based on probability, memorization, and noisy reasoning.

Figure 4 shows the predictions of the logistic regression compared to GPT-4's actual performance. The logistic regression correctly predicts the main trends in GPT-4's behavior (as expected, it does not match the curve exactly due to the simplicity of the logistic regression model). The other curves are ablations that use logistic regressions with only one feature among *output_logprob*, *shift_freq*, and *shift_level*. In the next few subsections, we conduct some additional experiments that investigate each hypothesized reasoning type in more detail.

4.2 Analyzing the effect of probability

If an LLM is influenced by probability, we would expect to occasionally observe *unfaithfulness* between the chain of reasoning steps produced by the LLM and the LLM's final answer. Specifically, if the individual reasoning steps would point to a final output that is low probability, a probabilistic reasoner might instead produce a different final answer that is higher probability. For example, in our CoT experiments, each step produces one letter, and these letters must be concatenated to form the final answer. If the individual step outputs are *S*, *T*, *A*, *Z*, the final answer should be *STAZ*, but a model might instead "self-correct" by producing the higher probability word *STAY*.

Such unfaithfulness can help or hurt the model. When the correct answer truly is a low-probability word such as *STAZ*, then correcting to *STAY* would reduce the model's accuracy. However, if the model had made a mistake during the reasoning chain such as by producing *S*, *T*, *A*, *Z* when the chain should have been *S*, *T*, *A*, *Y*—then correcting to *STAY* would rescue the model from its error.

To investigate unfaithfulness, we compare the *faithful accuracy* that would be obtained by concatenating the model's step outputs to the actual overall accuracy. We indeed observe that overall accuracy is generally lower than faithful accuracy, illustrating that unfaithfulness occurs. Further, the drop in accuracy is more pronounced in the lowprobability setting than the high-probability setting, which is consistent with the intuition that the lower the probability of a concatenated answer is, the more likely it will be that a probability-reliant model will be steered away from that answer. See Figure 8 in Appendix A.1 for the full results.

Table 1 provides a more detailed view of unfaithfulness. Incorrect intermediate chains (i.e., concatenated step outputs) are followed by correct final answers much more often in the setting where the correct answer has a high probability (34% and 55% of the time for rot-4 and rot-13, respectively) than in the low probability setting (1% and 19% of the time for rot-4 and rot-13, respectively). On the other hand, correct intermediate chains are followed by incorrect final answers *less* often in the high probability setting (7% and 1% of the time for rot-4 and rot-13, respectively) than in the lowprobability setting (14% and 9% of the time for rot-4 and rot-13, respectively).

These results support the hypothesis that GPT-4 over-relies on the prior probability of potential outputs (see Jang et al. (2023) for some related observations). If the answer has a high probability of occurrence, the model's priors favor generating it even if its intermediate reasoning steps suggest an alternative output. Conversely, if the answer is of lower likelihood, then even if the chain of reasoning is correct, the priors exert a detrimental influence leading to incorrect final answers.

4.3 Analyzing the effects of noise

The statistically significant impact of *shift_level* is evidence that GPT-4's CoT behavior is in part a noisy version of symbolic reasoning. Accuracy

Prob	Chain Steps	Final Answer							
1100	Output	Correct	Incorrect						
High	Correct	19	7						
High	Incorrect	34	40						
Low	Correct	7	14						
LOW	Incorrect	1	78						
	()	t-4. Final Answer							
Droh	(a) ro		Answer						
Prob			Answer Incorrect						
	Chain Steps	Final							
Prob High	Chain Steps Output	Final Correct							
	Chain Steps Output Correct	Final Correct	Incorrect						

(b) rot-13.

Table 1: Confusion matrices (100 examples; 2 probability bins {high, low}) for rot-4 and rot-13. *Effect of memorization*: incorrect step outputs lead to correct final answers more often for rot-13 than rot-4. *Effect of probability*: Unfaithfulness has a positive effect more often in high-probability bins than in low-probability bins; having a positive effect means that an incorrect chain is corrected to yield an accurate final answer. Conversely, unfaithfulness has a negative effect more often in low-probability bins than in high-probability bins.

falls as the shift level increases from 1 to 12 and then recovers at higher shift levels (Table 2), consistent with a noisy reasoning process in which deciphering each letter with a shift level of n involves $\min(n, 26 - n)$ implicit steps, with noise that gives each step some probability of being performed incorrectly. Note that the implicit steps referred to here are different from the steps that are explicitly produced in the chain of thought: the chain of thought uses one explicit step per letter (Figure 2), but here we are discussing the operations that must be implicitly carried out within each step of this chain in order to decode each letter.

Noise relating to complementary shift levels.

We have argued that the relation between accuracy and shift level is evidence that GPT-4 uses a twoway strategy. That is, accuracy is high for small shifts such as 1 but also for large shifts such as 25, which could plausibly be explained by GPT-4 implicitly selecting whichever direction will minimize the number of steps it needs to compute—shifting letters backward for small shift levels or forward for large shift levels. This two-way strategy is effective in that it supports strong performance on large shift levels such as 25. However, we also observe evidence that it contributes to the noise that causes accuracy to decline as the shift level increases. Figure 9 (in Appendix A.4) shows the actual shift level that GPT-4 produces for each letter in its chain of thought, for each of four intended shift levels. Across all four of these cases, GPT-4 shows peaks at both $shift_level$ and $26 - shift_level$. Thus, while some of the noise affecting the reasoning process may be random, it appears that at least some of the noise can be attributed to confusion between possible shift levels. Decoding a shift level of n can be done by shifting backward n steps or forward 26 - n steps, but it appears that GPT-4 sometimes mixes up these two strategies by shifting forward n steps (or, equivalently, shifting backward 26 - n steps), contributing to the overall noise.

Discretization. Another factor that interacts with noise is temperature. In principle, if CoT entailed pure symbolic reasoning, it would assign 100% probability to the correct continuation (i.e., each predicted next token) and 0% probability to everything else. If so, the temperature used would not affect performance. However, we observe that CoT scores better with a low temperature. For instance, in rot-13, the accuracy is 30.0% at temperature=0 and 0.33% at temperature=1. This shows that its predicted distribution over the vocabulary is not fully discrete—it has some noise in it that a low temperature can remove. However, even a temperature of 0 does not make the performance perfect because noise does not solely arise in the final distribution over the vocabulary (which temperature modifies) but also influences the implicit intermediate steps used to produce that distribution (which temperature does not change).

4.4 Analyzing the effect of memorization

To further investigate memorization, we focus on rot-13, because frequency is generally confounded with simplicity for the other shift levels (e.g., rot-1 is simple as well as frequent). 13 is the most frequent shift level (McCoy et al., 2023), and we observe in Table 2 that GPT-4 shows a spike in accuracy at this shift level in both Text-CoT and Math-CoT, providing strong evidence that memorization plays a role in GPT-4's CoT performance.

We also observe that memorization influences *unfaithfulness*. Consider the cells in Table 1 that involve incorrect chain steps outputs but correct final answers; such cases are much more common for rot-13 than for other levels, including rot-4 (the other shift level shown in that table); e.g., in the high-probability case, 55% of rot-13 examples fall in this category, while only 34% of rot-4 examples do. This pattern also provides some evidence

Style / Shift Level	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
Text CoT	49.2	52.4	50.8	51.6	42.8	47.0	32.6	44.0	30.2	9.6	0.2	0.0	60.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	16.6	17.0	47.0	45.4	50.4
Math CoT	70.2	68.0	68.6	66.2	58.8	60.4	57.4	63.2	45.4	41.6	40.2	33.8	71.0	16.2	19.2	17.8	11.4	8.8	4.8	1.6	0.8	0.6	0.0	50.0	61.6

Table 2: Accuracy for Text- and Math- CoT prompt styles. Math-CoT performs better than Text-CoT, but both display evidence of memorization because accuracy is highest for shift levels 13, 1, 3, and 2—the most frequent shifts in real-world corpora.

for memorization: for rot-13, the model may have two "paths" for producing the final output—it could use the chain of thought it has produced, or it could go directly from the input to the output due to memorization. Thus, when it produces the final output, it might implicitly weigh both of those paths, which helps it to correct faulty chains because it has a back-up path to consider. However, for rot-4, it may be that only the path involving the chain of thought is available, such that GPT-4 cannot fix incorrect chains as easily because it does not have this alternative path to fall back on.

4.5 The role of intermediate reasoning steps

Finally, we study the role of the intermediate reasoning steps that are involved with CoT prompting—both the chain that GPT-4 produces and the chain provided in the demonstration.

Strong reliance on the surface strings produced in reasoning steps. First we focus on the chain of thought that GPT-4 produces before providing its final answer. We consider two potential roles that this chain could have. First, it could be that the chain is helpful because it provides text that is useful for GPT-4 to condition on in later steps. Alternatively, it could be that the critical aspect of CoT reasoning is internal—rather than depending on the text that is produced, CoT could be helpful because it gives the LLM the opportunity to internally perform additional reasoning steps.

To disentangle these possibilities, we modify the prompt so that GPT-4 is told to perform the same steps of reasoning as before, but to have the intermediate output that it produces be uninformative. Specifically, we used the Text-CoT prompt but instructed the model to *not reveal step answers and instead output a* *. The step answers in the demonstration were also replaced by '*'; thus we left the format of reasoning intact but the expected generation token was no longer a component of the final answer. Next, we asked the model to explicitly *think about the correct letter that should go in the place of the* * *but just not write it down*. In the demonstration, we first provided an example with all step answers and then repeated the same

example but with a * in place of each output letter (see Appendix A.5 Figure 10 for prompts).

In both settings, performance was similar to that of standard prompting. This is evidence that CoT depends on "self-conditioning"—explicitly producing text that will be useful as context to condition on when producing the final answer. Merely instructing a model to "think" silently is not helpful, suggesting that the reasoning does not occur internally. These results corroborate prior work finding that CoT is unhelpful when the model is told to produce contentless "filler" tokens instead of contentful text (Lanham et al., 2023); models can reason internally when explicitly trained to do so (Pfau et al., 2024), but current LLMs without this explicit training do not seem to have this ability.

Little reliance on the validity of the demonstration. In experiments described in Appendix A.5, we also find that the validity of the reasoning shown in the prompt does not have a strong effect of CoT performance for shift ciphers. That is, even when the demonstration is perturbed such that it contains many errors, GPT-4's CoT performance remains approximately the same. This finding corroborates prior work showing that the validity of demonstrations did not matter much (Wang et al., 2023a; Madaan and Yazdanbakhsh, 2022; Ye et al., 2023); the demonstration seems to merely guide the model to solve the task by providing a format to generate accurate reasoning steps (Min et al., 2022).

5 Conclusion

We have used the case study of shift ciphers to disentangle the factors that influence CoT reasoning, with a focus on characterizing what *type* of reasoning is used in models prompted with CoT. We found that CoT performance is statistically significantly influenced by the probability of occurrence of the expected task output, the frequency of the task in corpora, and the number of reasoning steps that must be (implicitly) performed. These results suggest that CoT reasoning can be characterized as probabilistic, memorization-influenced noisy reasoning, meaning that LLM behavior displays traits of both memorization and generalization.

6 Limitations

We have conducted extensive studies on a single task, decoding shift ciphers; we chose this task because it enables us to separate memorization from reasoning in a controlled manner as explained in Subsection 3.1, and these factors cannot be easily disentangled for most other tasks. Our prompts contain one example demonstration (i.e. one-shot CoT prompting), but a single demonstration contains at least 5 reasoning steps which provide more than just one reference of decoding to the model. We also studied a single model, GPT-4, because focusing on just one task and model made it possible to do a deep dive in which we carefully investigated each factor that we considered. An important direction for future work would be to investigate additional tasks and models. In addition, while our experiments showed that GPT-4 displays some hallmarks of true reasoning, they also showed some ways in which it makes errors due to a reliance on memorization and probability; future work could investigate how these limitations could be overcome.

7 Ethical Considerations

We do not believe that this work raises major potential risks. As is the case with any analysis work, there is some risk that our results could lead some readers to overestimate or underestimate the abilities of LLMs, either of which could have negative consequences: overestimation can contribute to hype, while underestimation can result in the field paying too little attention to potential harms. However, we believe that this risk is minimal because we have aimed to present our results in a balanced way that highlights both strengths and limitations.

Acknowledgements

This work was supported in part by the National Science Foundation SBE Postdoctoral Research Fellowship under Grant No. 2204152. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the National Science Foundation

References

- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language models are few-shot learners. In Advances in Neural Information Processing Systems, volume 33, pages 1877–1901. Curran Associates, Inc.
- Boxi Cao, Qiaoyu Tang, Hongyu Lin, Xianpei Han, Jiawei Chen, Tianshu Wang, and Le Sun. 2023. Retentive or forgetful? diving into the knowledge memorizing mechanism of language models. *arXiv preprint arXiv:2305.09144*.
- Stephanie Chan, Adam Santoro, Andrew Lampinen, Jane Wang, Aaditya Singh, Pierre Richemond, James McClelland, and Felix Hill. 2022. Data distributional properties drive emergent in-context learning in transformers. In Advances in Neural Information Processing Systems, volume 35, pages 18878–18891. Curran Associates, Inc.
- Ting-Rui Chiang and Dani Yogatama. 2024. Understanding in-context learning with a pelican soup framework. *Preprint*, arXiv:2402.10424.
- Ishita Dasgupta, Andrew K. Lampinen, Stephanie C. Y. Chan, Hannah R. Sheahan, Antonia Creswell, Dharshan Kumaran, James L. McClelland, and Felix Hill. 2023. Language models show humanlike content effects on reasoning tasks. *Preprint*, arXiv:2207.07051.
- Ronald Fagin, Joseph Y Halpern, Yoram Moses, and Moshe Vardi. 2004. *Reasoning about knowledge*. MIT press.
- Guhao Feng, Bohang Zhang, Yuntian Gu, Haotian Ye, Di He, and Liwei Wang. 2023. Towards revealing the mystery behind chain of thought: A theoretical perspective. In *Advances in Neural Information Processing Systems*, volume 36, pages 70757–70798. Curran Associates, Inc.

- Simeng Han, Hailey Schoelkopf, Yilun Zhao, Zhenting Qi, Martin Riddell, Luke Benson, Lucy Sun, Ekaterina Zubova, Yujie Qiao, Matthew Burtell, et al. 2022. Folio: Natural language reasoning with firstorder logic. arXiv preprint arXiv:2209.00840.
- Roee Hendel, Mor Geva, and Amir Globerson. 2023. In-context learning creates task vectors. In *Find-ings of the Association for Computational Linguis-tics: EMNLP 2023*, pages 9318–9333, Singapore. Association for Computational Linguistics.
- Jie Huang and Kevin Chen-Chuan Chang. 2022. Towards reasoning in large language models: A survey. *arXiv preprint arXiv:2212.10403*.
- Joel Jang, Seonghyeon Ye, and Minjoon Seo. 2023. Can large language models truly understand prompts? a case study with negated prompts. In *Transfer Learning for Natural Language Processing Workshop*, pages 52–62. PMLR.
- Mingyu Jin, Qinkai Yu, Haiyan Zhao, Wenyue Hua, Yanda Meng, Yongfeng Zhang, Mengnan Du, et al. 2024. The impact of reasoning step length on large language models. *arXiv preprint arXiv:2401.04925*.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2023. Large language models are zero-shot reasoners. *Preprint*, arXiv:2205.11916.
- Jannik Kossen, Yarin Gal, and Tom Rainforth. 2024. Incontext learning learns label relationships but is not conventional learning. In *The Twelfth International Conference on Learning Representations*.
- Tamera Lanham, Anna Chen, Ansh Radhakrishnan, Benoit Steiner, Carson Denison, Danny Hernandez, Dustin Li, Esin Durmus, Evan Hubinger, Jackson Kernion, Kamilé Lukošiūtė, Karina Nguyen, Newton Cheng, Nicholas Joseph, Nicholas Schiefer, Oliver Rausch, Robin Larson, Sam McCandlish, Sandipan Kundu, Saurav Kadavath, Shannon Yang, Thomas Henighan, Timothy Maxwell, Timothy Telleen-Lawton, Tristan Hume, Zac Hatfield-Dodds, Jared Kaplan, Jan Brauner, Samuel R. Bowman, and Ethan Perez. 2023. Measuring faithfulness in chainof-thought reasoning. *Preprint*, arXiv:2307.13702.
- Yingcong Li, Kartik Sreenivasan, Angeliki Giannou, Dimitris Papailiopoulos, and Samet Oymak. 2023. Dissecting chain-of-thought: Compositionality through in-context filtering and learning. In *Thirty-seventh Conference on Neural Information Processing Systems.*
- Zhiyuan Li, Hong Liu, Denny Zhou, and Tengyu Ma. 2024. Chain of thought empowers transformers to solve inherently serial problems. *arXiv preprint arXiv:2402.12875*.
- Aman Madaan and Amir Yazdanbakhsh. 2022. Text and patterns: For effective chain of thought, it takes two to tango. *Preprint*, arXiv:2209.07686.

- R. Thomas McCoy, Shunyu Yao, Dan Friedman, Matthew Hardy, and Thomas L. Griffiths. 2023. Embers of autoregression: Understanding large language models through the problem they are trained to solve. *Preprint*, arXiv:2309.13638.
- Sewon Min, Xinxi Lyu, Ari Holtzman, Mikel Artetxe, Mike Lewis, Hannaneh Hajishirzi, and Luke Zettlemoyer. 2022. Rethinking the role of demonstrations: What makes in-context learning work? *Preprint*, arXiv:2202.12837.
- OpenAI. 2024. Gpt-4 technical report. *Preprint*, arXiv:2303.08774.
- Jane Pan, Tianyu Gao, Howard Chen, and Danqi Chen. 2023. What in-context learning "learns" in-context: Disentangling task recognition and task learning. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 8298–8319, Toronto, Canada. Association for Computational Linguistics.
- Jacob Pfau, William Merrill, and Samuel R Bowman. 2024. Let's think dot by dot: Hidden computation in transformer language models. *arXiv preprint arXiv:2404.15758*.
- Shuofei Qiao, Yixin Ou, Ningyu Zhang, Xiang Chen, Yunzhi Yao, Shumin Deng, Chuanqi Tan, Fei Huang, and Huajun Chen. 2022. Reasoning with language model prompting: A survey. *arXiv preprint arXiv:2212.09597*.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of machine learning research*, 21(140):1–67.
- Yasaman Razeghi, Robert L Logan IV, Matt Gardner, and Sameer Singh. 2022. Impact of pretraining term frequencies on few-shot reasoning. arXiv preprint arXiv:2202.07206.
- Abulhair Saparov and He He. 2022. Language models are greedy reasoners: A systematic formal analysis of chain-of-thought. *arXiv preprint arXiv:2210.01240*.
- Kaya Stechly, Karthik Valmeekam, and Subbarao Kambhampati. 2024. Chain of thoughtlessness: An analysis of cot in planning. *Preprint*, arXiv:2405.04776.
- Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung, Aakanksha Chowdhery, Quoc V Le, Ed H Chi, Denny Zhou, et al. 2022. Challenging big-bench tasks and whether chain-of-thought can solve them. *arXiv preprint arXiv:2210.09261*.

- Miles Turpin, Julian Michael, Ethan Perez, and Samuel Bowman. 2024. Language models don't always say what they think: unfaithful explanations in chain-ofthought prompting. *Advances in Neural Information Processing Systems*, 36.
- Karthik Valmeekam, Matthew Marquez, Alberto Olmo, Sarath Sreedharan, and Subbarao Kambhampati. 2023. Planbench: An extensible benchmark for evaluating large language models on planning and reasoning about change. In *Thirty-seventh Conference* on Neural Information Processing Systems Datasets and Benchmarks Track.
- Boshi Wang, Sewon Min, Xiang Deng, Jiaming Shen, You Wu, Luke Zettlemoyer, and Huan Sun. 2023a. Towards understanding chain-of-thought prompting: An empirical study of what matters. In *Proceedings* of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 2717–2739, Toronto, Canada. Association for Computational Linguistics.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023b. Self-consistency improves chain of thought reasoning in language models. In *The Eleventh International Conference on Learning Representations*.
- Peter C Wason. 1968. Reasoning about a rule. *Quarterly journal of experimental psychology*, 20(3):273–281.
- Peter Cathcart Wason and Philip Nicholas Johnson-Laird. 1972. *Psychology of reasoning: Structure and content*, volume 86. Harvard University Press.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. 2022. Chain-of-thought prompting elicits reasoning in large language models. *arXiv preprint*.
- Skyler Wu, Eric Meng Shen, Charumathi Badrinath, Jiaqi Ma, and Himabindu Lakkaraju. 2023. Analyzing chain-of-thought prompting in large language models via gradient-based feature attributions. *Preprint*, arXiv:2307.13339.
- Sang Michael Xie, Aditi Raghunathan, Percy Liang, and Tengyu Ma. 2022. An explanation of in-context learning as implicit bayesian inference. *Preprint*, arXiv:2111.02080.
- Xi Ye and Greg Durrett. 2022. The unreliability of explanations in few-shot prompting for textual reasoning. In Advances in Neural Information Processing Systems.
- Xi Ye, Srinivasan Iyer, Asli Celikyilmaz, Veselin Stoyanov, Greg Durrett, and Ramakanth Pasunuru. 2023. Complementary explanations for effective in-context learning. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 4469–4484, Toronto, Canada. Association for Computational Linguistics.

- Yufeng Zhang, Fengzhuo Zhang, Zhuoran Yang, and Zhaoran Wang. 2023. What and how does incontext learning learn? bayesian model averaging, parameterization, and generalization. *arXiv preprint arXiv:2305.19420*.
- Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. 2022. Large language models are human-level prompt engineers. *arXiv preprint arXiv:2211.01910*.

A Additional Details & Results

A.1 Dataset details

To create our dataset of 7-letter words, we found all 3-letter and 4-letter tokens from the lowercase English alphabet and formed words by considering all possible combinations of a 3-letter token followed by a 4-letter token. Note that GPT-4's tokenizer distinguishes between word-initial tokens and nonword-initial tokens; thus, to be precise, the tokens that we used were 3-letter word-initial tokens and 4-letter non-word-initial tokens. Following McCoy et al. (2023), we compute the log probability as the log probability that GPT-2 (Radford et al., 2019) assigns to the sentence 'The word is "WORD"', minus the log probability that it assigns to 'The word is "'; thus, this yields the log probability assigned to just the word and the following quotation mark in the context of 'The word is "'. The closing quotation mark is included because it indicates the end of the word. Finally, we manually checked the words in the dataset and filtered them to ensure there were no inappropriate words used. We partitioned each group of 150 examples into two subsets: a subset containing 100 words used to evaluate GPT-4, and a subset containing 50 words used to evaluate logistic regression models that were fitted to GPT-4's performance on the 100word subset. We run all evaluations a single time; the accuracies that we report are accuracies over these 100-example sets.

A.2 Standard, Math & Number-CoT prompts

The Standard prompt (Figure 5) used is adopted from McCoy et al. (2023) and yields poor performance on most shift levels. The Number-CoT prompt (Figure 6) in contrast gives nearly perfect scores across the shift levels. It is to be noted that some miscellaneous noise is captured in the Number-CoT case. This arises mostly due to incomplete generations/half-completed chains requiring more tokens than needed as the model does some additional sub-reasoning steps, and in very

Standard

Rot-13 is a cipher in which each letter is shifted 13 positions forward in the alphabet. For example, here is a message written in rot-13 along with the original text that it was created from: Rot-13 text: "fgnl" Original text: "stay" Decode this message to produce the original text: Rot-13 text: <test_input>

Figure 5: Standard prompt having just the description and demonstration.

rare cases produces numbers greater than 25. The Math-CoT prompt used is shown in Figure 7.

A.3 Effect of probability

The gap between the overall decoding accuracy and the expected accuracy upon concatenation of step outputs is seen between the orange and blue lines in Figure 8. The drop in accuracy is much higher for the lower probability data (i.e., the blue bin 5 line is lower than the bin 1 line).

A.4 Effect of noise

While decoding can be done by shifting n steps backward or 26 - n forward, the normalized frequency distribution of the predicted $shift_level$ in Figure 9 provides evidence that GPT-4 uses a noisy bidirectional reasoning approach by mixing the two strategies—shifting $26 - shift_level$ backward instead of forward.

A.5 Impact of producing explicit reasoning steps and validity of steps in demonstration.

Figure 10 shows the prompts used to test the importance of producing explicit reasoning steps by forcing the model to "think" silently.

Outputs from *silent thinking.* We observe that many of the outputs produced in the case when the reasoning step answers are * are related to the task of shift ciphers. It looks like the model is influenced by terms like 'cipher', 'decode' that are present in the description; as the reasoning steps no longer help meaningfully as the step output is now *. Influenced by the probabilistic effects discussed before it produces outputs having a high probability and containing words related to security, safety, and programming like 'encryption', 'code cracker', 'decoded', 'Javascript', 'Instagram'.

Number-CoT Shift-13 is a process in which each number is shifted 13 positions forward until it reaches 26 and subsequently circles back to 1. For example, here is a sequence of numbers written in shift-13: shift-13 sequence: "5,6,13,11" To decode this sequence, we need to shift each number 13 positions backward. New position = (Given position - 13) mod 26 Using this, 1. 5 -> (5 - 13) mod 26 -> 18 2. 6 -> (6 - 13) mod 26 -> 19 3. 13 -> (13 - 13) mod 26 -> 0 4. 11 -> (11 - 13) mod 26 -> 24 Therefore, the original sequence of numbers is: '18,19,0,24' Here is another sequence of numbers in shift-13. Decode this sequence one number at a time. On the last line, write the words "Original sequence:" followed by the decoded sequence: shift-13 sequence: <test_input>

Figure 6: The shift cipher task reformatted to be performed in the domain of numbers rather than the domain of letters (Number-CoT). The prompt consists of a description and the demonstration that includes several reasoning steps. Here both the encoded input and decoded output are number sequences abstracting out the alphabet and its influences.

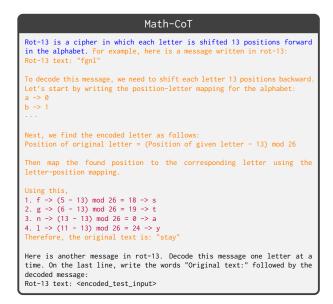


Figure 7: Math-based CoT prompt consisting of a description and the demonstration that includes several reasoning steps.

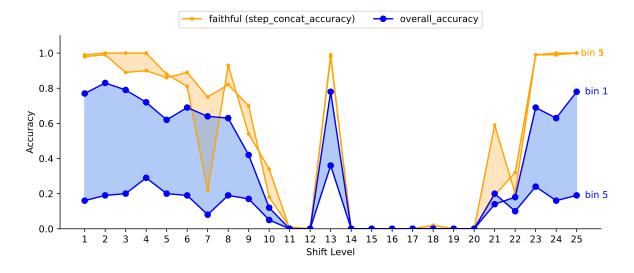


Figure 8: Actual overall decoding accuracy vs. *faithful* accuracy across shift levels showing the flip effects of probability. The effect is amplified for low probability outputs as seen in the larger drop in accuracy between the orange and blue bin 5 (low prob) lines.

Validity. Next we consider the chain that is provided to GPT-4 within the prompt. Prior work has found that the validity of the reasoning shown in the prompt does not have a strong effect on CoT performance; CoT is approximately as helpful when the chain of thought in the prompt contains errors as when it does not (Wang et al., 2023a; Madaan and Yazdanbakhsh, 2022; Ye et al., 2023). Here we test whether this observation extends to shift ciphers.

We first tried applying random corruptions to the steps in the demonstration. Each step answer in the demonstration was replaced by a random letter; the format of the chain was left unchanged, with only the produced letters being modified. We also tried applying systematic corruptions by having the linguistic description of the task specify rot-13 yet having the demonstration illustrate rot-14. Figure 11 shows the prompts used.

With both types of corruption, GPT-4's performance remained approximately as strong as when it was given accurate, uncorrupted demonstrations. This result corroborates the aforementioned prior work that found no strong correlation between the validity of the reasoning shown in the demonstration and the model performance. The demonstration seems to merely guide the model to solve the task by providing a format to generate accurate reasoning steps (Min et al., 2022).

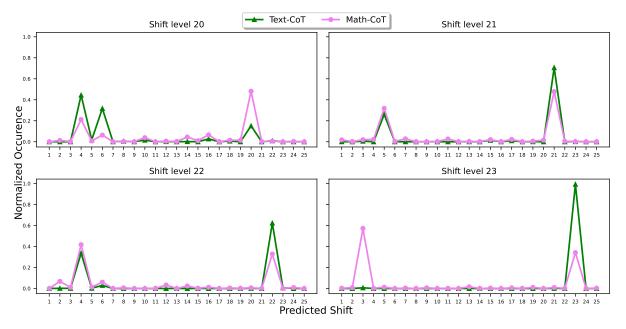


Figure 9: Normalized frequency distribution vs. predicted $shift_level$ of step answers for rot-20 to rot-23. The appearance of peaks at $26 - shift_level$ in Math-CoT and Text-CoT prompts is evidence that some of the noise in the model's predictions is due to confusion between the shift levels n and 26 - n.

	Partially hidden reasoning steps
Hidden reasoning steps	Rot-13 is a cipher in which each letter is shifted 13 positions
Rot-13 is a cipher in which each	forward in the alphabet. For example, here is a message written
letter is shifted 13 positions	in rot-13:
forward in the alphabet. For	Rot-13 text: "fgnl"
example, here is a message	To decode this message, we shift each letter 13 positions backward:
written in rot-13:	1. f -> s
Rot-13 text: "fgnl"	2. r > t
To decode this message, we shift each letter 13 positions backward; but instead of revealing what each letter	2. g -> t 3. n -> a 4. l -> y
<pre>becomes, we will replace it with</pre>	But, in order to preserve secrecy, we will ask you to write
a '*' until we write the final	your answer in a slightly different way: Instead of revealing
answer:	what each letter becomes, we will replace it with a '*' until
1. f -> *	we write the final answer. Using this format, the reasoning
2. g -> *	shown above becomes:
<pre>3. n -> * 4. l -> * If we put together the letters that were hidden behind each '*',</pre>	1. f -> * 2. g -> * 3. n -> * 4. 1 -> *
we get that the original text is: "stay".	Therefore, the original text is: "stay"
Here is another message in rot-13.	Here is another message in rot-13. Decode this message one
Decode this message one letter	letter at a time. As you produce each '*', we want you to still
at a time. On the last line,	think about the correct letter that should go in the place of
write the words "Original text:"	the star - just don't write it down. On the last line, write
followed by the decoded message:	the words "Original text:" followed by the decoded message:
Rot-13 text: <test_input></test_input>	Rot-13 text: <test_input></test_input>

Figure 10: Text-CoT prompt consisting of a description and the demonstration and hidden (left) and partially hidden (right) reasoning steps.

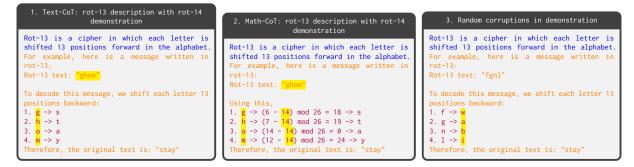


Figure 11: Prompt snippets with different types of mismatches/corruptions introduced are highlighted in yellow.