

Behavior Forests: Real-Time Discovery of Dynamic Behavior for Data Selection

Philipp Reis¹, Philipp Rigoll¹ and Eric Sax¹

Abstract—Automated Driving Systems (ADS) development relies on utilizing real-world vehicle data. The volume of data generated by modern vehicles presents transmission, storage, and computational challenges. Focusing on Dynamic Behavior (DB) offers a promising approach to distinguish relevant from irrelevant information for ADS functionalities, thereby reducing data. Time series pattern recognition is beneficial for this task as it can analyze the temporal context of vehicle driving behavior. However, existing state-of-the-art methods often lack the adaptability to identify variable-length patterns or provide analytical descriptions of discovered patterns. This contribution proposes a Behavior Forest framework for real-time data selection by constructing a Behavior Graph during vehicle operation, facilitating analytical descriptions without pre-training. The method demonstrates its performance using a synthetically generated and electrocardiogram data set. An automotive time series data set is used to evaluate the data reduction capabilities, in which this method discarded 96,01% of the incoming data stream, while relevant DB remain included.

I. INTRODUCTION

Real-world vehicle data is used in all development phases of Automated Driving Systems (ADS) [1] including risk analysis [2], perception, path planning and control [3] or simulation and critical scenario identification [4]. These possibilities for utilizing vehicle data face the challenge of dealing with the influx of data during vehicle operation. Modern vehicles equipped with cameras, RADAR, and LiDAR can generate up to 40 GB s^{-1} of data [5]. With an average driving time of one hour per day and approximately 60 million vehicles in Germany, this would result in a data volume of 8,64 zetta bytes ($8,64 \cdot 10^{12}$ GB) of data per year, which is an order of magnitude more data than the current capacity of the data center of the European Organisation for Nuclear Research (CERN) can hold [6]. Furthermore, recording these data would be associated with enormous transmission, storage, and computation costs, making it economically and technically inefficient or impossible [7], [8]. As a result, recording all these data volumes is impractical, necessitating a selective approach to recording. This begs the question: How can the influx of data be efficiently managed, and how can data recording during vehicle operation be triggered to obtain a relevant data set for ADS development? In ADS, developers are interested in Dynamic Behavior (DB) data described by time series like velocity or steering signals. Additionally, considering that DB happens at different frequencies, such as lane changes on highways being more common than evasive behavior, evaluating relevance

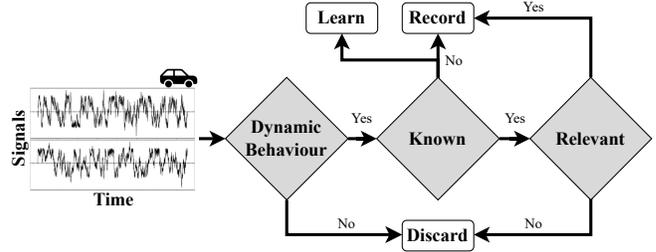


Fig. 1: Concept for recording or discarding vehicle data during operation using a Behavior Forest approach.

regarding information redundancy is essential.

The potential of real-time data selection techniques is demonstrated in physics research at the CERN institute [9]. In an experiment conducted with the Large Hadron Collider, 40 TB s^{-1} of data are generated. However, using run-time selection techniques, 99,98% of data can be removed [10]. In the automotive domain, Tesla uses a *shadow-mode*, which records data if a mismatch between a driver and the vehicle trajectory prediction occurs [7], which is rather an error detector than a holistic approach for data recording.

Time Series Analysis provides a variety of methods to examine sequential data effectively. For instance, it enables the discovery of recurring patterns in time-series data, known as Time Series Pattern Recognition (TSPR) [11], which in this context refers to DB. Current approaches to TSPR methods cannot learn what is already known during operation, identify patterns of variable length, or describe the identified patterns analytically. This contribution addresses these challenges by proposing a Behavior Forest for DB discovery of variable length explicitly designed for real-time data selection, see Fig. 1. This entails identifying unseen DB, learning their representation, and recording them if they are assessed as relevant while disregarding non-dynamic and already known irrelevant dynamic behavior.

A. Related Works

Methods for TSPR encompass various approaches, including sliding window techniques, signal thresholding, transformer models, and tree graphs. Especially, methods reliant on signal thresholds for detecting the initiation and termination of DB are straightforward to implement, such as thresholds applied to lateral and longitudinal acceleration [12] or rotational energy [13]. However, these methods often lack detailed characterization of DB progression and may oversimplify data recording conditions. A widely

¹Philipp Reis, Philipp Rigoll and Eric Sax are with the FZI Research Center for Information Technology, 76137 Karlsruhe, Germany {reis, philipp.rigoll, sax}@fzi.de

adopted strategy for TSPR involves employing a sliding window across the time series. This method utilizes raw signal values or derived features from rolling time windows, which are subsequently employed in (un)supervised learning models for classification tasks [14]–[16]. Despite its efficacy, the sliding window approach necessitates careful consideration of two critical hyperparameters: the *window size*, which dictates the temporal span of a DB, and the *window overlap*. Suboptimal settings for these parameters, such as *zero window overlap* leading to information loss or maximal *window overlap* yielding meaningless results, have been discussed in [17]. Recently, transformer architectures with self-attention mechanisms have emerged as promising tools for time series analysis, finding applications in various domains [18], [19]. However, despite their success in natural language processing tasks, concerns have been raised regarding their applicability in time series analysis due to inherent features like positional encoding and tokenization [20]. Additionally, formalizing discovered patterns interpretatively to extract actionable knowledge and facilitate continual learning processes is challenging, often complicated by issues such as the catastrophic forgetting phenomenon [21]. In time series analysis, tree graphs have been utilized for tasks such as forecasting [22] and anomaly detection [23] through methods like isolation trees. While effective, these approaches typically require training data and are not commonly explicitly employed for pattern identification. Moreover, none of the aforementioned approaches can learn from identified patterns and organize them meaningfully to address the challenge of selecting data by a specific data distribution condition of discovered patterns.

B. Contribution and Outline

The contribution of this paper unfolds in two main aspects: Firstly, it introduces an approach for TSPR of variable length without pre-training. These patterns are systematically structured analytically through a bottom-up construction of a Behavior Forest, effectively compressing observed data. This approach represents a continual learning process. Secondly, it proposes an approach for real-time data selection by solely recording relevant DB. This method is analyzed for TSPR using a synthetic and an electrocardiogram (ECG) data set. Additionally, experimental results from an automotive time series data set showcase its efficacy in handling data and facilitating real-time data recording trigger actions based on discovered DB.

Section II presents the necessary notation and definitions essential for TSPR in this paper, while Section III introduces the conceptual framework for discovering relevant DB, outlining all its components. Section IV thoroughly evaluates and discusses the method. Finally, Section V summarizes the findings of this contribution and provides insights into potential future research avenues.

II. PRELIMINARIES

Before delving into the concepts of the proposed method, the following terms are defined:

Definition 1 (Time Series \mathcal{T} [24]). A d-dimensional time series w.r.t. a series of time points $\mathbb{T} = \{t_1, \dots, t_n\}$ of length $n \in \mathbb{N}$ is $\mathcal{T} = \{(t_i, y_i) | y_i = (y_{i,1}, \dots, y_{i,d})^T \in \mathbb{R}^d, t_i \in \mathbb{T}, i = 1, \dots, n\}$. If $d = 1$, \mathcal{T} is called *univariate*, for $d > 1$ it is a *multivariate* time series.

Definition 2 (Subsequence $\mathcal{T}_{i,l}$ [25]). A subsequence $\mathcal{T}_{i,l} \in \mathbb{R}^{n \times d+1}$ of a time series \mathcal{T} is a subset of values from \mathcal{T} of length l starting from index i . This subsequence $\mathcal{T}_{i,l}$ contains consecutive tuples $[t_i \ t_{i+1} \ \dots \ t_{i+l-1}]$.

Definition 3 (Pattern \mathcal{P} based on [26]). A time series pattern \mathcal{P} is a group of m (with $m \geq 2$) similar subsequences in a time series \mathcal{T} . A subsequence $\mathcal{T}_{i,l}$, that is included in a pattern \mathcal{P} , is called a member M . Formally, $\mathcal{P} = [M_1, M_2, \dots, M_m]$ with each M_x being a subsequence with a starting index i and a length l . This includes a distance threshold τ with $dist(M_x, M_y) \leq \tau, \forall x, y \in [1, \dots, m]$.

Definition 4 (Dynamic Behavior (DB)). A Dynamic Behavior (DB) is a pattern \mathcal{P} that initiates from and concludes in a stationary state.

The goal of the real-time DB discovery is to find the DB during operation and trigger the recording if a relevance criteria is met.

III. CONCEPT

The proposed method for discovering DB in a continuous data stream comprises two steps: A preprocessing step based on [27], which is designed for discovering vehicle driving patterns involving discretization, hysteresis filtering, dimension, and numerosity reduction – Moreover, the construction of a Behavior Forest, which is the main contribution of this paper.

A. Preprocessing

1) **Discretization:** Symbolic Aggregate Approximation (SAX) is a method utilized to transform the original signal into a symbolic representation using predefined thresholds, thereby reducing computational resources as demonstrated in [28], see Fig. 2 (a) to (b).

Definition 5 (Discretization). Given a natural number $\alpha \geq 2$, define $\mathbb{P} := (\frac{1}{\alpha} | 1, \dots, \alpha)$. Applying the quantile function of the standard normal distribution to the probabilities in \mathbb{P} results in the α -quantiles β_j with $1 \leq j \leq \alpha$ of the standard normal distribution. The ascending sorted list of these α -quantiles

$$B := [\beta_0, \beta_1, \dots, \beta_\alpha] \quad (1)$$

with $\beta_0 = -\infty$ and $\beta_\alpha = +\infty$ are called breakpoints and α is called alphabet size.

This way, a time series \mathcal{T} is transformed in a symbolic time series \mathcal{T}_s , using the discretization function f_s

$$f_s : \mathcal{T} \rightarrow \mathcal{T}_s. \quad (2)$$

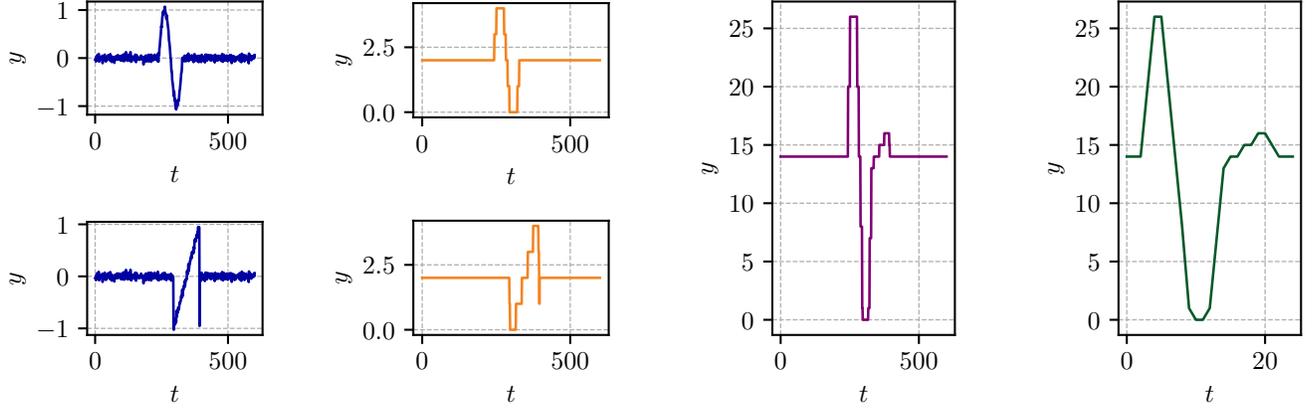


Fig. 2: Preprocessing of data. The raw multivariate time signals (left, --) are discretized with predefined breakpoints (middle left, --). Using unification, the multivariate time series is transformed into a univariate time series (middle right, --) and finally compressed with a logarithmic numerosity reduction method (right, --).

2) **Hysteresis Filter:** Signals which are in the value regions of the breakpoints β_i from (1) are prone to lead to symbolic toggling due to noise. This is eliminated by the hysteresis filter [25].

3) **Dimension Reduction:** Reducing the dimensionality of multivariate time series increases the computation efficiency of TSPR, which can be rule-based, spectral, probabilistic, and unsupervised learning-based [29]. Except for rule-based dimension reduction methods, these approaches need data in advance for parameter tuning. Therefore, this paper uses the rule-based method *unification* by mapping all combinations of discretization symbols to a unique symbol using the cartesian product, see Fig. 2 (b) to (c). For two discretized signals B_1 and B_2 , this leads to unified discretization breakpoints B_u :

$$B_u = B_1 \times B_2. \quad (3)$$

4) **Numerosity Reduction:** Numerosity Reduction is a data reduction technique that aims to reduce the number of data points while preserving its essential characteristics, see Fig. 2 (c) to (d). The consideration of temporally distorted signals as the same pattern is approached with a logarithmic reduction of the symbol sequence with the base a , that is, for each subsequence of the same symbol $\mathcal{S}_{\text{same}}$ leading to a numerosity reduced subsequence $\mathcal{S}_{\text{reduced}}$:

$$L(\mathcal{S}_{\text{reduced}}) = \lceil \log_a L(\mathcal{S}_{\text{same}}) \rceil \quad (4a)$$

where $L(\mathcal{S}_{\text{same}})$ is the length of consecutive identical symbols in a subsequence and $\lceil X \rceil$ being the ceiling function.

These preprocessing steps reduce the computational complexity of the time series while preserving the pattern characteristics. Based on this preprocessing, the discovery and analytical description take place using the Behavior Forest.

B. Continual DB Discovery with Behavior Forests

The core of pattern identification lies in the bottom-up construction of a Behavior Tree, illustrated in Fig. 3. The tree

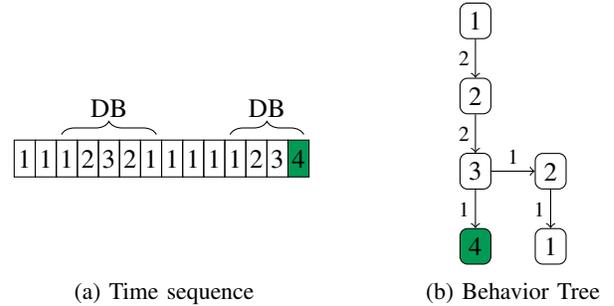


Fig. 3: Exemplary construction of a Behaviour Tree from a time sequence with the indicated DB.

structure (right) adapts as the algorithm processes the data stream (left), ultimately contributing to the broader Behavior Forest. The algorithm identifies the initiation of a DB when a symbol differs from the two preceding symbols of the same value. Upon detecting a DB initiation, the construction of a Behavior Tree commences. Subsequently, the first symbol in the DB sequence becomes the root node of this tree. As subsequent symbols arrive from the data stream, the algorithm traverses the Behavior Tree, searching for a child node of the current node that matches the incoming symbol. If a matching child node exists, the traversal continues down that branch, indicating that the observed sequence aligns with a previously encountered DB. However, if no matching child node exists, a new child node is created for the incoming symbol, signifying the discovery of a new element within the DB pattern, as indicated in green. The traversal then proceeds down the newly created branch, extending the tree structure. The traversal continues until a termination condition is met. This can occur when the data stream indicates a steady-state driving scenario identified by three consecutive symbols. Leaf nodes in the Behavior Tree represent the final symbols of a DB. Besides analytically describing DB, the algorithm tracks the frequency of each DB, indicated by

the edge weight of the Behaviour Tree. With each identified DB and its corresponding Behavior Tree construction, the frequency count associated with the leaf node increments. This functionality allows the algorithm to identify DB and quantify their prevalence within the data stream. Overall, the Behavior Tree construction process enables the algorithm to dynamically capture the structure and occurrence frequency of DB observed in the continuous data stream.

IV. NUMERICAL EVALUATION

The evaluation is divided into two sections: the first section assesses the discovery of patterns in two different data sets, while the second part evaluates the application of data reduction in a vehicle speed data set by discovering DB for data selection.

A. Discovery of Patterns

1) *Synthetic Time Series*: For a demonstration of TSPR according to Definition 4, a two-dimensional time series with four patterns consisting of alternating sawtooth and sinus wave signals with amplitudes of $a_1 = 1$ and $a_2 = 0.6$ with added Gaussian noise are generated, see Fig. 4a (top). The pattern discovery algorithm uses the parameter according to table I. The resulting Behavior Forest contains four leafs

TABLE I: Parameter Values Synthetic Data

Parameter	Value
logarithmic base a	10
$B_{1/2}$	$[-0.5, 0.5]$

indicating four different patterns, as shown in Fig. 4b. The colored patterns are shown in the original time series and in the preprocessed symbolic sequence. All multivariate patterns are found in the preprocessed data and represented in the Behavior Graph.

2) *Electrocardiogram Recording*: A popular time series for analysis is the open-source electrocardiogram (ECG) recording [30] since the patterns are labeled as normal and abnormal. For evaluation, the behavior Forest method is applied to the normal, see Fig. 5 in blue \blacksquare , and abnormal, see Fig. 5 in orange \blacksquare , ECG recording separately. The parameters are set according to table II. The Behavior Forest

TABLE II: Parameter Values ECG Data

Parameter	Value
logarithmic base a	10
B	$[0, 0.2, 0.4, 0.6, 0.8, 1]$

extracted 80 patterns from normal and 6 patterns from abnormal ECG data set. From each pattern, nine features are extracted which are: mean, variance, skew, kurtosis min, max, median, 25 and 75 percentil. This nine-dimensional feature vector of each pattern is visualized using the t-SNE algorithm into a two-dimensional plane, see Fig. 5. A blue dot \bullet indicates a normal ECG signal whereas an orange dot \bullet indicates an abnormal ECG signal. It can be seen

that some pattern features occur in both signals. However, compared to the normal ECG data set, the abnormal data set has a disturbed ECG signal between $t_{\text{start}} = 0s$ and $t_{\text{end}} \approx 0.5s$. These resulting patterns lead to the blue dominating pattern features. Consequently, the behavior Forest method discovered patterns that are both present in the normal and abnormal, and patterns that are only present in one of the normal or abnormal ECG data sets, allowing them to be distinguished.

B. Vehicle Data Selection

To demonstrate the method for real-time data selection, the vehicle speed data set containing 5973 rides with a total length of 9049.3km [31] is used for evaluation. The vehicle speed is generated synthetically using LSTMs with a speed range of $v_{\text{min}} = 0$ km/h and $v_{\text{max}} = 130$ km/h. For the discovery of DB with the proposed method, the parameters are set according to table III. For evaluation of

TABLE III: Parameter Values Vehicle Data

Parameter	Value
logarithmic base a	10
B	$[0, 5, 10, 17.5, 25, 35, 45, 55, 70]$

the data selection, the entire data set is repeated several times to simulate a progression from no prior knowledge to a known driving situation. The evaluation starts with an empty Behavior Forest, representing zero prior knowledge of the course. The criteria for data recording are:



- A leaf is created in the Behavior Forest, which indicates an unseen DB.
- A known DB is considered relevant if it has occurred less than five times.

During the initial run, 697 DB were detected, comprising 8,89 % of the complete data set. However, by the fifth run, all data was discarded, as indicated in Table IV. Consequently, the amount of recorded data decreases progressively, which indicates a learning process of the discovered DB inside the data set. Overall, 3,99 % of the data are recorded with 1528

TABLE IV: Recording of Vehicle Data

	Run 1	Run 2	Run 3	Run 4	Run 5
Recorded DB	697	383	277	171	0
Recording/Run	8,89 %	5,02 %	3,78 %	2,3 %	0 %
Total Recording	8,89 %	6,96 %	5,90 %	4,99 %	3,99 %

DB detections. By discarding 96,01 % of the data stream, the recorded data needs evaluation to determine if they represent the desired DB data. Therefore, the variance of the recorded data is computed and compared against the variance of a sliding window across the data set with 50 % overlap. The window length is set to the mean of all discovered DB, as depicted in Fig. 6. It is evident that the selected recorded data represent time series with high variance, indicating a more dynamic movement. Additionally, six of the 5973 rides are shown in Fig. 7 with the recorded data, in which the detected

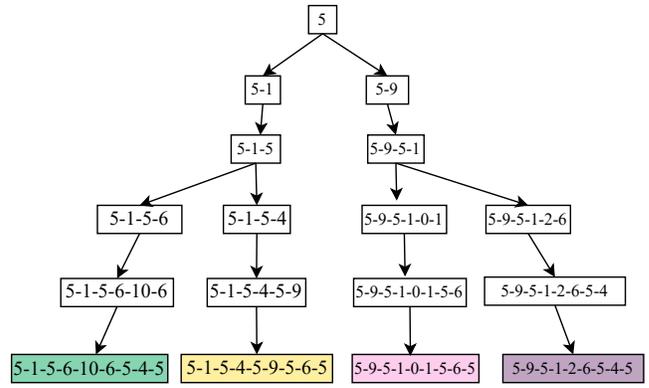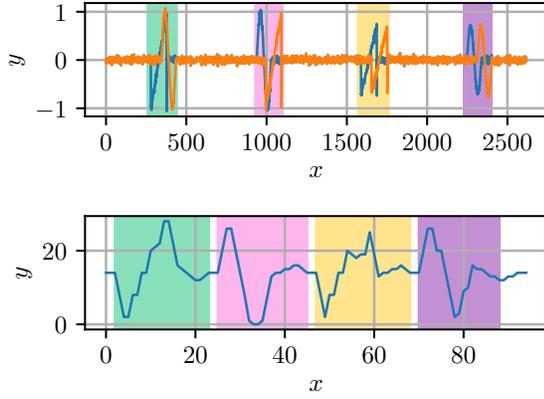

(a) (b)

Fig. 4: Visualization of the two-dimensional synthetic time series in (a, top), in which signal one is orange — and signal two is blue —. An extract of the Behavior Forest (b) represents four distinct patterns as a colored leaves. These colored leaves are highlighted according to the pattern in the original time series (a, top), and in the preprocessed symbolic sequence (a, bottom) which is the Behavior Forest algorithm input.

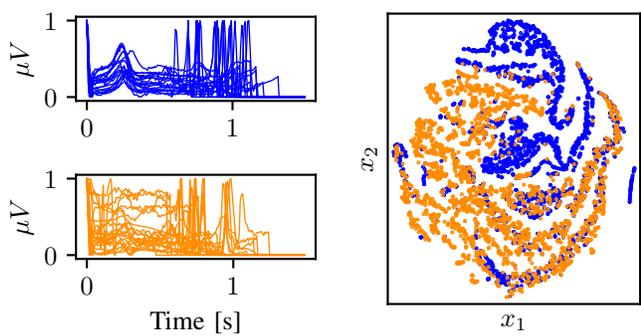


Fig. 5: Subset of normal —/• and abnormal —/• ECG time signals (left). Visualizing the features of found patterns (mean, variance, skew, kurtosis, minimum, maximum, median, 25th, and 75th percentiles) in a two-dimensional plane using the t-SNE algorithm (right).

DB are marked in green. It can be seen that both dynamic and variable length DB were recorded, which underlines the performance of the proposed method.

C. Discussion and Limitations

Besides the effectiveness of the proposed method, two other aspects need to be discussed. First, the criteria for relevant data is set to a threshold of five occurrences in the application of data selection. For real-world applications, more advanced criteria should be considered. Second, the proposed method utilizes two hyperparameters: discretization breakpoints and logarithmic reduction basis, which must be set. Expert knowledge is necessary to set these hyperparameters properly. However, in applications like DB detection, where ranges of the dynamical system are known, determining suitable breakpoints β_i and temporal scaling

becomes feasible. Therefore, the limitation of this method lies only in applications where no prior information about the data is available.

V. CONCLUSION & OUTLOOK

Compared to state-of-the-art methods for discovering Dynamic Behavior (DB) in time series data, the proposed approach excels in several aspects. It identifies dynamic behavior of variable length without pre-training, operating in a continual learning manner. Real-time data preprocessing and bottom-up construction of a Behavior Forest provides an analytical representation of DB, enabling effective data recording based on data prevalence as a relevance criterion. Numerical examples across a synthetic and an ECG data set showcase the method’s efficacy in discovering patterns. In a vehicle data set, 822 distinct DB were identified, reducing data by 96,01 %, while relevant DB remain included. Future research into selecting vehicle data based on multivariate time series using Behavior Forests and sharing them for faster trigger convergence shows promise for fleet coverage analysis, potentially integrating additional sensor modalities such as camera data analysis to enhance analysis capabilities.

VI. ACKNOWLEDGMENT

This work results from the just better DATA (jbDATA) project supported by the German Federal Ministry for Eco-

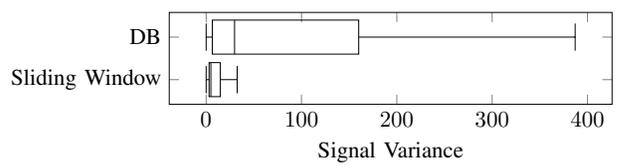


Fig. 6: Comparison of the signal variance of the recorded DB data and sliding window across the whole data set.

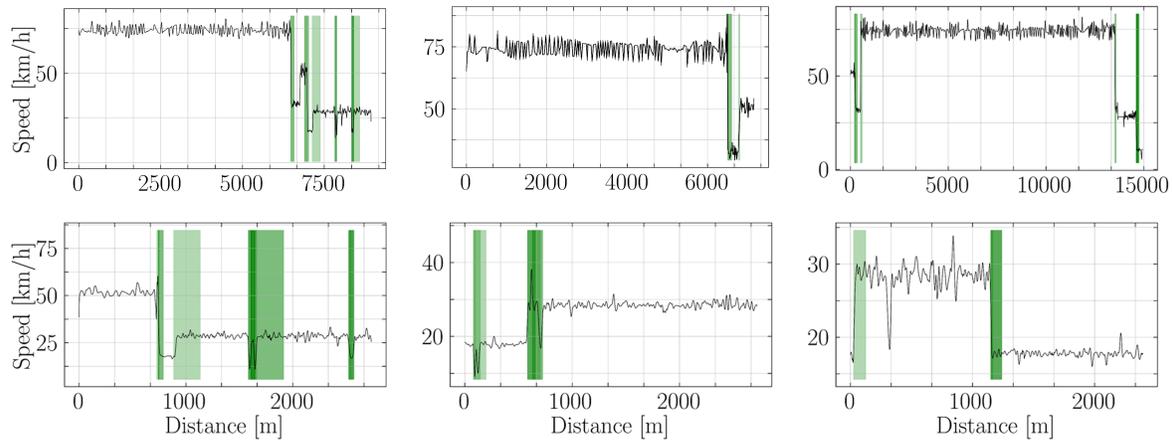


Fig. 7: Six different driving speed signals from the data set, with the variable-length DB highlighted in green, recorded using the Behavior Forest method. Darker green highlights indicates a detected sub-pattern within a pattern.

conomic Affairs and Climate Action of Germany (BMWK) and the European Union, grant number 19A23003H.

REFERENCES

- [1] J. Bach, J. Langner, S. Otten, M. Holzäpfel, and E. Sax, "Data-driven development, a complementing approach for automotive systems engineering," in *2017 IEEE International Systems Engineering Symposium (ISSE)*, 2017.
- [2] A. R. Patel and P. Liggesmeyer, "Machine learning based dynamic risk assessment for autonomous vehicles," in *2021 International Symposium on Computer Science and Intelligent Controls (ISCSIC)*, 2021.
- [3] J. Van Brummelen, M. O'Brien, D. Gruyer, and H. Najjaran, "Autonomous vehicle perception: The technology of today and tomorrow," *Transportation Research Part C: Emerging Technologies*, 2018.
- [4] X. Zhang, J. Tao, K. Tan, M. Törngren, J. M. G. Sánchez, M. R. Ramli, X. Tao, M. Gyllenhammar, F. Wotawa, N. Mohan, M. Nica, and H. Felbinger, "Finding critical scenarios for automated driving systems: A systematic mapping study," *IEEE Trans. Softw. Eng.*, 2023.
- [5] C. Dickert, "Network Overload? Adding Up the Data Produced By Connected Cars," Mar. 2023. [Online]. Available: <https://www.visualcapitalist.com/network-overload/>
- [6] "An exabyte of disk storage at CERN," Mar. 2024. [Online]. Available: [http://home.web.cern.ch/news/news/computing/exabyte-disk-storage-cern](http://dx.doi.org/10.1007/s41781-018-0018-8)
- [7] M. Harris, "The radical scope of tesla's data hoard: Every tesla is providing reams of sensitive data about its driver's life," *IEEE Spectrum*, 2022.
- [8] J. Hofmockel and E. Sax, *Anomalieerkennung in Kommunikationsdaten zur Datenselektion im Fahrzeug*. Karlsruhe Institut für Technologie (KIT), 2019.
- [9] V. D. Elvira *et al.*, "The future of high energy physics software and computing," *arXiv preprint arXiv:2210.05822*, 2022.
- [10] J. Albrecht *et al.*, "A roadmap for hep software and computing ramp;d for the 2020s," *Computing and Software for Big Science*, 2019. [Online]. Available: <https://dx.doi.org/10.1007/s41781-018-0018-8>
- [11] Y. Tanaka, K. Iwamoto, and K. Uehara, "Discovery of time-series motif from multidimensional data based on mdl principle," 2005.
- [12] J. Paefgen, F. Kehr, Y. Zhai, and F. Michahelles, "Driving behavior analysis with smartphones: insights from a controlled field study," in *Proceedings of the 11th International Conference on Mobile and Ubiquitous Multimedia*. Association for Computing Machinery, 2012.
- [13] D. A. Johnson and M. M. Trivedi, "Driving style recognition using a smartphone as a sensor platform," in *2011 14th International IEEE Conference on Intelligent Transportation Systems (ITSC)*, 2011.
- [14] J. Xie, A. R. Hilal, and D. Kulić, "Driving maneuver classification: A comparison of feature extraction methods," *IEEE Sensors Journal*, 2018.
- [15] J. Langner, J. Bach, L. Ries, S. Otten, M. Holzäpfel, and E. Sax, "Estimating the uniqueness of test scenarios derived from recorded real-world-driving-data using autoencoders," in *2018 IEEE Intelligent Vehicles Symposium (IV)*, 2018.
- [16] K. Saleh, M. Hossny, and S. Nahavandi, "Driving behavior classification based on sensor data fusion using lstm recurrent neural networks," in *2017 IEEE 20th International Conference on Intelligent Transportation Systems (ITSC)*, 2017.
- [17] E. Keogh, J. Lin, and W. Truppel, "Clustering of time series subsequences is meaningless: implications for previous and future research," in *Third IEEE International Conference on Data Mining*, 2003.
- [18] X. Zhang, R. R. Chowdhury, R. K. Gupta, and J. Shang, "Large language models for time series: A survey," 2024.
- [19] Q. Wen, T. Zhou, C. Zhang, W. Chen, Z. Ma, J. Yan, and L. Sun, "Transformers in time series: A survey," 2023.
- [20] A. Zeng, M. Chen, L. Zhang, and Q. Xu, "Are transformers effective for time series forecasting?" 2022.
- [21] Y. Luo, Z. Yang, F. Meng, Y. Li, J. Zhou, and Y. Zhang, "An empirical study of catastrophic forgetting in large language models during continual fine-tuning," 2023.
- [22] H. El, A. Mohamed, and H. Fawzy, "Time series forecasting using tree based methods," *Journal of Statistics Applications & Probability*, 2021.
- [23] J. Hofmockel. and E. Sax., "Isolation forest for anomaly detection in raw vehicle sensor data," in *Proceedings of the 4th International Conference on Vehicle Technology and Intelligent Transport Systems - VEHITS*, 2018.
- [24] F. Mörchen, *Time series knowledge mining*. Görlich und Weiershäuser, 2006.
- [25] F. K. D. Noering, "Unsupervised pattern discovery in automotive time series," 2022.
- [26] Y. Li, J. Lin, and T. Oates, *Visualizing Variable-Length Time Series Motifs*.
- [27] F. Noering, K. Jonas, and F. Klawonn, "Improving discretization based pattern discovery for multivariate time series by additional preprocessing," *Intelligent Data Analysis*, vol. 25, pp. 1051–1072, 09 2021.
- [28] J. Lin, E. Keogh, L. Wei, and S. Lonardi, "Experiencing sax: A novel symbolic representation of time series," *Data Min. Knowl. Discov.*, 2007.
- [29] P. Petersen., H. Stage., P. Reis., J. Rauch., and E. Sax., "Comparison of dimension reduction methods for multivariate time series pattern recognition," in *Proceedings of the 13th International Conference on Pattern Recognition Applications and Methods - ICPRAM*, 2024.
- [30] G. B. Moody and R. G. Mark, "MIT-BIH Arrhythmia Database," 1992. [Online]. Available: <https://physionet.org/content/mitdb/>
- [31] J. Vraný, M. Krepelka, R. Srb, J. Hybs, R. Janda, and R. Čih, "Vehicle speed dataset," 2023. [Online]. Available: <https://dx.doi.org/10.21227/n1z9-e630>