Black Big Boxes: Do Language Models Hide a Theory of Adjective Order?

Jaap Jumelet¹ Lisa Bylinina²

Willem Zuidema¹

Jakub Szymanik³

³CIMeC

¹ILLC ²Center for Language and Cognition

University of Amsterdam University of Groningen University of Trento

jumeletjaap@gmail.com e.g.bylinina@rug.nl

w.h.zuidema@uva.nl jakub.szymanik@gmail.com

Abstract

In English and other languages, multiple adjectives in a complex noun phrase show intricate ordering patterns that have been a target of much linguistic theory. These patterns offer an opportunity to assess the ability of language models (LMs) to learn subtle rules of language involving factors that cross the traditional divisions of syntax, semantics, and pragmatics. We review existing hypotheses designed to explain Adjective Order Preferences (AOPs) in humans and develop a setup to study AOPs in LMs: we present a reusable corpus of adjective pairs and define AOP measures for LMs. With these tools, we study a series of LMs across intermediate checkpoints during training. We find that all models' predictions are much closer to human AOPs than predictions generated by factors identified in theoretical linguistics. At the same time, we demonstrate that the observed AOPs in LMs are strongly correlated with the frequency of the adjective pairs in the training data and report limited generalization to unseen combinations. This highlights the difficulty in establishing the link between LM performance and linguistic theory. We therefore conclude with a road map for future studies our results set the stage for, and a discussion of key questions about the nature of knowledge in LMs and their ability to generalize beyond the training sets.¹

1 Introduction

Linguistic capabilities of language models (LMs) have been subject to a lot of research and benchmarking (e.g., Marvin and Linzen 2018; Hu et al. 2020; Gauthier et al. 2020). While LMs show impressive fluency in language generation and often

Adjective Order Frequency vs. Adjective Order Preference




Figure 1: We connect the **adjective order preferences** (AOP- Δ , §3.1) of language models (here Pythia-12b) to the **adjective order frequencies** of the corpus they have been trained on (The Pile). We highlight various regions of interest: adjective pairs for which both orders are rare and that require the LM to generalize from other adjective orders; pairs for which one particular order is far more common that can be resolved from frequency alone; and orders with high variance that rely more strongly on **context**.

score high on linguistic benchmarks, the mechanisms underlying their linguistic proficiency are hard to uncover. To what extent do LMs generalize beyond mere memorisation of training data? Do they acquire abstract linguistic rules and constraints that don't boil down to basic cooccurrence patterns? How similar are linguistic generalizations in LMs to those that humans have?

These questions have been asked and partially answered for different constructions and grammatical phenomena. The focus of such studies has mostly been on strict and binary grammatical constraints, where a violation results in an ungrammatical sequence.

There has been less attention to how 'softer' linguistic constraints are captured by LMs. Such constraints can give rise to slight and defeasible

¹All code and data, including CAP, can be found here: github.com/jumelet/lm-adjorder

preferences rather than sharp acceptability contrasts. One example is adjective order in noun phrases where multiple adjectives modify one noun, e.g. *large wooden box*. Changing the order of adjectives does not necessarily lead to unacceptability, but can result in a slight decrease in naturalness (Dyer et al., 2023) ('>' marks preference):

large wooden box > wooden large box

Moreover, these preferences are contextdependent: often, a context can be found where preferences switch – for instance, when a contrasting property is introduced (Teodorescu, 2006).

Take a wooden large box, not a plastic one.

> ... large wooden box ...

These adjective order preferences (**AOP**s) have been subject to a lot of interest in theoretical linguistics, but proved difficult to capture due to their graded and context-sensitive nature (see Levshina et al. 2023 for arguments in favor of a systematically gradient approach to word order). A number of factors ranging from superficial properties like adjective length to semantic and pragmatic properties to information-theoretic properties of a sentence have been identified as predictors for AOP. But even with all those factors combined together, a large portion of AOPs remains unaccounted for: the best model combining different predictors explains only 71% of human AOPs (Dyer et al., 2023).

Adjective order offers an opportunity to assess the ability of LMs to learn subtle linguistic preferences involving implicit, hard-to-identify factors. This paper is the first study of AOP in LMs. We put together metrics and data, and conduct a series of experiments that explore AOP in LMs, its relation to properties of training data and the extent to which LMs learn more abstract principles behind AOP, generalizing to unseen items. The contributions of our paper are the following:

- We introduce a reusable Corpus of Adjective Pairs (CAP.) and a series of metrics to measure AOP in LMs (§3).
- We show that LMs are impressively good predictors of naturally occurring adjective orders, with AOP prediction accuracy as high as 94.1%. We identify three stages of AOP acquisition in LMs that lead to their performance at the end of the training (§4).

- We demonstrate that linguistic and cognitive predictors only partly account for LM performance in AOP prediction. We identify the gap between linguistic theory and LM performance in the AOP domain that needs to be explained (§5).
- To pinpoint the role of training data cooccurrence statistics in LM AOP predictions, we study *the Pile* (Gao et al., 2020) – a largescale corpus that Pythia models were trained on. Simple bigram statistics turn out to be a powerful AOP predictor for naturally occurring adjective orders on their own, at 90.3% accuracy (§6). Figure 1 summarizes a close relation between count statistics and LM predictions, questioning whether LM predictions are significantly driven by anything beyond *n*-gram counts.
- At the same time, we find two ways in which LMs go beyond simple collocational statistics:
 1) We test LM predictions for adjectival combinations not seen *during* training (a challenging setup due to the large size of the Pile; we overcome this obstacle by turning to intermediate checkpoints and corresponding portions of training data). We find some—but limited—generalization to new data (§6); 2) We study the effect of context on AOP. We conclude that the sentence helps LMs make better AOP predictions compared to noun phrase with adjectives taken in isolation or in a set of random contexts, which indicates that AOP mechanisms in LMs go beyond *n*-gram counts in training data (§7).

2 Background

2.1 Adjective Order Theory

The mechanisms that drive adjective order have been a topic of research for decades (see Dyer et al. 2023 for overview). Theories have been proposed as far back as the 19th century (Sweet, 1898), and refinements to the theory are being made to this day. Early theories proposed lexical hierarchies that described adjective order based on abstract classes such as *dimension* or *color* (Dixon, 1982; Sproat and Shih, 1991; Cinque, 1996; Scott, 2002). Adjectives were expected to be ordered based on the class they belong to: e.g. dimension goes in front of color, which gives rise to the order of a phrase like *the big red house*. While these hierarchies are powerful predictors of adjective order, they are not really explanatory: the question remains how such hierarchies are formed by the underlying properties of adjectives. Furthermore, corpus studies have shown that many counterexamples against various versions of these hierarchies can be found (Truswell, 2009), demonstrating the need for a more fine-grained analysis (Trotzke and Wittenberg, 2019).

One line of work looks for semantic driving forces of AOP, placing emphasis on adjectival properties like *intersectivity* and *subsectivity* (Truswell, 2009) or identifying conditions under which adjective order constraints can be lifted, such as *focus* (Vendler, 1968; Teodorescu, 2006).

Other approaches take a broader perspective, leveraging insights from quantitative linguistics, distributional semantics and information theory, and connecting this to psycholinguistic theories of human language processing. Early analyses focus on properties such as length-shorter adjectives tend to precede longer ones (Behaghel, 1930)—and *frequency*: more frequent adjectives tend to appear earlier (Martin, 1969; Nev, 1981; Wulff, 2003). This follows from a broader theory of language production, according to which more accessible and familiar material is produced first (Bock, 1982; Ferreira and Dell, 2000) and is comprehended faster (Arnon and Snider, 2010). Collocational patterns of adjectives and nouns have been shown to be highly predictive of adjective order: adjectives most closely connected to the noun in term of co-occurrence appear closer to it (Sweet, 1898; Byrne, 1979; Lapata et al., 1999). This intuition has been operationalized through pointwise mutual information (PMI) (Hahn et al., 2018; Futrell et al., 2020a), which aligns with more general theories of word order arguing that distance between words that closely predict each other tends to be small (Gibson, 1998; Futrell et al., 2020b).

Predictors themselves can be complex, based on collocational or semantic factors or combinations thereof: *modification strength* of adjectives, for instance, is a predictor based on adjectival compositional potential (Vecchi et al., 2013, 2017); other predictors proposed in the literature include *information gain* that an adjective provides for a noun (Dyer et al., 2021), and *subjectivity* of adjectives, with more subjective adjectives occurring first (Hill, 2012; Scontras et al., 2017, 2019;

Franke et al., 2019). Although the majority of these approaches focus on English, various crosslingual accounts have demonstrated their universal nature: adjective order tends to be driven by the same principles across languages (Wulff and Gries, 2015; Leung et al., 2020; Scontras, 2023; Dyer et al., 2023).

Finally, various papers highlight the need for a multi-factorial account of adjective order: it is unlikely adjective order is driven by a single factor and therefore it's the result of various competing pressures (Wulff, 2003; Trotzke and Wittenberg, 2019; Dyer et al., 2023). Relatedly, a recent position paper (Levshina et al., 2023) argues for a fundamentally gradient theory of word order that would be able to capture its hybrid and multifaceted nature.

In our work, we compare LM predictions to various adjective order theories. Additionally, we examine the utility of LMs for investigating the role that *context* plays on word order: since almost all theories focus on adjectives in isolation, LMs may provide a fruitful starting point for shaping a contextual account of adjective order.

2.2 Word Order in Language Models

With the increasing capabilities of language models, their linguistic abilities have been under much scrutiny in recent years. A wide range of procedures have been introduced to uncover their understanding of grammaticality and notions of linguistic structure (Linzen and Baroni, 2021). Grammaticality is often assessed using the LM's probability predictions of minimal pairs of grammatical and ungrammatical sentences (Marvin and Linzen, 2018; Warstadt et al., 2020; Gauthier et al., 2020); phenomena that have been examined this way include number agreement (Linzen et al., 2016; Gulordava et al., 2018), negative polarity items (Jumelet and Hupkes, 2018; Bylinina and Tikhonov, 2022), and filler-gap dependencies (Wilcox et al., 2018; Suijkerbuijk et al., 2023). To our knowledge, no prior work has focused on adjective order in particular: the closest related phenomenon to this would be Misra and Mahowald (2024)'s analysis of adjective-numeral constructions in LMs.

The importance of word order in LMs has been a topic of debate, with various works claiming that downstream performance is not affected by scrambled inputs (Malkin et al., 2021; Sinha et al., 2021), although it has been shown that LMs are able to retain a notion of word order through their positional embeddings (Abdou et al., 2022). It has been argued that LMs acquire an abstract notion of word order that goes beyond mere n-gram co-occurrence statistics (Futrell and Levy, 2019; Kuribayashi et al., 2020; Merrill et al., 2024), a claim that we in this paper assess for large-scale LMs in the context of adjective order. Finally, numerous works have investigated the trade-off between memorization and generalization in LMs: it has been shown that larger LMs are able to memorize entire passages from the training data (Biderman et al., 2023a; Lesci et al., 2024; Prashanth et al., 2024), but generalization patterns for grammatical phenomena have also been shown to follow human-like generalization (Dankers et al., 2021; Hupkes et al., 2023; Alhama et al., 2023).

3 Methods

3.1 Measuring Word Order Preference

We measure a language model's AOP by comparing its log probability of the *natural* order (the order in which a pair of adjectives appears in the sentence from our corpus) with a *swapped* order. In our experiments we measure AOP in two settings, either by considering the phrase in *isolation*², or by taking the *context* of the phrase into account. For a double adjective phrase A_1A_2N that is extracted from a corpus with context C, we compute a model's preferred order as follows:

$$AOP-\Delta(A_1A_2N) = P(A_1A_2N) - P(A_2A_1N)$$
(1)
$$AOP-\Delta(A_1A_2N|C) = P(A_1A_2N|C) - P(A_2A_1N|C)$$
(2)

All probabilities are in log space. The AOP- Δ metric represents the *magnitude* of a models' preference. In our experiments we also consider an accuracy metric based on AOP- Δ , expressed as the number of items for which AOP- Δ is positive:

$$AOP-\%(\mathcal{C}) = \frac{\{\phi \in \mathcal{C} \mid AOP-\Delta(\phi) > 0\}}{|\mathcal{C}|} \quad (3)$$

Where C is an evaluation corpus of double adjective phrases, as described in the following section. Misra and Mahowald (2024) consider a similar metric for measuring properties of word order

preferences in LMs, based on corrupted word orders.

3.2 CAP Corpus of Adjective Pairs

To evaluate adjective order preferences across a wide range of adjective pairs and contexts, we extract a novel set of double adjective phrases from a corpus. Earlier work has extracted adjective pairs from the Universal Dependencies treebank (Dyer et al., 2023), but in order to collect a larger range of adjective pairs we collect novel constructions ourselves. We release this evaluation corpus under the name of CAP. Corpus of Adjective Pairs.

Procedure As a starting point, we use the BabyLM 10M corpus (Warstadt et al., 2023), which consists of a mix of various English language sources including Wikipedia articles, books, and transcribed dialogue data. From this corpus we make a pre-selection of sentences containing multiple adjectives by filtering all sentences containing at least two adjectives, based on a list of 11,000 adjectives released by Futrell et al. (2020a). Next, we generate dependency parse trees for each sentence using spaCy and select all sentences in which a NOUN contains two AMOD relations to an ADJ that is part of the adjective list. This procedure results in 2678 double adjective sentences. We provide a sample of CAP sentences in Appendix A.1.

From these sentences we also generated corrupted sentences in which the adjective order is swapped. In case the first adjective is preceded by an indefinite article we ensure the article is changed accordingly to satisfy morphophonological constraints. Here is an example of an extracted phrase and its swapped counterpart:

- + Peter received **a** full athletic scholarship [..]
- Peter received an athletic full scholarship [..]

3.3 Models

For our experiments we make use of the Pythia suite of language models (Biderman et al., 2023b). The models are released in increasing sizes (from 70M to 12B parameters) and all trained on The Pile corpus (Gao et al., 2020). Importantly, all intermediate checkpoints are available for these models in logarithmic intervals, which allows us to investigate the learning dynamics at a fine-grained level.

²We compute these isolated probabilities by prepending the noun phrase with '*The*'.

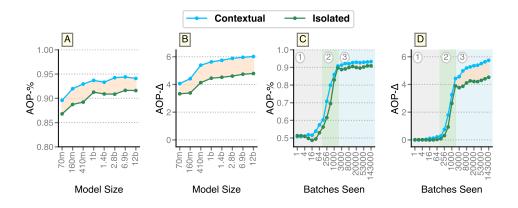


Figure 2: A–B: AOP-% and AOP- Δ scores for Pythia models of increasing size. C–D: AOP-% and AOP- Δ scores for Pythia-1.4b during training. We highlight the three learning phases: 1) initialization, 2) acquisition, and 3) consolidation.

4 Experiment 1: AOP in LLMs

In this first set of experiments we evaluate a series of pretrained LLMs on CAP using the AOP- Δ and AOP-% metrics of §3.1.

Model Size For the eight Pythia models of increasing size we plot the AOP-% performance in Figure 2A, and the AOP- Δ performance in Figure 2B. It can be seen that performance improves with model size: contextual AOP-% performance increases from 89.6% for the 70m model to 94.1% for the 12b model. AOP-% does not increase consistently with size, however, from the 1b model onward it reaches a plateau. Interestingly, AOP- Δ *does* increase consistently with size: this shows that larger models become more *certain* about their AOP judgment.

Learning Dynamics To investigate how AOP develops during training, we compute scores for the 1.4b model on all its intermediate checkpoints in Figure 2C and 2D. From these plots we can identify three distinct learning phases: 1) an initialization phase in which AOP judgments have not been formed yet, 2) an acquisition phase in which AOP judgments are rapidly being formed, and 3) a consolidation phase in which AOP judgments remain stable and only the role of context is being reinforced. A similar three-phase learning dynamic has been observed by Van Der Wal et al. (2022) and Chen et al. (2023). Note that the consolidation phase is reached relatively quickly: after around 2000 batches, which is ~1.4% of the total model training. This demonstrates that adjective order is a relatively low-level linguistic feature that is acquired early during training. Fur-




Figure 3: Average token probabilities for the original and swapped adjective orders on Pythia-12b, without and with sentence context (A–B), as well as the tokenlevel differences (C) that correspond to the difference between the curves in (A) and (B).

thermore, it highlights the importance of investigating learning dynamics at a logarithmic scale: with linear checkpoints we would not obtain this fine-grained level of precision.

Localizing AOP In our experiments so far we have measured AOP based on the probabilities of the full adjective-noun triplet. Preference order can arise at different locations of the phrase. The most natural location for this is the probability of the second adjective after having seen the first adjective, but context could also play a role for preferring which adjective comes at the first position, and a noun could be more probable after having seen two adjectives in their natural order.

In Figure 3 we plot the average token probabilities on CAP for Pythia-12b, in isolation and contextual. We observe that, as expected, the largest probability difference occurs at the position of the second adjective: the model is highly surprised

Metric	AOP-%	$\rho(\text{AOP-}\Delta(\bullet))$	$\rho(\text{AOP-}\Delta(\bullet c))$
AOP- $\Delta(\bullet)$	91.6	-	0.71
AOP- $\Delta(\bullet c)$	94.1	0.71	-
A	49.6	0.16	0.10
PMI(A;N)	62.4	0.27	0.20
Subj(A)	69.3	0.07	0.08
$\%(A_1)$	60.5	0.21	0.18
$\%(A_1A_2)$	90.3	0.58	0.53
$\%(A_1A_2N)$	87.6	0.54	0.53

Table 1: Predictive accuracy of adjective order on CAP for various metrics: AOP- Δ for Pythia-12b, 3 cognitive predictors (§5), and relative n-gram counts from The Pile (§6). The highest accuracy for each group is **bolded**. For each metric we provide the Spearman correlations with respect to the AOP- Δ scores of Pythia-12b.

by encountering the second swapped adjective after having seen the first. The noun probability is strongly affected by swapping adjective order as well: a noun is more likely to follow adjectives in natural order. Furthermore, we can see that context plays a role for the probability of the first adjective already: whereas in the isolated case both adjectives in first position receive equal probability, order preference already manifests here when the model has access to context.

Conclusion The Pythia LMs acquire a strong sense of adjective order that is learned early in training at around 1.5% of the total amount of training. We showed that sentence context has a positive effect on AOP, bumping up AOP-% from 91% to around 94%. By localizing the AOP scores on the token-level we show how these order preferences manifest at different points in a phrase. In the next experiments we will investigate these results in more detail, connecting LM AOP to cognitive predictors and training data statistics.

5 Experiment 2: Cognitive Predictors

As discussed in §2.1, a range of cognitively plausible predictors have been proposed to explain adjective order. In the previous section we have shown that LMs are highly capable of predicting adjective order, and in this section we investigate how their predictions are related to various theories on adjective order. We evaluate the performance of three cognitive predictors— Length, PMI, and Subjectivity— and correlate them against AOP- Δ scores across training.

5.1 Cognitive Predictors

For each predictor we compute its score for a particular adjective pair. An adjective order predictor f returns a graded score for adjective order, akin to our formulation of AOP- Δ .

Length For Length—which hypothesizes that the first adjective is the shortest—the score for adjectives A_1 and A_2 is expressed as

$$f(A_1, A_2) = |A_2| - |A_1|$$

We also considered expressing length as the number of tokenizer subwords, since this is the only notion of length LMs have access to, but found that this led to similar results as string length.

PMI We follow the procedure of Futrell et al. (2020a) for computing PMI, which is based on the distribution over adjective relations in dependency parse trees. It is defined as

$$PMI(A; N) = P(A, N)/(P(A) \cdot P(N))$$

P(A, N) is computed as the normalized number of occurrences of adjective A and noun N in amod relation. P(A) and P(N) are obtained by marginalizing over this joint distribution. PMI hypothesizes that adjectives closer to the noun have a higher PMI:

$$f(\mathbf{A}_1, \mathbf{A}_2, \mathbf{N}) = \mathbf{PMI}(\mathbf{A}_2; \mathbf{N}) - \mathbf{PMI}(\mathbf{A}_1; \mathbf{N})$$

Subjectivity We leverage the 450 subjectivity ratings provided by Dyer et al. (2023), to compute subjectivity scores for the subset of adjective pairs that contain a rating. This procedure retains 37.5% of the adjective pairs in CAP (1005 items). Subjectivity as predictor hypothesizes that more subjective adjectives occur first (Scontras et al., 2017):

$$f(A_1, A_2) = \operatorname{Subj}(A_1) - \operatorname{Subj}(A_2)$$

5.2 Predictive Accuracy

We present the predictive accuracy of each predictor in Table 1. Subjectivity is the strongest predictor with 69.3% accuracy, followed by PMI (62.4%) and Length (49.6%). While Subjectivity reaches the highest accuracy, its correlation with the LM's AOP- Δ scores is surprisingly the lowest of the three. We plot these correlations over time in Appendix A.2: all three correlations develop in







Figure 4: Correlations during training of LM probabilities for single adjectives, adjective pairs, and adjectivenoun triplets with respect to their frequency in The Pile.

the acquisition phase and remain stable in the consolidation phase.

We also compute the overlap between these three predictors on the 1005 items for which we have subjectivity scores:



The first Venn diagram makes clear that the cognitive predictors have low agreement: only 213 orders are predicted correctly by all three. The broad coverage (93.1%) of the union, however, shows that most of the CAP items are explained by at least one of these predictors. In the four diagrams on the right we show the overlap of the predictors with the AOP- Δ scores of Pythia-12b. All three predictors and their intersection are almost fully subsumed by the AOP- Δ predictions. This demonstrates that AOP- Δ 's unique contribution goes significantly above that of the ensemble of the cognitive factors, raising the question whether LMs 'hide' a meaningful linguistic theory that extends beyond established factors.

6 Experiment 3: Is AOP Driven by Data Statistics?

In order to truly understand what LMs base their adjective order preferences on, we need to get a better insight into how double adjective constructions are distributed in the training data. The way that contemporary LMs are trained nowadays makes this challenging: many models are released without open access to their training data, and the scale of training corpora that *are* available poses a challenge for targeted analysis.

6.1 WIMBD

To overcome this, we make use of the WIMBD API (*What's In My Big Data*, Elazar et al., 2023), which provides a fully indexed search engine over various large-scale corpora such as The Pile, on which the Pythia models have been trained. WIMBD makes it possible to retrieve the exact *n*gram statistics that LMs have been trained on, and as such provides a detailed insight into the collocational factors that play a direct role in shaping AOP.

We retrieve the uni-, bi- and trigram counts for all the adjective-noun triplets in CAP for The Pile, as well as for the swapped orders. To provide an analogue to AOP- Δ , we express the n-gram counts as log count differences. We express these relative n-gram counts as

$$\%(A_1A_2N) = \log \#(A_1A_2N) - \log \#(A_2A_1N)$$

with similar formulations for adjective bigrams $(\%(A_1A_2))$ and unigrams $(\%(A_1))$.

Predictive Accuracy We present the predictive accuracy of these relative n-gram occurrences in $%(A_1)$ predicts adjective order with Table 1. 60.5%, which provides weak evidence that more frequent adjectives tend to occur first (Martin, 1969; Trotzke and Wittenberg, 2019). $%(A_1A_2)$ is the strongest predictor of adjective order-except for the LMs-at 90.3%. This shows that a large majority of the items in CAP can be resolved based on bigram statistics alone, which is leveraged by the LMs during training. However, ngram collocations alone do not fully explain LM performance: a large amount of trigrams are not part of the Pile and performance for $\%(A_1A_2N)$ drops to 87.6%.

Correlations To investigate how n-gram statistics play a role in the formation of AOP- Δ during training, we compute the Spearman correlation between various log-transformed n-gram counts and a LM's AOP- Δ on intermediate checkpoints. We plot this in Figure 4, for contextual and isolated AOP- Δ . The trends we observe here align closely with the three learning phases that we outlined in §4. The initialization phase (1) is marked by a




Figure 5: The contextual AOP-% performance for Pythia-70m and 1.4b across training, split out for items that have been seen 0, 1, 2 to 10, and more than 10 times at each specific checkpoint.

rapid acquisition of unigram and bigram statistics, that remain unaffected by context at this point. Then, at the start of the acquisition phase (2), in which AOP performance rapidly improves, the model starts to incorporate linguistic context in its uni- and bigram predictions. Finally, in the consolidation phase (3), trigram predictions start being affected by context as well, whereas unigram and bigram predictions remain relatively stable. The fully trained model strongly reflects these correlations to data statistics, which explains the strong relation we observed in Figure 1 between bigram frequencies and AOP- Δ .

6.2 Generalizing to Unseen Adjective Orders

Having access to the n-gram distribution a model was trained on allows us to investigate its performance on unseen adjective orders: is the model able to generalize from an abstract signal of adjective order to novel orders? However, due to the enormous size of The Pile (300B tokens) it turns out that number of unseen adjective pairs in CAP is too small to draw significant conclusions from (only 4 out 2678 pairs). This leaves us with two options: either we collect an additional sample of rare adjective pairs that are not part of the Pile, or we investigate the model at intermediate checkpoints where a greater amount of adjective pairs has not been encountered yet. An issue with collecting highly rare pairs is that their canonical order will be much harder to determine, for which we would require extensive human judgments on the most natural order. We therefore go for the second option, and set up a procedure to measure the data statistics during training.

Intermediate *n*-gram Counts Since WIMBD only provides *n*-gram statistics for The Pile as a whole, we need to collect the intermediate statis-

tics ourselves. Using the Pythia batch viewer (Biderman et al., 2023b) this becomes possible: our implementation is able to process the first 10% of The Pile (up to batch 14,000; 29.4B tokens) in around 3 hours. We collect the bi-gram counts of all adjective pairs in CAP on the batch level, allowing us to determine exactly when and how often a specific adjective pair has been seen by the model.

Unseen Adjective Pairs Based on these intermediate *n*-gram counts, we compute the AOP-% scores for various splits based on the number of times an adjective pair has been encountered. We focus on the cases where the swapped order has *never* been encountered: this allows us to isolate the moment a model encounters an adjective combination for the first time, and measure its 'zero-shot' performance on cases that are not already skewed towards to swapped order. For each model checkpoint we collect the *n*-gram counts at that particular point in training, and split the CAP items based on the number of times an A_1A_2 bigram has been seen. We provide the size of these splits across training in Appendix A.3.

We present the results for Pythia-70m and 1.4b in Figure 5. The performance on unseen pairs is remarkably high, reaching around 85% at the highest point for both models. Interestingly, the gap between unseen pairs and pairs seen once is far greater for the 1.4b model than the small 70m model. This shows that this larger model is able to acquire adjective order preference faster: a single exposition to an order immediately leads to an increase in AOP- Δ . We provide a more detailed item-level analysis for these items in Appendix A.4: while it is clear on the split level that a single occurrence improves AOP-%, we do not observe such a clear effect on the item level. Interestingly, as the number of unseen adjective pairs decreases, the performance on unseen pairs decreases as well. This shows that the predicting the order for the set of unseen pairs around batch 2,000 (6% of CAP) could be better inferred from a general signal of adjective order than the set at batch 14,000 (1.3% of CAP).

Conclusions The question we set out to answer in this set of experiments is whether AOPs are driven by data statistics. We approached this question both in relation to the n-gram distribution of the Pile and to the shifting n-gram distribu-




Figure 6: A: Item-level AOP- Δ scores with and without sentence-context for Pythia-12b. We provide a sample of sentences from each quadrant in Appendix A.1. B: The relative impact (*c*- Δ , Eq. 5) of an item's true context compared to an expectation over random contexts (Eq. 4).

tion across training. On the one hand, AOP is strongly driven by data statistics: we find a strong correlation between AOP- Δ and count-based AOP scores, which is also visualized in Figure 1. However, the relatively strong performance on the set of unseen adjective pairs during training indicates that LMs *are* able to infer order from a more general signal for adjective pairs it has not encountered before.

7 Experiment 4: The Role of Context

In §4 we established that LMs have a thorough grasp of adjective order that manifests itself early during training. We showed that having access to sentence context boosts performance, and we now investigate the role of context in more detail.

Contextual Improvements To gain a better insight how much items are impacted by context, we investigate AOP- Δ scores on an item-level with and without context. In Figure 6A, we plot the AOP- Δ scores in isolation against the contextual scores, and mark the four quadrants of items that result in a positive or negative score after adding context. In the majority of cases (89.4%), AOP- Δ is positive both with and without context: the model is able to determine adjective order based on the adjective-noun triplet alone. In 4.8% of the cases, however, adding context flips a negative AOP- Δ score to a positive one. Adding context has a boosting effect in general: in 65.1% of the cases, AOP- Δ is increased by adding context. We provide an overview of how these ratios are affected by model size in Appendix A.5: the number of cases where context improves AOP-% is actually larger for small models, but so is the number of cases where context worsens it.

Random Contexts The fact that context improves AOP- Δ raises the question what information in the context is responsible for this improvement. Does context contain relevant semantic information that plays a meaningful role for determining adjective order, or is any linguistic signal sufficient for this? To test this, we compute an expectation over AOP- Δ scores with *random contexts*, in which an adjective pair is preceded by a randomly sampled context from another adjective pair in CAP:

$$AOP-\Delta(A_1A_2N \mid \mathcal{C}) = \mathbb{E}_{c \sim \mathcal{C}} \left[AOP-\Delta(A_1A_2N \mid c) \right]$$
(4)

We compute the expectation over a random sample of 500 contexts, taken from CAP (C). To express the *relative* impact of adding context, we regress out a model's isolated AOP- Δ score by subtracting it from the contextual scores, which we call c- Δ :

$$c \cdot \Delta(\bullet|c) = AOP \cdot \Delta(\bullet|c) - AOP \cdot \Delta(\bullet)$$
 (5)

By computing this score for both the original context and for the expectation over random contexts we can quantify how much more important the original context is for AOP- Δ .

We plot the results for this experiment in Figure 6B. The true context improves isolated AOP- Δ in 65.1% of the cases, whereas random contexts lead to an improvement for only 39.6%. Furthermore, for 33.2% the true context leads to an improvement whereas random contexts don't: this subset can serve as a valuable starting point for investigating what properties of the context are important for adjective order.

Conclusions AOP in Pythia is contextsensitive. Providing the model with the sentence where the adjective combination appears increases the model's preference towards the target adjective order - both compared to the noun phrase in isolation and to the noun phrase in a random context. This result points in the direction of a more linguistically interesting mechanism for AOP than reliance on *n*-gram counts in training data alone. In particular, it shows a non-trivial interaction between the noun phrase and bigger context that turns out relevant for adjective placement. Establishing this opens up a possibility of studying the forms and types of this contextual interaction - a potential novel contribution to linguistic theories of adjective order.

We leave a systematic discovery of types of AOP context-dependence open for future work, and focus on a small-scale qualitative study for now. An inspection of context-sensitive cases from CAP reveals at least two ways in which context matters for AOP:

1. Structural parallelism The 'canonical' word order can be overridden when context contains a parallel noun phrase with adjectives in non-canonical order (the example shows contextual AOP according to Pythia-1.4b):

- a) The green big cars AOP- Δ 4.2
- b) *The story is not about* small red houses, *it's about big green cars* AOP- Δ 6.63

2. Property saliency The property salient in the context brings the adjective describing this property to the left edge of the noun phrase. If the sentence is about color, color adjective will come first; if the sentence is about size, it will bring size adjectives to the left (again, orders preferred by Pythia-1.4b):

- a) They asked my favourite color of houses and I said I liked **red small houses** AOP- Δ 0.32
- b) They asked my favourite size of houses and I said I liked small red houses AOP- Δ 1.61

These observations, of course, barely scratch the surface of possible contextual AOP interactions, but exemplify the power of LMs in incorporating contextual information into word order judgments.

8 Discussion

Abstract Notions of Adjective Order In this paper, we looked for AOP generalization in LMs. We were interested in whether abstract driving forces are at play in LM predictions beyond simple n-gram counts in training data. From our experiments we conclude that LMs show limited AOP generalization. Here, we want to highlight an important question that is rarely brought up in linguistic generalization discussions in NLP: How general and abstract is human linguistic behavior?

Linguistic literature suggests that human language production, including word order preferences, is guided by a mix of memorization and abstract principles (O'Donnell, 2015). Speakers tend to recycle more routinized and therefore more accessible combinations (MacDonald, 2013), guided by sequence frequencies in linguistic input that, in turn, form sequential associations that lead to production automatizing (Bybee, 2010; Diessel, 2019). This is compatible with a picture of language acquisition where knowledge of grammar is formed based on encountered exemplars of usage, which are stored in memory (Bybee, 2010) and serve as basis of generalization (Goldberg, 2006), but can also serve as patterns for routinized language production. So, human linguistic knowledge and language production is not totally abstract and is not based exclusively on generalization. This has been discussed across linguistic phenomena and has been suggested for word order (MacDonald, 2013; Levshina et al., 2023), although not for adjective order specifically.

When investigating generalization in LMs it is therefore important to make a distinction between the degree to which they create generalizations for a particular phenomenon, and how similar this generalization is to human behavior. In principle, one could even find cases of LM *overgeneralization*, if we are interested in how human-like LMs are linguistically. Importantly, in order to answer the question of human-like generalization, we would need data on the trade-off in memorization and generalization in human linguistic behavior. Such data does not exist yet for adjective order preferences.

LMs and Linguistic Theory Despite the impressive performance of LMs in recent years, their impact on theoretical linguistics has remained minimal (Baroni, 2022). There are various reasons for this. On the one hand, the cognitive plausibility of current LMs remains questionable, both in terms of the scale at which they are trained (Huebner et al., 2021; Warstadt et al., 2023) and their inductive biases that depend strongly on model architecture and are not reflective of human language processing (Wilson and Frank, 2023; Oh et al., 2024). On the other hand, their black box nature makes it highly challenging to extract linguistic patterns that can be tested against existing linguistic theories. While advancements in interpretability have made this latter point less problematic, the number of works explicitly connecting LM behavior to human language processing remains few and limited to simple syntactic phenomena (e.g., Lakretz et al., 2021).

In this paper, we explore the possibility that LMs may 'hide' a theory of adjective order, by en-

coding features that are not covered by linguistic theories on adjective order. We show that LMs far exceed the predictive power of prior *cognitive predictors*, which raises the question whether this increase stems from meaningful interpretable features. While a lot of the LM predictions can be explained by collocational patterns—and those statistics alone do not *explain* the distribution of adjective orders—we *do* find some generalization to unseen adjective combinations and a linguistically meaningful pattern in the way that context boosts AOP. We hope our work can serve as an inspiration for using LMs as tools for measuring context-dependence, which is hard to quantify with traditional quantitative methods.

Corpus Interventions Our analysis of AOP abstractness is constrained by the fixed training corpus the models are trained on. More detailed insights into this question can be obtained by a intervention-based approach, in which we filter out specific constructions from the training data (Jumelet et al., 2021; Misra and Mahowald, 2024; Patil et al., 2024). An interesting experiment in this direction would be to remove *all* sentences containing double adjectives from the training corpus, and measure whether the remaining distribution of adjectives contains a sufficient signal to acquire adjective order constraints.

Limitations

Our analysis only focuses on a single language model family (Pythia), in a a single language (English). To test the cross-lingual properties of adjective order, a wider range of language models should be examined. Our double adjective extraction method (§3.2) depends on the quality of the dependency parser that was used, and as such contains inaccuracies. Furthermore, a downside of using such a broad-coverage approach is that it becomes harder to draw targeted conclusions about the linguistic properties of cases on which the model fails or succeeds. Annotating cases containing properties that have been shown to be important for adjective order in the linguistics literature would provide deeper insights into model behavior on a linguistic level.

References

Mostafa Abdou, Vinit Ravishankar, Artur Kulmizev, and Anders Søgaard. 2022. Word order does matter and shuffled language models know it. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6907– 6919, Dublin, Ireland. Association for Computational Linguistics.

- Raquel G. Alhama, Ruthe Foushee, Daniel Byrne, Allyson Ettinger, Susan Goldin-Meadow, and Afra Alishahi. 2023. Linguistic productivity: the case of determiners in English. In Proceedings of the 13th International Joint Conference on Natural Language Processing and the 3rd Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics (Volume 1: Long Papers), pages 330–343, Nusa Dua, Bali. Association for Computational Linguistics.
- Inbal Arnon and Neal Snider. 2010. More than words: Frequency effects for multi-word phrases. *Journal of Memory and Language*, 62(1):67–82.
- Marco Baroni. 2022. On the proper role of linguistically-oriented deep net analysis in linguistic theorizing. In *Algebraic systems and the representation of linguistic knowledge*, pages 5–22. CRC Press.
- Otto Behaghel. 1930. Von deutscher Wortstellung. Zeitschrift für Deutschkunde, 44:81–89.
- Stella Biderman, USVSN PRASHANTH, Lintang Sutawika, Hailey Schoelkopf, Quentin Anthony, Shivanshu Purohit, and Edward Raff. 2023a. Emergent and predictable memorization in large language models. In Advances in Neural Information Processing Systems, volume 36, pages 28072–28090. Curran Associates, Inc.
- Stella Biderman, Hailey Schoelkopf, Quentin Anthony, Herbie Bradley, Kyle O'Brien, Eric Hallahan, Mohammad Aflah Khan, Shivanshu Purohit, USVSN Sai Prashanth, Edward Raff, Aviya Skowron, Lintang Sutawika, and Oskar van der Wal. 2023b. Pythia: A suite for analyzing large language models across training and scaling.
- Kathryn Bock. 1982. Toward a cognitive psychology of syntax: Information processing contributions to sentence formulation. *Psychological Review*, 89:1–47.

- Joan Bybee. 2010. Language, usage and cognition. Cambridge University Press.
- Lisa Bylinina and Alexey Tikhonov. 2022. Transformers in the loop: Polarity in neural models of language. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6601–6610, Dublin, Ireland. Association for Computational Linguistics.
- Brian Byrne. 1979. Rules of prenominal adjective order and the interpretation of "incompatible" adjective pairs. *Journal of Verbal Learning and Verbal Behavior*, 18(1):73–78.
- Angelica Chen, Ravid Schwartz-Ziv, Kyunghyun Cho, Matthew L. Leavitt, and Naomi Saphra. 2023. Sudden drops in the loss: Syntax acquisition, phase transitions, and simplicity bias in mlms. *CoRR*, abs/2309.07311.
- Guglielmo Cinque. 1996. On the evidence for partial N-movement in the Romance DP, Cambridge Studies in Linguistics. Cambridge University Press.
- Verna Dankers, Anna Langedijk, Kate McCurdy, Adina Williams, and Dieuwke Hupkes. 2021. Generalising to German plural noun classes, from the perspective of a recurrent neural network. In Proceedings of the 25th Conference on Computational Natural Language Learning, pages 94–108, Online. Association for Computational Linguistics.
- Holger Diessel. 2019. The grammar network: How linguistic structure is shaped by language use. Cambridge University Press.
- Robert M. W. Dixon. 1982. 'Where Have All the Adjectives Gone?' and other Essays in Semantics and Syntax. Mouton de Gruyter, Berlin.
- William Dyer, Richard Futrell, Zoey Liu, and Greg Scontras. 2021. Predicting cross-linguistic adjective order with information gain. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 957–967, Online. Association for Computational Linguistics.
- William Dyer, Charles Torres, Gregory Scontras, and Richard Futrell. 2023. Evaluating a century of progress on the cognitive science of adjective

ordering. Transactions of the Association for Computational Linguistics, 11:1185–1200.

- Yanai Elazar, Akshita Bhagia, Ian Magnusson, Abhilasha Ravichander, Dustin Schwenk, Alane Suhr, Pete Walsh, Dirk Groeneveld, Luca Soldaini, Sameer Singh, Hanna Hajishirzi, Noah A. Smith, and Jesse Dodge. 2023. What's in my big data? *CoRR*, abs/2310.20707.
- Victor S. Ferreira and Gary S. Dell. 2000. Effect of ambiguity and lexical availability on syntactic and lexical production. *Cognitive Psychology*, 40(4):296–340.
- Michael Franke, Gregory Scontras, and Mihael Simonic. 2019. Subjectivity-based adjective ordering maximizes communicative success. In *CogSci*, pages 344–350.
- Richard Futrell, William Dyer, and Greg Scontras. 2020a. What determines the order of adjectives in English? comparing efficiency-based theories using dependency treebanks. In Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, pages 2003–2012, Online. Association for Computational Linguistics.
- Richard Futrell and Roger P. Levy. 2019. Do RNNs learn human-like abstract word order preferences? In *Proceedings of the Society for Computation in Linguistics (SCiL) 2019*, pages 50–59.
- Richard Futrell, Roger Philip Levy, and Edward Gibson. 2020b. Dependency locality as an explanatory principle for word order. *Language*, 96:371 412.
- Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. 2020. The pile: An 800gb dataset of diverse text for language modeling.
- Jon Gauthier, Jennifer Hu, Ethan Wilcox, Peng Qian, and Roger Levy. 2020. SyntaxGym: An online platform for targeted evaluation of language models. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 70–76, Online. Association for Computational Linguistics.

- Edward Gibson. 1998. Linguistic complexity: locality of syntactic dependencies. *Cognition*, 68(1):1–76.
- A.E. Goldberg. 2006. *Constructions at Work: The Nature of Generalization in Language*. Oxford linguistics. Oxford University Press.
- Kristina Gulordava, Piotr Bojanowski, Edouard Grave, Tal Linzen, and Marco Baroni. 2018. Colorless green recurrent networks dream hierarchically. In Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers), pages 1195–1205, New Orleans, Louisiana. Association for Computational Linguistics.
- Michael Hahn, Judith Degen, Noah D. Goodman, Dan Jurafsky, and Richard Futrell. 2018. An information-theoretic explanation of adjective ordering preferences. *Cognitive Science*.
- Felix Hill. 2012. Beauty before age? applying subjectivity to automatic English adjective ordering. In *Proceedings of the NAACL HLT* 2012 Student Research Workshop, pages 11– 16, Montréal, Canada. Association for Computational Linguistics.
- Jennifer Hu, Jon Gauthier, Peng Qian, Ethan Wilcox, and Roger Levy. 2020. A systematic assessment of syntactic generalization in neural language models. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1725–1744.
- Philip A. Huebner, Elior Sulem, Fisher Cynthia, and Dan Roth. 2021. BabyBERTa: Learning more grammar with small-scale child-directed language. In Proceedings of the 25th Conference on Computational Natural Language Learning, pages 624–646, Online. Association for Computational Linguistics.
- Dieuwke Hupkes, Mario Giulianelli, Verna Dankers, Mikel Artetxe, Yanai Elazar, Tiago Pimentel, Christos Christodoulopoulos, Karim Lasri, Naomi Saphra, Arabella Sinclair, Dennis Ulmer, Florian Schottmann, Khuyagbaatar Batsuren, Kaiser Sun, Koustuv Sinha, Leila Khalatbari, Maria Ryskina, Rita Frieske, Ryan Cotterell, and Zhijing Jin. 2023. A taxonomy and

review of generalization research in nlp. *Nature Machine Intelligence*, 5:1161–1174.

- Jaap Jumelet, Milica Denic, Jakub Szymanik, Dieuwke Hupkes, and Shane Steinert-Threlkeld. 2021. Language models use monotonicity to assess NPI licensing. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 4958– 4969, Online. Association for Computational Linguistics.
- Jaap Jumelet and Dieuwke Hupkes. 2018. Do language models understand anything? on the ability of LSTMs to understand negative polarity items. In *Proceedings of the 2018 EMNLP Workshop BlackboxNLP: Analyzing and Interpreting Neural Networks for NLP*, pages 222– 231, Brussels, Belgium. Association for Computational Linguistics.
- Tatsuki Kuribayashi, Takumi Ito, Jun Suzuki, and Kentaro Inui. 2020. Language models as an alternative evaluator of word order hypotheses: A case study in Japanese. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 488–504, Online. Association for Computational Linguistics.
- Yair Lakretz, Dieuwke Hupkes, Alessandra Vergallito, Marco Marelli, Marco Baroni, and Stanislas Dehaene. 2021. Mechanisms for handling nested dependencies in neural-network language models and humans. *Cognition*, 213:104699. Special Issue in Honour of Jacques Mehler, Cognition's founding editor.
- Maria Lapata, Scott McDonald, and Frank Keller. 1999. Determinants of adjective-noun plausibility. In Ninth Conference of the European Chapter of the Association for Computational Linguistics, pages 30–36, Bergen, Norway. Association for Computational Linguistics.
- Pietro Lesci, Clara Meister, Thomas Hofmann, Andreas Vlachos, and Tiago Pimentel. 2024. Causal estimation of memorisation profiles.
- Jun Yen Leung, Guy Emerson, and Ryan Cotterell. 2020. Investigating Cross-Linguistic Adjective Ordering Tendencies with a Latent-Variable Model. In Proceedings of the 2020 Conference on Empirical Methods in Natural

Language Processing (EMNLP), pages 4016–4028, Online. Association for Computational Linguistics.

- Natalia Levshina, Savithry Namboodiripad, Marc Allassonnière-Tang, Mathew Kramer, Luigi Talamo, Annemarie Verkerk, Sasha Wilmoth, Gabriela Garrido Rodriguez, Timothy Michael Gupton, Evan Kidd, Zoey Liu, Chiara Naccarato, Rachel Nordlinger, Anastasia Panova, and Natalia Stoynova. 2023. Why we need a gradient approach to word order. *Linguistics*, 61(4):825–883.
- Tal Linzen and Marco Baroni. 2021. Syntactic structure from deep learning. *Annual Review of Linguistics*, 7(Volume 7, 2021):195–212.
- Tal Linzen, Emmanuel Dupoux, and Yoav Goldberg. 2016. Assessing the ability of LSTMs to learn syntax-sensitive dependencies. *Transactions of the Association for Computational Linguistics*, 4:521–535.
- Maryellen C MacDonald. 2013. How language production shapes language form and comprehension. *Frontiers in psychology*, 4:226.
- Nikolay Malkin, Sameera Lanka, Pranav Goel, and Nebojsa Jojic. 2021. Studying word order through iterative shuffling. In *Proceedings* of the 2021 Conference on Empirical Methods in Natural Language Processing, pages 10351– 10366, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- J.E. Martin. 1969. Some competence-process relationships in noun phrases with prenominal and postnominal adjectives. *Journal of Verbal Learning and Verbal Behavior*, 8(4):471–480.
- Rebecca Marvin and Tal Linzen. 2018. Targeted syntactic evaluation of language models. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 1192–1202, Brussels, Belgium. Association for Computational Linguistics.
- William Merrill, Noah A. Smith, and Yanai Elazar. 2024. Evaluating *n*-gram novelty of language models using rusty-dawg.
- Kanishka Misra and Kyle Mahowald. 2024. Language models learn rare phenomena from less

rare phenomena: The case of the missing aanns. *CoRR*, abs/2403.19827.

- James W. Ney. 1981. Optionality and choice in the selection of verb complements in english. *WORD*, 32(2):133–152.
- Byung-Doh Oh, Shisen Yue, and William Schuler. 2024. Frequency explains the inverse correlation of large language models' size, training data amount, and surprisal's fit to reading times. In Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers), pages 2644–2663, St. Julian's, Malta. Association for Computational Linguistics.
- Timothy J. O'Donnell. 2015. Productivity and Reuse in Language: A Theory of Linguistic Computation and Storage. The MIT Press.
- Abhinav Patil, Jaap Jumelet, Yu Ying Chiu, Andy Lapastora, Peter Shen, Lexie Wang, Clevis Willrich, and Shane Steinert-Threlkeld. 2024. Filtered corpus training (fict) shows that language models can generalize from indirect evidence.
- USVSN Sai Prashanth, Alvin Deng, Kyle O'Brien, Jyothir S V au2, Mohammad Aflah Khan, Jaydeep Borkar, Christopher A. Choquette-Choo, Jacob Ray Fuehne, Stella Biderman, Tracy Ke, Katherine Lee, and Naomi Saphra. 2024. Recite, reconstruct, recollect: Memorization in lms as a multifaceted phenomenon.
- Gregory Scontras. 2023. Adjective ordering across languages. *Annual Review of Linguistics*, 9:357–376.
- Gregory Scontras, Judith Degen, and Noah Goodman. 2019. On the grammatical source of adjective ordering preferences. *Semantics and Pragmatics*, 12:1–21.
- Gregory Scontras, Judith Degen, and Noah D. Goodman. 2017. Subjectivity Predicts Adjective Ordering Preferences. *Open Mind*, 1(1):53–66.
- Gary-John Scott. 2002. Stacked Adjectival Modification and the Structure of Nominal Phrases.

- Koustuv Sinha, Robin Jia, Dieuwke Hupkes, Joelle Pineau, Adina Williams, and Douwe Kiela. 2021. Masked language modeling and the distributional hypothesis: Order word matters pre-training for little. In *Proceedings of the* 2021 Conference on Empirical Methods in Natural Language Processing, pages 2888–2913, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Richard Sproat and Chilin Shih. 1991. *The Cross-Linguistic Distribution of Adjective Ordering Restrictions*. Springer Netherlands, Dordrecht.
- Michelle Suijkerbuijk, Peter de Swart, and Stefan L. Frank. 2023. The learnability of the whisland constraint in Dutch by a long short-term memory network. In *Proceedings of the Society for Computation in Linguistics 2023*, pages 321–331, Amherst, MA. Association for Computational Linguistics.
- H. Sweet. 1898. A New English Grammar, Logical and Historical. Number pt. 2 in A New English Grammar, Logical and Historical. Clarendon Press.
- Alexandra Teodorescu. 2006. Adjective ordering restrictions revisited. In 25th West Coast Conference on Formal Linguistics, pages 399–407. Cascadilla Proceedings Project.
- Andreas Trotzke and Eva Wittenberg. 2019. Long-standing issues in adjective order and corpus evidence for a multifactorial approach. *Linguistics*, 57(2):273–282.
- Robert Truswell. 2009. Attributive adjectives and nominal templates. *Linguistic Inquiry*, 40(3):525–533.
- Oskar Van Der Wal, Jaap Jumelet, Katrin Schulz, and Willem Zuidema. 2022. The birth of bias: A case study on the evolution of gender bias in an English language model. In *Proceedings* of the 4th Workshop on Gender Bias in Natural Language Processing (GeBNLP), pages 75–75, Seattle, Washington. Association for Computational Linguistics.
- Eva Maria Vecchi, Marco Marelli, Roberto Zamparelli, and Marco Baroni. 2017. Spicy adjectives and nominal donkeys: Capturing semantic deviance using compositionality in distributional spaces. *Cognitive science*, 41 1:102–136.

- Eva Maria Vecchi, Roberto Zamparelli, and Marco Baroni. 2013. Studying the recursive behaviour of adjectival modification with compositional distributional semantics. In *Conference on Empirical Methods in Natural Language Processing*.
- Z. Vendler. 1968. *Adjectives and Nominalizations*. Papers on formal linguistics. Mouton.
- Alex Warstadt, Aaron Mueller, Leshem Choshen, Ethan Wilcox, Chengxu Zhuang, Juan Ciro, Rafael Mosquera, Bhargavi Paranjabe, Adina Williams, Tal Linzen, and Ryan Cotterell. 2023.
 Findings of the BabyLM challenge: Sampleefficient pretraining on developmentally plausible corpora. In *Proceedings of the BabyLM Challenge at the 27th Conference on Computational Natural Language Learning*, pages 1–34, Singapore. Association for Computational Linguistics.
- Alex Warstadt, Alicia Parrish, Haokun Liu, Anhad Mohananey, Wei Peng, Sheng-Fu Wang, and Samuel R. Bowman. 2020. BLiMP: The benchmark of linguistic minimal pairs for English. *Transactions of the Association for Computational Linguistics*, 8:377–392.
- Ethan Wilcox, Roger Levy, Takashi Morita, and Richard Futrell. 2018. What do RNN language models learn about filler-gap dependencies? In Proceedings of the 2018 EMNLP Workshop BlackboxNLP: Analyzing and Interpreting Neural Networks for NLP, pages 211– 221, Brussels, Belgium. Association for Computational Linguistics.
- Michael Wilson and Robert Frank. 2023. Inductive bias is in the eye of the beholder. In *Proceedings of the 1st GenBench Workshop on (Benchmarking) Generalisation in NLP*, pages 152–162, Singapore. Association for Computational Linguistics.
- Stefanie Wulff. 2003. A multifactorial corpus analysis of adjective order in english. *International Journal of Corpus Linguistics*, 8:245– 282.
- Stefanie Wulff and Stefan Gries. 2015. Prenominal adjective order preferences in chinese and german 12 english: A multifactorial corpus study. *Linguistic Approaches to Bilingualism*, 5.


A Complementary Results

A.1 CAP Examples

We provide a sample of CAP examples in Table 2, categorised by the contextual and isolated AOP scores of Pythia-12b.


A.2 Correlations to Cognitive Predictors

Correlation AOP- Δ to Cognitive Predictors



Correlations during training of AOP- Δ scores (Pythia-1.4b), with scores derived from various cognitive predictors.

A.3 Relative Number of Bigram Occurrences




Relative sizes of the 4 splits of CAP based on the number of bigram occurrences seen at each point in training. Note that an additional constraint on each split is that the swapped adjective order has not been seen at all, which explains why the 4 splits do not sum up to 1.

A.4 One-shot AOP

In Figure 7 we plot the AOP- Δ scores for the 27 adjective pairs that are seen exactly once in the first 10% of training.

A.5 Context Improvement Ratios



The relative number of items that are affected by context with respect to isolated AOP- Δ scores for each model size. These ratios correspond to the four quadrants of Figure 6A.

	CAP Sentence	$AOP(\bullet)$	$\operatorname{AOP}(ullet c)$		
	CAP order always preferred				
1.	In solution, lead(II) hydroxide is a somewhat weak base, forming lead(II) ion, Pb, under weakly acidic conditions.	16.5	18.8		
2.	It has the only deep water port in Cambodia.		15.4		
3.	The greatest social reforms in Denmark are certainly the work of the last <i>half</i> -century.	15.4	16.3		
4.	Icterids are unusual in songbirds because they have considerable sexual dimorphism.	16.9	14.5		
	Swapped order always preferred				
5.	Couches are usually bought in a set together with cushions, which give them a bouncey and decorative comfortable touch.	-7.1	-6.8		
6.	No, its 10 feet tall, and it's a red big monster, demon like.	-7.3	-5.9		
7.	It does this by following the grammatical basic rules of syntax.	-5.8	-6.0		
8.	<i>The daily average attendance from January through November 2010 was</i> 22,133 people a day.	-5.8	-5.7		
	Context improves AOP				
9.	Being a spherical 3-manifold, it is the only homology 3-sphere, besides the 3-sphere itself, with a <i>finite fundamental</i> group.	0.9	16.8		
10.	Since the 2015 Styria municipal structural reform, it is part of the munic- ipal ity Birkfeld.	-0.5	15.3		
11.	I won it at a fair last night.	0.2	15.4		
12.	I say that the man who does not play whist lays up a sad old age for himself.	2.6	17.5		
	Context worsens AOP				
13.	This is an ability which may have been present in their last common ancestor in the Archaean.	12.3	4.0		
14.	Jacob, you've had a complex partial seizure, which can cause psychosis, including religious psychosis.	7.3	0.3		
15.	He was also a right-arm medium fast bowler with three wickets in test matches to his credit.	6.2	-0.6		
16.	He wheeled round sharply, and distinguished her lying with helpless out-spread arms on the couch.	4.0	-2.8		

Table 2: Most salient examples of the four quadrants in Figure 6.

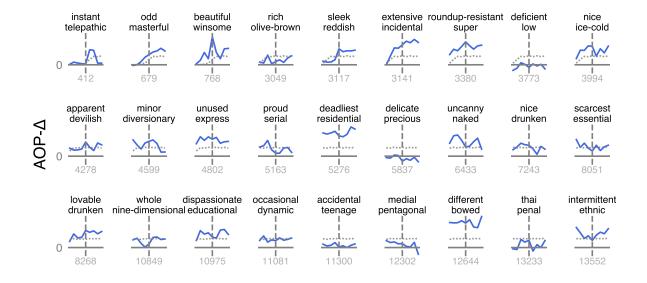


Figure 7: The AOP- Δ scores (Pythia-1.4b) across time for the subset of adjective pairs that are seen exactly once up to the 14,000th batch. Each curve is centered around the point where the adjective pair was encountered. The dotted line denotes the average AOP- Δ across all CAP items.