Measure Adaptations and Rank Aggregation for the Selection of Clustering Methods and Sizes For Single Cell Data

Owen Visser, Somnath Datta

July 3, 2024

Abstract

The growing efficiency of single-cell sequencing technology has provided biologists with ample cells to identify and differentiate, often through clustering. Heuristic approaches for clustering method choice have become more prevalent and could lead to inaccurate reports if statistical evaluation of the resulting clusters is omitted. During the advent of microarray data, a similar dilemma was addressed in literature through the provision of supervised and unsupervised measures, which were evaluated through Rank Aggregation. In this paper, these measures are adapted into the single-cell framework through a leave-one-out approach. Additionally, a scheme was created to utilize the information of cluster sizes by using their ranking to assign importance to the aggregation of methods, resulting in one table of methods ranked by cluster sizes. To demonstrate the ensemble of measures and scheme, five benchmark single-cell datasets were clustered with various methods at appropriate cluster sizes. We show that through rank aggregation and our importance scheme, our adapted measures select clustering methods that perform better at cluster sizes associated with true biological groups compared to those selected through traditional measures. For four of the five datasets and with internal measures alone, the rank aggregation scheme could correctly identify methods that performed the best at cluster sizes that match the original biological groups. We plan to package this ensemble of measures in the hopes to provide others with a tool to identify the best performing clustering methods and associated sizes for a variety of single cell datasets.

1 Introduction

1.1 Background

The availability of single-cell sequencing has inspired many researchers to develop a multitude of computational analysis pipelines in order to tackle the vast number of datasets that are now available (Vieth et al., 2019). A common aim shared among these pipelines is cell type differentiation, which is typically approached through clustering (Kiselev et al., 2019). The pressure to analyze the growing number of datasets has led to less critical choices regarding clustering method (Grabski et al., 2023). Moreover, the choice of clustering method sometimes relies on heuristic analysis, which has become more prevalent in recent years (Grabski et al., 2023). Currently, most comparisons of clustering algorithms are in the form of external measures that only allow for post-analysis evaluation (Kiselev et al., 2019). However, this can lead to inaccuracies due to a lack of information about true biological classifications (Zhang et al., 2023). Furthermore, the post-analysis evaluation of a clustering algorithm's results is both tedious and subjective to any particular dataset (Handl et al., 2005).

1.2 Motivation & Objective

Historically, the field of microarray data analysis encountered similar challenges which were addressed (Pihur et al., 2007) through a multitude of internal measures (Halkidi et al., 2001) that can be found within the R package c1Valid (Brock et al., 2008). While most measures can be directly applied to single cell data, a number of the measures found within the package cannot.

These measures are known as stability measures(Handl et al., 2005) and were developed by Datta and Datta (2003); they evaluate the change in clusters based on missing information. If the same strategy was applied directly to single cell data we would be required to remove gene information; however, this is not reasonable when data cleaning and feature selection is already taken into consideration; any more gene removal would hinder the dataset. In the single cell framework, cells, or the samples themselves, are clustered. In order to retain the functionality of the stability measures, a leave-one-out (Wong, 2015) (LOO) strategy was employed to evaluate the clusters of remaining cells after some have been removed. This exclusion principle is known as partition compliance (Handl et al., 2005). If partition compliance is done before dimension reduction, the loss of gene expression information from the removed cell is spread to all remaining cells, mimicking the loss of information required by the stability measures. Using this strategy, some of the measures included in the aforementioned package have been adapted to the single-cell framework. Our objective is to demonstrate the utility of these adapted measures in identifying suitable clustering methods for specific datasets when no biological information is available to guide the analysis. Additionally, the necessity of incorporating biological information into cluster validation cannot be ignored. Therefore, we chose to include external validation through popular measures such as the adjusted Rand index (Hubert and Arabie, 1985), and adjusted versions of measures developed by Datta (2006): Biological Homogeneity Index and Biological Stability Index (Datta and Datta, 2006). The latter of which was adapted in a similar fashion to the internal measures.

In the next section 2, we define each measure in its adapted form. Following this, in section 3, we describe the datasets, pre-processing steps, and the clustering methods chosen for the demonstration. Furthermore, we describe the rank aggregation process conducted on the recorded measures. In section 4 we demonstrate the utility of the adapted measures. We end in section 5 with a discussion of limitations and potential future work on this project.

2 Measures

In previous years, Pihur et al. (2009) incorporated a number of measures used to assess clustering algorithms into the R package c1Va1id (Brock et al., 2008; Datta and Datta, 2006; Handl et al., 2005; Pihur et al., 2009). Several measures required further adaptation and have been redefined to follow a leave-one-out strategy to ensure they retain their identity as metrics of internal stability (Wong, 2015).

2.1 Notation

Consider a single-cell gene expression matrix of l cells. Assume the cells can be partitioned into N many distinct biological groups denoted as $T = \{T_1, ..., T_N\}$. Assume an algorithm has partitioned the cells into K distinct clusters denoted as $C = \{C_1, ..., C_K\}$. Let C(i) denote the cluster containing cell i which was formed using the full dataset. Let $C^j(i)$ denote the cluster containing cell i which was formed by clustering the dataset of cells where cell j was removed prior to clustering. Let $C^{-j}(i)$ denote the cluster containing cell i which was formed using the full dataset, and following clustering, cell j was removed. Using this notation, the measures below are defined over the single cell data structure. Each measure is labeled as internal or external. Internal measures asses the statistical clustering of cells without reference to biological groups, whereas in the setting of external measures, the biological assignment of cells is considered known and is used to validate the clustering algorithm. Additionally, some are labeled as stability measures, which asses an algorithms consistency in assigning cells to clusters when partial data is available.

2.2 Connectivity

Connectivity (CN) measures the ranked distance of cells i and j if they are not assigned the same cluster (Pihur et al., 2009). $nn_{i(j)}$ is defined as the jth nearest neighbor of cell i, and $\delta_{i,nn_{i(j)}}$ is an indicator that takes the value zero when C(j) is equal to C(i), and 1/j otherwise. Connectivity for

2.3 Dunn Index 2 MEASURES

an entire dataset is defined as,

$$CN = \sum_{i=1}^{l} \sum_{j=1}^{M} \delta_{i,nn_{i(j)}},$$
(1)

where M is a user-defined integer with restriction 0 < M < l. Connectivity is valued on the interval $[0, \infty)$ and should be minimized (Pihur et al., 2009).

2.3 Dunn Index

The Dunn Index (DI) measures the ratio of the smallest distance between gene expression profiles of cells not in the same cluster to the largest intra-cluster distance (Dunn, 1974; Pihur et al., 2007). The Dunn Index is computed as,

$$DI = \frac{\min\limits_{C_i, C_j \in \mathcal{C}, C_i \neq C_j} \left(\min\limits_{s \in C_i, t \in C_j} d(x_s, x_t)\right)}{\max\limits_{C_r \in \mathcal{C}} \left(\max\limits_{s \neq t \in C_r} d(x_s, x_t)\right)},$$
(2)

where $d(x_s, x_t)$ is a distance measure (Euclidean, Manhattan, etc.) in the gene expression profiles of cell s and cell t. The Dunn Index is valued on the interval $[0, \infty)$ and should be maximized.

2.4 Silhouette Width

Silhouette width (SW) is the average of each cells silhouette value and measures the compactness of clusters (Rousseeuw, 1987). The Silhouette value of cell i is defined as

$$S(i) = \frac{b_i - a_i}{\max(a_i, b_i)}$$

where, a_i is the average distance between the gene expression profiles of cell i and all other observations in the same cluster and b_i is the average distance between the gene expression profile of cell i and the gene expression profiles of the cells in the nearest cluster by distance. The values a_i and b_i are defined as

$$a_i = \frac{1}{n(C(i)) - 1} \sum_{h \neq i \in C(i)} d(x_i, x_h),$$

and

$$b_i = \min_{C_k \in \mathcal{C} \setminus C(i)} \frac{1}{n(C_k)} \sum_{h \in C_k} d(x_i, x_h).$$

The Silhouette width on a full dataset can be defined as,

$$SW = \frac{1}{l} \sum_{i=1}^{l} S(i).$$
 (3)

SW is valued on the interval [-1,1], where values closer to 1 indicate well-clustered cells, and values closer to -1 indicate poorly clustered cells.

2.5 Adjusted Rand Index

The adjusted Rand index (ARI) measures the agreement between two partitions (Hubert and Arabie, 1985). Consider two vectors of categorical assignments of the biological groups and statistical clusters of all l cells, respectively. Let a_i denote the number of cells assigned to group i in the first vector, and b_j denote the number of cells assigned to cluster j in the second vector. Furthermore,

 $l_{i,j}$ is defined as number of cells that are assigned to biological group i and cluster j. The adjusted Rand index is defined as,

$$ARI = \frac{\sum_{i,j}^{l} {\binom{l_{i,j}}{2}} - \left[\sum_{i} {\binom{a_i}{2}} \cdot \sum_{j} {\binom{b_j}{2}}\right] / {\binom{l}{2}}}{\frac{1}{2} \left[\sum_{i} {\binom{a_i}{2}} + \sum_{j} {\binom{b_j}{2}}\right] - \left[\sum_{i} {\binom{a_i}{2}} \cdot \sum_{j} {\binom{b_j}{2}}\right] / {\binom{l}{2}}}.$$
(4)

The ARI is valued on the interval [0,1], where 0 indicates no agreement and 1 indicates a perfect agreement.

2.6 Biological Homogeniety Index

The Biological Homogeneity index (BHI) measures the homogeneous nature of statistical clusters of cells and their true biological grouping. Unlike the measure previously defined by Datta and Datta (2006), the biological groupings of cells are disjointed. Let us say T(x) is a known cell group that contains cell x. Similarly, T(y) contains cell y. We assign the indicator function I(T(x) = T(y)) to be 1 when T(x) and T(y) are equivalent, and zero otherwise. The BHI is then defined as,

$$BHI = \frac{1}{K} \sum_{i=1}^{K} \frac{1}{n(C_i)(n(C_i) - 1)} \sum_{x \neq y \in C_i} I(T(x) = T(y)).$$
 (5)

The BHI is valued on the interval of [0,1] and indicates more homogeneous clusters as the measure approaches 1 (Pihur et al., 2009).

2.7 Biological Stability Index

The Biological Stability Index (BSI) measures the stability of a clustering algorithms consistency in assigning similar biological groups to cells (Datta and Datta, 2006). In the format of single cell data this is done by calculating the proportion of overlap of assigned clusters, based on the full and reduced datasets, of cells within a known biological group. The (adjusted) BSI is defined as,

$$BSI = \frac{1}{l} \sum_{j=1}^{l} \left[\frac{1}{N^{j}} \sum_{i=1}^{N^{j}} \left(\frac{1}{\left(n(T_{i}^{j}) - 1\right)n(T_{i}^{j})} \cdot \sum_{x \neq y \in T_{i}^{j}} \frac{n(C^{-j}(x) \cap C^{j}(y))}{n(C^{-j}(x))} \right) \right], \tag{6}$$

where T_i^j is the i^{th} biological group excluding cell j, and N^j is the number of biological groups if cell j is excluded. The BSI is valued on the interval of [0,1], where values closer to 1 indicate more stable clustering in regards to the biological grouping of cells (Datta and Datta, 2006).

2.8 Average Distance

The average distance (AD) measure evaluates the compactness of the clusters by computing the average distance between the genes expression profiles of all cells contained within intersecting clusters constructed by the full dataset and clusters constructed from the reduced dataset (Datta and Datta, 2003). The AD is defined as,

$$AD = \frac{1}{l(l-1)} \sum_{j=1}^{l} \sum_{i \neq j}^{l} \left(\frac{1}{n(C^{j}(i))n(C^{-j}(i))} \sum_{\substack{i \in C^{-j}(i) \\ i' \in C^{j}(i)}} d(x_{i}, x_{i'}) \right), \tag{7}$$

where $d(x_i, x_{i'})$ is a distance measure (Euclidean, Manhattan, etc.) in the gene expression profiles of cell i and cell i'. AD is valued on the interval $[0, \infty)$ and should be minimized.

2.9 Average Proportion of Non-overlap

The average proportion of non-overlap (APN) measure computes the average proportion of cells that are common among both clusters constructed by the full dataset and clusters constructed from the reduced dataset (Datta and Datta, 2003). The APN is defined as,

$$APN = \frac{1}{l(l-1)} \sum_{j=1}^{l} \sum_{\substack{i=1\\i \neq j}}^{l} \left(1 - \frac{n(C^{-j}(i) \cap C^{j}(i))}{n(C^{-j}(i))} \right), \tag{8}$$

where n(A) is the cardinality of a set A. APN is valued on the interval [0,1], where values closer to zero indicate better consistency of cluster assignments.

2.10 In-group Proportion

The in-group proportion (IGP) measures the proportion of cells whose nearest neighbor are assigned to the same cluster (Kapp and Tibshirani, 2007). We choose to follow the design of Pihur et al. (2009) and calculate the overall IGP score, which is defined as

$$IGP = \sum_{K} \frac{n(i: i \in C_k \text{and} i^* \in C_k)}{n(C_k)},$$
(9)

where i^* is the nearest neighbor of i defined as $i^* = argmin_{j\neq i}d(i,j)$. The overall IGP score is valued on the interval (0,K) and larger scores correspond to better predictive ability (Pihur et al., 2009).

3 Materials and Methods

3.1 Datasets

Five datasets were chosen to demonstrate the rank aggregation scheme and ensemble of measures. These datasets are considered by most as gold standard (Qi et al., 2020). The Biase (Biase et al., 2014) dataset contains three groups of forty-eight cells. The dataset captures the transcription profiles of individual cells from 1-cell, 2-cell, and 4-cell mouse embryos. The Deng (Deng et al., 2014) dataset of contains ten distinctions of 268 mouse pre-implantation embryos and mature cells; providing similar profiles to that of the Biase dataset. The Goolam (Goolam et al., 2016) dataset contains five groups of 124 mouse cells collected at the 2-cell, 4-cell, 8-cell, 16-cell, and 32-cell stages of embryo development; once again, similar to the Biase dataset. The Pollen (Pollen et al., 2014) dataset contains four broad groups of 301 cells derived from developing human cortex, interpreted as dividing neural progenitors (group I), radial glia (group II), newborn neurons (group III), and maturing neurons (group IV). Additionally, distinct subgroups were discovered in these broad categories, resulting in 11 different cell groups within this dataset. The final dataset, Yan (Yan et al., 2013), contains eight groups of 124 cells from human pre-implantation embryos and human embryonic stem cells (hESCs): Oocytes, Zygotes, 2-cell, 4-cell, 8-cell, Morula, late Blastocyst, and hESCpassage.

3.1.1 Pre-processing The impact on performance and computation time that pre-processing has on single-cell data is irrefutable (Vieth et al., 2019). Most clustering methods found within popular tools today have pre-processing included in some capacity. Among all tools considered was a dimension reduction step. We chose to implement a simple pre-processing step in which each dataset was cleaned of genes with no counts, log-normalized, and a pseudo count was added (McCarthy et al., 2017). These simply filtered datasets were used as input for each clustering method. Further dimension reduction before application of a clustering algorithm was left to each individual tool considered, we will denote their pairing as clustering methods.

3.2 Clustering Methods

Three well known tools and clustering methods have been chosen to demonstrate the rank aggregation scheme and ensemble of measures. These tools contain clustering methods that represent

ones commonly used in single-cell research to date (Petegrosso et al., 2020). Additionally, we use two simple, widely used methods for clustering. The methods used and a brief description are as follows.

- **3.2.1 K-means** The k-means (Hartigan and Wong, 1979) algorithm divides a dataset into k distinct, non-overlapping subsets based on the distance. The iterative process assigns each data point to the nearest centroid, then recalculates the location of the centroid until no changes occur. Both tSNE and PCA are utilized as dimension reduction techniques for this method.
- **3.2.2 Hierarchical (agglomerative)** The *hierarchical* (Ward Jr, 1963) algorithm creates a tree of clusters that splits based on dissimilarity by either a bottom-up approach (agglomerative), or a top-down approach (divisive). We chose to utilize only the agglomerative method of hierarchical clustering. Assignment to a set number of clusters was done by cutting the dendogram at the proper height using cutree in the R package, statsTeam (2022). Within the hierarchical clustering, the Ward linkage was used as the agglomeration method. Both tSNE and PCA are utilized as dimension reduction techniques for this method.
- **3.2.3 pcaReduce** *pcaReduce* (Žurauskienė and Yau, 2016) is a hierarchical (agglomerative) clustering method that wraps the K-means algorithm. Initially the dimension of the data is reduced to its K-1 principle directions by principle component analysis. The K-means algorithm is conducted to obtain K clusters. The two clusters who are most similar are merged into a single cluster. These steps repeat subsequently, reducing K by one until only two clusters remain. The randomness in K-means starting points is dealt with by bootstrapping. The resulting bootstrapped cluster assignments are joined through consensus clustering using the R package clueHornik (2005). Furthermore, there are two approaches of merging clusters: a probabilistic approach and a sampling approach. Each method of merging clusters was decided as an individual clustering method.
- **3.2.4 RaceID** The *RaceID* (Grün et al., 2015) clustering method reduces the dimensionality of the data through construction of a distance matrix by subtracting each cells' Pearson's correlation coefficients from one. The k-means clustering algorithms is applied to the distance matrix using the euclidean metric. The cluster assignments are finalized after assessing their reproducibility by bootstrapping.
- **3.2.5 CIDR** The extremely efficient clustering method *CIDR* (Lin et al., 2017) reduces the dimension of the data through removal of genes determined by a kernel density estimation of the expression counts. The remaining data is reduced in dimension through principle coordinates analysis (PCoA). The lower dimension data is then clustered through the agglomerative hierarchical clustering method with Ward linkageWard Jr (1963).

4 Results

For each of the five datasets, eight clustering methods were utilized to calculate cluster assignments over an appropriate range of cluster sizes. For each method and cluster size, nine measures were calculated. The measures were then scaled to the interval [0,1] and ordered such that a value closer to 1 would indicate a better performance of clustering; we refer to value of these scaled and re-ordered measures as scores. The measures and methods were then abbreviated. The abbreviation of methods relabels RaceID as RID, PcaHC as PHC, PcaKmeans as PKM, pcaReduceS as PRS, pcaReduceM as PRM, TsneHC as THC, TsneKmeans as TKM, and CIDR remains the same.

As seen in Figure 1a, the visual evaluation of a clustering method based on measure scores is not feasible. Even for a singular cluster size, the best performing method remains indiscernible (see Figure 1b). Upon close inspection of Figure 1b, one could conclude that PRM and PRS are performing similarly well, but visual affirmation of the better scored method is subjective. Rank aggregation of the measure scores for cluster size 11 gives the following descending ordered list of ranked methods (PRS, PRM, PKM, PHC, TKM, THC, RID, CIDR).

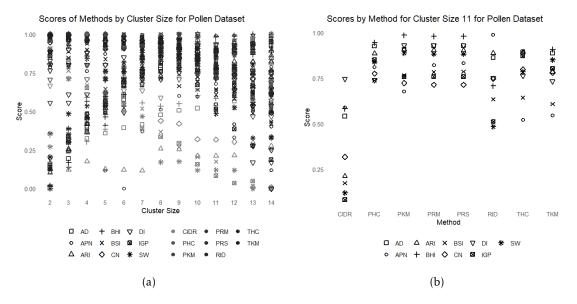


Figure 1: (a) is a table of measure scores for all cluster sizes and methods for the Pollen dataset. (b) is a table of measure scores for all methods at cluster size 11 for the pollen dataset.

In the general case, when the true clusters are unknown, methods can only be judged via internal measure scores. Moreover, if the number of clusters is also unknown, evaluating measure scores over a variety of cluster sizes maybe necessary. Rank aggregation and implementation of the re-aggregation scheme produces a list of methods for each cluster size and an overall list. For example, the best overall identified method for the pollen dataset when using solely internal measures was PRS 1. The cluster sizes at which PRS performs the best are 8, 9, 11, and 12; notably, 11 is the number of distinct subgroups found by Pollen et al..

The interpretation of cluster sizes where the best method is the top performer can be extended to include all datasets (see 1). Additionally, a comparison of the internal adapted measures of predictive power (AD and APN), conventional internal measures (CN, SW, DI, IGP), and all internal measures (AD, APN, CN, SW, DI, and IGP) can be seen in Table. When only the adapted measures are used, the best method performing for the Yan, Goolam, and Deng datasets included the appropriate cluster size matching the true biological groups. When solely conventional methods are used, the best performing method includes the appropriate cluster size for only the Yan dataset. When both adapted and conventional internal methods are used, the best performing methods for four of the five datasets are noted as best at cluster sizes matching the true biological groups; the only remaining being the Deng dataset. Notably, when all measures are utilized, including external, we still only see four of the five datasets matching method and cluster size with the true groupings.

5 Conclusion and Discussion

In the field of single-cell analysis, the application of measures to assess clustering methods and cluster sizes is well-established. Typically, the evaluation of these measures relies heavily on visual assessment, which while common, lacks rigor and introduces subjectivity. To address this, we introduced a rank aggregation scheme aimed at adding a layer of objectivity to the evaluation process. This scheme provides a more decisive selection of clustering methods by aggregating multiple evaluation measures, thereby mitigating the bias inherent in any single measure. We chose to use a set of five gold standard datasets over simulated datasets, as all intricacies of single cell data cannot be captured through simulated data (Crowell et al., 2023).

Our findings demonstrate that internal measures successfully identified and assigned the top rank to the most effective clustering method across four of the five datasets examined; while the method pertaining to the remaining dataset was ranked second in its respective list. These methods performed best at the true number of biological groups associated with each dataset.

REFERENCES REFERENCES

Dataset	Measures	Top Method	Top Clusters for Method	Cluster Size Included
Biase	Adapted	PHC	2, 4, 5, 6, 7	×
	Conventional	THC	4, 5	×
	Internal	CIDR	2, 3	✓
	All	THC	4, 5, 6, 7	×
Yan	Adapted	PHC	7, 8, 10, 11, 12	✓
	Conventional	PKM	5, 6, 8, 10	✓
	Internal	RID	7, 8, 9, 10, 11, 12	✓
	All	RID	5, 7, 8, 9, 11, 12	✓
Goolam	Adapted	PHC	5, 6, 7, 8	✓
	Conventional	PRS	2, 3	×
	Internal	RID	3, 5, 6, 7, 8	✓
	All	RID	3, 4, 5, 6, 7, 8	✓
Pollen	Adapted	PHC	3, 5, 6, 7, 8, 9	×
	Conventional	PKM	5, 9, 10, 14	×
	Internal	PRS	8, 9, 11, 12	✓
	All	PRS	4, 5, 6, 9, 11, 12	✓
Deng	Adapted	RID	7, 10, 11, 12, 13	✓
	Conventional	RID	7, 11, 12	×
	Internal	RID	7, 9, 11, 12, 13	×
	All	RID	7, 9, 10, 11, 12, 13	✓

Table 1: Comparison of clustering methods and sizes chosen by measures across different datasets via scores of external validation measures. Adapted measures are AD and APN, conventional measures are CN, SW, DI, and IGP. All measures includes both adapted and conventional measures. The cluster sizes are ordered by average external measures.

In this study, we did not utilize Louvain or Leiden clustering methods, which are commonly used today in packages such as Seurat and monocle3, as our primary objective was to compare cluster sizes across different methods (Hao et al., 2023; Cao et al., 2019). However, future expansions of this work will explore the application of our measures to additional parameters such as cluster resolution and the number of nearest neighbors utilized within the Louvain, Leiden, and other graphical clustering algorithms. We also aim to integrate our ensemble of measures and the rank aggregation scheme into a comprehensive package compatible with popular platforms.

Further, we plan to investigate whether the clustering method choices informed by our rank aggregation scheme enhance the quality of downstream analyses. This aspect may form the basis of subsequent research, potentially leading to further publications that explore the practical impacts of methodological decisions in single-cell data analysis.

References

- F. H. Biase, X. Cao, and S. Zhong. Cell fate inclination within 2-cell and 4-cell mouse embryos revealed by single-cell rna sequencing. *Genome research*, 24, 2014.
- G. Brock, V. Pihur, S. Datta, and S. Datta. clvalid: An r package for cluster validation. *Journal of Statistical Software*, 25, 2008.
- J. Cao, M. Spielmann, X. Qiu, X. Huang, D. M. Ibrahim, A. J. Hill, F. Zhang, S. Mundlos, L. Christiansen, F. J. Steemers, et al. The single-cell transcriptional landscape of mammalian organogenesis. *Nature*, 566, 2019.
- H. L. Crowell, S. X. Morillo Leonardo, C. Soneson, and M. D. Robinson. The shaky foundations of simulating single-cell rna sequencing data. *Genome Biology*, 24, 2023.
- S. Datta and S. Datta. Comparisons and validation of statistical clustering techniques for microarray gene expression data. *Bioinformatics*, 2003.
- S. Datta and S. Datta. Methods for evaluating clustering algorithms for gene expression data using a reference set of functional classes. *BMC Bioinformatics*, 7, 2006.

REFERENCES REFERENCES

Q. Deng, D. Ramsköld, B. Reinius, and R. Sandberg. Single-cell rna-seq reveals dynamic, random monoallelic gene expression in mammalian cells. *Science*, 343, 2014.

- J. C. Dunn. Well-separated clusters and optimal fuzzy partitions. Journal of Cybernetics, 4, 1974.
- M. Goolam, A. Scialdone, S. J. Graham, I. C. Macaulay, A. Jedrusik, A. Hupalowska, T. Voet, J. C. Marioni, and M. Zernicka-Goetz. Heterogeneity in oct4 and sox2 targets biases cell fate in 4-cell mouse embryos. *Cell*, 165, 2016.
- I. N. Grabski, K. Street, and R. A. Irizarry. Significance analysis for clustering with single-cell rna-sequencing data. *Nature Methods*, 20, 2023.
- D. Grün, A. Lyubimova, L. Kester, K. Wiebrands, O. Basak, N. Sasaki, H. Clevers, and A. Van Oudenaarden. Single-cell messenger rna sequencing reveals rare intestinal cell types. *Nature*, 525, 2015.
- M. Halkidi, Y. Batistakis, and M. Vazirgiannis. On clustering validation techniques. *Journal of Intelligent Information Systems*, 17, 2001.
- J. Handl, J. Knowles, and D. B. Kell. Computational cluster validation in post-genomic data analysis. *Bioinformatics*, 21, 2005.
- Y. Hao, T. Stuart, M. H. Kowalski, S. Choudhary, P. Hoffman, A. Hartman, A. Srivastava, G. Molla, S. Madad, C. Fernandez-Granda, and R. Satija. Dictionary learning for integrative, multimodal and scalable single-cell analysis. *Nature Biotechnology*, 2023.
- J. A. Hartigan and M. A. Wong. Algorithm as 136: A k-means clustering algorithm. *Journal of the Royal Statistical Society. Series C (Applied Statistics)*, 28, 1979.
- K. Hornik. A clue for cluster ensembles. Journal of Statistical Software, 14, 2005.
- L. Hubert and P. Arabie. Comparing partitions. *Journal of Classification*, 2, 1985.
- A. V. Kapp and R. Tibshirani. Are clusters found in one dataset present in another dataset? *Biostatistics*, 8, 2007.
- V. Y. Kiselev, T. S. Andrews, and M. Hemberg. Challenges in unsupervised clustering of single-cell rna-seq data. *Nature Reviews Genetics*, 20, 2019.
- P. Lin, M. Troup, and J. W. Ho. Cidr: Ultrafast and accurate clustering through imputation for single-cell rna-seq data. *Genome Biology*, 18, 2017.
- D. J. McCarthy, K. R. Campbell, A. T. L. Lun, and Q. F. Willis. Scater: pre-processing, quality control, normalisation and visualisation of single-cell rna-seq data in r. *Bioinformatics*, 33, 2017.
- R. Petegrosso, Z. Li, and R. Kuang. Machine learning and statistical methods for clustering single-cell rna-sequencing data. *Briefings in Bioinformatics*, 21, 2020.
- V. Pihur, S. Datta, and S. Datta. Weighted rank aggregation of cluster validation measures: a monte carlo cross-entropy approach. *Bioinformatics*, 23, 2007.
- V. Pihur, G. Brock, and S. Datta. Cluster validation for microarray data: an appraisal. In *Advances in Multivariate Statistical Methods*. Springer, 2009.
- A. A. Pollen, T. J. Nowakowski, J. Shuga, X. Wang, A. A. Leyrat, J. H. Lui, N. Li, L. Szpankowski, B. Fowler, P. Chen, et al. Low-coverage single-cell mrna sequencing reveals cellular heterogeneity and activated signaling pathways in developing cerebral cortex. *Nature Biotechnology*, 32, 2014.
- R. Qi, A. Ma, Q. Ma, and Q. Zou. Clustering and classification methods for single-cell rna-sequencing data. *Briefings in Bioinformatics*, 21, 2020.
- P. J. Rousseeuw. Silhouettes: a graphical aid to the interpretation and validation of cluster analysis. *Journal of Computational and Applied Mathematics*, 20, 1987.

REFERENCES REFERENCES

R. C. Team. *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria, 2022.

- B. Vieth, S. Parekh, C. Ziegenhain, W. Enard, and I. Hellmann. A systematic evaluation of single cell rna-seq analysis pipelines. *Nature Communications*, 10, 2019.
- J. H. Ward Jr. Hierarchical grouping to optimize an objective function. *Journal of the American Statistical Association*, 58, 1963.
- T.-T. Wong. Performance evaluation of classification algorithms by k-fold and leave-one-out cross validation. *Pattern Recognition*, 48, 2015.
- L. Yan, M. Yang, H. Guo, L. Yang, J. Wu, R. Li, P. Liu, Y. Lian, X. Zheng, J. Yan, et al. Single-cell rnaseq profiling of human preimplantation embryos and embryonic stem cells. *Nature Structural & Molecular Biology*, 20, 2013.
- S. Zhang, X. Li, J. Lin, Q. Lin, and K.-C. Wong. Review of single-cell rna-seq data clustering for cell-type identification and characterization. *RNA*, 29, 2023.
- J. Žurauskienė and C. Yau. pcareduce: hierarchical clustering of single cell transcriptional profiles. *BMC Bioinformatics*, 17, 2016.

6 Supplementary Materials

6.1 Illustrations

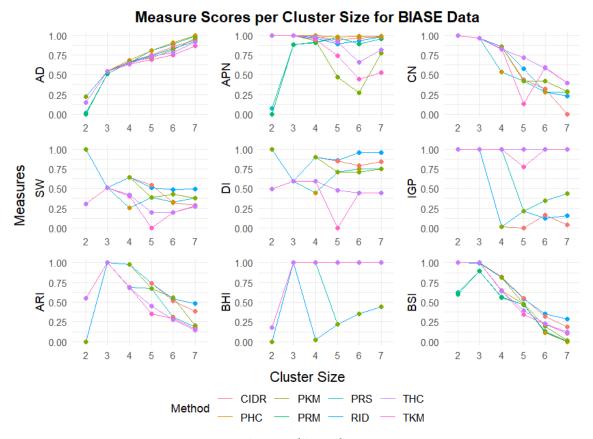


Figure 2: biase plot

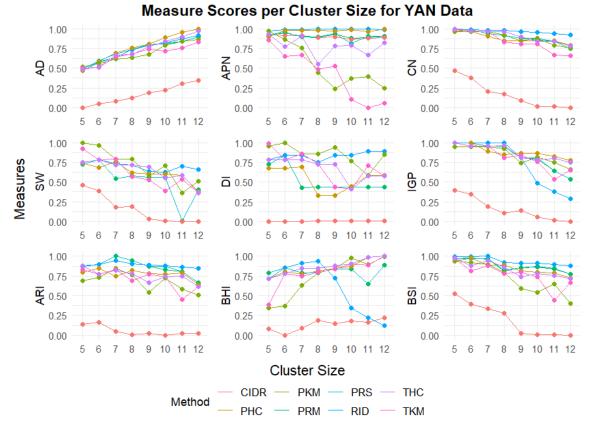


Figure 3: yan plot

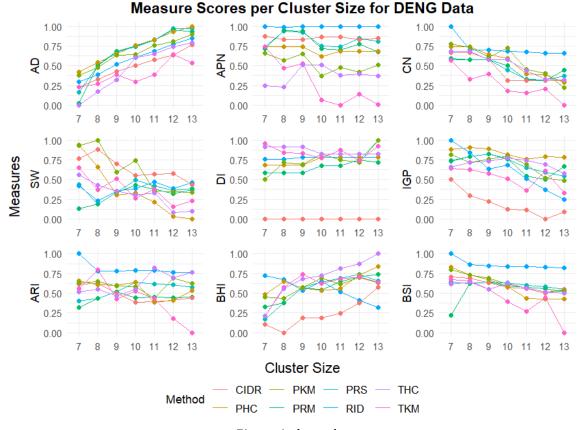


Figure 4: deng plot

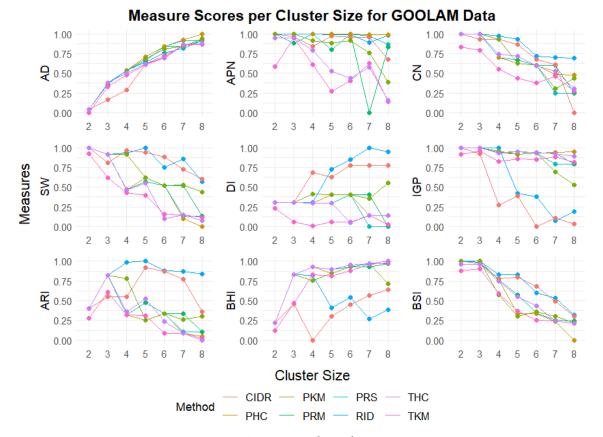


Figure 5: goolam plot

