

Breaking-Good: Explaining Breaking Dependency Updates with Build Analysis

Frank Reyes^{*}, Benoit Baudry[†], and Martin Monperrus^{*}

^{*}KTH Royal Institute of Technology, Sweden

[†]Université de Montréal, Canada

Abstract—Dependency updates often cause compilation errors when new dependency versions introduce changes that are incompatible with existing client code. Fixing breaking dependency updates is notoriously hard, as their root cause can be hidden deep in the dependency tree. We present Breaking-Good, a tool that automatically generates explanations for breaking updates. Breaking-Good provides a detailed categorization of compilation errors, identifying several factors related to changes in direct and indirect dependencies, incompatibilities between Java versions, and client-specific configuration. With a blended analysis of log and dependency trees, Breaking-Good generates detailed explanations for each breaking update. These explanations help developers understand the causes of the breaking update, and suggest possible actions to fix the breakage. We evaluate Breaking-Good on 243 real-world breaking dependency updates. Our results indicate that Breaking-Good accurately identifies root causes and generates automatic explanations for 70% of these breaking updates. Our user study demonstrates that the generated explanations help developers. Breaking-Good is the first technique that automatically identifies causes of a breaking dependency update and explains the breakage accordingly.

I. INTRODUCTION

Dependency management and maintenance is an essential task in modern software development [1]. Projects can have tens or hundreds of dependencies, which makes the maintenance task hard and time consuming [2]. One challenge in maintaining dependencies up-to-date is that the new dependency version can introduce incompatible changes that prevent the compilation of the client application [3]. For example, a new version of the dependency may change the API of the used library and break the build of the client code [4], [5]. Fixing these dependency related errors is a complex task that demands a detailed joint analysis of the code and its dependencies, along with a clear understanding of the expected behavior [6].

Several studies have analyzed the errors causing breaking dependency updates [7], [8]. It has been shown that the large amount of information generated in logs during client compilation, along with the need to differentiate between warnings and critical errors, poses significant challenges for developers [9]. Overall, understanding the causes of a breaking update only from logs consumes valuable time and reduces the efficiency of software maintenance [10].

To address this problem, we propose to generate explanations for breaking updates. The explanations should state the underlying causes of the breaking update point to the elements involved in the breakage. The generating explanations would

allow developers to reduce the time spent analyzing large volumes of log data and to quickly identify and fix the root cause of the breaking dependency update.

In this study, we present Breaking-Good, a tool to automatically generate explanations for breaking updates. Breaking-Good is founded on a comprehensive categorization of compilation errors related to changes in direct dependencies and indirect dependencies, incompatibilities between Java versions, and client-specific configurations. Breaking-Good extracts information from logs, analyzes dependency trees, and parses the application code to craft the best possible explanation. Using this extracted information, Breaking-Good first categorizes the causes of the breakage. For each category of compilation error, Breaking-Good provides an explanation templates, ensuring that each explanation highlights the cause of the compilation error and provides details relevant to its resolution. The Breaking-Good explanations steer the developers' attention toward the causes of the breaking dependency updates and provide suggestions for possible actions to fix the problem.

We evaluate Breaking-Good using a dataset of 243 breaking dependency updates in real-world projects. Our results indicate that Breaking-Good successfully identifies the root causes of compilation errors in 70% of cases. In particular, Breaking-Good determines that 38 breaking dependency updates are due to changes in the indirect dependencies of the project. A user study enabled us to validate the core structure of the explanation provided to developers. To the best of our knowledge, Breaking-Good is the first tool that helps developers in mitigating the common problem of breaking dependency updates with generated explanations. Also, our paper is the first to pinpoint indirect dependencies as a common cause of breaking updates.

To summarise, we make the following contributions:

- A novel approach for explaining breaking updates, which combines the analysis of build logs with the semantic comparison of dependency trees. We provide a complete overview of the dependency-related factors that trigger broken compilation in client code, with rare insights on indirect dependencies causing breaking dependency updates.
- Breaking-Good, an original tool that automatically generates explanations for breaking updates, in order to help developers find, understand and fix build breakages.

- A quantitative evaluation and a user study to evaluate Breaking-Good. We run the tool on 243 real dependency updates that caused compilation errors in the field, proving its effectiveness in 70% of the cases. The interviewed developers validate the usefulness of the explanations generated by Breaking-Good.

II. METHOD FOR EXPLAINING BREAKING DEPENDENCY UPDATES

In this section, we introduce the key concepts used in this work and we outline the main steps to automatically generate explanations for breaking dependency updates.

A. Concepts

The concept of *breaking dependency update* is a well known pain for practitioners. For a client project that declares a set of third-party dependencies, a breaking dependency update refers to an update of a dependency version, which results in breakage of the project's build [11].

Definition 1: A **breaking dependency update** is a pair of commits for a project composed by a pre-breaking commit with a passing build and a breaking commit that updates the version of one single dependency and fails the build.

In Figure 1 we illustrate a breaking dependency update found in the flink-faker project. We see a commit which updates the `datafaker` dependency from version 1.3.0 to version 1.4.0. When the continuous integration tries to build after this commit, the build fails due to compilation error *incompatible types: java.util.Date cannot be converted to java.sql.Timestamp*.

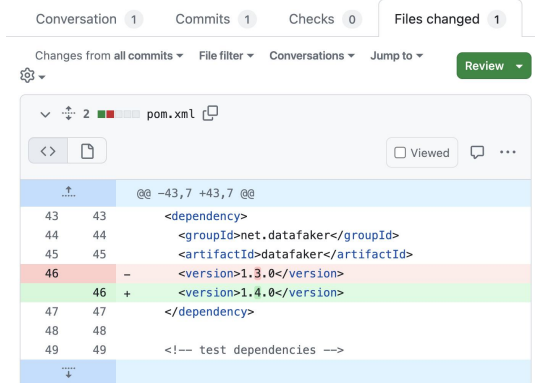


Fig. 1. Commit with dependency version update in Maven.

In this work, we aim at generating a human readable and actionable explanation that clarifies why and how the dependency update breaks the build and what the possible actions to fix the breakage are.

To effectively generate explanations, we need to know which code elements have changed between the two versions of the dependency, and how these elements interact with the client project's code. Java to basic elements such as classes, methods, and variables as *construct* [12]. Here, we use this term to designate any element that can change in the new dependency version.

Definition 2: A **construct** is a basic building unit in software, such as a class, function, module, and other similar elements. A dependency update can add or remove **constructs**, or modify their interface or behavior.

B. Overview

Our process to automatically generate explanations for breaking dependency updates starts with three inputs. It takes both versions of the updated dependency: the original version, which acts as the stable reference, and the updated version. The analysis and comparison of both versions will provide the list of constructs that have changed in the new version. The third input is the source code of the client project. The analysis of the client code, with respect to the changed constructs, will provide indications about the possible locations that need to be fixed to address the build breakage.

As output, we generate an explanation for the breakage. The explanation includes information about the causes of the build failure. We also generate suggestions on how to fix the failure in the client's project code. For the flink-faker breaking update example in Figure 1, we would automatically generate the explanation shown in Figure 3

In Figure 2, we show the different steps to automate the generation of explanations. The process starts with two independent actions. On one hand, we analyze the logs generated by the build system to determine the type of error caused by the dependency update (step 1). On the other hand, we enumerate the list of constructs that have been modified between the two versions of the dependency (step 2). Then, we combine the results of both analyses to identify the client elements affected by the changes in the new dependency version (step 3), and we automatically generate the explanation for the breaking dependency update (step 4). Each step is discussed in the following sections.

C. Error localization in client code

We locate the source of each compilation error in the log files generated by the client's build. Error lines are matched in the log to extract various types of information, including warnings, file paths, error codes, and even the actual line in the client code.

For instance, consider the following error line: [ERROR] /flink-faker/src/main/java/com/github/knaufk/flink/faker/DateTime.java:[45,40] incompatible types: java.util.Date cannot be converted to java.sql.Timestamp. From this line, we extract information such as the file path (/flink-faker/src/main/java/com/github/knaufk/flink/faker/DateTime.java) and the specific location in the file ([45,40]). This process allows us to precisely identify the nature and context of each error.

This classification step outputs, a list of errors caused by breaking dependency updates, as well as detailed information about the failure.

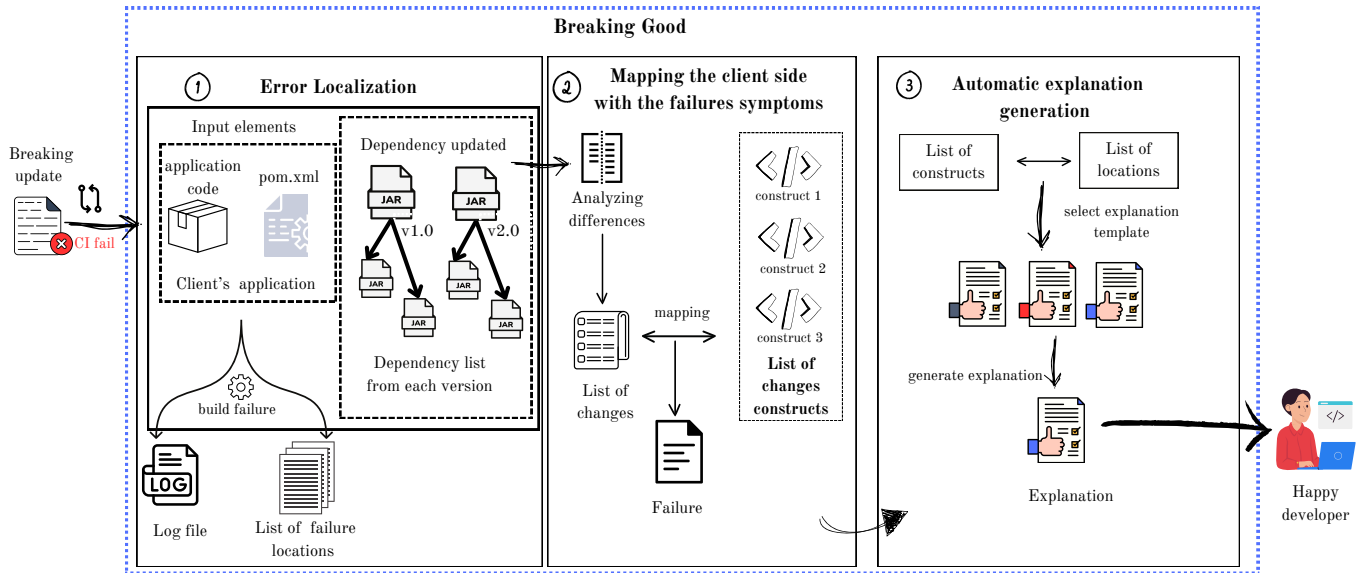


Fig. 2. Overview of Breaking-Good to automatically generate explanations for breaking dependency updates.

CI detected that the dependency upgrade from version **datafaker-1.3.0** to **datafaker-1.4.0** has failed. Here are details to help you understand and fix the problem:

1. Your client utilizes 1 construct which has been modified in the new version of the dependency.

- Method **between(java.util.Date,java.util.Date)** which has been removed in the new version of the dependency
 - The failure is identified from the logs generated in the build process.

```
[ERROR] /flink-faker/src/main/java/com/github/knaufk/flink/faker/DateTime.java:[45,40] incompatible types: java.util.Date cannot be converted to java.sql.Timestamp
```

- An error was detected in line 45 which is making use of an outdated API.

```
45 super.between(from, to);
```

To resolve this issue, there are alternative options available in the new version of the dependency that can replace the incompatible method currently used in the client. You can consider substituting the existing method with one of the following options provided by the new version of the dependency

```
Timestamp between(Timestamp, Timestamp);
```

Fig. 3. Generated explanation for the breaking dependency update in flink-flaker project.

D. Categories of breaking updates

There is a wide variety of build failures [13]. To generate an appropriate explanation, we first need to categorize the type of build failure. This will inform the type of explanation we generate. First, we focus on compilation errors and discard test failures due to change behavior.

After a systematic manual analysis of real-world dependency updates, we identify four categories of compilation errors: **Werror failure**, **Java version incompatibility**, **Direct compilation failure**, and **Indirect compilation failure**.

A build failure is categorized as a **Werror failure** when the compiler treats warnings as errors. In Maven, this option is `-Werror`, which stands for ‘warning as error’. When the new version of the dependency introduces changes that generate warnings in the client project’s code, this results in a build breakage.

A build failure is considered a **Java version incompatibility** if the Java bytecode version used for a dependency is incompatible with the JVM used during the compilation of the client project. This may cause bytecode incompatibilities or missing APIs that have been removed or introduced in some JVM versions.

The breaking update is categorized as a **Direct compilation failure** if the log file contains the pattern “COMPILATION ERROR” and the project’s compilation fails. This failure occurs when the updated dependency directly causes compilation errors in the client’s code.

In addition, a breaking update is considered a **Indirect compilation failure** if the cause of the failure is due to changes in the code of an indirect dependency (and not of the bumped dependency). We identify these failures when no changes can be found in the updated dependency. Yet, we find the root cause by analyzing the differences between the lists of indirect dependency of both versions of the updated dependency.

Table I summarizes the four main categories.

Categorizing the breakage is essential for explaining the root causes of the breakage to the developer.

TABLE I
LIST OF BREAKING UPDATE CATEGORIES.

Compilation failure category	Definition
Werror failure	The compiler treats warnings as errors due to the <code>-Werror</code> option enabled in the build configuration file.
Java version incompatibility	The Java version required by a dependency is incompatible with the JVM version used during the client project's build.
Direct compilation error	The updated dependency directly causes compilation errors in the client's code.
Indirect compilation error	The client code uses APIs from an indirect dependency that have been updated, added, or removed, causing ripple compilation errors in the client under consideration.

E. Mapping the client side errors with the root causes in dependencies

To identify the causes of the breaking update, we analyze the relation between the compilation errors in the client project and various factors that could trigger these failures. The causes can include changes in the new version of the dependency, incompatibilities in Java versions, conflicts with indirect dependencies, or specific errors due to particular configurations.

First, we analyze the compilation logs that contain the dependency update errors. We use regular expressions to identify patterns which allow us to detect the category of failures (subsection II-D).

To determine if the cause of the failure is due to **Java version incompatibility**, we search for the predefined keyword “class file has wrong version” in the logs. For example, when the dependency `spring-context` is updated from version 5.3.23 to version 6.0.2 in the `camunda-platform-7-mockito` project, the build fails due to the new version of the dependency being incompatible with the Java 11 version in which the project is built.

We determine the cause **Werror failure** if the logs contain the keywords “class file has wrong version”. For instance, by updating the `hibernate-entitymanager` dependency from version 4.2.11.Final to 5.5.14.Final in the `nem` project the compilation process fails because the `-Werror` option is enabled in the configuration file. The new version of the dependency flags as deprecated the `Query` interface which is invoked in the client code generating warnings and causing the compilation error.

To identify if the failure is due to **Direct compilation failure**, first, we identify the constructs present in the client lines of code that cause compilation errors (after error localization, see subsection II-C), resulting in a list of constructs. Next, we analyze whether some of the identified constructs are present in the list of constructs that have changed in the new version of the dependency. To get this list of changed constructs, we

use state of the art API differencing [14], the result is a list of constructs that have changed in the new dependency version. For example, when updating the `datafaker` dependency from version 1.3.0 to version 1.4.0 the client build fails due to compilation errors. We identify from the lines that trigger the error the following constructs: `Timestamp`, `between`, `getTime`. As a result, we determine that the compilation error is because the construct `between` has been modified in the new version of the dependency, causing the compilation error.

To identify **Indirect compilation failure** as the cause of the failure we retrieve the complete list of indirect dependencies for the new and previous versions of the updated dependency and compare both lists. From this comparison, each indirect dependency is in one of the following situations: no changes, deleted, added, or updated.

If a dependency has been added or removed from the list of indirect dependencies, then we analyze whether the breakage is due to the use of deleted dependency constructs or incompatible constructs defined in the new indirect dependencies. For instance, the project `docker-adapter` build fails to update the `http` dependency from version `v0.25` to version `v1.1.0` because the `org.cactoos` dependency was removed from version `v1.1.0`.

When some indirect dependencies have been updated in the new version, we analyze which constructs change in the new version of each updated indirect dependency. As a result, we obtain a complete list of all modified constructs. Subsequently, we examine whether the components causing the breakage update belong to any of the indirect dependencies that have been updated. For example, the update of `logback-classic` from version 1.2.11 to version 1.4.1 in the `pay-adminusers` project fails the build because it is not possible to load the `org.slf4j.spi.LoggingEventAware` class from the indirect dependency `slf4j-spi`.

To recapitulate, we propose a novel process of mapping the information between the error information from the build logs and the differencing of updated dependencies. As a result, we have a sound and robust categorization of the breakage cause per the ones of subsection II-D.

F. Generate an explanation with templates

To generate explanations, we have defined specific templates for each breakage category.

Java incompatibility failures are explained by specifying which Java versions are required by the client to compile with the new dependency version. The explanation indicates which workflow files need to be updated, with the actual Java version required by the new version of the dependency to solve the version incompatibility problem. In addition, the explanation lists the errors extracted from the logs that are triggered by the incompatibility problem. Figure 4 show an example of the explanation.

For **Werror Failures**, the explanation template flags warnings that have been escalated to errors due to the `Werror` option. As a result, it presents the list of warnings generated by the use of deprecated constructs which belong to the new version

CI detected that the dependency upgrade from version **spring-core-5.3.23** to **spring-core-6.0.3** has failed. The new version of the dependency require a different version of Java.

CI uses **Java 11** (class version **55.0**). The new version of the dependency requires **Java 17** (class version **61.0**).

To resolve this issue, you need to update the Java version to **Java 17** in the following files:

- test-suite.yml
- build.yml
- findbugs.yml

▼ Here you can find a list of failures identified from the logs generated in the build process

- [ERROR]
/LPVS/src/main/java/com/lpvs/controller/GitHubWebhooksController.java:[25,32] cannot access org.springframework.util.StringUtils [ERROR] bad class file:
/root/.m2/repository/org/springframework/spring-core/6.0.3/spring-core-6.0.3.jar(/org/springframework/util/StringUtils.class)
[ERROR] class file has wrong version 61.0, should be 55.0
[ERROR] Please remove or make sure it appears in the correct

Fig. 4. Generated explanation for a breaking dependency update due to **Java version incompatibility**.

of the dependency updated used in the client application. An example explanation can be found in the Figure 5

CI detected that the dependency upgrade from version **hibernate-entitymanager-4.3.11.Final** to **hibernate-entitymanager-5.6.14.Final** has failed. Here are details to help you understand and fix the problem:

1. This occur because the option **failureOnWarning** is activated in the following files:
 - nem/core/pom.xml
 - nem/deploy/pom.xml
 - nem/peer/pom.xml
 - nem/nis/pom.xml

▼ Here you can find a list of warnings identified from the logs generated in the build process

- [WARNING]
/nem/nis/src/main/java/org/nem/nis/dao/retrievers/NamespaceRetriever.java:[66,50]
createCriteria(java.lang.Class) in
org.hibernate.SharedSessionContract has been deprecated

Fig. 5. Generated explanation for a breaking dependency update due to **Warning failure**.

In the case of **Direct compilation failures**, the template highlights the number of constructs causing the compilation failures. For each construct, the template specifies its signature, the lines where it is used in the client code, and the information gathered from the logs related to the failure. In addition, it includes suggestions for constructs added in the new version of the dependency that may be utilized to fix the problem. To create this list of suggestions, first, we identify the constructs added in the updated version of the dependency. Next, we analyze such constructs that have the same name and belong to the same class as the construct that causes the breakage For

example, Figure 3 is an explanation generated from a case of direct compilation failures.

For **Indirect compilation failure**, the template follows the same structure as for **Direct compilation failure** with the number of constructs causing the compilation error and the information gathered from the logs related to the failure. Also, it also includes suggestions for alternative constructs. Crucially, it also includes additional information about the indirect dependency: 1) its changed version and 2) where it fits in the dependency tree. An example explanation can be found in the Figure 6

CI detected that the dependency upgrade from version **maven-surefire-common-3.0.0-M5** to **maven-surefire-common-3.0.0-M7** has failed. Here are details to help you understand and fix the problem:

Your code depends on indirect dependency **surefire-api** which has been updated from version **3.0.0-M5** to **3.0.0-M7**. The new version of the indirect dependency has introduced breaking changes which are causing the build to fail.

1. Your client utilizes **5** constructs which has been modified in the new version of the dependency.
 - ► Method **getWildcard()** which has been **removed** in the new version of the dependency
 - ► Method **getWildcard()** which has been **removed** in the new version of the dependency
 - ► Method **getWildcard()** which has been **removed** in the new version of the dependency
 - ► Method **getWildcard()** which has been **removed** in the new version of the dependency
 - ► Method **getWildcard()** which has been **removed** in the new version of the dependency

Fig. 6. Generated explanation for a breaking dependency update due to **Indirect compilation failure**.

Each template ensures that each breakage category is addressed with a clear, human-readable explanation, providing developers with the necessary, concrete information to identify and fix the broken build.

G. Integration in a development workflow

To keep Java project dependencies up to date, developers can choose to update them manually or do automated updates through bots such as Dependabot or Renovate. They automate the process by creating pull requests with the required updates. Such updates can break the application build due to changes in the API or behavior of the new dependency version. To address this problem, Breaking-Good can be tightly integrated into the dependency update process by monitoring dependency update pull requests, regardless of whether they are generated by bots or humans. Breaking-Good would 1) automatically generate the detailed explanation about the causes of the broken dependency update 2) push that explanation as a comment on the pull request. These explanations integrated in the development

platform allow developers to quickly access the information needed to understand and fix the build breakage.

H. Implementation

Breaking-Good is implemented in Java and runs on Java 17. We locate the lines that cause compilation errors in the client code using AST analysis with Spoon [15], based on the information gathered from the logs. We rely on japicmp [14], a static analysis tool that detects binary changes between dependencies, to identify changes causing failures. We use Maven to generate the dependency tree for the new and previous versions of the dependency update.

III. EXPERIMENTAL METHODOLOGY

In this section, we present the research questions that serve as the basis to evaluate Breaking-Good, as well as the methodology to answer them.

A. Research Questions

In this paper, we study the following research questions:

- RQ1: **What is the prevalence of each failure category behind breaking dependency updates?**
- RQ2: **How helpful are the automatically generated explanations for developers to understand and fix breaking dependency updates?**
- RQ3: **What is the extent of breaking dependency updates due to indirect dependencies?**

B. Study Subjects

We performed all experiments on the BUMP benchmark, which contains a total of 571 fully reproducible breaking dependency updates. These updates are distributed over 153 Java projects collected from GitHub. Each project has more than 7 contributors, over 100 commits, and more than 10 stars, ensuring significant diversity in the selected projects. The generation of automatic explanations was applied for the 243 breaking updates categorized as compilation failures by BUMP.

C. Methodology for RQ1

The goal of this research question is to determine the occurrence of different types of compilation errors that cause breaking dependency updates, and the prevalence of the explanations generated for each category. First, we reproduce the breaking dependency updates of BUMP and select those that fail due to compilation errors. We examine each log generated by the breaking updates to classify the failures. We categorize the compilation errors into four categories, as presented in subsection II-D. Second, we generated explanations using specific templates for each dependency break update. We then analyzed the total number of explanations generated and the root causes of the missing explanations. Through this approach, we provide a detailed and quantitative understanding of the underlying causes of compilation errors resulting from breaking dependency updates.

D. Methodology for RQ2

In this research question, we aim to evaluate the quality of explanations generated by Breaking-Good. We designed an online questionnaire to collect feedback about developers. We selected 5 researchers specialized in software engineering and invited them to participate in the study. The participants analyzed two different cases of breaking updates. The questionnaire included both Likert-scale questions and open-ended questions, to obtain a detailed evaluation of the level of difficulty in identifying the causes of breaking updates, the usefulness of the explanations provided, and the strengths and weaknesses of the generated explanation. The answers to Likert-scale questions were analyzed quantitatively to identify trends and patterns in participants' perceptions. Responses to open-ended questions were analyzed qualitatively to identify recurring themes and better understand the researchers' feedback.

E. Methodology for RQ3

A key novelty of our work is to consider that a dependency update can break because of an indirect dependency. In this question, we investigate these cases in detail. We use the subset of 38 breaking updates categorized as **Indirect compilation failure** in RQ1. We analyze whether the indirect dependency was modified, removed, or added in the new version of the updated dependency. We also analyze how the constructs that trigger the breaking update failure affect the client's compilation process.

IV. EXPERIMENTAL RESULTS

In this section, we present the experimental results to answer our research questions.

A. RQ1 (Breaking Category Prevalence)

The goal of this RQ is to classify the compilation errors behind breaking dependency updates and the prevalence for each explanation type. Each compilation error is classified into four different categories, as described in Table I. In Table II we report the number of occurrences of each compilation error category and the number of generated explanations per category.

TABLE II
NUMBER OF BREAKING UPDATES PER BREAKAGE CATEGORY AND NUMBER OF SUCCESSFULLY GENERATED EXPLANATIONS PER CATEGORY.

Compilation error category	Number of breaking updates	Number of explanations
Direct compilation failure	116 (47%)	82
Indirect compilation failure	38 (16%)	2
Java version incompatibility	78 (34%)	78
Werror failure	8 (3%)	8

BUMP contains a total of 243 dependency updates that fail due to compilation errors. Breaking-Good aims to generate automatic explanations for each of the categorized breaking updates in Table II. Each explanation is generated according to the corresponding template. Breaking-Good generates a total

of 181 explanations for 243 breaking dependency updates that fail due to compilation errors.

Out of our set of 243 breaking updates, 116 (47%) fail due to a change in the updated dependency, which affects the client application. They are categorized as **Direct compilation failure**. Such failures occur when the client application uses constructs that have been modified or removed in the new version of the dependency. The explanations detail the modifications or deletions of constructs in the new version of the dependency and suggest alternatives to resolve the problem. Continuing with the example in Figure 1, when updating the `datafaker` dependency from version 1.3.0 to version 1.4.0, the compilation fails due to a change in the API of the `between` method in the new version of the updated dependency. Figure 3 contains the generated explanation of the update after the breaking update. The explanation shows how the change in the API of the `between` method causes the breaking update.

We categorized 38 (16%) breaking updates as **Indirect compilation failure**. This happens when an indirect dependency is added, removed, or modified in the dependency tree of the updated dependency and when the indirect dependency is used in the application code. For example, Figure 6 shows the dependency update of `maven-surefire-common` from version 3.0.0-M5 to version 3.0.0-M7. The upgrade fails due to the update of the indirect dependency `surefire-api` from version 3.0.0-M5 to version 3.0.0-M7. The new version of the indirect dependency removes the `getInstance` method that is used in the client application.

Breaking-Good successfully generates an explanation for 82 of the 116 **Direct compilation failure**, as well as for 13 of the 38 broken updates classified as **Indirect compilation failure**. The explanations provide details about the affected dependencies, and the specific constructs causing the errors. They also suggest adjustments to the client code to resolve the problems. Breaking-Good cannot generate an explanation when the comparison between the two versions of a dependency returns no element. In these cases, we know that a dependency has changed, we know the dependency is the root cause for the breaking update, but we cannot retrieve the exact set of constructs that have changed between the two versions of the dependency. This is due to the underlying tool for comparing the two dependency versions, `japicmp`, and we leave for future work the improvement of this tool. In section subsection IV-C, we provide a more detailed analysis of the causes that trigger indirect compilation failures.

Java version incompatibility occurs in 78 (34%) cases. This happens when the Java version used in the workflow to compile and test the client application differs from the Java version required by the new version of the dependency. For this category, Breaking-Good automatically generates an explanation for all the 78 breakages. Figure 4 shows an example of an explanation generated for updating the `spring-core` dependency from version 5.3.23 to version 6.0.3. The explanation points the developer to the cause of the breakage: an incompatibility between Java 11, which is used to compile the client, and Java 17, which is required by the new version

of the dependency.

The least frequent cause of compilation error is a Werror failure. In this scenario, the build system treats warnings as errors, resulting in compilation failure. Warnings occur, for example, when the new version of the dependency declares some constructs as deprecated, and they are used in the client code. We observe this phenomenon for 8 (3%) breaking dependency updates. Breaking-Good generates an explanation for each of these 8 breakages. The generated explanation show the warnings generated by the deprecated constructs. It also includes the list of build configuration files that contain the enabled option. Figure 5 shows the explanation generated for the breaking update of the dependency `hibernate-entitymanager` from version 4.3.11.Final to version 5.6.14.Final in the project `nem`. The explanation highlights how 4 configuration files contain the enabled option causing the breaking updates.

To our knowledge, this experiment is the most fine-grain overview of the most common causes of compilation failures for breaking updates. Changes in the direct dependency’s API only cause half of the failures (47%). Java version incompatibility and changes in indirect dependencies are also major sources of breaking dependency updates, a result that has never been discussed before. This detailed knowledge of root causes allows us to propose high quality explanations to developers in order to locate and fix the issue. In the case of failures due to Java version incompatibilities and client-specific configurations, Breaking-Good is capable of generating 100% of the explanations for the failure.

Answer to RQ1: On the recent BUMP benchmark [11], Breaking-Good find that, 47% of compilation errors are due to changes in direct dependencies, 33% are due to changes in indirect dependencies, 17% are caused by Java version incompatibility and 4% result from Werror failures. Breaking-Good automatically generates explanations for 70% of these breaking dependency updates. These result highlight the diverse nature of compilation errors and clearly show the need for considering different scenarios for explaining build failures due to dependency updates.

B. RQ2 (User Study)

In this research question, we evaluate the quality of automatically generated explanations. To evaluate the quality of the explanations, we survey a group of researchers in computer science. The survey allows us to collect feedback about the generated explanations in terms of quality, usefulness, and accuracy. We evaluate 10 generated explanations in total covering all categories, allowing for inclusive and diverse feedback. To illustrate the result, we use the explanation shown in Figure 3 generated by Breaking-Good and evaluated by the participants.

Identifying the causes of breakages is a challenging task for developers. Our explanations include a specific section to address that problem, pointing to the cause of the breaking update. The explanation in Figure 3 shows that the cause

of the breaking update is the modification of the `between` method. For 8 cases in our survey, 4 of the participants felt that identifying the cause of a breaking update was “very difficult” or “extremely difficult” when only having access to the Maven logs. However, when we provided the generated explanation only 1 participant reported difficulty in identifying the cause of the breakage. Additionally, 4 participants reported that detailed explanations made it much easier to identify the root cause of the problem, providing a valuable foundation for addressing its resolution.

It explained exactly where the bugs occurred in the program and provided a more visualized explanation of what had happened.

Breaking-Good’s explanations significantly improve the understanding of the cause of breaking updates.

Regarding the usefulness of the explanations, all participants rated them as “very useful” for resolving issues in the compilation process. One participant highlighted the value of the explanations, claiming the explanations would significantly reduce the time needed to analyze breaking updates. The qualitative feedback revealed several strengths of our novel approach. The survey participants appreciated the clarity and precision of the explanations, as well as their ability to contextualize the problem. The participants shared that the suggestions helped to resolve the failure.

The survey shows that the explanations are accurate, which can help reduce the time required to resolve the error. One developer mentions that adding icons to the sections covering the constructs causing the errors helps to focus on the important sections of the explanation. On the other hand, the participants agree that grouping all the information related to the breaking update together helps to understand the error better. This positive feedback validates some key design decisions of Breaking-Good.

The idea of providing a detailed explanation of the error shown in the Maven compilation process is already very amazing.

However, some weaknesses were also identified. Some respondents mentioned that, in certain cases, explanations could benefit from further customization of the information presented. For example, the identified constructs could be represented with a simple name instead of the fully qualified name, improving the construct’s readability and identification in the client’s code. In the example of Figure 7, participants say that the names of

1. Your client utilizes 1 instructions which has been modified in the new version of the dependency.
 - Method `between(java.util.Date,java.util.Date)` which has been removed in the new version of the dependency

Fig. 7. Example of construct that causes breaking update.

the parameters that are passed to the method can be represented in a more human-readable text. Another weakness identified

was the inclusion of error lists extracted from Maven logs. One developer pointed out that having duplicate information seemed unnecessary.

Answer to RQ2: In the user study, the surveyed developers appreciated the clarity of explanations generated by Breaking-Good. They noted the usefulness of concrete feedback given to fix the breaking update. Overall, the use study gives evidence that Breaking-Good generates actionable explanations, which are effective at helping developers finding the root cause of a breaking update.

C. RQ3 (Indirect Dependency Problem)

In this research question, we dive into one specific type of breaking dependency update: the ones classified as **Indirect compilation failure**, for which we are the first to report on. This is a special type of breakage, where a project updates one of its dependencies, but the breakage is not due to a change in that direct dependency. Instead, the breakage is due to an indirect dependency. Our paper is the first to analyze this problem which happens a lot in the field and poses problems to practitioners. In this research question, we focus on 38 breaking dependency updates classified as **Indirect compilation failure**.

TABLE III
CHANGES IN INDIRECT DEPENDENCIES THAT TRIGGER BREAKING UPDATES

Indirect dependency modification	Number of breaking updates
REMOVED DEP.	25
UPDATED DEP.	7
ADDED DEP.	6

Table III presents the three types of changes that we observe number of breaking updates because indirect dependencies are removed, modified, or added in the dependency update. A total of 27 breaking updates fail due to indirect dependencies being removed in the new version of the updated direct dependency. The addition of indirect dependencies caused 6 breaking dependency updates, and 7 breaking updates out of 38 fail due to the update of an indirect dependency. All those dependency updates introduce changes in the indirect dependencies.

For 38 breaking updates, more than one indirect dependency is updated. In 37/38 breaking updates, only one of the updated indirect dependencies causes the failure. One breaking update is due to breaking changes in two indirect dependencies.

Adding a new indirect dependency can result in a breakage, when the added dependency creates a version conflict with the same dependency that is present elsewhere in the dependency tree, but with a different version. In this case, the Maven dependency resolution algorithm selects the version from the update. For example, by updating the `asto-core` dependency from `v1.13.0` to `v1.15.3` in the `docker-adapter` project, the new transitive dependency `hamcrest-core` is added. Yet, `hamcrest` is declared as a direct dependency of `docker-adapter`. `hamcrest-core`

is a higher version of `hamcrest`, which contains the same class structure as `hamcrest`. The Maven algorithm resolves to use `hamcrest-core` instead of `hamcrest`, modifying the project's classpath, causing the breakage. For example, the `StringContainer` class is contained in both dependencies. Yet, the class constructor is not the same in both dependencies, resulting in incompatibilities that cause *constructor cannot be applied to given types* error during compilation build.

Removing indirect dependencies in the new version of an updated dependency can considerably impact the client application. Recall that in Java, it is perfectly normal for application developers to invoke functions from indirect dependencies. While this is not a recommended practice with respect to encapsulation, we have seen this happens. In this case, the removal of the indirect dependency break the application's build because it relies of non-existent code. For example, when the developer of `code-coverage-api-plugin` project updates the `acceptance-test-harness` dependency from version `5631.v2dcb_f66e58f7` to version `5588.vd13b_52985008`, a total of 27 indirect dependencies are removed in the new version. The removal of the `htmlunit` dependency causes the compilation of the client code to fail because it is not possible to access constructs that belong to the removed dependency, causing *cannot find symbol* errors. For future work on mitigating this problem, we a static analysis for identifying client code using indirect dependencies.

We consider that an indirect dependency is updated if its version changes and it involves changes to the API or behavior. If a modified construct from the indirect dependency is used in the client application, this can lead to compilation errors that result in a breaking update. For the client, the use of indirect dependency constructs that are modified creates a breakage. For example, updating the `maven-surefire-common` dependency from version `3.0.0-M5` to version `3.0.0-M7` in the `flacoco` project fails to compile the client application code. A failure occurred because the `getWildcard` method can not be found. This method belongs to the indirect dependency `surefire-api`, which was updated uner the hood from version `3.0.0-M5` to version `3.0.0-M7`. The method was removed in the new version of the `surefire-api` dependency which causes *cannot find symbol* errors.

Answer to RQ3: In the field, indirect dependencies that are changed as a ripple of updating one direct dependency can trigger a breaking update. We observe that additions, deletions, and modifications of indirect dependencies create various scenarios where the change propagates as compilation error in the client application. There is a need for research to study this problem which happens a lot in the field. We believe that dedicated tooling would help developer 1) to ensure to no function from indirect dependencies are called and 2) to help developers understand and fix the indirect breakage when this happens.

V. RELATED WORK

In the following section, we discuss the state of the art in two areas that address the problem of breaking dependency updates: build breakage assistance and breaking changes.

A. Build Breakage Assistance

In software development, build breakages occur due to various factors, including changes in dependencies. Addressing these build breakages is crucial for maintaining the stability and functionality of the software.

Vassallo et al. [3] propose BART to summarize Maven build failures and suggest solutions from StackOverflow, aiming to assist developers in understanding and fixing build breakages. Zhang et al. introduce BuildSonic [16], to address configuration problems in continuous integration (CI) processes. The study presents a comprehensive catalog of CI performance configuration issues, detailing each element including its description, solution, and identification method. Al-Kofahi et al. [17] detect bugs that trigger build issues in Makefile. Silva et al. [18] investigate the frequency, structure, and resolution patterns of build conflicts arising from collaborative software development, based on analysis of 451 open-source Java projects' merge scenarios and Travis build logs. HireBuild [19] proposes automatic patch generation for Gradle build scripts, using fix patterns derived from historical fixes and making recommendations based on build log similarity. HireBuild successfully fixed 11/24 (45%) build failures in a time comparable to manual fixes. Lou et al. [20] investigate the resolution of build failures in Maven, Ant, and Gradle, analyzing 1,080 Stack Overflow issues and identifying effective fix patterns. It highlights the prevalence of issues in build scripts related to plugins and dependencies, underscoring the need for nuanced approaches to mitigate the challenges developers face in resolving build failures. Li et al. [21] study the challenges of the Dependency Maze (DM) faced by developers in the .NET ecosystem by proposing NuFix, an automated technique that utilizes empirical studies of real DM issues to generate high-quality fixes adopted by popular .NET projects.

Breaking-Good differs from the previous approaches, as it analyzes the logs generated during the build process and then analyzes the source code of the application to locate the lines that cause the failure. This novel combination of code analysis and log analysis, allows us to identify the client elements affected by the new dependency version.

B. Studies of Breaking Changes

Research on the problem of breaking changes in software dependencies and its implications for development have been addressed through different studies.

Yamaoka et al. [22] propose a technique using Merkle trees to identify incompatibilities in client-side library updates. This method compares execution traces before and after the update to identify possible library methods that could cause incompatibilities. PyDFix [23] detects dependency errors in Python compilations. PyDFix is evaluated on two bug datasets, BugSwarm and BugsInPy, identifying a high proportion of

builds as unreproducible due to dependency errors. Bogart et al. [24] explore the impact of disruptive updates on open source projects, investigating methods and processes used by software development communities to manage and adapt to major changes, analyzing platforms (Eclipse, NPM, and CRAN). Supatsara et al. [25] investigate the acceptance rates of insecure dependency updates across 1,500 JavaScript npm libraries categorized into Top-500, Middle-500, and Bottom-500 tiers, revealing higher acceptance rates in lower-tier libraries. CompCheck [26] analyzes how a dependency update affects client behavior. CompCheck generates a knowledge base from compatibility issues between clients and their updates. A total of 202 sites in 37 open-source projects are examined by CompCheck, identifying incompatibilities in 76 of them.

The closest work to our approach is Maracas [8]. Maracas analyses the changes between two versions of a Java library using a static analysis approach based on Java bytecode. Maracas determines if the changes introduced by the new version of the dependency are used in the client's code, providing a detailed understanding of the implications of library updates on client code. Breaking-Good focuses on identifying the changes introduced in the new version of the dependency and their relationship with the compilation failures detected in the build process of the client application, while Maracas identifies these changes through static analysis of client code. Our approach accurately identifies which lines are affected by the changes introduced, unlike Maracas, which identifies lines that are not invoked in the build process. While Maracas only analyzes changes between two versions of a dependency and how they affect client code, Breaking-Good also analyzes how changes in indirect dependencies defined in the new version of the dependency influence client behavior. Breaking-Good analyzes if the elements causing the breaking dependency update belong to an indirect dependency that has been modified, removed, or added in the new version of the dependency being updated.

VI. CONCLUSION

In this paper, we have introduced Breaking-Good, a novel technique that combines log and dependency analysis to automatically generate explanations for breaking dependency updates. Breaking-Good provides a detailed categorization of the causes of compilation errors triggered by dependency updates. We are the first to report quantitative and qualitative findings on the main causes of compilation error due to breaking updates: API changes in direct and indirect dependencies, incorrect build configurations and incompatibilities between Java versions required by the client and dependencies. To our knowledge, Breaking-Good is the first technique that highlights and mitigates the common problem in practice of indirect dependencies causing breaking updates. Overall, Breaking-Good is an essential missing tool in the developer toolbox, facilitating the understanding and resolution of breaking updates and reducing the time and effort spent in dependency-related software engineering problems.

VII. ACKNOWLEDGMENT

This work was supported by the CHAINS project funded Swedish Foundation for Strategic Research (SSF), the WebInspector project funded by the Swedish Research Council (VR), as well as by the Wallenberg Autonomous Systems and Software Program (WASP) funded by the Knut and Alice Wallenberg Foundation.

REFERENCES

- [1] G. A. A. Prana, A. Sharma, L. K. Shar, D. Foo, A. E. Santosa, A. Sharma, and D. Lo, "Out of sight, out of mind? How vulnerable dependencies affect open-source projects," *Empirical Software Engineering*, vol. 26, no. 4, pp. 1–34, 7 2021. [Online]. Available: <https://link.springer.com/article/10.1007/s10664-021-09959-3>
- [2] I. Pashchenko, D. L. Vu, and F. Massacci, "A Qualitative Study of Dependency Management and Its Security Implications," *Proceedings of the ACM Conference on Computer and Communications Security*, pp. 1513–1531, 10 2020. [Online]. Available: <https://dl.acm.org/doi/10.1145/3372297.3417232>
- [3] C. Vassallo, S. Proksch, T. Zemp, H. C. Gall, C. Roy, J. Siegmund, and D. Lo, "Every build you break: developer-oriented assistance for build failure resolution," *Empirical Software Engineering*, 2020. [Online]. Available: <https://doi.org/10.1007/s10664-019-09765-y>
- [4] E. Ruiz, S. Mostafa, and X. Wang, "Beyond api signatures: An empirical study on behavioral backward incompatibilities of java software libraries," *Department of Computer Science, University of Texas at San Antonio, Tech. Rep.*, 2015.
- [5] B. Dagenais and M. P. Robillard, "Recommending adaptive changes for framework evolution," *ACM Transactions on Software Engineering and Methodology (TOSEM)*, vol. 20, no. 4, pp. 1–35, 2011.
- [6] D. Foo, H. Chua, J. Yeo, M. Y. Ang, and A. Sharma, "Efficient static checking of library updates," in *Proceedings of the 2018 26th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, ser. ESEC/FSE 2018. New York, NY, USA: Association for Computing Machinery, 2018, p. 791–796. [Online]. Available: <https://doi.org/10.1145/3236024.3275535>
- [7] D. Jayasuriya, V. Terragni, J. Dietrich, and K. Blincoe, "Understanding the Impact of APIs Behavioral Breaking Changes on Client Applications," *Proceedings of the ACM on Software Engineering*, vol. 1, p. 23, 2024. [Online]. Available: <https://doi.org/10.1145/3643782>
- [8] L. Ochoa, T. Degueule, J. R. Falleri, and J. Vinju, "Breaking bad? Semantic versioning and impact of breaking changes in Maven Central: An external and differentiated replication study," *Empirical Software Engineering*, vol. 27, no. 3, pp. 1–42, 5 2022. [Online]. Available: <https://link.springer.com/article/10.1007/s10664-021-10052-y>
- [9] C. Zhang, B. Chen, L. Chen, X. Peng, and W. Zhao, "A large-scale empirical study of compiler errors in continuous integration," in *Proceedings of the 2019 27th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, ser. ESEC/FSE 2019. New York, NY, USA: Association for Computing Machinery, 2019, p. 176–187. [Online]. Available: <https://doi.org/10.1145/3338906.3338917>
- [10] P. W. Gonçalves, E. Fregnan, T. Baum, K. Schneider, and A. Bacchelli, "Do explicit review strategies improve code review performance? Towards understanding the role of cognitive load," *Empirical Software Engineering*, vol. 27, no. 4, pp. 1–46, 7 2022. [Online]. Available: <https://link.springer.com/article/10.1007/s10664-022-10123-8>
- [11] F. Reyes, Y. Gamage, G. Skoglund, B. Baudry, and M. Monperrus, "BUMP: A Benchmark of Reproducible Breaking Dependency Updates," *arXiv preprint arXiv:2401.09906*, 2024.
- [12] "The Java® Language Specification." [Online]. Available: <https://docs.oracle.com/javase/specs/jls/se8/html/index.html>
- [13] F. Hassan, "Tackling build failures in continuous integration," *Proceedings - 2019 34th IEEE/ACM International Conference on Automated Software Engineering, ASE 2019*, pp. 1242–1245, 11 2019.
- [14] Maven, "japicmp-base," 2022. [Online]. Available: <https://siom79.github.io/japicmp/>

- [15] R. Pawlak, M. Monperrus, N. Petitprez, C. Noguera, and L. Seinturier, "Spoon: A Library for Implementing Analyses and Transformations of Java Source Code," *Software: Practice and Experience*, vol. 46, pp. 1155–1179, 2015. [Online]. Available: <https://hal.archives-ouvertes.fr/hal-01078532/document>
- [16] C. Zhang, B. Chen, J. Hu, X. Peng, and W. Zhao, "BuildSonic: Detecting and Repairing Performance-Related Configuration Smells for Continuous Integration Builds," *ACM International Conference Proceeding Series*, 9 2022. [Online]. Available: <https://dl.acm.org/doi/10.1145/3551349.3556923>
- [17] J. Al-Kofahi, H. V. Nguyen, and T. N. Nguyen, "Fault localization for build code errors in makefiles," in *Companion Proceedings of the 36th International Conference on Software Engineering*, ser. ICSE Companion 2014. New York, NY, USA: Association for Computing Machinery, 2014, p. 600–601. [Online]. Available: <https://doi.org/10.1145/2591062.2591135>
- [18] L. Da Silva, P. Borba, and A. Pires, "Build conflicts in the wild," *Journal of Software: Evolution and Process*, vol. 34, no. 4, p. e2441, 4 2022. [Online]. Available: <https://onlinelibrary.wiley.com/doi/full/10.1002/smr.2441> <https://onlinelibrary.wiley.com/doi/abs/10.1002/smr.2441> <https://onlinelibrary.wiley.com/doi/10.1002/smr.2441>
- [19] F. Hassan and X. Wang, "HireBuild: An Automatic Approach to History-Driven Repair of Build Scripts," *2018 IEEE/ACM 40th International Conference on Software Engineering (ICSE)*, pp. 1078–1089, 5 2018.
- [20] Y. Lou, Z. Chen, Y. Cao, D. Hao, and L. Zhang, "Understanding build issue resolution in practice: Symptoms and fix patterns," *ESEC/FSE 2020 - Proceedings of the 28th ACM Joint Meeting European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, pp. 617–628, 11 2020. [Online]. Available: <https://dl.acm.org/doi/10.1145/3368089.3409760>
- [21] Z. Li, Y. Wang, Z. Lin, S. C. Cheung, and J. G. Lou, "Nufix: Escape From NuGet Dependency Maze," *Proceedings - International Conference on Software Engineering*, vol. 2022-May, pp. 1545–1557, 2022. [Online]. Available: <https://dl.acm.org/doi/10.1145/3510003.3510118>
- [22] A. Yamaoka, T. Son, K. Shimari, T. Ishio, and K. Matsumoto, "Comparing Execution Trace Using Merkle-Tree to Detect Backward Incompatibilities," *Proceedings - International Conference on Software Analysis, Evolution and Reengineering*, 2024. [Online]. Available: <https://asm.ow2.io/>
- [23] S. Mukherjee, A. Almanza, and C. Rubio-González, "Fixing dependency errors for Python build reproducibility," in *ISSTA 2021 - Proceedings of the 30th ACM SIGSOFT International Symposium on Software Testing and Analysis*. ACM, 2021, pp. 439–451. [Online]. Available: <https://doi.org/10.1145/3460319.3464797>
- [24] C. Bogart, C. Kästner, J. Herbsleb, F. Thung, C. Kästner, and J. Herbsleb, "When and How to Make Breaking Changes: Policies and Practices in 18 Open Source Software Ecosystems," *ACM Transactions on Software Engineering and Methodology*, vol. 30, no. 4, 2021. [Online]. Available: <https://doi.org/10.1145/3447245>
- [25] S. Wattanakriengkrai, R. G. Kula, C. Treude, and K. Matsumoto, "Lessons from the Long Tail: Analysing Unsafe Dependency Updates across Software Ecosystems," *ESEC/FSE 2023 - Proceedings of the 31st ACM Joint Meeting European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, pp. 2077–2081, 11 2023. [Online]. Available: <https://dl.acm.org/doi/10.1145/3611643.3613086>
- [26] C. Zhu, M. Zhang, X. Wu, X. Xu, and Y. Li, "Client-Specific Upgrade Compatibility Checking via Knowledge-Guided Discovery," *ACM Transactions on Software Engineering and Methodology*, vol. 32, no. 4, p. 31, 5 2023. [Online]. Available: <https://dl.acm.org/doi/10.1145/3582569>