
Language Models Encode Collaborative Signals in Recommendation

Leheng Sheng¹ An Zhang^{1*} Yi Zhang² Yuxin Chen¹
Xiang Wang² Tat-Seng Chua¹

¹National University of Singapore

²University of Science and Technology of China

leheng.sheng@u.nus.edu, anzhang@u.nus.edu, zy1230@mail.ustc.edu.cn,
e1143404@u.nus.edu, xiangwang1223@gmail.com, dcscts@nus.edu.sg

Abstract

Recent studies empirically indicate that language models (LMs) encode rich world knowledge beyond mere semantics, attracting significant attention across various fields. However, in the recommendation domain, it remains uncertain whether LMs implicitly encode user preference information. Contrary to the prevailing understanding that LMs and traditional recommender models learn two distinct representation spaces due to a huge gap in language and behavior modeling objectives, this work rethinks such understanding and explores extracting a recommendation space directly from the language representation space. Surprisingly, our findings demonstrate that item representations, when linearly mapped from advanced LM representations, yield superior recommendation performance. This outcome suggests the homomorphism between the language representation space and an effective recommendation space, implying that collaborative signals may indeed be encoded within advanced LMs. Motivated by these findings, we propose a simple yet effective collaborative filtering (CF) model named **AlphaRec**, which utilizes language representations of item textual metadata (*e.g.*, titles) instead of traditional ID-based embeddings. Specifically, AlphaRec is comprised of three main components: a multilayer perceptron (MLP), graph convolution, and contrastive learning (CL) loss function, making it extremely easy to implement and train. Our empirical results show that AlphaRec outperforms leading ID-based CF models on multiple datasets, marking the first instance of such a recommender with text embeddings achieving this level of performance. Moreover, AlphaRec introduces a new language-representation-based CF paradigm with several desirable advantages: being easy to implement, lightweight, rapid convergence, superior zero-shot recommendation abilities in new domains, and being aware of user intention. Codes are available at <https://github.com/LehengTHU/AlphaRec>.

1 Introduction

Language models (LMs) have achieved great success across various domains [3–7], prompting a critical question about the knowledge encoded within their representation spaces. Recent studies empirically find that LMs extend beyond semantic understanding to encode comprehensive world knowledge about various domains, including game states [8], lexical attributes [9], and even concepts of space and time [10] through language modeling. However, in the domain of recommendation where the integration of LMs is attracting widespread interest [11–15], it remains unclear whether LMs inherently encode relevant information on user preferences and behaviors. One possible reason

*An Zhang is the corresponding author.

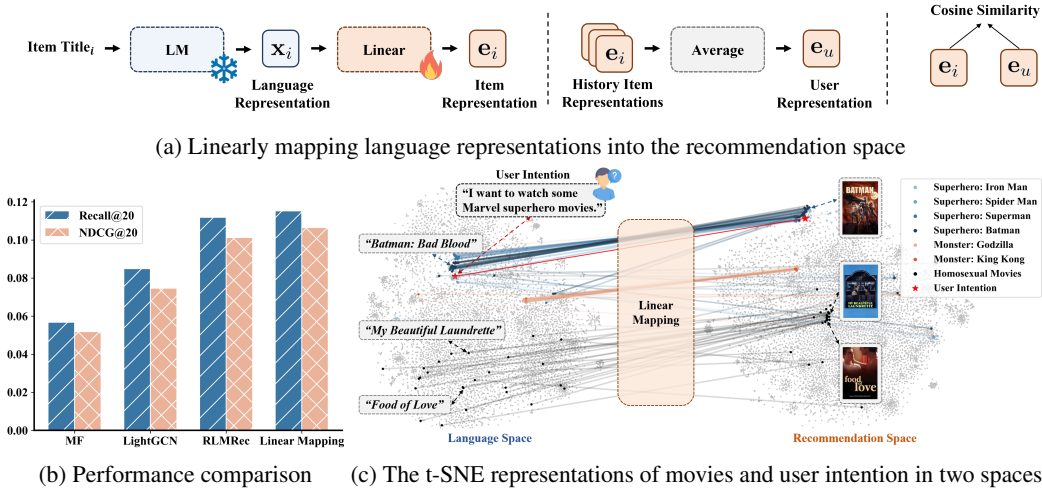


Figure 1: Linearly mapping item titles in language representation space into recommendation space yields superior recommendation performance on Movies & TV [1] dataset. (1a) The framework of linear mapping. (1b) The recommendation performance comparison between leading CF recommenders and linear mapping. (1c) The t-SNE [2] visualizations of movie representations, with colored lines linking identical movies or user intention across language space (left) and linearly projected recommendation space (right).

is the significant difference between the objectives of language modeling for LMs and user behavior modeling for recommenders [16–19].

Currently, one prevailing understanding holds that general LMs and traditional recommenders encode two distinct representation spaces: the language space and the recommendation space (*i.e.*, user and item representation space), each offering potential enhancements to the other for recommendation tasks [17, 20]. On the one hand, when using LMs as recommenders, aligning the language space with the recommendation space could significantly improve the performance of LM-based recommendation [14, 21–23]. Various alignment strategies are proposed, including fine-tuning LMs with recommendation data [15, 16, 24–26], incorporating embeddings from traditional recommenders as a new modality of LMs [17, 20, 27], and extending the vocabulary of LMs with item tokens [18, 19, 28–31]. On the other hand, when using LMs as the enhancer, traditional recommenders greatly benefit from leveraging text representations [32–45], semantic and reasoning information [46–49], and generated user behaviors [50, 51]. Despite these efforts, explicit explorations of the relationship between language and recommendation spaces remain largely unexplored.

In this work, we rethink the prevailing understanding and explore whether LMs inherently encode user preferences through language modeling. Specifically, we test the possibility of directly deriving a recommendation space from the language representation space, assessing whether the representations of item textual metadata (*e.g.*, titles) obtained from LMs can independently achieve satisfactory recommendation performance. Positive results would imply that user behavioral patterns, such as **collaborative signals** (*i.e.*, user preference similarities between items) [52, 53], may be implicitly encoded by LMs. To test this hypothesis, we employ linear mapping to project the language representations of item titles into a recommendation space (see Figure 1a). Our observations include:

- Surprisingly, this simple linear mapping yields high-quality item representations, which achieve exceptional recommendation performance (see Figure 1b and experimental results in Section 2).
- The clustering of items is generally preserved from the language space to the recommendation space (see Figure 1c). For example, movies with the theme of superheroes and monsters are gathering in both language and recommendation spaces.
- Interestingly, the linear mapping effectively reveals preference similarities that may be implicit or even obscure in the language space. For instance, while certain movies, such as those of homosexual movies (illustrated in Figure 1c), show dispersed representations in the language space, their projections through linear mapping tend to cluster together, reflecting their genres affiliation.

These findings indicate the **homomorphism** [54] between the language representation space of LMs and an effective item representation space for recommendation. Motivated by this insight, we propose a new language-representation-based recommendation paradigm for general collaborative filtering (CF), which utilizes the pre-trained language representations of item titles as the item input and the average historical interactions’ representations as the user input. Different from traditional ID-based CF models [55, 56, 52] that heavily rely on trainable user and item IDs, this paradigm solely uses pre-trained LM embeddings and completely abandons ID-based embeddings. In this paper, to fully explore the potential of advanced language representations, we adopt a simple model architecture consisting of a two-layer MLP with graph convolution, and the popular contrastive loss, InfoNCE [57–59], as the objective function. This model is named **AlphaRec** for its originality, a series of good properties, and an adjustable hyperparameter α for user intention capture.

Benefiting from paradigm shifts from ID-based embeddings to language representations, AlphaRec presents three desirable advantages. First, AlphaRec is notable for its simplicity, lightweight, rapid convergence, and exceptional recommendation performance (see Section 4.1). We empirically demonstrate that, for the first time, such a simple model with embeddings from pre-trained LMs can outperform leading CF models on multiple datasets. This finding strongly supports the possibility for developing language-representation-based recommender systems. Second, AlphaRec exhibits a strong zero-shot recommendation capability across untrained datasets (see Section 4.2). By co-training on three Amazon datasets (Books, Movies & TV, and Video Games) [1], AlphaRec can achieve performance comparable to the fully-trained LightGCN on entirely different platforms (MovieLens-1M [60] and BookCrossing [61]), and even exceed LightGCN in a completely new domain (Amazon Industrial), without additional training on these target datasets. This capability underscores AlphaRec’s potential to develop more general recommenders. Third, AlphaRec is user-friendly, offering a new research paradigm that enhances recommendation by leveraging language-based user feedback (see Section 4.3). Endowed with its inherent semantic comprehension of language representations, AlphaRec can refine recommendations based on user intentions expressed in natural language, enabling traditional CF recommenders to evolve into intention-aware systems through a straightforward paradigm shift.

2 Uncovering Collaborative Signals in LMs via Linear Mapping

In this section, we aim to explore whether LMs implicitly encode user preference similarities in their representation spaces. We first formulate the personalized item recommendation task, then detail the linear mapping method and its empirical findings. Empirical evidence indicates the homomorphism [54] between the representation spaces of advanced LMs and effective recommendation spaces.

Task formulation. Personalized item recommendation with implicit feedback aims to select items $i \in \mathcal{I}$ that best match user u ’s preferences based on binary interaction data $\mathbf{Y} = [y_{ui}]$, where $y_{ui} = 1$ ($y_{ui} = 0$) indicates user $u \in \mathcal{U}$ has (has not) interacted with item i [59]. The primary objective of recommendation is to model the user-item interaction matrix \mathbf{Y} using a scoring function $\hat{y} : \mathcal{U} \times \mathcal{I} \rightarrow \mathbb{R}$, where \hat{y}_{ui} measures u ’s preference for i . The scoring function $\hat{y}_{ui} = s \circ \phi_{\theta}(\mathbf{x}_u, \mathbf{x}_i)$ comprises three key components: pre-existing features \mathbf{x}_u and \mathbf{x}_i for user u and item i , a representation learning module $\phi_{\theta}(\cdot, \cdot)$ parametrized by θ , and a similarity function $s(\cdot, \cdot)$. The representation learning module ϕ_{θ} transfers u and i into representations \mathbf{e}_u and \mathbf{e}_i for similarity matching $s(\cdot, \cdot)$, and the Top- K highest scoring items are recommended to u .

Different recommenders employ various pre-existing features $\mathbf{x}_u, \mathbf{x}_i$ and representation learning architecture $\phi_{\theta}(\cdot, \cdot)$. Traditional ID-based recommenders use one-hot vectors as pre-existing features $\mathbf{x}_u, \mathbf{x}_i$. The choice of ID-based representation learning architecture ϕ_{θ} can vary widely, including ID-based embedding matrix [55], multilayer perception [62], graph neural network [52, 63], and variational autoencoder [64]. We adopt a commonly used similarity function, cosine similarity [65, 58] $s(\mathbf{e}_u, \mathbf{e}_i) = \frac{\mathbf{e}_u^{\top} \mathbf{e}_i}{\|\mathbf{e}_u\| \|\mathbf{e}_i\|}$, in this paper.

Linear mapping. Linear mapping ensures the homomorphism [54] between the vector spaces, and is therefore widely used in the study on the representation space properties of LMs [10, 66, 67]. In this section, we adopt a trainable linear mapping matrix \mathbf{W} as the representation learning module ϕ_{θ} , mapping representations from the language space into an item recommendation space. High performance on the test set would indicate the homomorphism between the language space and an effective recommendation space, which further suggests the possible existence of collaborative signals

Table 1: The recommendation performance of linear mapping comparing with classical CF baselines.

		Books			Movies & TV			Video Games		
		Recall	NDCG	HR	Recall	NDCG	HR	Recall	NDCG	HR
CF	MF (Rendle et al., 2012)	0.0437	0.0391	0.2476	0.0568	0.0519	0.3377	0.0323	0.0195	0.0864
	MultVAE (Liang et al., 2018)	0.0722	0.0597	0.3418	0.0853	0.0776	0.4434	0.0908	0.0531	0.2211
	LightGCN (He et al., 2021)	0.0723	<u>0.0608</u>	0.3489	0.0849	0.0747	0.4397	0.1007	0.0590	0.2281
Linear Mapping	BERT	0.0226	0.0194	0.1240	0.0415	0.0399	0.2362	0.0524	0.0309	0.1245
	RoBERTa	0.0247	0.0209	0.1262	0.0406	0.0387	0.2277	0.0578	0.0338	0.1339
	Llama2-7B	0.0662	0.0559	0.3176	0.1027	0.0955	0.4952	0.1249	0.0729	0.2746
	Mistral-7B	0.0650	0.0544	0.3124	0.1039	0.0963	0.4994	0.1270	0.0687	0.2428
	text-embedding-ada-v2	0.0515	0.0436	0.2570	0.0926	0.0874	0.4563	0.1176	0.0683	0.2579
	text-embeddings-3-large	<u>0.0735</u>	<u>0.0608</u>	0.3355	<u>0.1109</u>	<u>0.1023</u>	<u>0.5200</u>	<u>0.1367</u>	0.0793	0.2928
	SFR-Embedding-Mistral	0.0738	0.0610	0.3371	0.1152	0.1065	0.5327	0.1370	0.0787	0.2927

(*i.e.*, user preference similarities between items) [56] in the language representation space [68, 10]. The overall framework of the linear mapping process is illustrated in Figure 1a. Specifically, we utilize LMs as feature extractors, leveraging the language representations of item titles as initial item feature \mathbf{x}_i . For initial user feature \mathbf{x}_u , we use the average of the title representations of historically interacted items, defined as $\mathbf{x}_u = \frac{1}{|\mathcal{N}_u|} \sum_{i \in \mathcal{N}_u} \mathbf{x}_i$, where \mathcal{N}_u is the set of items user u has interacted with. Detailed procedures for obtaining these language-based features are provided in Appendix B.2. The linear mapping matrix sets user and item representations as $\mathbf{e}_u = \mathbf{W}\mathbf{x}_u$ and $\mathbf{e}_i = \mathbf{W}\mathbf{x}_i$ respectively. To learn the linear mapping matrix \mathbf{W} , we adopt the InfoNCE loss [57] as the objective function, which has demonstrated state-of-the-art performance in both ID-based [69, 70] and LM-enhanced CF recommenders [47] (refer to Equation (4) for the formula). We directly use linearly mapped representations \mathbf{e}_u and \mathbf{e}_i to calculate the user-item similarity $s(\mathbf{e}_u, \mathbf{e}_i)$ for recommendation.

Empirical findings. We compare the recommendation performance of the linear mapping method with three classical CF baselines, matrix factorization (MF) [55, 71], MultVAE [64], and LightGCN [56] (see more details about baselines in Appendix C.2.1). We report three widely used metrics Hit Ratio (HR@ K), Recall@ K , Normalized Discounted Cumulative Gain (NDCG@ K) to evaluate the effectiveness of linear mapping, with K set by default at 20. We evaluate a wide range of LMs, including BERT-style models [4, 5], decoder-only large language models (LLMs) [6, 72], and LLM-based text embedding models [73, 74] (see Appendix B.1 for details about used LMs).

Table 1 reports the recommendation performance yielded by the linear mapping on three Amazon datasets [1], comparing with classic CF baselines. We observe that the performance of most advanced text embedding models (*e.g.*, text-embeddings-3-large [73] and SFR-Embedding-Mistral [74]) exceeds LightGCN on all datasets. We also empirically show that these improvements may not merely come from the better feature encoding ability (refer to Appendix B.3). Figure 1c further suggests that obscure user preference similarities may be implicitly encoded in the language representation space, with a linear mapping matrix to activate. These findings indicate the homomorphism [54] between the language representation spaces of advanced LMs and effective item representation spaces for recommendation. In addition, with the help of linear mapping, for the first time, we are able to clearly quantify the gap in the representation spaces between different LMs for recommendation. With the advances in LMs, we observe that the performance of language representations exhibits a rising trend, especially showing a sharp rise from BERT-style models to LLMs. Representations from early BERT-style models (*e.g.*, BERT [4] and RoBERTa [5]) only show weaker or equal capabilities compared with MF, failing behind LLMs largely. This further suggests that, until very recently, the language representation spaces are able to encode user preference similarities efficiently.

3 AlphaRec

This finding of space homomorphism [54] sheds light on building advanced CF models purely based on language representations without introducing ID-based embeddings. Inspired by this, we develop a simple yet effective CF model called AlphaRec, by incorporating only three simple components (*i.e.*, nonlinear projection [62], graph convolution [56] and contrastive learning (CL) objectives [57]). It is important to highlight that our approach is centered on exploring the potential of language representations for recommendation by integrating essential components from leading CF models, rather than deliberately inventing new CF mechanisms. Surprisingly, these basic and simple components lead to an excellent language-representation-based recommender with multiple capabilities. We present the model structure of AlphaRec in Section 3.1, and compare AlphaRec with two popular recommendation paradigms in Section 3.2.

3.1 Method

We present how AlphaRec is designed and trained. Generally, the representation learning architecture $\phi_\theta(\cdot, \cdot)$ of AlphaRec is simple, which only contains a two-layer MLP and the basic graph convolution operation, with language representations as the input features $\mathbf{x}_u, \mathbf{x}_i$. The cosine similarity is used as the similarity function $s(\cdot, \cdot)$, and the contrastive loss InfoNCE [57, 58] is adopted for optimization. For simplicity, we consistently adopt text-embeddings-3-large [73] as the language representation model, for its excellent language understanding and representation capabilities.

Nonlinear projection. In AlphaRec, we substitute the linear mapping matrix delineated in Section 2 with a nonlinear MLP. This conversion from linear to nonlinear is non-trivial, for the paradigm shift from ID-based embeddings to language representations, since nonlinear transformation helps in excavating more comprehensive user preference similarities from the language representation space with rich semantics (see discussions about this in Appendix C.2.3) [62]. Specifically, we project the language representation \mathbf{x}_i of the item title to an item space for recommendation with the two-layer MLP, and obtain user representations as the average of historical items:

$$\mathbf{e}_i^{(0)} = \mathbf{W}_2 \text{LeakyReLU}(\mathbf{W}_1 \mathbf{x}_i + \mathbf{b}_1) + \mathbf{b}_2, \quad \mathbf{e}_u^{(0)} = \frac{1}{|\mathcal{N}_u|} \sum_{i \in \mathcal{N}_u} \mathbf{e}_i^{(0)}. \quad (1)$$

Graph convolution. Graph neural networks (GNNs) have shown superior effectiveness for recommendation [52, 56], owing to the natural user-item graph structure in recommender systems [75]. In AlphaRec, we employ a minimal graph convolution operation [56] to capture more complicated collaborative signals from high-order connectivity [56, 76, 77, 75] as follows:

$$\mathbf{e}_u^{(k+1)} = \sum_{i \in \mathcal{N}_u} \frac{1}{\sqrt{|\mathcal{N}_u|} \sqrt{|\mathcal{N}_i|}} \mathbf{e}_i^{(k)}, \quad \mathbf{e}_i^{(k+1)} = \sum_{u \in \mathcal{N}_i} \frac{1}{\sqrt{|\mathcal{N}_i|} \sqrt{|\mathcal{N}_u|}} \mathbf{e}_u^{(k)}. \quad (2)$$

The information of connected neighbors is aggregated with a symmetric normalization term $\frac{1}{\sqrt{|\mathcal{N}_u|} \sqrt{|\mathcal{N}_i|}}$. Here \mathcal{N}_u (\mathcal{N}_i) denotes the historical item (user) set that user u (item i) has interacted with. The features $\mathbf{e}_u^{(0)}$ and $\mathbf{e}_i^{(0)}$ projected from the MLP are used as the input of the first layer. After propagating for K layers, the final representation of a user (item) is obtained as the average of features from each layer:

$$\mathbf{e}_u = \frac{1}{K+1} \sum_{k=0}^K \mathbf{e}_u^{(k)}, \quad \mathbf{e}_i = \frac{1}{K+1} \sum_{k=0}^K \mathbf{e}_i^{(k)}. \quad (3)$$

Contrastive learning objective. The introduction of contrasting learning is another key element for the success of leading CF models. Recent research suggests that the contrast learning objective, rather than data augmentation, plays a more significant role in improving recommendation performance [70, 78, 69]. Therefore, we simply use the contrast learning object InfoNCE [57] as the loss function without any additional data augmentation on the graph [79, 58]. With cosine similarity as the similarity function $s(\mathbf{e}_u, \mathbf{e}_i) = \frac{\mathbf{e}_u^\top \mathbf{e}_i}{\|\mathbf{e}_u\| \cdot \|\mathbf{e}_i\|}$, the InfoNCE loss [57, 79, 80] is written as:

$$\mathcal{L}_{\text{InfoNCE}} = - \sum_{(u,i) \in \mathcal{O}^+} \log \frac{\exp(s(\mathbf{e}_u, \mathbf{e}_i)/\tau)}{\exp(s(\mathbf{e}_u, \mathbf{e}_i)/\tau) + \sum_{j \in \mathcal{S}_u} \exp(s(\mathbf{e}_u, \mathbf{e}_j)/\tau)}. \quad (4)$$

Here, τ is a hyperparameter called temperature [81], $\mathcal{O}^+ = \{(u, i) | y_{ui} = 1\}$ denoting the observed interactions between users \mathcal{U} and items \mathcal{I} . And \mathcal{S}_u is a randomly sampled subset of negative items that user u does not adopt.

3.2 Discussion of Recommendation Paradigms

We compare the language-representation-based AlphaRec with two popular recommendation paradigms in Table 2 (see more discussion about related works in Appendix A).

ID-based recommendation (ID-Rec) [52, 55]. In the traditional ID-based recommendation paradigm, users and items are represented by ID-based learnable embeddings derived from a large number of user interactions. While ID-Rec exhibits excellent recommendation capabilities with low training and inference costs [63, 79], it also has two significant drawbacks. Firstly, these ID-based embeddings

Table 2: Comparison of recommendation paradigms

Recommendation Paradigms	Training Cost	Zero-shot Ability	Intention-aware Ability
ID-based	Low	✗	✗
LM-based	High	✓	✓
Language-representation-based	Low	✓	✓

learned in specific domains are difficult to transfer to new domains without overlapping users and items [37], thereby hindering zero-shot recommendation capabilities. Additionally, there is a substantial gap between ID-Rec and natural languages [34], which makes ID-based recommenders hard to incorporate language-based user intentions and further refine recommendations accordingly.

LM-based recommendation (LM-Rec) [15, 16, 24]. Benefitting from the extensive world knowledge and powerful reasoning capabilities of LMs [7, 82], the LM-based recommendation paradigm has gained widespread attention [11, 13]. LM-Rec tends to convert user interaction history into text prompts as input for LMs, utilizing pre-trained or fine-tuned LMs in a text generation pattern to recommend items. LM-Rec demonstrates zero-shot and few-shot abilities and can easily understand language-based user intentions. However, LM-Rec faces significant challenges. Firstly, the LM-based model architecture leads to huge training and inference costs, with real-world deployment difficulties. Additionally, limited by the text generation paradigm, LM-based models tend to perform candidate selection [17] or generate a single next item [24]. It remains difficult for LM-Rec to comprehensively rank the entire item corpus or recommend multiple items that align with user interests.

Language-representation-based recommendation. We argue that AlphaRec follows a new CF paradigm, which we term the language-representation-based paradigm. This paradigm replaces the ID-based embeddings in ID-Rec with representations from pre-trained LMs, employing feature encoders to map language representations directly into the recommendation space. Few early studies lie in this paradigm, including using BERT-style LMs to learn universal sequence representations [37, 44], or adopting the same model architecture as ID-Rec with simple input features replacement [34, 35]. These early explorations, which are mostly based on BERT-style LMs, are usually only applicable in certain specific scenarios, such as the transductive setting with the help of ID-based embeddings [37]. This phenomenon is consistent with our previous findings in Section 2, indicating that BERT-style LMs may fail to effectively encode user preference similarities. We point out that AlphaRec is the first recommender in the language-representation-based paradigm to surpass the traditional ID-based paradigm on multiple tasks, faithfully demonstrating the effectiveness and potential of this paradigm.

4 Experiments

In this section, we aim to explore the effectiveness of AlphaRec. Specifically, we are trying to answer the following research questions:

- **RQ1:** How does AlphaRec perform compared with leading ID-based CF methods?
- **RQ2:** Can AlphaRec learn general item representations, and achieve good zero-shot recommendation performance on entirely new datasets?
- **RQ3:** Can AlphaRec capture user intention described in natural language and adjust the recommendation results accordingly?

4.1 General Recommendation Performance (RQ1)

Motivation. We aim to explore whether the language-representation-based recommendation paradigm can outperform the ID-Rec paradigm. An excellent performance of AlphaRec would shed light on the research line of building language-representation-based recommenders in the future.

Baselines. We consider ID-based baselines in this section. LM-based methods are not incorporated for two practical reasons: the huge inference cost on datasets with millions of interactions and the task limitation of candidate selection or next item prediction. In addition to classic baselines (*i.e.*, MF, MultVAE, and LightGCN) introduced in section 2, we consider two categories of leading ID-based

Table 3: The performance comparison with ID-based CF baselines. The improvement achieved by AlphaRec is significant (p -value $\ll 0.05$).

	Books			Movies & TV			Video Games		
	Recall	NDCG	HR	Recall	NDCG	HR	Recall	NDCG	HR
MF (Rendle et al., 2012)	0.0437	0.0391	0.2476	0.0568	0.0519	0.3377	0.0323	0.0195	0.0864
MultVAE (Liang et al., 2018)	0.0722	0.0597	0.3418	0.0853	0.0776	0.4434	0.0908	0.0531	0.2211
LightGCN (He et al., 2021)	0.0723	0.0608	0.3489	0.0849	0.0747	0.4397	0.1007	0.0590	0.2281
SGL (Wu et al., 2021)	0.0789	0.0657	0.3734	0.0916	0.0838	0.4680	0.1089	0.0634	0.2449
BC Loss (Zhang et al., 2022)	0.0915	0.0779	0.4045	0.1039	0.0943	0.5037	0.1145	0.0668	0.2561
XSimGCL (Yu et al., 2024)	0.0879	0.0745	0.3918	0.1057	0.0984	0.5128	0.1138	0.0662	0.2550
KAR (Xi et al., 2023)	0.0852	0.0734	0.3834	0.1084	0.1001	0.5134	0.1181	0.0693	0.2571
RLMRec (Ren et al., 2024)	<u>0.0928</u>	<u>0.0774</u>	<u>0.4092</u>	<u>0.1119</u>	<u>0.1013</u>	<u>0.5301</u>	<u>0.1384</u>	<u>0.0809</u>	<u>0.2997</u>
AlphaRec	0.0991*	0.0828*	0.4185*	0.1221*	0.1144*	0.5587*	0.1519*	0.0894*	0.3207*
Imp.% over the best baseline	6.79%	5.34%	2.27%	9.12%	10.75%	5.40%	9.75%	10.51%	7.01%

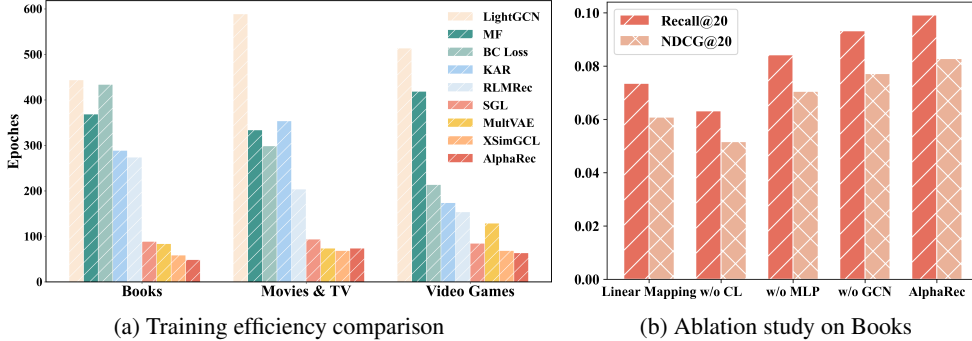


Figure 2: (2a) The bar charts show the number of epochs needed for each model to converge. AlphaRec tends to exhibit an extremely fast convergence speed. (2b) The effect of each component in AlphaRec on Books dataset.

CF baselines: CL-based CF methods: SGL [83], BC Loss [79], XSimGCL [70] and LM-enhanced CF methods: KAR [48], RLMRec [47]. See more details about baselines in Appendix C.2.1.

Results. Table 3 presents the performance of AlphaRec compared with leading CF baselines. The best-performing methods are bold, while the second-best methods are underlined. Figure 2a and Figure 2b report the training efficiency and ablation results. We observe that:

- **AlphaRec consistently outperforms leading CF baselines by a large margin across all metrics on all datasets.** AlphaRec shows an improvement ranging from 6.79% to 9.75% on Recall@20 compared to the best baseline RLMRec [47]. We further conduct the ablation study to explore the reason for its success (see more ablation results in Appendix C.2.2). As shown in Figure 2b, each component in AlphaRec contributes positively. Specifically, the performance degradation caused by replacing the MLP with a linear weight matrix (w/o MLP) indicates that nonlinear transformations can extract the implicit user preference similarities encoded in the language representation space more effectively. Moreover, the performance drop from replacing InfoNCE loss [58] with BPR loss [71] (w/o CL) and removing the graph convolution (w/o GCN) suggests that explicitly modeling the collaborative relationships through the loss function and model architecture can further enhance recommendation performance. These findings suggest that, by carefully designing the model to extract user preference similarities, the potential of language-representation-based paradigm can be realized, surpassing the leading ID-Rec paradigm.
- **The incorporation of semantic language representations into traditional ID-based CF methods can lead to significant performance improvements.** We note that two LM-enhanced CF methods, KAR and RLMRec, both show improvements over CL-based CF methods. Nevertheless, the combination of ID-based embeddings and language representations in these methods does not yield higher results than purely language-representation-based AlphaRec. We attribute this phenomenon to the fact that the performance contribution of these methods mainly comes from the language representations, which is consistent with the previous findings [34, 44].
- **AlphaRec exhibits fast convergence speed.** We find that the convergence speed of AlphaRec is comparable with, or even surpasses, CL-based methods with data augmentation (e.g., SGL [83] and XSimGCL [70]). Meanwhile, methods based solely on graph convolution (LightGCN [56]) or CL objective (BC Loss [79]) show relatively slow convergence speed, indicating that introducing

Table 4: The zero-shot recommendation performance comparison on entirely new datasets. The improvement achieved by AlphaRec is significant (p -value $\ll 0.05$).

	Industrial			MovieLens-1M			Book Crossing			
	Recall	NDCG	HR	Recall	NDCG	HR	Recall	NDCG	HR	
full	MF (Rendle et al., 2012)	0.0344	0.0225	0.0521	0.1855	0.3765	0.9634	0.0316	0.0317	0.2382
	MultVAE (Liang et al., 2018)	0.0751	0.0459	0.1125	0.2039	0.3741	0.9740	0.0736	0.0634	0.3716
	LightGCN (He et al., 2021)	0.0785	0.0533	0.1078	0.2019	0.4017	0.9715	0.0630	0.0588	0.3475
zero-shot	Random	0.0148	0.0061	0.0248	0.0068	0.0185	0.2611	0.0039	0.0036	0.0443
	Pop	0.0216	0.0087	0.0396	0.0253	0.0679	0.5439	0.0119	0.0101	0.1157
	ZESRec (Ding et al., 2021)	0.0326	0.0272	0.0628	0.0274	0.0787	0.5786	0.0155	0.0143	0.1347
	UniSRec (Hou et al., 2022)	<u>0.0453</u>	<u>0.0350</u>	<u>0.0863</u>	<u>0.0578</u>	<u>0.1412</u>	<u>0.7135</u>	<u>0.0396</u>	<u>0.0332</u>	<u>0.2454</u>
	AlphaRec	0.0913*	0.0573	0.1277*	0.1486*	0.3215*	0.9296*	0.0660*	0.0545*	0.3381*
	Imp.% over the best zero-shot baseline	157.09%	127.69%	30.29%	66.67%	64.16%	37.78%	101.55%	63.71%	47.97%

these modules may not lead to convergence speed improvement. We attribute the fast convergence speed of AlphaRec to the homomorphism between the language space and a good recommendation space. As a result, only minor adjustments to the vanilla language representations are needed for effective recommendation.

4.2 Zero-shot Recommendation Performance on Entirely New Datasets (RQ2)

Motivation. We aim to explore whether AlphaRec has learned general item representations [37], which enables it to perform well on entirely new datasets without any user and item overlap.

Task and datasets. In zero-shot recommendation [38], there is not any item or user overlap between the training set and test set [38, 33], which is different from the research line of cross-domain recommendation in ID-Rec [84]. We jointly train AlphaRec on three source datasets (*i.e.*, Books, Movies & TV, and Video Games), while testing it on three completely new target datasets (*i.e.*, MovieLens-1M [60], Book Crossing [61], and Industrial [1]) without further training on these new datasets. (see more details about how we train AlphaRec on multiple datasets in Appendix C.3.1).

Baselines. Due to the lack of zero-shot recommenders in the field of general recommendation, we slightly modify two zero-shot methods in the sequential recommendation [85], ZESRec [37] and UniSRec [37], as baselines. We also incorporate two strategy-based CF methods, Random and Pop (see more details about these baselines in Appendix C.3.2).

Results. Table 4 presents the zero-shot recommendation performance comparison on entirely new datasets. The best-performing methods are bold and starred, while the second-best methods are underlined. We observe that:

- **AlphaRec demonstrates strong zero-shot recommendation capabilities, comparable to or even surpassing the fully trained LightGCN.** On datasets from completely different platforms (*e.g.*, MovieLens-1M and Book Crossing), AlphaRec is comparable with the fully trained LightGCN. On the same Amazon platform dataset, Industrial, AlphaRec even surpasses LightGCN, for which we attribute to the possibility that AlphaRec implicitly learns unique user behavioral patterns on the Amazon platform [1]. Conversely, ZESRec and UniSRec exhibit a marked performance decrement compared with AlphaRec. We attribute this phenomenon to two aspects. On the one hand, BERT-style LMs [4, 5] used in these works may not have effectively encoded user preference similarities, which is consistent with our previous findings in Section 2. On the other hand, components designed for the next item prediction task in sequential recommendation [86] may not be suitable for capturing the general preferences of users in CF scenarios.
- **The zero-shot recommendation capability of AlphaRec generally benefits from an increased amount of training data, without harming the performance on source datasets.** As illustrated in Figure 8, the zero-shot performance of AlphaRec, when trained on a mixed dataset, is generally superior to training on one single dataset [37]. Additionally, we also note that training data with themes similar to the target domain contributes more to the zero-shot performance. For instance, the zero-shot capability on MovieLens-1M may primarily stem from Movies & TV. Furthermore, we discover that AlphaRec, when trained jointly on multiple datasets, hardly experiences a performance decline on each source dataset. These findings further point to the general recommendation capability of a single pre-trained AlphaRec across multiple datasets. The above findings also offer a potential research path to achieve general recommendation capabilities, by incorporating more training data with more themes. See more details about these results in Appendix C.3.3.

Table 5: The performance comparison in user intention capture.

	MovieLens-1M		Video Games	
	HR@5	NDCG@5	HR@5	NDCG@5
TEM (Bi et al., 2020)	0.2738	0.1973	0.2212	0.1425
AlphaRec (w/o Intention)	0.0793	0.0498	0.0663	0.0438
AlphaRec (w Intention)	0.4704*	0.3738*	0.2569*	0.1862*

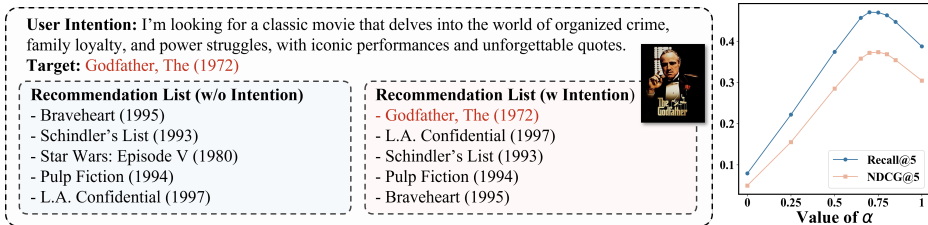


Figure 3: User intention capture experiments on MovieLens-1M. (3a) AlphaRec refines the recommendations according to language-based user intention. (3b) The effect of user intention strength α .

4.3 User Intention Capture Performance (RQ3)

Motivation. We aim to investigate whether a straightforward paradigm shift enables pre-trained AlphaRec to perceive text-based user intentions and refine recommendations. Specifically, we introduce an adjustable hyperparameter α to combine user intentions with historical interests.

Task and datasets. We test the user intention capture ability of AlphaRec on MovieLens-1M and Video Games. In the test set, only one target item remains for each user [87], with one intention query generated by ChatGPT [88, 40] (see the details about how to generate and check these intention queries in Appendix C.4.1). In the training stage, we follow the same procedure as illustrated in Section 2 to train AlphaRec. In the inference stage, we obtain the language representation $e_u^{Intention}$ for each user intention query and combine it with the original user representation to get a new user representation as $\tilde{e}_u^{(0)} = (1 - \alpha)e_u^{(0)} + \alpha e_u^{Intention}$ [87]. This new user representation is sent into the frozen AlphaRec for recommendation. We report a relatively small $K = 5$ for all metrics to better reflect the intention capture accuracy.

User intention capture results. Table 5 represents the user intention capture experiment results, compared with the baseline TEM [89]. Clearly, the introduction of user intention (w Intention) significantly refines the recommendations of the pre-trained AlphaRec (w/o Intention). Moreover, AlphaRec outperforms the baseline model TEM by a large margin, even without additional training on search tasks. We further conduct a case study on MovieLens-1M to demonstrate how AlphaRec captures the user (see more case study results in Appendix C.4.3). As shown in Figure 3a, AlphaRec accurately captures the hidden user intention for “Godfather”, while keeping most of the recommendation results unchanged. This indicates that AlphaRec captures the user intention and historical interests simultaneously.

Effect of the intention strength α . By controlling the value of α , AlphaRec can provide better recommendation results, with a balance between user historical interests and user intent capture. Figure 3b depicts the effect of α . Initially, as α increases, the recommendation performance rises accordingly, indicating that incorporating user intention enables AlphaRec to provide better recommendation results. However, as the α approaches 1, the recommendation performance starts to decrease, which suggests that the user historical interests learned by AlphaRec also play a vital role. The similar effect of α on Video Games is discussed in Appendix C.4.4.

5 Limitations

There are several limitations not addressed in this paper. On the one hand, although we have demonstrated the excellence of AlphaRec for multiple tasks on various offline datasets, the effectiveness of online employment remains unclear. On the other hand, although we have successfully explored the potential of language-representation-based recommenders by incorporating essential components in leading CF models, we do not elaboratively focus on designing new components for CF models.

6 Conclusion

In this paper, we explored what knowledge about recommendations has been encoded in the LM representation space. Specifically, we found that the advanced LMs representation space exhibits a homomorphic relationship with an effective recommendation space. Based on this finding, we developed a simple yet effective CF model called AlphaRec, which exhibits good recommendation performance with zero-shot recommendation and user intent capture ability. We pointed out that AlphaRec follows a new recommendation paradigm, language-representation-based recommendation, which uses language representations from LMs to represent users and items and completely abandons ID-based embeddings. We believed that AlphaRec is an important stepping stone towards building general recommenders in the future.²

References

- [1] Jianmo Ni, Jiacheng Li, and Julian J. McAuley. Justifying recommendations using distantly-labeled reviews and fine-grained aspects. In *EMNLP*, 2019.
- [2] Laurens Van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of machine learning research*, 9(11), 2008.
- [3] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *NeurIPS*, 2017.
- [4] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: pre-training of deep bidirectional transformers for language understanding. In *ACL*, 2019.
- [5] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized BERT pretraining approach. *CoRR*, abs/1907.11692, 2019.
- [6] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton-Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurélien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models. *CoRR*, abs/2307.09288, 2023.
- [7] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In *NeurIPS*, 2020.
- [8] Kenneth Li, Aspen K. Hopkins, David Bau, Fernanda B. Viégas, Hanspeter Pfister, and Martin Wattenberg. Emergent world representations: Exploring a sequence model trained on a synthetic task. In *ICLR*, 2023.
- [9] Ivan Vulic, Edoardo Maria Ponti, Robert Litschko, Goran Glavas, and Anna Korhonen. Probing pretrained language models for lexical semantics. In *EMNLP*, 2020.

²The broader impact of AlphaRec will be detailed in Appendix E

- [10] Wes Gurnee and Max Tegmark. Language models represent space and time. *CoRR*, abs/2310.02207, 2023.
- [11] Wenqi Fan, Zihuai Zhao, Jiatong Li, Yunqing Liu, Xiaowei Mei, Yiqi Wang, Jiliang Tang, and Qing Li. Recommender systems in the era of large language models (llms). *CoRR*, abs/2307.02046, 2023.
- [12] Lei Li, Yongfeng Zhang, Dugang Liu, and Li Chen. Large language models for generative recommendation: A survey and visionary discussions. *CoRR*, abs/2309.01157, 2023.
- [13] Likang Wu, Zhi Zheng, Zhaopeng Qiu, Hao Wang, Hongchao Gu, Tingjia Shen, Chuan Qin, Chen Zhu, Hengshu Zhu, Qi Liu, Hui Xiong, and Enhong Chen. A survey on large language models for recommendation. *CoRR*, abs/2305.19860, 2023.
- [14] Jianghao Lin, Xinyi Dai, Yunjia Xi, Weiwen Liu, Bo Chen, Xiangyang Li, Chenxu Zhu, Huifeng Guo, Yong Yu, Ruiming Tang, and Weinan Zhang. How can recommender systems benefit from large language models: A survey. *CoRR*, abs/2306.05817, 2023.
- [15] Junjie Zhang, Ruobing Xie, Yupeng Hou, Wayne Xin Zhao, Leyu Lin, and Ji-Rong Wen. Recommendation as instruction following: A large language model empowered recommendation approach. *CoRR*, abs/2305.07001, 2023.
- [16] Keqin Bao, Jizhi Zhang, Yang Zhang, Wenjie Wang, Fuli Feng, and Xiangnan He. Tallrec: An effective and efficient tuning framework to align large language model with recommendation. In *RecSys*, 2023.
- [17] Jiayi Liao, Sihang Li, Zhengyi Yang, Jiancan Wu, Yancheng Yuan, and Xiang Wang. Llara: Aligning large language models with sequential recommenders. *CoRR*, abs/2312.02445, 2023.
- [18] Yaochen Zhu, Liang Wu, Qi Guo, Liangjie Hong, and Jundong Li. Collaborative large language model for recommender systems. *CoRR*, abs/2311.01343, 2023.
- [19] Bowen Zheng, Yupeng Hou, Hongyu Lu, Yu Chen, Wayne Xin Zhao, Ming Chen, and Ji-Rong Wen. Adapting large language models by integrating collaborative semantics for recommendation. *CoRR*, abs/2311.09049, 2023.
- [20] Yang Zhang, Fuli Feng, Jizhi Zhang, Keqin Bao, Qifan Wang, and Xiangnan He. Collm: Integrating collaborative embeddings into large language models for recommendation. *CoRR*, abs/2310.19488, 2023.
- [21] Arpita Vats, Vinija Jain, Rahul Raja, and Aman Chadha. Exploring the impact of large language models on recommender systems: An extensive review. *CoRR*, abs/2402.18590, 2024.
- [22] Chengkai Huang, Tong Yu, Kaige Xie, Shuai Zhang, Lina Yao, and Julian J. McAuley. Foundation models for recommender systems: A survey and new perspectives. *CoRR*, abs/2402.11143, 2024.
- [23] Lanling Xu, Junjie Zhang, Bingqian Li, Jinpeng Wang, Mingchen Cai, Wayne Xin Zhao, and Ji-Rong Wen. Prompting large language models for recommender systems: A comprehensive framework and empirical analysis. *CoRR*, abs/2401.04997, 2024.
- [24] Shijie Geng, Shuchang Liu, Zuohui Fu, Yingqiang Ge, and Yongfeng Zhang. Recommendation as language processing (RLP): A unified pretrain, personalized prompt & predict paradigm (P5). In *RecSys*, 2022.
- [25] Zeyu Cui, Jianxin Ma, Chang Zhou, Jingren Zhou, and Hongxia Yang. M6-rec: Generative pretrained language models are open-ended recommender systems. *CoRR*, abs/2205.08084, 2022.
- [26] Jianghao Lin, Rong Shan, Chenxu Zhu, Kounianhua Du, Bo Chen, Shigang Quan, Ruiming Tang, Yong Yu, and Weinan Zhang. Rella: Retrieval-enhanced large language models for lifelong sequential behavior comprehension in recommendation. *CoRR*, abs/2308.11131, 2023.

- [27] Zhengyi Yang, Jiancan Wu, Yanchen Luo, Jizhi Zhang, Yancheng Yuan, An Zhang, Xiang Wang, and Xiangnan He. Large language model can interpret latent space of sequential recommender. *CoRR*, abs/2310.20487, 2023.
- [28] Shashank Rajput, Nikhil Mehta, Anima Singh, Raghunandan Hulikal Keshavan, Trung Vu, Lukasz Heldt, Lichan Hong, Yi Tay, Vinh Q. Tran, Jonah Samost, Maciej Kula, Ed H. Chi, and Mahesh Sathiamoorthy. Recommender systems with generative retrieval. In Alice Oh, Tristan Naumann, Amir Globerson, Kate Saenko, Moritz Hardt, and Sergey Levine, editors, *NeurIPS*, 2023.
- [29] Qijiong Liu, Nuo Chen, Tetsuya Sakai, and Xiao-Ming Wu. ONCE: boosting content-based recommendation with both open- and closed-source large language models. In Luz Angelica Caudillo-Mata, Silvio Lattanzi, Andrés Muñoz Medina, Leman Akoglu, Aristides Gionis, and Sergei Vassilvitskii, editors, *WSDM*, 2024.
- [30] Jiaqi Zhai, Lucy Liao, Xing Liu, Yueming Wang, Rui Li, Xuan Cao, Leon Gao, Zhaojie Gong, Fangda Gu, Michael He, Yinghai Lu, and Yu Shi. Actions speak louder than words: Trillion-parameter sequential transducers for generative recommendations. *CoRR*, abs/2402.17152, 2024.
- [31] Wenyue Hua, Shuyuan Xu, Yingqiang Ge, and Yongfeng Zhang. How to index item ids for recommendation foundation models. In Qingyao Ai, Yiqin Liu, Alistair Moffat, Xuanjing Huang, Tetsuya Sakai, and Justin Zobel, editors, *SIGIR-AP*, 2023.
- [32] Guanghu Yuan, Fajie Yuan, Yudong Li, Beibei Kong, Shujie Li, Lei Chen, Min Yang, Chenyun Yu, Bo Hu, Zang Li, Yu Xu, and Xiaohu Qie. Tenrec: A large-scale multipurpose benchmark dataset for recommender systems. In Sanmi Koyejo, S. Mohamed, A. Agarwal, Danielle Belgrave, K. Cho, and A. Oh, editors, *NeurIPS*, 2022.
- [33] Jiaqi Zhang, Yu Cheng, Yongxin Ni, Yunzhu Pan, Zheng Yuan, Junchen Fu, Youhua Li, Jie Wang, and Fajie Yuan. Ninerec: A benchmark dataset suite for evaluating transferable recommendation. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- [34] Zheng Yuan, Fajie Yuan, Yu Song, Youhua Li, Junchen Fu, Fei Yang, Yunzhu Pan, and Yongxin Ni. Where to go next for recommender systems? ID- vs. modality-based recommender models revisited. In *SIGIR*, 2023.
- [35] Ruyu Li, Wenhao Deng, Yu Cheng, Zheng Yuan, Jiaqi Zhang, and Fajie Yuan. Exploring the upper limits of text-based collaborative filtering using large language models: Discoveries and insights. *CoRR*, abs/2305.11700, 2023.
- [36] Youhua Li, Hanwen Du, Yongxin Ni, Pengpeng Zhao, Qi Guo, Fajie Yuan, and Xiaofang Zhou. Multi-modality is all you need for transferable recommender systems. *CoRR*, abs/2312.09602, 2023.
- [37] Yupeng Hou, Shanlei Mu, Wayne Xin Zhao, Yaliang Li, Bolin Ding, and Ji-Rong Wen. Towards universal sequence representation learning for recommender systems. In *KDD*, pages 585–593. ACM, 2022.
- [38] Hao Ding, Yifei Ma, Anoop Deoras, Yuyang Wang, and Hao Wang. Zero-shot recommender systems. *CoRR*, abs/2105.08318, 2021.
- [39] Jiacheng Li, Ming Wang, Jin Li, Jinmiao Fu, Xin Shen, Jingbo Shang, and Julian J. McAuley. Text is all you need: Learning language representations for sequential recommendation. In *KDD*, 2023.
- [40] Yupeng Hou, Jiacheng Li, Zhankui He, An Yan, Xiusi Chen, and Julian J. McAuley. Bridging language and items for retrieval and recommendation. *CoRR*, abs/2403.03952, 2024.
- [41] Yupeng Hou, Zhankui He, Julian J. McAuley, and Wayne Xin Zhao. Learning vector-quantized item representation for transferable sequential recommenders. In Ying Ding, Jie Tang, Juan F. Sequeda, Lora Aroyo, Carlos Castillo, and Geert-Jan Houben, editors, *WWW*, 2023.

- [42] Zhiming Mao, Huimin Wang, Yiming Du, and Kam-Fai Wong. Unitrec: A unified text-to-text transformer and joint contrastive learning framework for text-based recommendation. In *ACL*, 2023.
- [43] Zhaopeng Qiu, Xian Wu, Jingyue Gao, and Wei Fan. U-BERT: pre-training user representations for improved recommendation. In *Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021, Thirty-Third Conference on Innovative Applications of Artificial Intelligence, IAAI 2021, The Eleventh Symposium on Educational Advances in Artificial Intelligence, EAAI 2021, Virtual Event, February 2-9, 2021*. AAAI, 2021.
- [44] Lingzi Zhang, Xin Zhou, Zhiwei Zeng, and Zhiqi Shen. Are ID embeddings necessary? whitening pre-trained text embeddings for effective sequential recommendation. *CoRR*, abs/2402.10602, 2024.
- [45] Fajie Yuan, Xiangnan He, Alexandros Karatzoglou, and Liguang Zhang. Parameter-efficient transfer from sequential behaviors for user modeling and recommendation. In *SIGIR*, 2020.
- [46] Wei Wei, Xubin Ren, Jiabin Tang, Qinyong Wang, Lixin Su, Suqi Cheng, Junfeng Wang, Dawei Yin, and Chao Huang. Llmrec: Large language models with graph augmentation for recommendation. In Luz Angelica Caudillo-Mata, Silvio Lattanzi, Andrés Muñoz Medina, Leman Akoglu, Aristides Gionis, and Sergei Vassilvitskii, editors, *WSDM*, 2024.
- [47] Xubin Ren, Wei Wei, Lianghao Xia, Lixin Su, Suqi Cheng, Junfeng Wang, Dawei Yin, and Chao Huang. Representation learning with large language models for recommendation. *CoRR*, abs/2310.15950, 2024.
- [48] Yunjia Xi, Weiwen Liu, Jianghao Lin, Jieming Zhu, Bo Chen, Ruiming Tang, Weinan Zhang, Rui Zhang, and Yong Yu. Towards open-world recommendation with knowledge augmentation from large language models. *CoRR*, abs/2306.10933, 2023.
- [49] Binzong Geng, Zhaoxin Huan, Xiaolu Zhang, Yong He, Liang Zhang, Fajie Yuan, Jun Zhou, and Linjian Mo. Breaking the length barrier: Llm-enhanced CTR prediction in long textual user behaviors. *CoRR*, abs/2403.19347, 2024.
- [50] An Zhang, Leheng Sheng, Yuxin Chen, Hao Li, Yang Deng, Xiang Wang, and Tat-Seng Chua. On generative agents in recommendation. *CoRR*, abs/2310.10108, 2023.
- [51] Junjie Zhang, Yupeng Hou, Ruobing Xie, Wenqi Sun, Julian J. McAuley, Wayne Xin Zhao, Leyu Lin, and Ji-Rong Wen. Agentcf: Collaborative learning with autonomous language agents for recommender systems. *CoRR*, abs/2310.09233, 2023.
- [52] Xiang Wang, Xiangnan He, Meng Wang, Fuli Feng, and Tat-Seng Chua. Neural graph collaborative filtering. In *SIGIR*, 2019.
- [53] Yang Li, Tong Chen, Yadan Luo, Hongzhi Yin, and Zi Huang. Discovering collaborative signals for next POI recommendation with iterative seq2graph augmentation. In *IJCAI*, 2021.
- [54] Jean Dieudonne. *Linear algebra and geometry*. Hermann, 1969.
- [55] Yehuda Koren, Robert M. Bell, and Chris Volinsky. Matrix factorization techniques for recommender systems. *Computer*, 42(8):30–37, 2009.
- [56] Xiangnan He, Kuan Deng, Xiang Wang, Yan Li, Yong-Dong Zhang, and Meng Wang. Lightgcn: Simplifying and powering graph convolution network for recommendation. In *SIGIR*, 2021.
- [57] Aäron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *CoRR*, abs/1807.03748, 2018.
- [58] Jiancan Wu, Xiang Wang, Xingyu Gao, Jiawei Chen, Hongcheng Fu, Tianyu Qiu, and Xiangnan He. On the effectiveness of sampled softmax loss for item recommendation. *CoRR*, abs/2201.02327, 2022.
- [59] Steffen Rendle. Item recommendation from implicit feedback. In *Recommender Systems Handbook*. Springer US, 2022.

- [60] F. Maxwell Harper and Joseph A. Konstan. The movielens datasets: History and context. *ACM Trans. Interact. Intell. Syst.*, 5(4):19:1–19:19, 2016.
- [61] Hyeop Lee, Jinbae Im, Seongwon Jang, Hyunsook Cho, and Sehee Chung. Melu: Meta-learned user preference estimator for cold-start recommendation. In *KDD*, 2019.
- [62] Xiangnan He, Lizi Liao, Hanwang Zhang, Liqiang Nie, Xia Hu, and Tat-Seng Chua. Neural collaborative filtering. In *WWW*, 2017.
- [63] Xuheng Cai, Chao Huang, Lianghao Xia, and Xubin Ren. Lightgcl: Simple yet effective graph contrastive learning for recommendation. In *ICLR*, 2023.
- [64] Dawen Liang, Rahul G. Krishnan, Matthew D. Hoffman, and Tony Jebara. Variational autoencoders for collaborative filtering. In *WWW*, 2018.
- [65] Jiawei Chen, Junkang Wu, Jiancan Wu, Xuezhi Cao, Sheng Zhou, and Xiangnan He. Adap- τ : Adaptively modulating embedding magnitude for recommendation. In *WWW*, 2023.
- [66] Jack Merullo, Louis Castricato, Carsten Eickhoff, and Ellie Pavlick. Linearly mapping from image to text space. In *ICLR*, 2023.
- [67] Guillaume Alain and Yoshua Bengio. Understanding intermediate layers using linear classifier probes. In *ICLR (Workshop)*, 2017.
- [68] Abhilasha Ravichander, Yonatan Belinkov, and Eduard H. Hovy. Probing the probing paradigm: Does probing accuracy entail task relevance? In *EACL*, 2021.
- [69] An Zhang, Leheng Sheng, Zhibo Cai, Xiang Wang, and Tat-Seng Chua. Empowering collaborative filtering with principled adversarial contrastive loss. In *NeurIPS*, 2023.
- [70] Junliang Yu, Xin Xia, Tong Chen, Lizhen Cui, Nguyen Quoc Viet Hung, and Hongzhi Yin. Xsimple: Towards extremely simple graph contrastive learning for recommendation. *IEEE Trans. Knowl. Data Eng.*, 36(2):913–926, 2024.
- [71] Steffen Rendle, Christoph Freudenthaler, Zeno Gantner, and Lars Schmidt-Thieme. BPR: bayesian personalized ranking from implicit feedback. *CoRR*, abs/1205.2618, 2012.
- [72] Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. Mistral 7b. *CoRR*, abs/2310.06825, 2023.
- [73] Arvind Neelakantan, Tao Xu, Raul Puri, Alec Radford, Jesse Michael Han, Jerry Tworek, Qiming Yuan, Nikolas Tezak, Jong Wook Kim, Chris Hallacy, Johannes Heidecke, Pranav Shyam, Boris Power, Tyna Eloundou Nekoul, Girish Sastry, Gretchen Krueger, David Schnurr, Felipe Petroski Such, Kenny Hsu, Madeleine Thompson, Tabarak Khan, Toki Sherbakov, Joanne Jang, Peter Welinder, and Lilian Weng. Text and code embeddings by contrastive pre-training. *CoRR*, abs/2201.10005, 2022.
- [74] Rui Meng, Ye Liu, Shafiq Rayhan Joty, Caiming Xiong, Yingbo Zhou, and Semih Yavuz. Sfr-embedding-mistral:enhance text retrieval with transfer learning. Salesforce AI Research Blog, 2024. URL <https://blog.salesforceairesearch.com/sfr-embedded-mistral/>.
- [75] Shiwen Wu, Fei Sun, Wentao Zhang, Xu Xie, and Bin Cui. Graph neural networks in recommender systems: A survey. *ACM Comput. Surv.*, 55(5):97:1–97:37, 2023.
- [76] Felix Wu, Amauri H. Souza Jr., Tianyi Zhang, Christopher Fifty, Tao Yu, and Kilian Q. Weinberger. Simplifying graph convolutional networks. In *ICML*, 2019.
- [77] Lei Chen, Le Wu, Richang Hong, Kun Zhang, and Meng Wang. Revisiting graph based collaborative filtering: A linear residual graph convolutional network approach. In *AAAI*, 2020.

- [78] Junliang Yu, Hongzhi Yin, Xin Xia, Tong Chen, Lizhen Cui, and Quoc Viet Hung Nguyen. Are graph augmentations necessary?: Simple graph contrastive learning for recommendation. In *SIGIR*, 2022.
- [79] An Zhang, Wenchang Ma, Xiang Wang, and Tat-Seng Chua. Incorporating bias-aware margins into contrastive loss for collaborative filtering. In *NeurIPS*, 2022.
- [80] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *ICML*, 2021.
- [81] Feng Wang and Huaping Liu. Understanding the behaviour of contrastive loss. In *CVPR*, 2021.
- [82] Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, Yifan Du, Chen Yang, Yushuo Chen, Zhipeng Chen, Jinhao Jiang, Ruiyang Ren, Yifan Li, Xinyu Tang, Zikang Liu, Peiyu Liu, Jian-Yun Nie, and Ji-Rong Wen. A survey of large language models. *CoRR*, abs/2303.18223, 2023.
- [83] Jiancan Wu, Xiang Wang, Fuli Feng, Xiangnan He, Liang Chen, Jianxun Lian, and Xing Xie. Self-supervised graph learning for recommendation. In *SIGIR*, 2021.
- [84] Feng Zhu, Yan Wang, Chaochao Chen, Jun Zhou, Longfei Li, and Guanfeng Liu. Cross-domain recommendation: Challenges, progress, and prospects. In *IJCAI*, 2021.
- [85] Shoujin Wang, Liang Hu, Yan Wang, Longbing Cao, Quan Z. Sheng, and Mehmet A. Orgun. Sequential recommender systems: Challenges, progress and prospects. In *IJCAI*, 2019.
- [86] Wang-Cheng Kang and Julian J. McAuley. Self-attentive sequential recommendation. In *ICDM*, 2018.
- [87] Qingyao Ai, Yongfeng Zhang, Keping Bi, Xu Chen, and W. Bruce Croft. Learning a hierarchical embedding model for personalized product search. In *SIGIR*, 2017.
- [88] OpenAI. GPT-4 technical report. *CoRR*, 2023.
- [89] Keping Bi, Qingyao Ai, and W. Bruce Croft. A transformer-based embedding model for personalized product search. In *SIGIR*, 2020.
- [90] Roma Patel and Ellie Pavlick. Mapping language models to grounded conceptual spaces. In *ICLR*, 2022.
- [91] Kiho Park, Yo Joong Choe, and Victor Veitch. The linear representation hypothesis and the geometry of large language models. *CoRR*, abs/2311.03658, 2023.
- [92] Xubin Ren, Wei Wei, Lianghao Xia, and Chao Huang. A comprehensive survey on self-supervised learning for recommendation. *arXiv preprint arXiv:2404.03354*, 2024.
- [93] Zheng Chen. PALR: personalization aware llms for recommendation. *CoRR*, abs/2305.07622, 2023.
- [94] Yuling Wang, Changxin Tian, Binbin Hu, Yanhua Yu, Ziqi Liu, Zhiqiang Zhang, Jun Zhou, Liang Pang, and Xiao Wang. Can small language models be good reasoners for sequential recommendation? *CoRR*, abs/2403.04260, 2024.
- [95] Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Zhiyong Wu, Baobao Chang, Xu Sun, Jingjing Xu, and Zhifang Sui. A survey on in-context learning. *arXiv preprint arXiv:2301.00234*, 2022.
- [96] Yupeng Hou, Junjie Zhang, Zihan Lin, Hongyu Lu, Ruobing Xie, Julian J. McAuley, and Wayne Xin Zhao. Large language models are zero-shot rankers for recommender systems. In *ECIR*, 2024.
- [97] Junling Liu, Chao Liu, Renjie Lv, Kang Zhou, and Yan Zhang. Is chatgpt a good recommender? A preliminary study. *CoRR*, abs/2304.10149, 2023.

- [98] Sunhao Dai, Ninglu Shao, Haiyuan Zhao, Weijie Yu, Zihua Si, Chen Xu, Zhongxiang Sun, Xiao Zhang, and Jun Xu. Uncovering chatgpt’s capabilities in recommender systems. In *RecSys*, 2023.
- [99] Yunfan Gao, Tao Sheng, Youlin Xiang, Yun Xiong, Haofen Wang, and Jiawei Zhang. Chat-rec: Towards interactive and explainable llms-augmented recommender system. *CoRR*, abs/2303.14524, 2023.
- [100] Xiangyang Li, Bo Chen, Lu Hou, and Ruiming Tang. Ctrl: Connect tabular and language model for ctr prediction. *arXiv preprint arXiv:2306.02841*, 2023.
- [101] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurélien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models. *CoRR*, abs/2302.13971, 2023.
- [102] Eric Todd, Millicent L. Li, Arnab Sen Sharma, Aaron Mueller, Byron C. Wallace, and David Bau. Function vectors in large language models. *CoRR*, abs/2310.15213, 2023.
- [103] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *NeurIPS*, 2022.
- [104] Julian J. McAuley, Rahul Pandey, and Jure Leskovec. Inferring networks of substitutable and complementary products. In *KDD*, 2015.
- [105] Walid Krichene and Steffen Rendle. On sampled metrics for item recommendation. In *KDD*, 2020.

A Related Works

Representations in LMs. The impressive capabilities demonstrated by LMs across various tasks raise a wide concern about what they have learned in the representation space. An important and effective approach for interpreting and analyzing representations of LMs is linear probing [68, 67]. The main idea of linear probing is simple: training linear classifiers to predict some specific attributes or concepts (*e.g.*, lexical structure [9]) from the representations in the hidden layers of LMs. A high probing result (*e.g.*, classification accuracy on the out-of-sample test set) tends to imply relevant information has been implicitly encoded in the representation space of LMs, although this does not imply LMs directly use these representations [68, 10]. Recent studies empirically demonstrate that concepts such as color [90], game states [8], and geographic position are encoded in LMs. Furthermore, these concepts may even be linearly encoded in the representation space of LMs [8, 91].

Collaborative filtering. Collaborative filtering (CF) [92] is an advanced technique in modern recommender systems. The prevailing CF methods tend to adopt an ID-based paradigm, where users and items are typically represented as one-hot vectors, with an embedding table used for lookup [55]. Usually, these embedding parameters are learned by optimizing specific loss functions to reconstruct the history interaction pattern [71]. Recent advances in CF mainly benefit from two aspects, graph convolution [75] and contrastive learning [92]. These CF models exhibit superior recommendation performance by conducting the embedding propagation [52, 56] and applying contrastive learning objectives [83, 63, 70]. However, although effective, these methods are still limited, due to the ID-based paradigm. Since one-hot vectors contain no feature information beyond being identifiers, it is challenging to transfer pre-trained ID embeddings to other domains [37] or to leverage leading techniques from computer vision (CV) and natural language processing (NLP) [34].

LMs for recommendation. The remarkable language understanding and reasoning ability shown by LMs has attracted extensive attention in the field of recommendation. The application of LMs in recommendation can be categorized into three main approaches: LM-enhanced recommendation, LM as the modality encoder, and LLM-based recommendation. The first research direction, LLM-enhanced recommendation, focuses on empowering traditional recommenders with the semantic representations from LMs [48, 47, 46, 49, 93, 94]. Specifically, these methods introduce representations from LMs as additional features for traditional ID-based recommenders, to capture complicated user preferences. The second research line lies in adopting the LM as the text modality encoder, which is also known as a kind of modality-based recommendation (MoRec) [34, 35]. These methods tend to train the LM as the text modality encoder together with the traditional recommender. In previous studies, BERT-style LMs are widely used as the text modality encoder. The third research line, LLM-based recommendation, directly uses LLMs as the recommender and recommends items in a text generation paradigm. Early attempts focus on adopting in-context learning (ICL) [95] and prompting pre-trained LLMs [96–99]. However, such naive methods tend to yield poor performance compared to traditional models. Therefore, recent studies concentrate on fine-tuning LLMs on recommendation-related corpus [16, 15, 26, 25, 29] and align the LLMs with the representations from traditional recommenders as the additional modality [17, 20, 27, 100].

B Linear Mapping

B.1 Brief of Used LMs

We briefly introduce the LMs we use for linear mapping in Section 2.

- **BERT** [4] is an encoder-only language model based on the transformer architecture [3], pre-trained on text corpus with unsupervised tasks. BERT adopts bidirectional self-attention heads to learn bidirectional representations.
- **RoBERTa** [5] is an enhanced version of BERT. RoBERTa preserves the architecture of BERT but improves it by training with more data and large batches, adopting dynamic masking, and removing the next sentence prediction objective.
- **Llama2-7B** [6] is an open-source decoder-only LLM with 7 billion parameters. Llama2 adopts grouped-query attention, with longer context length and larger size of the pre-training corpus compared with Llama-7B [101].

Table 6: Linear mapping performance of randomly shuffled item representations

	Books			Movies & TV			Video Games		
	Recall	NDCG	HR	Recall	NDCG	HR	Recall	NDCG	HR
BERT	0.0226	0.0194	0.1240	0.0415	0.0399	0.2362	0.0524	0.0309	0.1245
text-embeddings-3-large (Random)	0.0200	0.0197	0.1316	0.0559	0.0528	0.3204	0.0562	0.0328	0.1351
text-embeddings-3-large	0.0735	0.0608	0.3355	0.1109	0.1023	0.5200	0.1367	0.0793	0.2928

Table 7: Dataset statistics.

	Books	Movies & TV	Video Games	Industrial	MovieLens-1M	Book Crossing
#Users	71,306	26,073	40,834	15,141	6,040	6,273
#Items	26,073	12,464	14,344	5,163	3,043	5,335
#Interactions	2,209,030	876,027	390,013	82,578	995,492	253,057
Density	0.0008	0.0026	0.0007	0.0010	0.0542	0.0076

- **Mistral-7B** [72] is an open-source pre-trained decoder-only LLM with 7 billion parameters. Mistral 7B leverages grouped-query attention, coupled with sliding window attention for faster and lower cost inference.
- **text-embedding-ada-v2 & text-embeddings-3-large** [73] are leading text embedding models released by OpenAI. These models are built upon decoder-only GPT models, pre-trained on unsupervised data at scale.
- **SFR-Embedding-Mistral** [74] is a decoder-based text embedding model built upon the open-source LLM Mistral-7B [72]. SFR-Embedding-Mistral introduces task-homogeneous batching and computes contrastive loss on “hard negatives”, which brings a better performance than the vanilla Mistral-7B model.

B.2 Extracting Representations from LMs

We present how to extract representations from LMs. For encoder-based LMs (*e.g.*, BERT [4] and RoBERTa [5]), we use the representation of the last hidden state corresponding to the [CLS] token [40]. For decoder-based models (*e.g.*, Llama-7B [6, 72], Mistral-7B, and SFR-Embedding-Mistral [74]), we use the representation in the last transformer block [3], corresponding to the last input token [10, 102, 73]. Especially, for the commercial closed-source model (*e.g.*, text-embedding-ada-v2 and text-embeddings-3-large³ [73]), we directly call the API interface to obtain representations.

B.3 Empirical Findings

We examine whether the better performance of leading LMs comes from the more compact representation ability. We randomly shuffle item representations and conduct the same linear mapping experiment. As illustrated in Table 6, randomly shuffled representations, text-embeddings-3-large (Random), lags largely behind the vanilla linear mapping method, suggesting that the performance improvement not merely comes from the better feature encoding ability.

C Experiments

C.1 Datasets

We incorporate six datasets in this paper, including four datasets from the Amazon platform⁴ [1] (*i.e.*, Books, Movies & TV, Video Games, and Industrial), and two datasets from other platforms (*i.e.*, MovieLens-1M and Book Crossing). Table 7 reports the data statistics of each dataset.

We divide the history interaction of each user into training, validation, and testing sets with a ratio of 4:3:3, and remove users with less than 20 interactions following previous studies [50]. We also remove items from the test and validation sets that do not appear in the training set, to address the cold start problem.

³<https://platform.openai.com/docs/guides/embeddings>

⁴www.amazon.com

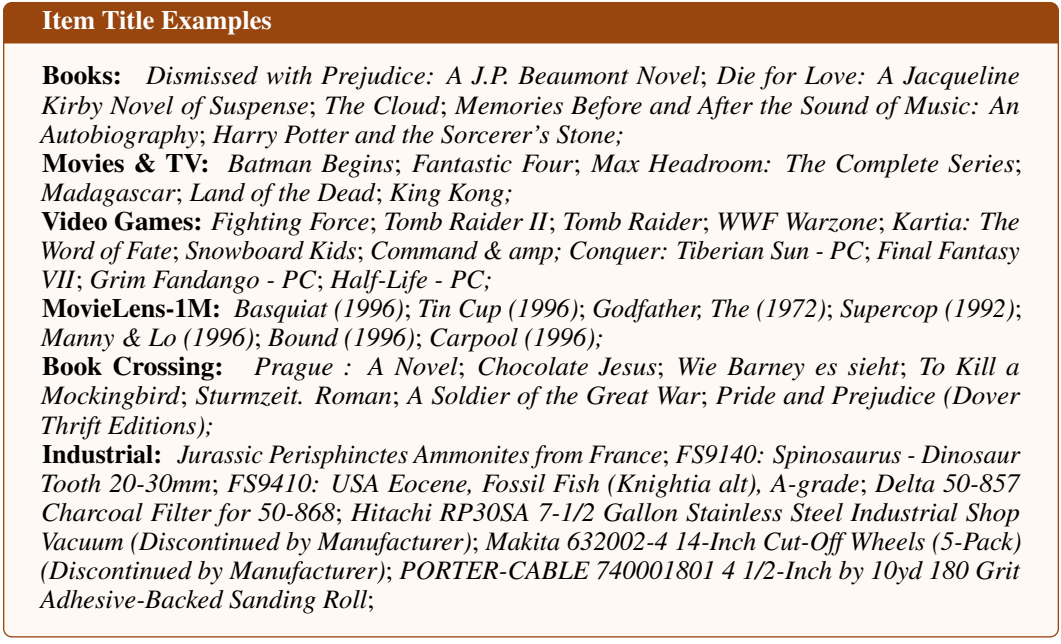


Figure 4: Example of item titles.

In this paper, we only use the item titles as the text description. Figure 4 gives some item title examples from different datasets.

C.2 General Recommendation

C.2.1 Baselines

We incorporate a series of CF models as our baselines for general recommendation. These models are classified as classical CF methods (MF, MultVAE, and LightGCN), CL-based CF methods (SGL, BC Loss, and XSimGCL), and LM-enhanced CF methods (KAR, RLMRec). For these LM-enhanced CF methods, we adopt the leading CF method XSimGCL as the backbone.

- **MF** [55, 71] is the most basic CF model. It denotes users and items with ID-based embeddings and conducts matrix factorization with Bayesian personalized ranking (BPR) loss.
- **MultVAE** [64] is a traditional CF model based on the variational autoencoder (VAE). It regards the item recommendation as a generative process from a multinomial distribution and uses variational inference to estimate parameters. We adopt the same model structure as suggested in the paper: 600 → 200 → 600.
- **LightGCN** [56] is a light graph convolution network tailored for the recommendation, which deletes redundant feature transformation and activation function in NGCF [52].
- **SGL** [83] introduces graph contrastive learning into recommender models for the first time. By employing node or edge dropout to generate augmented graph views and conduct contrastive learning between two views, SGL achieves better performance than LightGCN.
- **BC Loss** [79] introduces a robust and model-agnostic contrastive loss, handling various data biases in recommendation, especially for popularity bias.
- **XSimGCL** [70] directly generates augmented views by adding noise into the inner layer of LightGCN without graph augmentation. The simplicity of XSimGCL leads to a faster convergence speed and better performance.
- **KAR** [48] enhances recommender models by integrating knowledge from large language models (LLMs). It generates textual descriptions of users and items and combine the LM representations with traditional recommenders using a hybrid-expert adaptor.

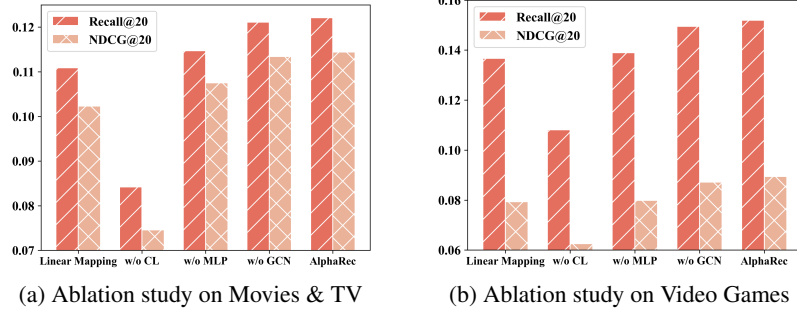


Figure 5: Ablation study

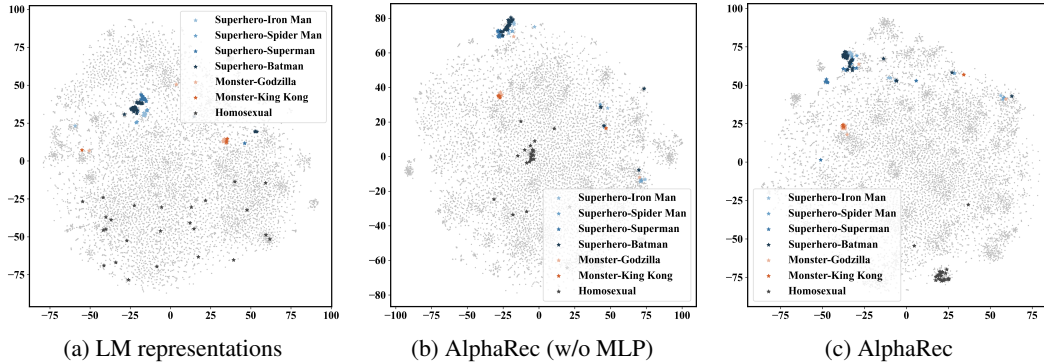


Figure 6: The t-SNE visualization of representations on Movies & TV. (6a) The item representations in the LM space. (6b) The item representations obtained by replacing the MLP with a linear mapping matrix in AlphaRec. (6c) The item representations obtained from AlphaRec.

- **RLMRec** [47] aligns semantic representations of users and items with the representations in CF models through a contrastive loss, as an additional loss trained together with the CF model. The fusion of semantic information and collaborative information brings performance improvement.

C.2.2 Ablation Study

We conduct the same ablation study as introduced in Section 4.1 on Movies & TV and Video Games datasets. As illustrated in Figure 5, each component in AlphaRec contributes positively, which is consistent with our findings in Section 4.1.

C.2.3 The t-SNE Visualization Comparison

In this section, we aim to intuitively explore how the MLP in AlphaRec further helps in excavating collaborative signals in language representations, compared to the linear mapping matrix. We visualize the item representations from LMs, AlphaRec (w/o MLP), and AlphaRec in Figure 6, where AlphaRec (w/o MLP) denotes replacing the MLP with a linear mapping matrix. We observed that movies about superhero and monster cluster in all representation spaces, indicating both AlphaRec (w/o MLP) and AlphaRec capture the preference similarities between these items and preserve the clustering relationship. The difference between AlphaRec (w/o MLP) and AlphaRec lies in the ability to capture obscure preference similarities among items. As shown in Figure 6a, homosexual movies are dispersed in the language space, indicating the possible semantic differences between them. AlphaRec successfully captures the preference similarities and gathers these items in the representation space, while AlphaRec (w/o MLP) remains some items dispersed. Moreover, AlphaRec outperforms AlphaRec (w/o MLP) by a large margin, as indicated in Figure 5a. These results indicate that AlphaRec exhibits a more fine-grained preference capture ability with the help of nonlinear transformation.

Table 8: The effect of the training dataset on zero-shot recommendation

	Industrial			MovieLens-1M			Book Crossing		
	Recall	NDCG	HR	Recall	NDCG	HR	Recall	NDCG	HR
AlphaRec (trained on Books)	0.0896	0.0562	0.1256	0.1218	0.2619	0.8942	<u>0.0646</u>	<u>0.0532</u>	<u>0.3346</u>
AlphaRec (trained on Movies & TV)	<u>0.0909</u>	0.0581	<u>0.1266</u>	<u>0.1438</u>	<u>0.3122</u>	<u>0.9200</u>	0.0471	0.0406	0.2600
AlphaRec (trained on Video Games)	0.0905	0.0567	0.1225	0.1221	0.2313	0.9034	0.0412	0.0378	0.2585
AlphaRec (trained on mixed dataset)	0.0913	<u>0.0573</u>	0.1277	0.1486	0.3215	0.9296	0.0660	0.0545	0.3381

C.3 Zero-shot Recommendation

C.3.1 Co-training on Multiple Datasets

Co-training on multiple datasets is similar to training on one single dataset, where the only difference lies in the negative sampling. When co-training on multiple datasets, the negative items are restricted to the same dataset as the positive item rather than the full item pool. The other training procedures remain the same with training on one single dataset.

C.3.2 Baselines

Since previous works about zero-shot recommendation mostly focus on sequential recommendation [86, 85], we slightly modify two methods in sequential recommendation, ZESRec [38] and UniSRec [37] as our baselines. Specifically, we maintain the model structure as provided in the paper, and adopt the training paradigm of CF.

- **Random** denotes randomly recommending items from the entire item pool.
- **Pop** denotes randomly recommending from the most popular items. Here popularity denotes the number of users that have interacted with the item.
- **ZESRec** [38] is the first work that defines the problem of zero-shot recommendation. To address this problem, this work introduces a hierarchical Bayesian model with representations from the pre-trained BERT.
- **UniSRec** [37] aims to learn universal item representations from BERT, with parametric whitening and a MoE-enhanced adaptor. By pre-training on multiple source datasets, UniSRec can conduct zero-shot recommendation on various datasets in a transductive or inductive paradigm.

C.3.3 The Effect of Training Datasets

The effect of the training dataset scale on zero-shot recommendation. We report the zero-shot recommendation performance differences trained on different datasets in Table 8. Here AlphaRec (trained on Books) denotes training on a single Books dataset, while AlphaRec (trained on mixed dataset) denotes co-training on three Amazon datasets. Generally, training on more datasets leads to a better zero-shot performance. In addition, we observe that, for the zero-shot performance on untrained target datasets, training datasets with similar themes contribute more (*e.g.*, Movies & TV and MovieLens-1M).

The performance comparison between training on the single dataset and the mixed dataset. In Table 9, AlphaRec (trained on single dataset) denotes training and testing on the same single dataset, while AlphaRec (trained on mixed dataset) denotes training on three Amazon datasets (*i.e.*, Books, Movies & TV, and Video Games) and testing on one single dataset. Generally, co-training on three Amazon datasets yields similar performance compared with training on one single dataset. The only exception lies in Video Games, which shows some performance degradation. We attribute this to the difference between the selection of τ . We use $\tau = 0.15$ when trained on the mixed dataset, while the optimal τ for Video Games lies around 0.2. These results indicate that a single AlphaRec can capture user preferences among various datasets, showcasing a general collaborative signal capture ability.

Table 9: Performance comparison between training on the single dataset and the mixed dataset

	Books			Movies & TV			Video Games		
	Recall	NDCG	HR	Recall	NDCG	HR	Recall	NDCG	HR
AlphaRec (trained on single dataset)	0.0991	0.0828	0.4185	0.1221	0.1144	0.5587	0.1519	0.0894	0.3207
AlphaRec (trained on mixed dataset)	0.0979	0.0818	0.4147	0.1194	0.1107	0.5463	0.1381	0.0827	0.2985

Intention Query Generation

Input
 You are an expert in generating queries for a target movie. Please help me generate the most suitable query for the target movie within one sentence, following the given example.
 Example:
 TARGET: [BUG-A-SALT 3.0 Black Fly Edition](#).
 QUERY: *I want a gun that I can use while gardening to get rid of stink bugs, ants, flies, and spiders in my house. It needs to be amazing and help me feel less scared.*
 TARGET: [Toy Story \(1995\)](#).

Output
 QUERY: *I'm looking for a heartwarming animated movie that follows the adventures of a group of toys who come to life when their owner is not around.*

Figure 7: Example of item query generation.

C.4 User Intention Capture

C.4.1 Intention Query Generation

The user intention query is a natural language sentence implying the target item of interest. For each item in the dataset, we generate a fixed user intention query. Following the previous work [40], we generate user intention queries with the help of ChatGPT [88]. As shown in Figure 7, we prompt ChatGPT in a Chain-of-Thought (CoT) [103] paradigm and adopt the output as the user intention query. We adopt a rule-based strategy to ensure the quality of generated queries, and regenerate the wrong query. Considering the huge amount of item title text, we use ChatGPT3.5 API for generating all queries for the budget’s sake.

C.4.2 Baseline

AlphaRec exhibits user intention capture abilities, although not specially designed for search tasks. We compare AlphaRec with TEM [89] which falls in the field of personalized search [87, 104].

- TEM [89] uses a transformer to encode the intention query together with user history behaviors, which enables it to achieve better search results by considering the user’s historical interest.

C.4.3 Case Study

We conduct two more case studies to verify the user intention capture ability of AlphaRec. As illustrated in Figure 8 and Figure 9, AlphaRec provides better recommendation results, assigning the target item at the top while maintaining the general user preferences.

C.4.4 Effect of the Intention Strength Alpha

The value of α controls the balance between the user’s historical interests and the user intention query. A larger α incorporates more about the user intention while considering less about the user’s historical interests. As shown in Figure 10, the effect of α on Video Games shows a similar trend with MovieLens-1M.

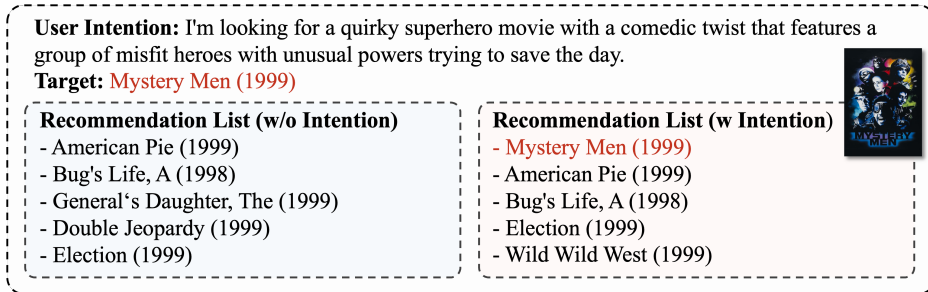


Figure 8: Case study of user intention capture on MovieLens-1M

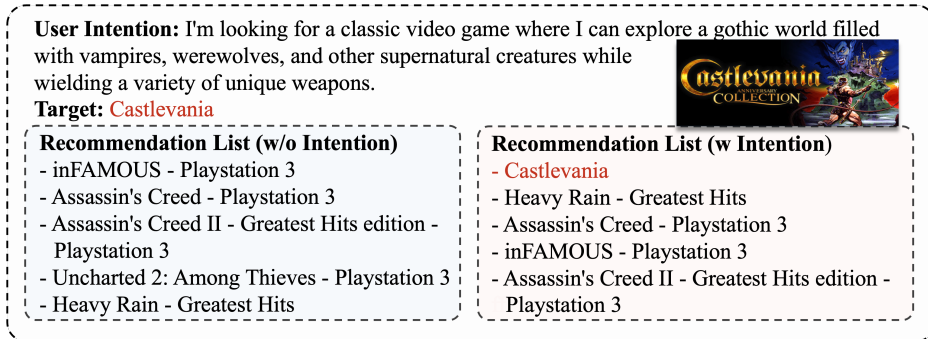


Figure 9: Case study of user intention capture on Video Games

C.5 Trainig Cost

We report the training cost of AlphaRec in this section. Table 10 reports the seconds needed per epoch and the total training cost until convergence. Here Amazon-Mix denotes the mixed dataset of Books, Movies & TV, and Video Games. It's worth noting that AlphaRec converges quickly and only requires a small amount of training time.

D Hyperparameter Settings and Implementation Details

We conduct all the experiments in PyTorch with a single NVIDIA RTX A5000 (24G) GPU and a 64 AMD EPYC 7543 32-Core Processor CPU. We optimize all methods with the Adam optimizer. For all ID-based CF methods, we set the layer numbers of graph propagation by default at 2, with the embedding size as 64 and the size of sampled negative items $|S_u|$ as 256. We use the early stop strategy to avoid overfitting. We stop the training process if the Recall@20 metric on the validation set does not increase for 20 successive evaluations. In AlphaRec, the dimensions of the input and output in the two-layer MLP are 3072 and 64 respectively, with the hidden layer dimension as 1536. We apply the all-ranking strategy [105] for all experiments, which ranks all items except positive ones in the training set for each user. We search hyperparameters for baselines according to the suggestion in the literature. The hyperparameter search space is reported in Table 11. For these LM-enhanced models, KAR and RLMRec, we also search the hyperparameter of their backbone XSimGCL.

For AlphaRec, the only hyperparameter is the temperature τ and we search it in $[0.05, 2]$. We report the temperature τ we used for each dataset in Table 12. For the mixed dataset Amazon-Mix in Section 4.2, we use a universal $\tau = 0.15$. We adopt $\tau = 0.2$ for the MovieLens-1M dataset for the user intention capture experiment in Section 4.3.

E Broader Impact

The proposed AlphaRec can significantly improve the performance of zero-shot recommendation and the capability of user intent capture, offering a good approach to crafting more personalized recommendation results. One concern of AlphaRec is the potential for the representations generated

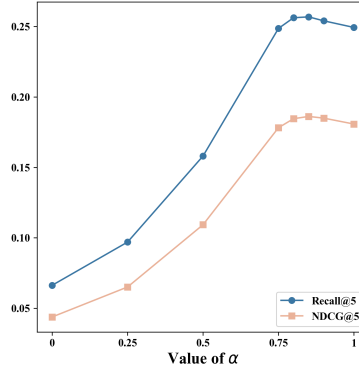


Figure 10: Effect of α on Video Games

Table 10: Training cost of AlphaRec (seconds per epoch/in total).

	Books	Movies & TV	Video Games	Amazon-Mix
AlphaRec	40.1 / 1363.4	12.3 / 479.7	7.4 / 214.6	107.2 / 5788.8

by language models can be maliciously attacked, which may result in erroneous or unexpected recommendations. Therefore, we kindly advise researchers to cautiously check the quality of the language representations before using AlphaRec.

Table 11: Hyperparameters search space for baselines.

	Hyperparameter space
MF & LightGCN	$lr \sim \{1e-5, 3e-5, 5e-5, 1e-4, 3e-4, 5e-4, 1e-3\}$
MultVAE	dropout ratio $\sim \{0, 0.2, 0.5\}$, $\beta \sim \{0.2, 0.4, 0.6, 0.8\}$
SGL	$\tau \sim [0.05, 2]$, $\lambda_1 \sim \{0.005, 0.01, 0.05, 0.1, 0.5, 1.0\}$, $\rho \sim \{0, 0.1, 0.2, 0.3, 0.4, 0.5\}$
BC Loss	$\tau_1 \sim [0.05, 3]$, $\tau_2 \sim [0.05, 2]$
XSimGCL	$\tau \sim [0.05, 2]$, $\epsilon \sim \{0.01, 0.05, 0.1, 0.2, 0.5, 1.0\}$, $\lambda \sim \{0.005, 0.01, 0.05, 0.1, 0.5, 1.0\}$, $l^* = 1$
KAR	No. shared experts $\sim \{3, 4, 5\}$, No. preference experts $\sim \{4, 5\}$
RLMRec	kd weight $\sim [0.05, 2]$, kd temperature $\sim [0.01, 0.05, 0.1, 0.15, 0.2, 0.5, 1]$
ZESRec	$\lambda_u \sim \{0.01, 0.05, 0.1, 0.5, 1.0\}$, $\lambda_v \sim \{0.01, 0.05, 0.1, 0.5, 1.0\}$
UniSRec	$lr \sim \{3e-4, 1e-3, 3e-3, 1e-2\}$
TEM	$l \sim \{2, 3\}$, head $h \sim \{4, 8\}$
AlphaRec	$\tau \sim [0.05, 2]$

Table 12: The hyperparameters of AlphaRec

	Books	Movies & TV	Video Games	Amazon-Mix
τ	0.15	0.15	0.2	0.15