
Vision-Braille: An End-to-End Tool for Chinese Braille Image-to-Text Translation

Alan Wu*
The High School Affiliated to
Renmin University of China
alanyowu@gmail.com

Ye Yuan
School of Computer Science
Peking University
yuanye_pku@pku.edu.cn

Ming Zhang
School of Computer Science
Peking University
mzhang_cs@pku.edu.cn

Abstract

Visually impaired people are a large group who can only use braille for reading and writing. However, the lack of special educational resources is the bottleneck for educating them. Educational equity is a reflection of the level of social civilization, cultural equality, and individual dignity. Facilitating and improving lifelong learning channels for the visually impaired is of great significance. Their written braille homework or exam papers cannot be understood by sighted teachers, because of the lack of a highly accurate braille translation system, especially in Chinese which has tone marks. Braille writers often omit tone marks to save space, leading to confusion when braille with the same consonants and vowels is translated into Chinese. Previous algorithms were insufficient in extracting contextual information, resulting in low accuracy of braille translations into Chinese. This project informatively fine-tuned the mT5 model with an Encoder-decoder architecture for braille to Chinese character conversion. This research created a training set of braille and corresponding Chinese text from the Leipzig Corpora. This project significantly reduced the confusion in braille, achieving 62.4 and 62.3 BLEU scores in the validation and test sets, with a curriculum learning fine-tuning method. By incorporating the braille recognition algorithm, this project is the first publicly available braille translation system and can benefit lots of visually impaired students and families who are preparing for the Chinese College Test and help to propel their college dreams in the future. There is a demo on our homepage¹.

1 Introduction

Among the 4 million registered persons with visual disabilities in China [2], there is a special group of 150,000 school-age blind children [15] who face the risk of "double-blind" (physical disabled and illiterate). We have found that even though the population is staggering, education resources are scarce—only 10 percent can attend one of the 11 Senior High Schools for Blind Students nationwide, located in major cities [2]. Although the Chinese Bureau of Education enacted the specialized form of GaoKao, allowing participants to read braille exam papers and write in braille, this group was almost absent in higher education: only 15 students nationwide participated in this special GaoKao. This number was small compared with the total number, to 13 million Gaokao students [14]. The scarcity of specialized educational resources has discouraged many eager learners from pursuing their college dreams. However, if artificial intelligence could be leveraged to support these "double-blind" children, it might enable them to participate in mainstream education and transform their lives.

The Braille writing system, devised in 1824 by Louis Braille in France, is a tactile reading and writing method used worldwide by individuals with vision impairments. A braille cell is uniform

*The author completed this project while studying in grade 12.

¹<https://vision-braille.com/>

worldwide, consisting of six humps or “dots”. Braille has been adapted to represent each Chinese character phonetically through up to three cells: consonants, vowels, and tones; words with multiple braille characters were separated by spaces based on their meaning. Furthermore, to facilitate ease of writing, Chinese Braille omits consonants, vowels, or tones based on rules and personal preferences, particularly with tones. According to linguistic research based on the largest Chinese braille corpus, braille writers average omitted up to 90 percent of braille tones [19]. Though simplification aids in streamlining the writing process, it obstructs accurate understanding because of homonyms and various characters with the same pronunciation. One example of this homophone confusion is the Chinese pronunciation "yi", having more than a hundred common Chinese characters, such as "一", "弈", "驿", "意", "疑" and so on. This phenomenon is also common in other language like French [1], Khmer [6], and Japanese [8]

We have interviewed several faculties at the Beijing School for Blind Children and have observed the need for more adequate educational resources. This study designed the “Vision-Braille” model, providing an end-to-end braille recognition and translation system as an educational tool for Chinese visually impaired students.

2 Related Works

In machine translation, the progression of algorithms has been pivotal in enhancing the quality and efficiency of translations across various languages. Early approaches were dominated by Rule-based Translation systems, which were superseded by the advent of Statistical Machine Translation. These methods laid the groundwork for subsequent advancements in Neural Machine Translation (NMT), where Recurrent Neural Networks (RNNs)[13] and Long Short-Term Memory (LSTM)[5] networks first demonstrated significant improvements in context retention and sequence modeling. The introduction of transformer-based models[16], such as BERT[3], GPT2, and T5[12], marked a further shift towards models with enhanced context awareness, leveraging attention mechanisms to improve the depth and relevance of translations. Moreover, mT5 [20] is a variant of the T5 model, which has multilingual abilities. More recently, the potential incorporation of advanced versions of large language models like LLaMA and GPT-4 into translation tasks promises further innovations, particularly in few-shot learning applications. This evolution is also reflected in niche translation tasks such as converting Braille to Chinese characters, where techniques ranging from N-gram models[17, 7] to LSTM and GRU-based approaches [18] have been explored to address specific challenges like character confusion, demonstrating a trend towards increasingly sophisticated, contextually aware solutions in the field of machine translation.

A number of models reached satisfactory accuracy in braille recognition. These braille detection models[9, 11, 10] utilized convoluted neural networks (CNN)and were trained on multiple datasets, such as the DSBI and Angelina datasets. In this research, we chose the Angelina Braille Reader developed by Ilya Ovodov². This model is based on the RetinaNet and gets satisfactory accuracy in real-world braille recognition.

3 Dataset

The braille Chinese datasets are extremely rare and are all private because of labor-intensive doubling checking and aligning processes [19]. We overcome this challenge by converting Chinese corpora into braille. The Chinese data for this research were publicly available at Leipzig Corpora Collection [4]. The dataset comprised one million discrete sentences gathered from news media between 2007 and 2009. Later, the Chinese characters were converted into “fully toned” braille characters using the tools offered by The Braille Online Platform of China³. The tool works by labeling the pronunciation of Chinese characters, and accurately converting them into braille. To stimulate the real-world braille, which often omits lots of tones, we identify the braille for tones and remove 90% of them, and get Chinese-Braille-10per-Tone. We also provide the dataset with full tones and with no tones for the easiest and hardest parts. Finally, we got a paired Chinese-Braille dataset, including Chinese-Braille-Full-Tone, Chinese-Braille-No-Tone and Chinese-Braille-10per-Tone. Chinese-Braille-10per-Tone

²<https://github.com/IlyaOvodov/AngelinaReader>

³<http://www.braille.org.cn:24414/>

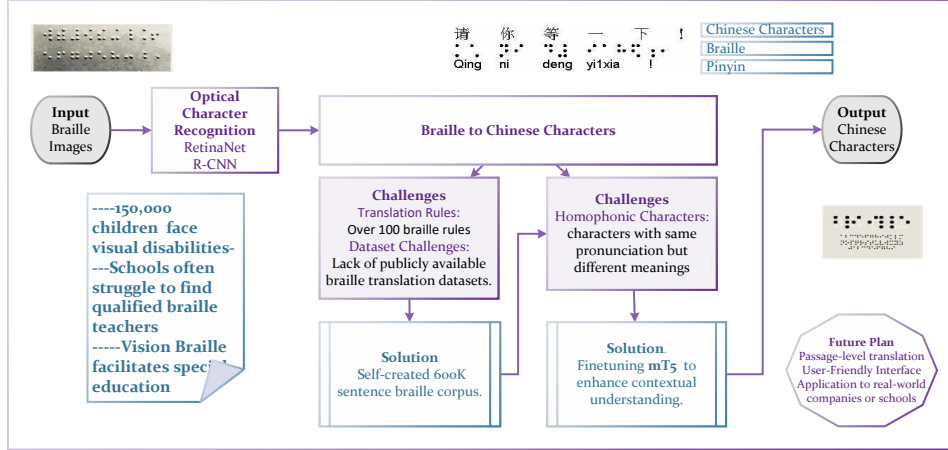


Figure 1: The pipeline of our system.

reflects the real-world Chinese braille usage. The data were split into training, validation, and testing datasets with a ratio of 8 : 1 : 1. The statistics of our created dataset are shown in Table 1.

	# Sample	Braille Len.		Chinese Len.	
		String	Token	String	Token
Training	525072	145/112	149/115	74/64	59/51
Validation	65634	117/96	121/99	71/62	57/50
Test	65634	107/90	111/93	72/63	58/50

Table 1: Basic statistics of our created dataset Chinese-Braille-10per-Tone.

4 Methodology

The overall pipeline of our system is shown in Figure 1. It includes two parts: Braille OCR (Image-to-Braille) and Braille Translation (Braille-to-Text), which we will introduce in the following.

4.1 Braille OCR

In our research, we employed RetinaNet for the task of Braille Optical Character Recognition (OCR). RetinaNet utilizes a pre-trained convolutional neural network architecture, augmented by a Feature Pyramid Network (FPN) as its backbone, which effectively extracts multi-scale features from input images. This model facilitates one-stage object detection by integrating a classification subnet and a box regression subnet. The classification subnet, comprising several 3x3 convolutional layers and a sigmoid activation layer, predicts the presence of objects at specific spatial locations by generating binary outputs. Concurrently, the box regression subnet estimates the offset from each anchor to the actual bounding boxes. Subsequently, the identified regions are processed using a pre-trained image classification model to ensure precise object recognition. The incorporation of focal loss further enhances the model’s accuracy, making it highly effective for one-stage object detection tasks.

4.2 Braille Translation

We fine-tune a pre-trained LLM to improve our Braille-Chinese translation system. We use the multilingual version of the T5 model—mT5, which uses architectures similar to those of the T5 models except for training in 101 languages (including Chinese) and scaling both the hidden and feedforward dimensions. Text-to-Text Transfer Transformer (T5) is a powerful neural architecture developed by Google for natural language processing (NLP) tasks. It follows the Encoder-Decoder architecture. Every task is transformed into an input-output format, where both input and output are treated as text.

By finetuning the mT5 model, we capture more connections during the context. Compared with other large language models, mT5 can capture the linguistic characters from multiple languages, which we believe may lead to higher accuracy and superior performances. We use the mT5-Small model in our braille translation system.

We add 63 braille characters as special tokens into the vocabulary of the mT5 tokenizer and resize the embedding dimension of the mT5 model accordingly. Our finetuning task aims to teach the mT5 model to learn the rules and mappings of unseen braille tokens and accurately return the translated Chinese characters. As a sequence-to-sequence matching problem, we choose the BLEU metric for model evaluation. BLEU measures the similarity in the choice and order of words, using the precision of n-grams, a contiguous sequence of ‘n’ items from the text—compared to reference translation, objectively evaluating the quality of machine translation. The BLEU scores range from 0 to 1, where 1 indicates a perfect match with the reference, thus higher scores denote better translation quality.

For the fine-tuning procedure, we develop a three-stage curriculum learning method. We first use the Chinese-Braille-Full-Tone dataset as the easy part of training, to let the model learn basic translation rules. Next, we adopt Chinese-Braille-No-Tone to let the model learn to guess the Chinese based on the contexts, without knowing the tone. Finally, we fine-tune the model on Chinese-Braille-10per-Tone to make it close to real-world data distribution.

5 Experiments

We fine-tuned the mT5-small model, which comprises approximately 300 million parameters. We use 4 NVIDIA-A40 GPUs to fine-tune the model with the following hyper-parameters in Table 2. We fine-tune the model for 30,000/20,000/10,000 steps in three stages independently and use AdamW as the optimizer for all stages. We use a smaller learning rate for Stage-2 and Stage-3. The whole fine-tuning procedure will take about 20 hours. Finally, we achieve 62.4 and 62.3 BLEU scores in validation and test sets of our Chinese-Braille-10per-Tone dataset.

	Batch Size	Learning Rate	LR Scheduler	Source SeqLen.	Target SeqLen.
Stage-1	72	0.00005	Cosine	285	285
Stage-2	72	0.000025	Cosine	285	285
Stage-3	72	0.00001	Cosine	285	285

Table 2: Hyper parameters of our fine-tuning procedure.

We have constructed a complete pipeline of braille translation, incorporating braille recognition, braille translation, and translation pronunciation. Users scan the braille pictures using their phones, and the picture will be uploaded to the remote server and become the input of the ReinaNet braille recognition systems. The RetinaNet returns the recognized digital braille characters, and the model translates the digital braille into Chinese characters and prints the output. The demo can be accessed in the <https://vision-braille.com/> website.

6 Conclusion

In this paper, we develop a Chinese braille dataset that simulates real-world Chinese braille writing habits. And we propose a tool that can translate a braille image into Chinese texts. We use the curriculum learning strategy to fine-tune a mT5 model to do the braille translation. We also provide a demo of our tool and show the potential applications in the education of visually impaired people.

7 Limitations

First of all, our braille translation tool can only handle sentences for now. It will be better to translate a whole page of braille. Moreover, we only use mT5-Small as our backbone due to resource limits. We will try larger models and few-shot methods using recent LLMs in the future.

Acknowledgments and Disclosure of Funding

I would like to thank Professor Ming Zhang for her gratuitous guidance in topic selection and for providing the opportunity to participate in Peking University’s “Deep Learning Seminar”, which allowed me to gain a profound understanding of the frontier models in natural language processing and deep learning. I am also grateful to Senior Ye Yuan (who provided guidance voluntarily) for guiding the model design and encouraging me not to give up when facing setbacks in research. Thanks to the senior students of the School of Computer Science at Peking University for their assistance. I also appreciate Peking University for providing computational resources, which significantly improved the training speed of the model. I would also like to thank my parents and family for their support. Additionally, I am thankful for the full support and advice of the China Braille Library, Professor Jinghua Zhong from Beijing Union University, Liu Hong from the Institute of Computing Technology, Chinese Academy of Sciences, and Beijing School for the Blind.

References

- [1] Pierrette Bouillon, Johanna Gerlach, Ulrich Germann, Barry Haddow, and Manny Rayner. Two approaches to correcting homophone confusions in a hybrid machine translation system. In *Proceedings of the Second Workshop on Hybrid Approaches to Translation*, pages 109–116, 2013.
- [2] China Disabled Persons’ Federation. *Chinese Statistical Yearbook on the Work for People with Disabilities*. China Disabled Persons Federation, December 2022.
- [3] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [4] Dirk Goldhahn, Thomas Eckart, Uwe Quasthoff, et al. Building large monolingual dictionaries at the leipzig corpora collection: From 100 to 200 languages. In *LREC*, volume 29, pages 31–43, 2012.
- [5] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.
- [6] Chea Sok Huor, Ros Pich Hemy, and Vann Navy. Detection and correction of homophonous error word for khmer language. *Ref. No. PANL10n/Admn/RR*, 2004.
- [7] Minghu Jiang, Xiaoyan Zhu, Georges Gielen, Elliott Drábek, Ying Xia, Gang Tan, and Ta Bao. Braille to print translations for chinese. *Information and Software Technology*, 44(2):91–100, February 2002.
- [8] Shuji Komeiji and Toshihisa Tanaka. A Language Model-Based Design of Reduced Phoneme Set for Acoustic Model. In *2019 Asia-Pacific Signal and Information Processing Association Annual Summit and Conference (APSIPA ASC)*, pages 192–197, November 2019. ISSN: 2640-0103.
- [9] Renqiang Li, Hong Liu, Xiangdong Wang, and Yueliang Qian. Dsbi: double-sided braille image dataset and algorithm evaluation for braille dots detection. In *Proceedings of the 2018 2nd International Conference on Video and Image Processing*, pages 65–69, 2018.
- [10] Liqiong Lu, Dong Wu, Jianfang Xiong, Zhou Liang, and Faliang Huang. Anchor-free braille character detection based on edge feature in natural scene images. *Computational Intelligence and Neuroscience*, 2022(1):7201775, 2022.
- [11] Ilya G. Ovodov. Optical braille recognition using object detection cnn. *2021 IEEE/CVF International Conference on Computer Vision Workshops*, pages 1741–1748, 2021.
- [12] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020.
- [13] David E Rumelhart, Geoffrey E Hinton, and Ronald J Williams. Learning internal representations by error propagation, parallel distributed processing, explorations in the microstructure of cognition, ed. de rumelhart and j. mccllland. vol. 1. 1986. *Biometrika*, 71(599-607):6, 1986.
- [14] China News Service. 2024 national college entrance examination: Continue to do a good job of examination services for groups with special difficulties, Jun 2024.
- [15] Li Zehui%A Bai Xianchun%A Sun Youran. Interpretation of the blue book of the disabled: Report on the development of the cause of disabled people in china (2020). *Modern special education*, 02:3–7, 2021. ISBN: 1004-8014.
- [16] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.

- [17] Chao Wang, Xiangdong Wang, Yueliang Qian, and Shouxun Lin. Accurate Braille-Chinese translation towards efficient Chinese input method for blind people. In *5th International Conference on Pervasive Computing and Applications*, pages 82–87, Maribor, Slovenia, December 2010. IEEE.
- [18] Taiqing Wang. taiqing/pinyin2hanzi, Aug 2019.
- [19] Xiao Yangmei, Guo Jialiang, Lv ming, Gao Xuezhen, and Zhong Jinghua. Quantitative research on national common braille based on braille corpus. *Chinese Journal of Special Education*, 4:25–32, April 2020.
- [20] Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. mt5: A massively multilingual pre-trained text-to-text transformer. *arXiv preprint arXiv:2010.11934*, 2020.