

VIMI: Grounding Video Generation through Multi-modal Instruction

Yuwei Fang¹ Willi Menapace¹ Aliaksandr Siarohin¹ Tsai-Shien Chen²
Kuan-Chien Wang¹ Ivan Skorokhodov¹ Graham Neubig³ Sergey Tulyakov¹

Snap Inc.¹ UC Merced² Carnegie Mellon University³
snap-research.github.io/VIMI

Abstract

Existing text-to-video diffusion models rely solely on text-only encoders for their pretraining. This limitation stems from the absence of large-scale multimodal prompt video datasets, resulting in a lack of visual grounding and restricting their versatility and application in multimodal integration. To address this, we construct a large-scale multimodal prompt dataset by employing retrieval methods to pair in-context examples with the given text prompts and then utilize a two-stage training strategy to enable diverse video generation tasks within the same model. In the first stage, we propose a multimodal conditional video generation framework for pretraining on these augmented datasets, establishing a foundational model for grounded video generation. Secondly, we fine-tune the model from the first stage on three video generation tasks, incorporating multimodal instructions. This process further refines the model’s ability to handle diverse inputs and tasks, ensuring seamless integration of multimodal information. After this two-stage training process, ViMI demonstrates multimodal understanding capabilities, producing contextually rich and personalized videos grounded in the provided inputs, as shown in Figure 1. Compared to previous visual grounded video generation methods, ViMI can synthesize consistent and temporally coherent videos with large motion while retaining the semantic control. Lastly, ViMI also achieves state-of-the-art text-to-video generation results on UCF101 benchmark.

1 Introduction

Recent advancements in video diffusion models have led to significant successes across various video creation tasks (Singer et al., 2022; Villegas et al., 2022; Zhang et al., 2023; Chai et al., 2023; Chen et al., 2023; Ceylan et al., 2023; Geyer et al., 2023). These models have demonstrated impressive capabilities in generating high-quality videos

from textual prompts (An et al., 2023; Blattmann et al., 2023b; Ge et al., 2023; Guo et al., 2023b; He et al., 2023; Ho et al., 2022a,b; Singer et al., 2022; Wang et al., 2023; Zhou et al., 2023; Blattmann et al., 2023a). However, the majority of these models rely solely on text-only encoders for their diffusion-based pretraining. This limitation stems from the absence of large-scale multimodal prompt datasets, which results in a lack of visual grounding during the pretraining stage. Consequently, current models struggle to incorporate visual input effectively, restricting their versatility and application in scenarios that demand multi-modal integration.

To effectively incorporate visual input into pre-trained text-to-video models, standalone image encoders are often employed to process image prompts (Jiang et al., 2023b; Guo et al., 2023a; Ren et al., 2024; He et al., 2024). The visual embeddings generated by these encoders are then injected into the diffusion model, enabling it to handle multimodal applications. However, this approach necessitates customized model designs, leading to fragmented solutions that cannot support various tasks in a unified manner. As a result, the models lack the flexibility and generalization needed to seamlessly integrate different modalities for diverse video generation tasks.

Recently, generative pretrained multimodal language models have demonstrated robust multimodal in-context learning capabilities, showcasing their ability to process and integrate various types of input data effectively (Team et al., 2023; Zhu et al., 2023; Achiam et al., 2023; Liu et al., 2024). Inspired by this success, we introduce a *multi-modal instruction* pretraining framework ViMI for grounded video generation. This novel framework aims to leverage the strengths of multimodal models, enhancing the ability to generate videos that are coherently grounded in both textual and visual inputs. Specifically, the training of ViMI consists of two stages: (1) Retrieved Augmented Pretraining;

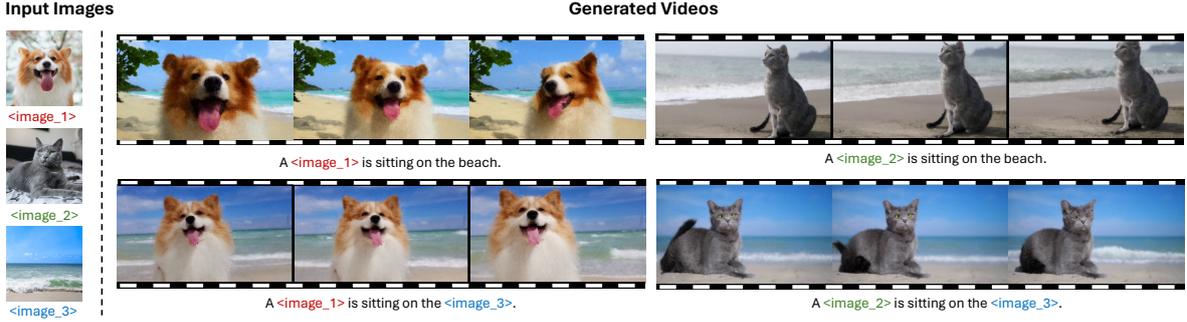


Figure 1: **Examples of ViMI for grounded video generation.** Thanks to our visual grounding during retrieval-augmented pretraining and multimodal instruction tuning, our generator can generate videos from multimodal prompts that include multiple image entities. Each multimodal prompt is displayed below the generated videos, illustrating the model’s capability to integrate and interpret both textual and visual inputs effectively.

and (2) Multi-Modal Instruction Fine-Tuning.

During the pretraining stage, we first construct a large-scale multimodal prompt dataset by employing a large-scale retrieval method to pair multimodal in-context examples with the given text prompts. The retrieved contexts from a web-scale corpus provide a rich multimodal in-context environment for model training. With these paired datasets, we can either pretrain a multimodal video generator from scratch or fine-tune an existing text-to-video generator. After this stage, the model gains the capability to understand both text-only and multimodal inputs for video generation. This establishes a foundation model for grounded video generation, capable of integrating diverse modalities into cohesive video outputs.

In the second stage, we fine-tune the model from the first stage on various video generation tasks, incorporating multimodal instructions. This fine-tuning process further refines the model’s ability to handle diverse inputs and tasks, ensuring it can seamlessly integrate multimodal information. After this two-stage training process, ViMI demonstrates enhanced multimodal understanding capabilities, producing contextually rich and personalized videos grounded in the provided inputs. This makes the model highly versatile and effective for a wide range of video generation applications.

In summary, our main contributions include:

- **Novel Dataset Construction:** We are the first to use retrieval methods to build large-scale multimodal datasets for video pretraining.
- **Retrieval Augmented Video Pretraining:** We propose a novel retrieval-augmented pretraining framework specifically designed for grounded video generation. Our pretraining

framework enables video generators to receive multi-modal prompts, instead of text-only prompts.

- **Instruction Tuning for Video Generation:** We introduce instruction tuning for video generation, unifying three distinct video generation tasks within a single, cohesive instruction framework. This innovative approach allows the model to flexibly handle various video generation tasks based on specific instructions.

2 Preliminary

2.1 Text-To-Video Pretraining

We base our work on the diffusion framework proposed by Menapace et al. (2024), which adapts the EDM (Karras et al. (2022a)) diffusion framework to high resolution video generation. In EDM, the forward diffusion process is characterized by a variance-exploding mechanism $p(\mathbf{x}_\sigma|\mathbf{x}) \sim \mathcal{N}(\mathbf{x}, \sigma^2\mathbf{I})$, where noise σ is gradually added to the data, causing the variance to increase over time, and \mathbf{x}_σ represents the data at the current noise level. The reverse process is modeled by learnable denoiser function denoted as \mathcal{D}_θ , which is trained using a denoising objective formulated as:

$$\mathcal{L}(\mathcal{D}_\theta) = \mathbb{E}_{\sigma, \mathbf{x}, \epsilon} \left[\lambda(\sigma) \|\mathcal{D}_\theta(\mathbf{x}_\sigma) - \mathbf{x}\|_2^2 \right], \quad (1)$$

where \mathbf{x} is a data sample, λ is a weighting function for the loss and ϵ is gaussian noise. Rather than learning $\mathcal{D}_\theta(\mathbf{x}_\sigma)$ directly, it is parametrized as:

$$\mathcal{D}_\theta(\mathbf{x}_\sigma) = c_{\text{out}}(\sigma)\mathcal{F}_\theta(c_{\text{in}}(\sigma)\mathbf{x}_\sigma) + c_{\text{skip}}(\sigma)\mathbf{x}_\sigma, \quad (2)$$

where \mathcal{F}_θ is a neural network. By appropriately choosing scaling functions c_{out} , c_{skip} and c_{in} (see

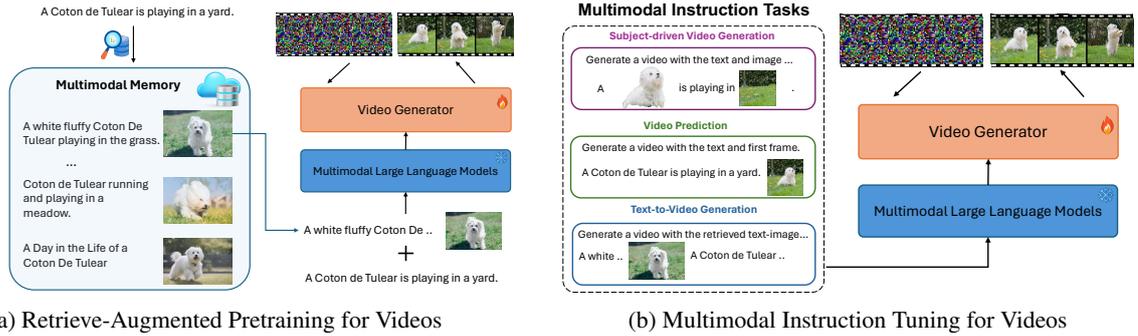


Figure 2: **Overview of our VIMI framework.** (a-left) We first construct a large-scale dataset by employing retrieval methods to pair multimodal in-context with given text prompts. Then we present a multimodal conditional video generation framework for pretraining on these augmented datasets. (b) We propose multimodal instruction tuning for video generation, grounding the model on customized input specified in different multimodal instructions for video generation, including subject-driven video generation, video prediction and text-to-video. By fine-tuning the model with multimodal instructions, we enable VIMI to generate videos that are both contextually rich and visually accurate across a wider range of tasks.

Menapace et al. (2024)), the model can train optimally on high resolution videos. We employ a second order Runge-Kutta sampler to produce video samples.

2.2 Multimodal Large Language Models

Building upon the success of Large Language Models (LLMs), Multimodal Large Language Models (MLLMs) (Liu et al., 2024; Zhu et al., 2023; Team et al., 2023) integrate visual information from a pretrained vision encoder (Radford et al., 2021) with an advanced LLM (Touvron et al., 2023; Jiang et al., 2023a). This integration is achieved by treating visual modalities as sequences of discrete tokens. In our work, we utilize MLLMs to process and interpret multimodal in-context input data $s = (s_1, s_2, \dots, s_n)$, where s_i can be a signal unit, such as an image. For the image unit s_i in the prompt, a pre-trained CLIP visual encoder ViT-L/14, is used to provide the visual features $v_i = \text{Visual-Encoder}(s_i)$. The patch features v_i before the last Transformer layer, combined with the text tokens, are used for MLLM encoding, formulated as:

$$C = \text{MLLM}(\{s_1, s_2, \dots, s_n\} | \mathcal{W}(v_i)), \quad (3)$$

where \mathcal{W} projects v_i to connect image features into the word embeddings. This approach allows the MLLM to effectively interpret a combination of textual and visual inputs, leveraging the strengths of both modalities to enhance the model’s multimodal understanding and generation capabilities.

3 Method

We aim to generalize the video generation pretraining to the multimodal setting. Figure 2 shows the overview of our framework. Sec. 3.1 introduces how we construct a large-scale multimodal input-video dataset by employing retrieval methods to pair in-context examples with given text prompts. Sec. 3.2 presents a multimodal conditional video generation framework for pretraining on these augmented datasets, establishing a foundational model for grounded video generation. Sec. 3.3 introduces the instruction finetuning stage on three video generation tasks, incorporating multimodal instructions.

3.1 Retrieval-Augmented Multi-modal Datasets

Retrieval-based methods collect relevant information to the input from an external multimodal memory \mathcal{M} . In our study, we use web-scale image-text pairs as our multi-modal memory for retrieval and build index into a list of key-value pairs, i.e. $\mathcal{M} = \{(k_i, v_i)\}$. Then, given the input sequence s , the retrieval engine \mathcal{E} matches it with all keys and returns the top K most similar keys to the query together with their values:

$$\{(k_{i_1}, v_{i_1}), \dots, (k_{i_K}, v_{i_K})\} = \mathcal{E}(s | \mathcal{M}) \quad (4)$$

In this work, we build the retrieval engine based on the widely used BM25 score (Schütze et al., 2008). We choose BM25 over dense representations due to the large scale of the retrieval datastore and its faster speed. In our work, we construct

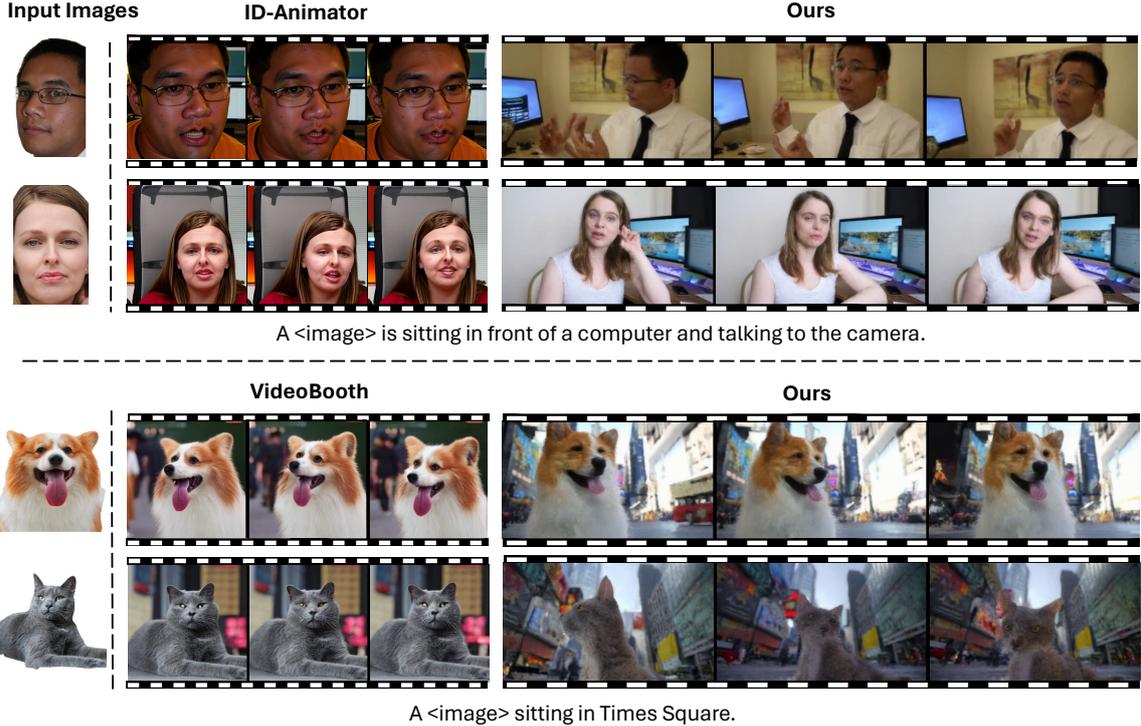


Figure 3: **Comparison of subject-driven video generation.** We compared with concurrent work ID-Animator (He et al., 2024) for zero-shot human video generation (above) and VideoBooth (Jiang et al., 2023b) for general subject-driven video generation (below). Our video generator can synthesize temporally coherent videos with large motion while retaining the semantic control.

500M image-text pairs as our multimodal memory. Using this retrieval approach, we augment our internal text-to-video and text-to-image datasets. Specifically, we use the text caption as the query and retrieve the top-3 image-text pairs from the memory \mathcal{M} for model training. These retrieved multimodal documents are then combined with the text input to form the new multimodal input, which serves as the condition for video pretraining, ensuring that the model receives contextually relevant and diverse multimodal information.

3.2 Retrieval-Augmented Video Pretraining

Given the retrieval-augmented multimodal input, we first concatenate the text caption s with the retrieved multimodal documents to form the new multimodal input. Then, we feed this combined input into the Multimodal Large Language Models (MLLMs) to generate the multimodal conditional embedding \mathbf{C} :

$$\mathbf{C} = \text{MLLM}(\mathcal{F}(\{(k_{i_1}, v_{i_1}), \dots, (k_{i_K}, v_{i_K})\}, s)) \quad (5)$$

Here, \mathcal{F} denotes concatenation and the embedding \mathbf{C} encapsulates the rich contextual information

from both the text and the retrieved multimodal data.

Following (Menapace et al., 2024), we use FITs (Chen and Li, 2023) as the backbone to jointly model the spatial and temporal dimensions for high-quality video generation. However, here we only use the multimodal conditioning embedding \mathbf{C} to control the generation process rather than the text embeddings from T5 text encoder. We concatenate additional tokens representing the diffusion timestep, framerate and original resolution of the current input, to support variable video framerates and large differences in resolution and aspect ratios in the training data. To generate high-resolution outputs, we pretrain a cascade model consisting of a first-stage model producing $36 \times 64\text{px}$ videos and a second-stage upsampling model producing $288 \times 512\text{px}$ videos.

3.3 Multimodal Instruction Tuning

After the first stage of retrieval-augmented pretraining, VIMI can generate videos from prompts involving both text and images, leveraging the multimodal understanding capabilities of the multimodal language model. However, this initial stage primar-

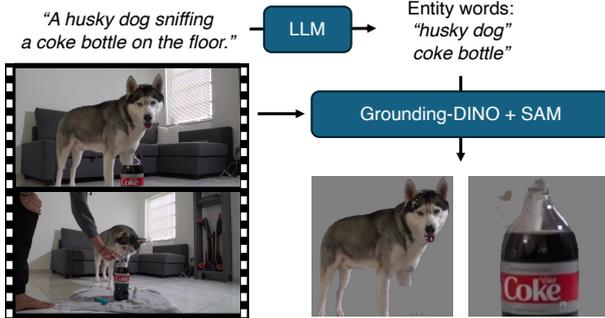


Figure 4: An overview of our data curation pipeline for subject-driven video generation.

ily focuses on grounding the model in the noisy retrieved in-context input for video generation. As a result, VIMI may not fully utilize visual features for precise and faithful video generation.

To address these limitations, we propose multimodal instruction tuning for video generation, grounding the model on customized input specified in different multimodal contexts for video generation. By fine-tuning the model with multimodal instructions, we enhance its ability to integrate and utilize visual features more effectively, enabling VIMI to generate videos that are both contextually rich and visually accurate across three video tasks, illustrated in Figure 2b.

Subject-Driven Video Generation To enhance the visual grounding capabilities for video generation, we curate a multimodal interleaved prompt composed of texts and images based on the Panda-70M dataset (Chen et al., 2024). The data curation pipeline is illustrated in Figure 4. First, we extract entity words from the text captions using Large Language Models (LLMs). For each entity, we extract the corresponding image segment using Grounding DINO (Liu et al., 2023) for object detection and SAM (Kirillov et al., 2023) for image segmentation. This process ensures that each textual element has a visually grounded counterpart. We prepend the task instruction "Generate a video with the text and image interleaved prompt." to the prompt. This curated data ensures that the model can ground specific multimodal inputs effectively and generate videos that faithfully represent the combined textual and visual information.

Video Prediction As our framework can flexibly encode multimodal prompts, we simply encode the first frame along with the text prompt with MLLMs. Following this, we generate subsequent frames based on the given multimodal prompt. To

	FVD ↓	IS ↑
CogVideo (Hong et al., 2022) (Chinese)	751.3	23.6
CogVideo (Hong et al., 2022) (English)	701.6	25.3
MagicVideo (Zhou et al., 2023)	655	-
LVDM (He et al., 2023)	641.8	-
Video LDM (Blattmann et al., 2023b)	550.6	33.5
VideoFactory (Wang et al., 2023)	410.0	-
Make-A-Video (Singer et al., 2022)	367.2	33.0
PYoCo (Ge et al., 2023)	355.2	47.46
VideoPoet (Kondratyuk et al., 2023)	355	38.4
W.A.L.T (Gupta et al., 2023)	258.1	35.1
Lumiere (Bar-Tal et al., 2024)	332.5	37.5
Snap Video (288 × 288 px)	260.1	38.89
Snap Video (512 × 288 px)	200.2	38.89
VIMI (288 × 288 px)	262.5	35.6
VIMI (512 × 288 px)	193.7	35.6

Table 1: Zero-shot evaluation results on UCF101 (Soomro et al., 2012).

facilitate this process, we prepend the task instruction "Generate a video with the following text and first frame." to the prompt. This approach allows the model to anchor the video generation process with a visual starting point, ensuring that the subsequent frames are coherently built upon both the initial visual and textual inputs.

Text-to-Video Generation We also use our augmented text-to-video dataset for instructed text-to-video generation. Initially, the input comprises only text. To enhance this input, we leverage retrieval methods as described in 3.1 to augment it with retrieved images. We prepend the task instruction "Generate a video with the retrieved text-image examples and text prompt." to the prompt, setting a clear directive for the model. This approach ensures that the model receives enriched and contextually relevant multimodal data, improving its capability to generate high-quality videos from multimodal in-context descriptions.

4 Experiments

In this section, we evaluate VIMI against baselines and ablate the model design components. Sec. 4.1 introduces our implementation details. Sec. 4.2 shows our results in three different evaluation settings: (1) general text-to-video generation; (2) subject-driven video generation; and (3) video prediction. Sec. 4.3 shows ablations of our framework.

4.1 Implementation Details

We use an internal licensed dataset of images and videos, each paired with a corresponding text cap-

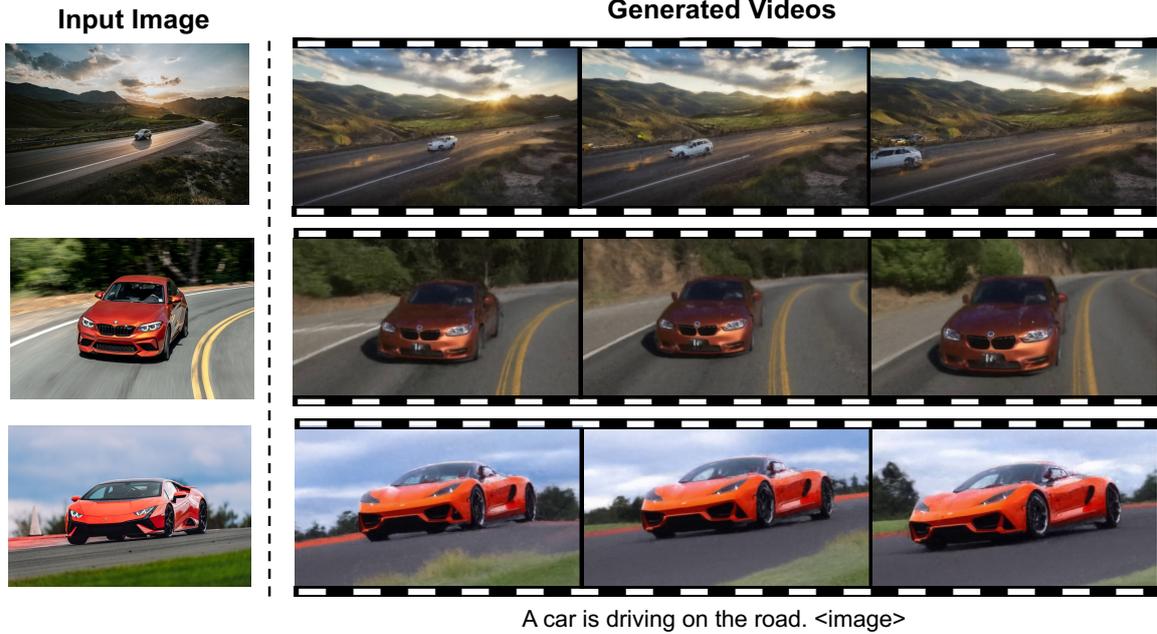


Figure 5: Examples of Video Prediction results.

tion. We use the retrieval methods of section 3.1 to augment multimodal in-context examples for pretraining and instruction tuning. We use UCF-101 (Soomro et al., 2012), a video dataset from 101 action categories, for general text-to-video evaluation. We use human subjects from the CelebA (Liu et al., 2015) and general subject from the Dreambooth (Ruiz et al., 2023) for qualitative comparison. Training and evaluation details are in Appendix A and B.

4.2 Results

Zero-shot Text-to-Video Evaluation We generate 10,000 videos (Wang et al., 2023; Blattmann et al., 2023b) sampling classes with the same distribution as the original UCF-101 dataset. We produce a text prompt for each class label (Ge et al., 2023) and compute FVD (Unterthiner et al., 2018) and Inception Score (Salimans et al., 2016). Table 1 shows our competitive performance to previous state-of-the-art text-to-video generators in both FVD and IS metrics. We achieve the best FVD score of 193.7 which we attribute to our visual grounding during pretraining.

Zero-shot Subject-driven Video generation

Figures 1 and 3 show our results for subject-driven video generation. Compared to VideoBooth (Jiang et al., 2023b), our generator can handle multimodal prompts that include multiple image entities, as illustrated in Figure 1. We also compared our model

with the concurrent work ID-Animator (He et al., 2024) for zero-shot human identity preservation generation in Figure 3. Overall, our video generator can not only ground on the visual input but also synthesize temporally coherent videos with large motion while retaining semantic control.

Video Prediction As shown in Figure 5, VIMI can also generate videos conditioned on a single image, thanks to our unified multimodal instruction tuning stage. We first append the ‘<image>’ token after the text prompt and use MLLMs to encode this multimodal prompt for video prediction.

4.3 Ablation Study

Effectiveness of retrieval-augmented pretraining

Figure 6a shows the evaluations of retrieval-augmented pretraining on our validation set for CLIP similarity and FID metrics. We denote VIMI without retrieval augmented pretraining as VIMI (w/o RAG). We use Snap Video (Menapace et al., 2024) with text encoders T5-11B as another baseline. The results indicate that using multimodal large language models as the encoding leads to unstable model training. Specifically, the FID results converge slowly and do not decrease after 125K pretraining steps. In contrast, with retrieval augmented pretraining, VIMI shows faster convergence and more stable training. After 200K pretraining steps, using a multimodal large language model as the encoder demonstrates performance

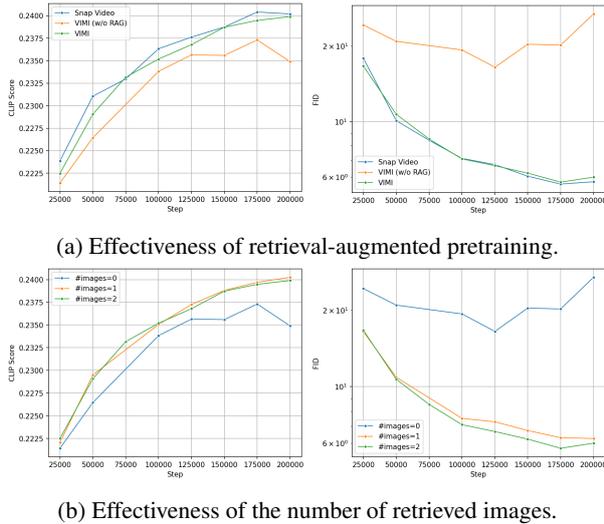


Figure 6: **Ablation of retrieval-augmented pretraining.** (a) shows the evaluations of retrieval-augmented pretraining on our validation set for CLIP similarity and FID metrics. We denote VIMI without retrieval augmented pretraining as VIMI (w/o RAG). (b) shows the results of pretraining with different numbers of retrieved images.

comparable to Snap Video (Menapace et al., 2024). This highlights the effectiveness of our retrieval augmented pretraining approach in stabilizing training and improving the overall performance of the video generation model.

Effectiveness of the number of retrieved Images

Figure 6b shows the results of pretraining with different numbers of retrieved images. We set K to be up to 2 for ablation studies, primarily considering the multimodal sequence length. We observe that using only one retrieved image stabilizes the model training. Increasing K to 2 provides further stable improvements in the early pretraining stage. After 200K pretraining steps, the model converges to comparable evaluation results for both settings. Given our aim to support multi-subject generation, we use $K=2$ for the pretraining. This choice balances the need for rich contextual information with the practical constraints of sequence length, ensuring stable and effective training.

Effectiveness of multimodal instruction tuning

For the second stage, if we fine-tune only on subject-driven data (denoted as “w/o Instruction Tuning”), VIMI can also generate videos from multimodal interleaved prompts. To evaluate the effectiveness of unified multimodal instruction tuning, we compare this variant of VIMI in subject-driven generation tasks after fine-tuning for the

same 100K steps. Figure 7 shows that multimodal instruction tuning preserves identity better and follows instructions more accurately. We attribute this improvement to the more diverse fine-tuning tasks provided by multimodal instruction tuning.

5 Related Work

Video Generation Diffusion models are now the standard methodology for both image (Ho et al., 2020; Nichol and Dhariwal, 2021; Rombach et al., 2022; Song et al., 2020) and video generation (An et al., 2023; Blattmann et al., 2023b; Ge et al., 2023; Guo et al., 2023b; He et al., 2023; Ho et al., 2022a,b; Singer et al., 2022; Wang et al., 2023; Zhou et al., 2023; Blattmann et al., 2023a). Early video diffusion models use the U-Net (Ronneberger et al., 2015) for the video generation task. Ho et al. (2022b) showed that jointly training on image and video data can improve text conditioned video generation greatly. Make-A-Video (Singer et al., 2022) proposed to build on text-to-image models with novel and effective spatial-temporal modules. Video LDM (Blattmann et al., 2023b) adopts a latent diffusion paradigm where a pre-trained latent image generator and latent decoder are fine-tuned to generate temporally coherent videos. Most recently, diffusion transformer (Peebles and Xie, 2022) has been widely adopted for video generation. Latte (Ma et al., 2024) proposes a latent diffusion transformer, which adopts a video Transformer as the backbone. W.A.L.T (Gupta et al., 2023) uses a transformer-based method for latent video diffusion models and a window attention architecture tailored for joint spatial and spatiotemporal generative modeling. Snap Video (Menapace et al., 2024) replaced U-Nets with efficient transformer-based FITs (Chen and Li, 2023) and scaled to billions of parameters. However, these existing works are still limited by the use of text encoders like T5 or the CLIP Text encoder, which lack visual grounding in the pretraining phase. In our work, we propose to utilize multimodal large language models to encode multimodal inputs for video generation, addressing the limitations by integrating visual grounding into the pretraining process.

Retrieval Augmented Multimodal Pretraining

Retrieval augmentation has shown significant promise, particularly in language models. Initial work (Lewis et al., 2020; Guu et al., 2020) demonstrated how incorporating external knowledge into a language model can enhance its performance.



Figure 7: **Ablation of multimodal instruction tuning.** We compare VIMI with a variant finetuned only on subject-driven data during the second stage (“w/o Instruction Tuning”). We use the prompt “A <image> is sitting in front of a computer and talking to the camera.”. VIMI achieves better semantic alignment and identity preservation.

This is achieved by first retrieving documents relevant to the input text from an external memory, and then integrating these retrieved documents with the input for improved modeling (Hashimoto et al., 2018; Karpukhin et al., 2020; Borgeaud et al., 2022). Beyond language models, recent studies have explored retrieval techniques for image generation (Blattmann et al., 2022; Sheynin et al., 2022; Sarto et al., 2022; Ramos et al., 2023; Chen et al., 2022). For instance, KNN-Diffusion (Sheynin et al., 2022) used retrieval methods to search for k-Nearest-Neighbors images, facilitating the training of a small and efficient text-to-image diffusion model. RA-CM3 (Yasunaga et al., 2022) was the first multimodal model capable of retrieving and generating both text and images using autoregressive models. Additionally, Re-Imagen (Chen et al., 2022) employed an external multimodal knowledge base to retrieve relevant image-text pairs, using them as references for a diffusion model to generate images. In contrast to these works, our approach is the first to use retrieval methods to augment text-video datasets, formalizing multimodal input-video pairs for video pretraining.

Multimodal Instruction Tuning Instruction tuning was first proposed to finetune a large language model with instructions to improve its zero-shot learning performance on unseen tasks (Wei et al., 2021; Chung et al., 2024). Inspired by its success in language domain, instruction tuning was also introduced in the vision generation domain (Yu et al., 2023; Sun et al., 2023; Liu et al., 2024; Hu et al., 2024). For instance, CM3Leon (Yu et al., 2023) utilized the CM3 multimodal architecture (Aghajanyan et al., 2022), demonstrating the substantial benefits of scaling up and tuning on more diverse

instruction-style data. Emu2 (Sun et al., 2023) demonstrated the in-context learning capabilities of large multimodal models with a unified autoregressive objective. More recently, Instruct-Imagen (Hu et al., 2024) introduced multi-modal instruction for image generation by fine-tuning a pre-trained text-to-image diffusion model with a two-stage framework. In our work, we are the first to propose instruction tuning for video generation, by unifying three distinct video generation tasks within a single, cohesive instruction framework. By leveraging instruction tuning, we aim to enhance the model’s ability to interpret and execute a wide range of video generation instructions, thereby improving its performance and applicability in diverse contexts.

6 Conclusion

In this work, we first construct a multimodal prompt dataset for video pretraining using retrieval methods. We then propose a two-stage training strategy to enable diverse video tasks within the same model. For the first stage, we introduce a multimodal conditional video generation framework for pretraining on these augmented datasets, establishing a foundational model for grounded video generation. In the second stage, we fine-tune the model from the first stage on three video generation tasks, incorporating multimodal instructions. Our experiments demonstrate the effectiveness of retrieval-augmented pretraining and the use of multimodal instruction tuning. We hope this approach opens up new opportunities for video pretraining, such as building large-scale multimodal datasets for pretraining, utilizing stronger multimodal large language models for encoding, and employing in-

struction tuning for diverse video tasks.

7 Limitations

Firstly, similar to subject-driven image generation models, our video generator sometimes struggles to produce accurate and faithful videos. To improve visual quality, future work will focus on utilizing stronger multimodal large language models, diffusion transformers and jointly fine-tuning these models. Secondly, due to memory and training constraints, we only experimented with two context examples and displayed at most two image entities for multi-subject-driven generation. Extending this work to support any-subject video generation will be a goal for future research. Thirdly, our current results are based on qualitative evaluation. Developing comprehensive evaluation methods for grounded video generation, such as any-subject-driven video generation, will be crucial for building a visually grounded video generator.

8 Ethical Considerations

Like all generative AI advancements, visually grounded video generation models raise important ethical considerations, such as the creation of misleading or false information and bias. Developers and researchers should consider safeguards to address these issues such as evaluating datasets, and adding watermarks or other identification mechanisms. It is important to consider the societal impacts and work towards solutions that balance innovation with social responsibility.

References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Armen Aghajanyan, Bernie Huang, Candace Ross, Vladimir Karpukhin, Hu Xu, Naman Goyal, Dmytro Okhonko, Mandar Joshi, Gargi Ghosh, Mike Lewis, et al. 2022. Cm3: A causal masked multimodal model of the internet. *arXiv preprint arXiv:2201.07520*.
- Jie An, Songyang Zhang, Harry Yang, Sonal Gupta, Jia-Bin Huang, Jiebo Luo, and Xi Yin. 2023. Latent-shift: Latent diffusion with temporal shift for efficient text-to-video generation. *arXiv*.
- Omer Bar-Tal, Hila Chefer, Omer Tov, Charles Herrmann, Roni Paiss, Shiran Zada, Ariel Ephrat, Jun-hwa Hur, Yuanzhen Li, Tomer Michaeli, et al. 2024. Lumiere: A space-time diffusion model for video generation. *arXiv preprint arXiv:2401.12945*.
- Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. 2023a. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*.
- Andreas Blattmann, Robin Rombach, Huan Ling, Tim Dockhorn, Seung Wook Kim, Sanja Fidler, and Karsten Kreis. 2023b. Align your latents: High-resolution video synthesis with latent diffusion models. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Andreas Blattmann, Robin Rombach, Kaan Oktay, Jonas Müller, and Björn Ommer. 2022. Retrieval-augmented diffusion models. *Advances in Neural Information Processing Systems*, 35:15309–15324.
- Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Millican, George Bm Van Den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, et al. 2022. Improving language models by retrieving from trillions of tokens. In *International conference on machine learning*, pages 2206–2240. PMLR.
- Duygu Ceylan, Chun-Hao P Huang, and Niloy J Mitra. 2023. Pix2video: Video editing using image diffusion. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 23206–23217.
- Wenhao Chai, Xun Guo, Gaoang Wang, and Yan Lu. 2023. Stablevideo: Text-driven consistency-aware diffusion video editing. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 23040–23050.
- Ting Chen and Lala Li. 2023. Fit: Far-reaching interleaved transformers. *arXiv*.
- Tsai-Shien Chen, Aliaksandr Siarohin, Willi Menapace, Ekaterina Deyneka, Hsiang-wei Chao, Byung Eun Jeon, Yuwei Fang, Hsin-Ying Lee, Jian Ren, Ming-Hsuan Yang, and Sergey Tulyakov. 2024. Panda-70m: Captioning 70m videos with multiple cross-modality teachers. *arXiv preprint arXiv:2402.19479*.
- Weifeng Chen, Yatai Ji, Jie Wu, Hefeng Wu, Pan Xie, Jiashi Li, Xin Xia, Xuefeng Xiao, and Liang Lin. 2023. Control-a-video: Controllable text-to-video generation with diffusion models. *arXiv preprint arXiv:2305.13840*.
- Wenhu Chen, Hexiang Hu, Chitwan Saharia, and William W Cohen. 2022. Re-imagen: Retrieval-augmented text-to-image generator. *arXiv preprint arXiv:2209.14491*.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al.

2024. Scaling instruction-finetuned language models. *Journal of Machine Learning Research*, 25(70):1–53.
- Songwei Ge, Seungjun Nah, Guilin Liu, Tyler Poon, Andrew Tao, Bryan Catanzaro, David Jacobs, Jia-Bin Huang, Ming-Yu Liu, and Yogesh Balaji. 2023. Preserve your own correlation: A noise prior for video diffusion models. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*.
- Michal Geyer, Omer Bar-Tal, Shai Bagon, and Tali Dekel. 2023. Tokenflow: Consistent diffusion features for consistent video editing. *arXiv preprint arXiv:2307.10373*.
- Xun Guo, Mingwu Zheng, Liang Hou, Yuan Gao, Yufan Deng, Chongyang Ma, Weiming Hu, Zhengjun Zha, Haibin Huang, Pengfei Wan, et al. 2023a. I2v-adapter: A general image-to-video adapter for video diffusion models. *arXiv preprint arXiv:2312.16693*.
- Yuwei Guo, Ceyuan Yang, Anyi Rao, Yaohui Wang, Yu Qiao, Dahua Lin, and Bo Dai. 2023b. Animated-iff: Animate your personalized text-to-image diffusion models without specific tuning. *arXiv*.
- Agrim Gupta, Lijun Yu, Kihyuk Sohn, Xiuye Gu, Meera Hahn, Li Fei-Fei, Irfan Essa, Lu Jiang, and José Lezama. 2023. Photorealistic video generation with diffusion models. *arXiv preprint arXiv:2312.06662*.
- Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Mingwei Chang. 2020. Retrieval augmented language model pre-training. In *International conference on machine learning*, pages 3929–3938. PMLR.
- Tatsunori B Hashimoto, Kelvin Guu, Yonatan Oren, and Percy S Liang. 2018. A retrieve-and-edit framework for predicting structured outputs. *Advances in Neural Information Processing Systems*, 31.
- Xuanhua He, Quande Liu, Shengju Qian, Xin Wang, Tao Hu, Ke Cao, Keyu Yan, Man Zhou, and Jie Zhang. 2024. Id-animator: Zero-shot identity-preserving human video generation. *arXiv preprint arXiv:2404.15275*.
- Yingqing He, Tianyu Yang, Yong Zhang, Ying Shan, and Qifeng Chen. 2023. Latent video diffusion models for high-fidelity long video generation. *arXiv*.
- Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. 2017. Gans trained by a two time-scale update rule converge to a local nash equilibrium. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Jonathan Ho, William Chan, Chitwan Saharia, Jay Whang, Ruiqi Gao, Alexey Gritsenko, Diederik P. Kingma, Ben Poole, Mohammad Norouzi, David J. Fleet, and Tim Salimans. 2022a. Imagen video: High definition video generation with diffusion models. *arXiv*.
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. 2020. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851.
- Jonathan Ho and Tim Salimans. 2022. Classifier-free diffusion guidance. *arXiv*.
- Jonathan Ho, Tim Salimans, Alexey A. Gritsenko, William Chan, Mohammad Norouzi, and David J. Fleet. 2022b. Video diffusion models. In *ICLR Workshop on Deep Generative Models for Highly Structured Data*.
- Wenyi Hong, Ming Ding, Wendi Zheng, Xinghan Liu, and Jie Tang. 2022. Cogvideo: Large-scale pre-training for text-to-video generation via transformers. *arXiv*.
- Hexiang Hu, Kelvin CK Chan, Yu-Chuan Su, Wenhui Chen, Yandong Li, Kihyuk Sohn, Yang Zhao, Xue Ben, Boqing Gong, William Cohen, et al. 2024. Instruct-imagen: Image generation with multi-modal instruction. *arXiv preprint arXiv:2401.01952*.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. 2023a. Mistral 7b. *arXiv preprint arXiv:2310.06825*.
- Yuming Jiang, Tianxing Wu, Shuai Yang, Chenyang Si, Dahua Lin, Yu Qiao, Chen Change Loy, and Ziwei Liu. 2023b. Videobooth: Diffusion-based video generation with image prompts. *arXiv preprint arXiv:2312.00777*.
- Vladimir Karpukhin, Barlas Oğuz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. Dense passage retrieval for open-domain question answering. *arXiv preprint arXiv:2004.04906*.
- Tero Karras, Miika Aittala, Timo Aila, and Samuli Laine. 2022a. Elucidating the design space of diffusion-based generative models. *Advances in Neural Information Processing Systems*, 35:26565–26577.
- Tero Karras, Miika Aittala, Timo Aila, and Samuli Laine. 2022b. Elucidating the design space of diffusion-based generative models. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollár, and Ross Girshick. 2023. Segment anything. *arXiv:2304.02643*.
- Dan Kondratyuk, Lijun Yu, Xiuye Gu, José Lezama, Jonathan Huang, Rachel Hornung, Hartwig Adam, Hassan Akbari, Yair Alon, Vighnesh Birodkar, et al. 2023. Videopoet: A large language model for zero-shot video generation. *arXiv preprint arXiv:2312.14125*.

- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33:9459–9474.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2024. Visual instruction tuning. *Advances in neural information processing systems*, 36.
- Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chunyuan Li, Jianwei Yang, Hang Su, Jun Zhu, et al. 2023. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. *arXiv preprint arXiv:2303.05499*.
- Ziwei Liu, Ping Luo, Xiaogang Wang, and Xiaoou Tang. 2015. Deep learning face attributes in the wild. In *Proceedings of the IEEE international conference on computer vision*, pages 3730–3738.
- Z. Luo, D. Chen, Y. Zhang, Y. Huang, L. Wang, Y. Shen, D. Zhao, J. Zhou, and T. Tan. 2023. Videofusion: Decomposed diffusion models for high-quality video generation. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Xin Ma, Yaohui Wang, Gengyun Jia, Xinyuan Chen, Ziwei Liu, Yuan-Fang Li, Cunjian Chen, and Yu Qiao. 2024. Latte: Latent diffusion transformer for video generation. *arXiv preprint arXiv:2401.03048*.
- Willi Menapace, Aliaksandr Siarohin, Ivan Skokhodov, Ekaterina Deyneka, Tsai-Shien Chen, Anil Kag, Yuwei Fang, Aleksei Stoliar, Elisa Ricci, Jian Ren, et al. 2024. Snap video: Scaled spatiotemporal transformers for text-to-video synthesis. *arXiv preprint arXiv:2402.14797*.
- Alexander Quinn Nichol and Prafulla Dhariwal. 2021. Improved denoising diffusion probabilistic models. In *International conference on machine learning*, pages 8162–8171. PMLR.
- William Peebles and Saining Xie. 2022. Scalable diffusion models with transformers. *arXiv preprint arXiv:2212.09748*.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR.
- Rita Ramos, Bruno Martins, Desmond Elliott, and Yova Kementchedjhiava. 2023. Smallcap: lightweight image captioning prompted with retrieval augmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2840–2849.
- Weiming Ren, Harry Yang, Ge Zhang, Cong Wei, Xinrun Du, Stephen Huang, and Wenhui Chen. 2024. Consisti2v: Enhancing visual consistency for image-to-video generation. *arXiv preprint arXiv:2402.04324*.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. 2022. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695.
- Olaf Ronneberger, Philipp Fischer, and Thomas Brox. 2015. U-net: Convolutional networks for biomedical image segmentation. In *Medical Image Computing and Computer-Assisted Intervention (MICCAI)*.
- Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman. 2023. Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22500–22510.
- Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. 2016. Improved techniques for training gans. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Sara Sarto, Marcella Cornia, Lorenzo Baraldi, and Rita Cucchiara. 2022. Retrieval-augmented transformer for image captioning. In *Proceedings of the 19th international conference on content-based multimedia indexing*, pages 1–7.
- Hinrich Schütze, Christopher D Manning, and Prabhakar Raghavan. 2008. *Introduction to information retrieval*. Cambridge University Press Cambridge.
- Shelly Sheynin, Oron Ashual, Adam Polyak, Uriel Singer, Oran Gafni, Eliya Nachmani, and Yaniv Taigman. 2022. Knn-diffusion: Image generation via large-scale retrieval. *arXiv preprint arXiv:2204.02849*.
- Uriel Singer, Adam Polyak, Thomas Hayes, Xi Yin, Jie An, Songyang Zhang, Qiyuan Hu, Harry Yang, Oron Ashual, Oran Gafni, Devi Parikh, Sonal Gupta, and Yaniv Taigman. 2022. Make-a-video: Text-to-video generation without text-video data. *arXiv*.
- Jiaming Song, Chenlin Meng, and Stefano Ermon. 2020. Denoising diffusion implicit models. *arXiv preprint arXiv:2010.02502*.
- Khurram Soomro, Amir Roshan Zamir, and Mubarak Shah. 2012. UCF101: A dataset of 101 human actions classes from videos in the wild. *arXiv*.
- Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiying Yu, Zhengxiong Luo, Yueze Wang, Yongming Rao, Jingjing Liu, Tiejun Huang, et al. 2023. Generative multimodal models are in-context learners. *arXiv preprint arXiv:2312.13286*.

- Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. 2023. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Thomas Unterthiner, Sjoerd van Steenkiste, Karol Kurach, Raphael Marinier, Marcin Michalski, and Sylvain Gelly. 2018. Towards accurate generative models of video: A new metric & challenges. *arXiv*.
- Ruben Villegas, Mohammad Babaeizadeh, Pieter-Jan Kindermans, Hernan Moraldo, Han Zhang, Mohammad Taghi Saffar, Santiago Castro, Julius Kunze, and Dumitru Erhan. 2022. Phenaki: Variable length video generation from open domain textual descriptions. In *International Conference on Learning Representations*.
- Wenjing Wang, Huan Yang, Zixi Tuo, Huiguo He, Junchen Zhu, Jianlong Fu, and Jiaying Liu. 2023. Videofactory: Swap attention in spatiotemporal diffusions for text-to-video generation. *arXiv*.
- Jason Wei, Maarten Bosma, Vincent Y Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M Dai, and Quoc V Le. 2021. Finetuned language models are zero-shot learners. *arXiv preprint arXiv:2109.01652*.
- Chenfei Wu, Lun Huang, Qianxi Zhang, Binyang Li, Lei Ji, Fan Yang, Guillermo Sapiro, and Nan Duan. 2021. Godiva: Generating open-domain videos from natural descriptions. *ArXiv*.
- Michihiro Yasunaga, Armen Aghajanyan, Weijia Shi, Rich James, Jure Leskovec, Percy Liang, Mike Lewis, Luke Zettlemoyer, and Wen-tau Yih. 2022. Retrieval-augmented multimodal language modeling. *arXiv preprint arXiv:2211.12561*.
- Lili Yu, Bowen Shi, Ramakanth Pasunuru, Benjamin Muller, Olga Golovneva, Tianlu Wang, Arun Babu, Binh Tang, Brian Karrer, Shelly Sheynin, et al. 2023. Scaling autoregressive multi-modal models: Pretraining and instruction tuning. *arXiv preprint arXiv:2309.02591*, 2(3).
- David Junhao Zhang, Jay Zhangjie Wu, Jia-Wei Liu, Rui Zhao, Lingmin Ran, Yuchao Gu, Difei Gao, and Mike Zheng Shou. 2023. Show-1: Marrying pixel and latent diffusion models for text-to-video generation. *arXiv preprint arXiv:2309.15818*.
- Daquan Zhou, Weimin Wang, Hanshu Yan, Weiwei Lv, Yizhe Zhu, and Jiashi Feng. 2023. Magicvideo: Efficient video generation with latent diffusion models. *arXiv*.
- Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. 2023. Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*.

A Training details

For pretraining, we can either start from scratch or initialize the weights of the model from existing text-to-video generators. In our work, we initialize the FIT weights from (Menapace et al., 2024). We keep its parameters frozen for 30,000 steps to stabilize the initial training phase, and then fine-tune the entire model for an additional 100,000 steps. In the second stage, we fine-tune the model starting from the weights obtained in the first stage for 30,000 steps. We use a learning rate of $5e^{-3}$, a cosine learning schedule, and a total batch size of 256 videos and 256 images.

B Evaluation Protocol

We evaluate our method against baselines by following the protocols in (Singer et al., 2022; Ge et al., 2023; Wang et al., 2023; Blattmann et al., 2023b; Zhou et al., 2023; Luo et al., 2023) for zero-shot evaluation on the UCF-101 (Soomro et al., 2012). We generate 16 frames videos in 512×288 px resolution at 24fps. To validate the effectiveness of pretraining, ablations are performed in 64×36 px resolution using the first-stage model only, and compute FID (Heusel et al., 2017), FVD (Unterthiner et al., 2018) and CLIPSIM (Wu et al., 2021) metrics against the test set of our internal dataset on 50k generated videos.

C Inference

We produce video samples from gaussian noise and user-provided conditioning information using the deterministic sampler of (Karras et al., 2022b) and two-stage cascade. We use 256 sampling steps for the first-stage and 40 for the second-stage model, and employ classifier free guidance (Ho and Salimans, 2022) to improve text-video alignment.