
Lean-STaR: Learning to Interleave Thinking and Proving

Haohan Lin^{1,2*}

Zhiqing Sun¹

Yiming Yang¹

Sean Welleck¹

¹Language Technologies Institute, Carnegie Mellon University

²Institute for Interdisciplinary Information Sciences, Tsinghua University

{haohanl, zhiqings, yiming, swelleck}@cs.cmu.edu

<https://leanstar.github.io/>

Abstract

Traditional language model-based theorem proving assumes that by training on a sufficient amount of formal proof data, a model will learn to prove theorems. Our key observation is that a wealth of *informal* information that is not present in formal proofs can be useful for learning to prove theorems. For instance, humans think through steps of a proof, but this thought process is not visible in the resulting code. We present Lean-STaR, a framework for training language models to produce informal thoughts prior to each step of a proof, thereby boosting the model’s theorem-proving capabilities. Lean-STaR uses retrospective ground-truth tactics to generate synthetic thoughts for training the language model. At inference time, the trained model directly generates the thoughts prior to the prediction of the tactics in each proof step. Building on the self-taught reasoner framework, we then apply expert iteration to further fine-tune the model on the correct proofs it samples and verifies using the Lean solver. Lean-STaR achieves state-of-the-art results on the miniF2F-test benchmark within the Lean theorem proving environment, significantly outperforming base models (43.4% \rightarrow 46.3%, Pass@64). We also analyze the impact of the augmented thoughts on various aspects of the theorem proving process, providing insights into their effectiveness.

1 Introduction

Theorem proving is a fundamental aspect of mathematics, and mathematical reasoning is an important part of artificial intelligence [28, 55]. *Formalized mathematics* in particular provides a challenging testbed for assessing mathematical reasoning capabilities. Since theorems and proofs in this setting can be represented in the form of checkable source code, it is easy to evaluate proofs of arbitrary complexity [15]. Automated theorem proving, if successful, can also help discover unknown errors in previous proofs¹, and make it easier to guarantee that new proofs are correct. More broadly, formal mathematics coupled with powerful automation may unlock new forms of education and collaboration, mathematical insights, and applications to verifying critical software [4, 16, 10, 31].

*Work done during the visit at CMU.

¹For example, Terence Tao found a non-trivial error while using Lean to formalize a project [38].

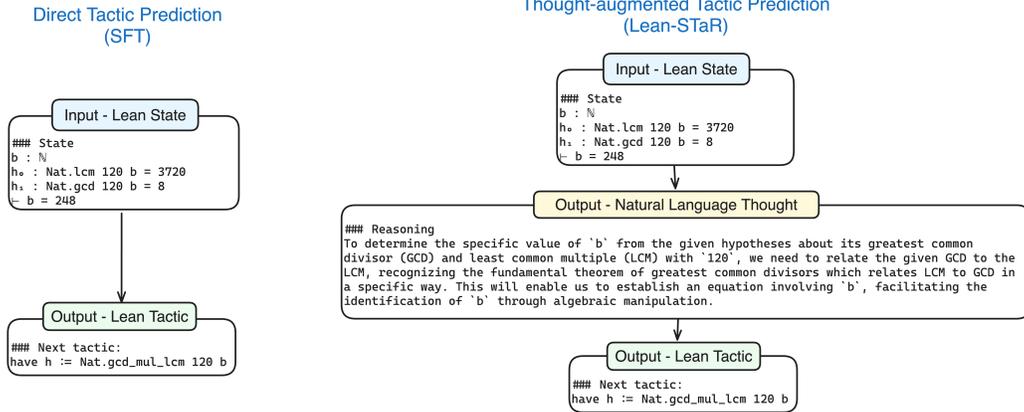


Figure 1: The illustration of tactic prediction in one proof step with and without thought.

Recently, language models have shown promising progress in formal theorem proving [33, 35, 47, 19, 25, 50, 26]. Existing approaches typically train a model solely based on the proofs in a formal language (code) such as Lean [15], Isabelle [29], or Coq [13]. Our key observation is that such approaches ignore a wealth of *informal* information that may be useful for learning to prove theorems [45, 46]. For instance, the underlying *thought process* prior to each step of a proof is not present in formal source code. Based on this insight, we propose to train a language model that can produce a natural language chain-of-thought (“thought”) prior to each step (“tactic”) of a formal proof.

We introduce Lean-STaR, a framework for learning to interleave informal thoughts with steps of formal proving. Building on the Self-Taught Reasoner (STaR) framework [52], we enable language models to interleave step-by-step rationales (i.e., thoughts) [30, 43] with formal proving in a two-stage process. In an initial phase, we prompt a sufficiently capable language model, such as GPT-4 [1], and generate retrospective thoughts based on a dataset of human-written proofs, such as Mathlib, the largest collection of human-written proofs in Lean [27]. Subsequently, we fine-tune a thought-augmented tactic predictor [8, 7, 18, 14] that, given a Lean state, can generate a thought and predict the subsequent tactic. In a second phase, we optimize this thought-augmented tactic predictor with the expert iteration algorithm [3, 36], using multi-step success rate in theorem proving as the reward.

Our work presents a new link between informal and formal mathematics, complementary to prior explorations that translate standalone mathematical statements [37, 42, 48] or translate informal proofs into formal proofs [2, 23, 5, 56, 22]. Lean-STaR generates natural language thoughts specifically for each proof step, improving formal proving capabilities by interleaving natural and formal languages.

We instantiate Lean-STaR by generating roughly 50,000 thought-augmented examples from Lean’s Mathlib [27], then synthesize an additional 50k examples through two iterations of expert iteration. To the best of our knowledge, this yields the first thought-augmented dataset for theorem proving. After fine-tuning an InternLM2-7b base model [51] on our thought-augmented data, our final Lean-STaR model can solve **34.8%** (pass@32) or **36.1%** (pass@64) of the problems on miniF2F-test [54]. Using stronger base model InternLM2-7b-plus, Lean-STaR can achieve **45.4%** (pass@32), significantly surpassing the previous state-of-the-art results of 43.4% (pass@32). In summary, Lean-STaR offers a framework for teaching language models to interleave informal thoughts with formal verification, advancing the capabilities of language models in automated theorem proving.

2 Related Work

Automatic Theorem Proving & Autoformalization. Previous work on learning-based theorem proving typically follows the GPT-f framework [33], which trains a language model on (proof state, next-tactic) pairs, then proves theorems by using the model within a best-first tree search. Subsequent work has explored several directions, including data augmentation [20], novel proof search methods [25, 41], further training through curriculum learning [34], retrieval augmentation [50], or practical tools [44]. Others use prompted models to generate tactics [6, 39], or fine-tune models to generate a full proof [17]. A second *auto-formalization* [48] thread incorporates informal mathematics into

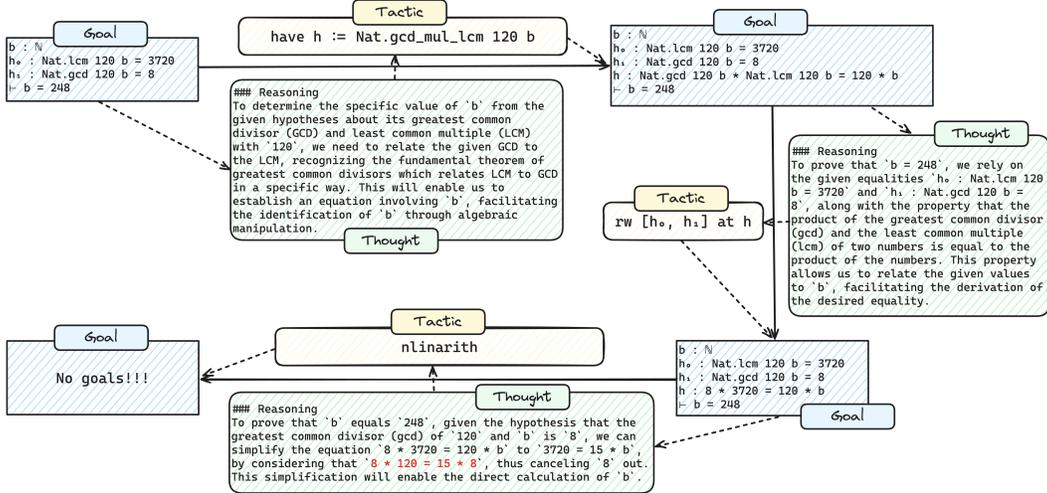


Figure 2: An example of Lean proof and thoughts generated by Lean-STaR. Note that there is a calculation error in the thought (in red), but this does not affect the correctness of the proof because the calculation task is actually completed by the interactive theorem prover (i.e., Lean’s `nlinarith`) instead of the language model. This shows a benefit of combining neural and symbolic systems.

formal theorem proving. Draft-Sketch-Prove [23] shows that language models have some ability to use informal proofs to improve a model’s formal proving abilities, by drafting an informal proof, translating into a formal proof sketch, then completing the proof with tools like Sledgehammer [8]. Draft-Sketch-Prove and related methods [40, 53, 57] are limited to the Isabelle prover, since they use powerful automatic proving tools like Sledgehammer. Lean lacks these tools, so generating the entire proof at once would be more unlikely in Lean. We focus on Lean, and train language models to generate a thought and predict the subsequent tactic in each proof step. To the best of our knowledge, we are the first to introduce thought-augmented reasoning in automatic theorem proving.

Rationale-augmented Reasoning. Recently, many works demonstrated that letting language models reason before an answer can improve their performance on tasks including math, science, and code [30, 43, 12]. Although the corresponding techniques (e.g., Scratchpad and Chain-of-Thought) have proven to be effective, they require either extensive annotated training examples or exposure to numerous similar examples during pre-training [9]. The scarcity of natural language reasoning in formal theorem proving, coupled with the impracticality of manually annotating rationales for formal mathematics, thus presents a challenge. We propose a new Lean-STaR framework for *synthesizing* training examples by taking advantage of the correctness signal from the formal system.

Bootstrapping Language Model Reasoning. Recently, several works suggest that language models may be taught to reason via synthetic data that they generate themselves, akin to a reinforcement learning method that improves a policy through self-play. Polu et al. [34] showed that a simple RL algorithm, expert iteration, paired with curriculum learning can improve a formal theorem proving model. Self-Taught Reasoner (STaR) [52] showed that we can iteratively fine-tune the language model on the correct (reasoning, answer) pairs generated by itself to gradually improve performance. Singh et al. [36] proposed ReST-EM, which filters data generated by language model with a binary feedback signal rather than using fully manually annotated data (similar to expert iteration in [34]). Our work builds on these ideas, providing the first study of bootstrapped thought-augmented proving.

3 Our Method: Lean-STaR

We introduce Lean-STaR, a new method for combining informal thoughts with formal theorem proving. First, we recap interactive theorem proving (§3.1). Then we present Lean-STaR’s data-generation (§3.2.1, §3.2.2) and reinforcement learning (§3.2.3) phases. Finally, we present our evaluation protocols (§3.3).

```

### State
a b n : ℕ
⊢ ¬(n ≠ 0 ∧ a ≠ 0) ↔ n = 0 ∨ a = 0
### Tactic
```lean4
... simp only [not_and_or, ne_eq, not_not]
...

```

```

Reasoning
To prove the equivalence between the negation of a conjunction and a disjunction, we utilize logical
equivalences, specifically the negation of a conjunction ¬(P ∧ Q) being equivalent to the disjunction
of the negations (¬P ∨ ¬Q) and simplifications related to negation and inequality.

```

Figure 3: Examples of (input, output) pairs of retrospective rationale generation with GPT-4. The full prompt is given in Appendix F. See §3.2.2 for the detailed explanation.

### 3.1 Preliminaries

*Interactive Theorem Provers* (ITPs) are typically used for step-by-step automatic theorem proving in formal mathematics. At each step, we can provide the ITP with a high-level “tactic” to simplify the current goal state (e.g., the initial goal theorems to be proven) into subgoals. These subgoals will form new states, and proving all the subgoals results in a complete proof of the given theorem. We use Lean [15], a popular interactive theorem prover. An example formal proof in Lean and its explanation are shown in Appendix C.

### 3.2 Data Generation & Training

We describe the data generation and training of the direct tactic prediction model (SFT), the thought-augmented tactic prediction model trained with synthetic data (Lean-CoT), and the final model trained with expert iteration (Lean-STaR).

#### 3.2.1 Direct Tactic Prediction

We define the theorem-proving problem as a *Markov Decision Process* (MDP)  $(\mathcal{S}, \mathcal{A}, P_a, R_a)$  where proof states serve as states in MDP and tactics serve as actions. From this perspective, a proof is a trajectory  $(s_1, a_1, r_1), (s_2, a_2, r_2), \dots$  of states  $s_i$ , tactics  $a_i$ , and rewards  $r_i \in \mathbb{R}_1$ , and the ITP (e.g., Lean) provides each new state  $s_{i+1}$ .

In the typical setting [33], proving a theorem consists of providing a proof state  $s$  to the language model and then generating a tactic from the language model  $M$ , i.e.,  $\pi_M(a|s)$ . The language model can be fine-tuned for this task using a dataset of (proof state, next-tactic) pairs from successful proof trajectories, i.e.  $D = \{(s^i, a^i) : i = 1, \dots, M\}$ , where final states have a reward of 1. We refer to a language model fine-tuned on such a dataset as a *supervised fine-tuning (SFT)* model.

#### 3.2.2 Thought-augmented Tactic Prediction

Existing approaches typically train only on formal states and tactics [33]. We hypothesize that incorporating a latent *thought* can improve a model’s ability to predict the next tactic. Formally, we introduce a hidden “thought” variable  $t_i$  prior to each tactic, and then extend the model to the form  $\pi_M(a_i, t_i | s_i) = \pi_M(a_i | t_i, s_i) \pi_M(t_i | s_i)$ . In thought-augmented tactic prediction, the distribution over the next tactic can then be expressed as:

$$\pi_M(a_i | s_i) = \sum_{t_i} \pi_M(a_i | t_i, s_i) \pi_M(t_i | s_i).$$

The key challenge is obtaining (state, thought, tactic) pairs for training a model. To this end, we introduce **retrospective rationale generation**. Our motivating observation is that the distribution of natural language thoughts in theorem-proving  $\pi_M(t_i | s_i)$  is scarce in the pre-training corpus of large language models. In turn, we find that even the most powerful GPT-4 model does not perform well in generating the correct rationale through few-shot prompting [9]. To develop a language model capable

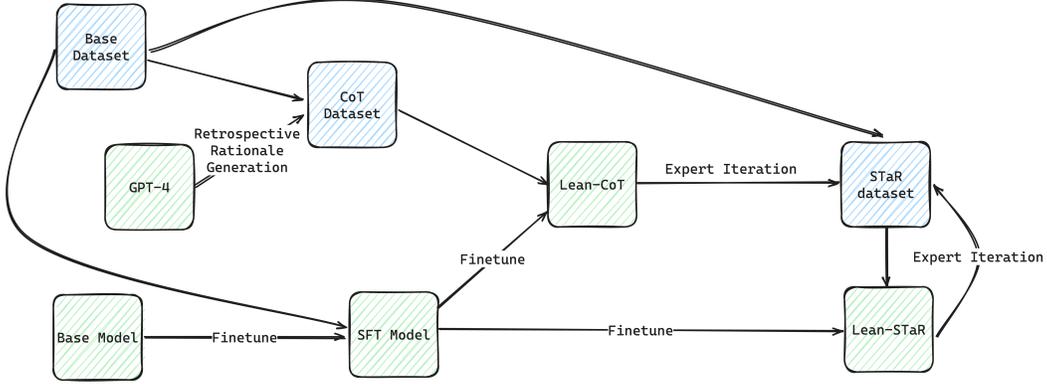


Figure 4: **The diagram of our pipeline.** (1) Produce CoT dataset through GPT-4. (2) Fine-tune the SFT model with the CoT dataset to obtain Lean-CoT. (3) Use expert iteration to generate the STaR dataset through the model in the last iteration (Lean-CoT in the first iteration) and then fine-tune Lean-CoT on the updated STaR dataset to obtain the model in the next iteration. We continue performing this step until a stopping condition is met (e.g., a fixed number of iterations).

of generating thoughts and tactics  $a_i, t_i | s_i$ , we need an entirely new dataset  $D_T = \{(s^i, t^i, a^i) : i = 1, \dots, N\}$ . However, in Lean, we only have a dataset of  $D_S = \{(s^i, a^i) : i = 1, \dots, N\}$  where  $(s^i, a^i)$  is one step in some successful proof trajectories. Given a powerful large language model  $G$ , which we refer to as the oracle model<sup>2</sup>, we give the oracle model the ground-truth tactic  $a_i$  and let the oracle model produce the thought  $t_i$  given the current state  $s_i$  and ground-truth tactic  $a_i$ . This helps improve the pass rate and produce thought-augmented data more efficiently. Our few-shot prompt is provided in Appendix F. The design principle of the prompt is to prevent the oracle model from generating hindsight-like thoughts.

We randomly select  $M$  pairs  $(s^i, a^i) \in D_S$ . Then the oracle model is used to produce a thought  $t^i$  for each pair  $(s^i, a^i)$  to create a new dataset  $D_T \{(s^i, t^i, a^i) : i = 1, \dots, M\}$ . With this retrospectively annotated dataset by the oracle model  $D_T$ , we obtained our first thought-augmented tactic prediction model, Lean-CoT, by fine-tuning from the SFT model.

### 3.2.3 Bootstrapping Thought-augmented Theorem Proving

We propose to apply expert iteration to further improve the performance of Lean-CoT. Specifically, we start from the initial Lean-CoT model  $M_0$  and the initial dataset  $D = \{s^i : i = 1, \dots, M\}$ , which consists of all initial states  $s^i$  of the theorems to be proved. In iteration 1, we use model  $M$  to sample  $K$  times per problem. Each time the model will produce a proof trajectory  $[(s_0, t_0, a_0), (s_1, t_1, a_1), \dots, (s_n, t_n, a_n)]$ . Then we create a new dataset  $D_1$  by filtering the generated trajectories to include only the successful ones. De-duplication is then applied to the collected trajectories. Now, we can further fine-tune the SFT model  $M$  on dataset  $D_T \cup D_1$  to produce Lean-STaR model  $M_1$ . Then we can use  $M_1$  as initial model to produce dataset  $D_2$  and further fine-tune to obtain model  $M_2$  in the next iteration.

This method can be seen as an offline RL method [36] in the theorem proving MDP. In this MDP, the cumulative reward  $R((s_0, t_0, a_0), (s_1, t_1, a_1), \dots, (s_n, t_n, a_n)) = 1$  if and only if the proof trajectory is successful. The total expected reward is

$$J(M, D) = \sum_i \mathbb{E}_{(s_0, t_0, a_0), \dots, (s_n, t_n, a_n) \sim \pi_M(\cdot | s^i)} R((s_0, t_0, a_0), \dots, (s_n, t_n, a_n)),$$

and Lean-STaR’s expert iteration can be seen as optimizing this reward [36].

## 3.3 Evaluation

**Setup.** We evaluate the model on formal theorem proving – given a theorem statement, produce a theorem that is correct according to the formal system. This requires an algorithm for producing a

<sup>2</sup>For instance, in our experiments we use the best available large language model, GPT-4.

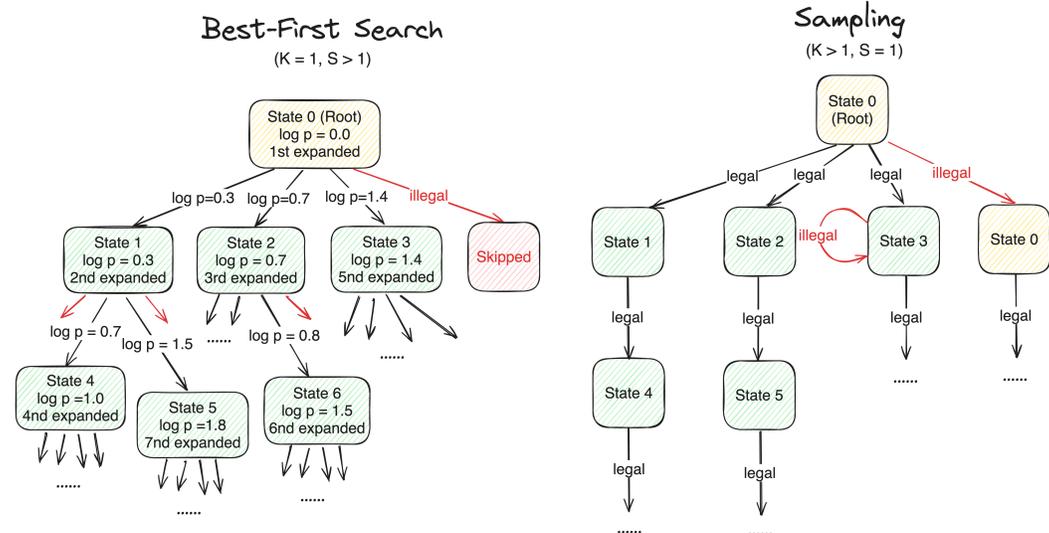


Figure 5: **The visualization of Best-first Search ( $K = 1$ ) and Sampling ( $S = 1$ ).** Search method maintains a search tree and explores  $S$  tactics on each expanded node. Sampling method explores  $K$  tactic trajectories from the root and ignores illegal tactics in the trajectories.

full proof by interacting with Lean. As a new form of theorem-proving system, it is unclear what the best strategy is when we have informal thoughts. Our preliminary experiments indicate that best-first search with beam search does not work well for the thoughts in the natural language format. Thus we describe the traditional strategy (best-first search), and our new approach based on sampling.

**Best-First Search.** The most popular method to evaluate the theorem proving ability of a language model  $M$  is to use best-first search like GPT-f [33, 50, 6, 44]. In best-first search, we keep all unexpanded states  $s_i$ . Each time, we expand the “best” state  $s_i$  and use the language model to sample  $S$  next tactics  $a_{i,1\dots S}$  for the current state  $s_i$ . For each legal tactic  $a_{i,j}$ , a new state can be obtained by applying tactic  $a_{i,j}$  on state  $s_i$ . Following standard practice [33, 50, 44], we assume the state with maximum log-probabilities is the “best”s. Specifically, we select state  $s_i$  with maximum  $\sum_{j=0}^{i-1} \log p(a_j, s_j)$ , where  $(s_0, a_0), \dots, (s_{i-1}, a_{i-1})$  is the proof trajectory before state  $s_i$  and  $\log p(a_j, s_j)$  is the average log probability of each generated token. We expand up to  $N$  states and we get a successful proof search when we reach any proof state with no goals. Then, we can attempt the search  $K$  times to obtain a pass rate  $pass@K$ . However, we found that the best-first search method performs poorly with the Lean-CoT and Lean-STaR models. We attribute this to using average log probabilities, which may not be a reliable quality indicator when the thought sequence  $t_j$  is generated.

**Sampling.** Motivated by these issues with applying best-first search to thought-augmented proving, we develop a new method based on sampling trajectories in parallel. Specifically, our method samples  $K$  times in parallel for each problem, each time generating at most  $N$  tactics. Also, illegal sampled tactics will be ignored during sampling. Specifically, in a sample, suppose our current state is  $s_i$ , the proof trajectory before  $s_i$  is  $(s_0, a_0), \dots, (s_{i-1}, a_{i-1})$  and the sampled tactic is  $a_i$ . If  $a_i$  is a legal tactic,  $(s_i, a_i)$  will be added to the proof trajectory and we will reach a new state obtained by applying tactic  $a_{i,j}$  on state  $s_i$ . Otherwise, we ignore this  $a_i$  and use language model  $M$  to sample a new tactic given state  $s_i$ . We limit the number of times a tactic can be generated by language model  $M$  to a total of  $N$  per time in  $K$  sampling times. The sampling method is roughly equivalent to the search with  $S = 1$ , except that the sampling ignores illegal tactics. We assume that in the sampling method we have  $S = 1$ . In this setting, evaluating our sampling method and best-first search with equal  $S \times K$  took approximately the same amount of GPU time. This sampling method can easily accommodate hidden variable “thoughts”  $t_j$ . Figure 5 compares best-first search and our sampling method.

Table 1: **Pass rates on the minif2f-test dataset with Lean.** This table shows the pass rates of previous works and our work.  $S$  is the number of tactics attempted at each expanded node (assumed to be 1 in sampling) and  $K$  is the total number of search or sampling attempts per problem. In sampling we use temperature 0.7, and in search we use beam search when generating the next tactic. Note that we sample 32 examples twice when  $K = 64$  in sampling.

APPROACH	DECODING	$N$	$K$	$S$	PASS RATE
GPT-3.5 [1] (FEW-SHOT)	SAMPLING	50	1	1	2.8%
GPT-4 [1] (FEW-SHOT)	SAMPLING	50	1	1	11.9%
TRANSFORMER [34] (W/O RL)	SEARCH	512	1	8	24.6%
LLEMMA-34B [6] (FEW-SHOT)	SEARCH	50	1	32	25.8%
LLEMMA-7B [6] (FEW-SHOT)	SEARCH	50	1	32	26.2%
REPROVER [50]	SEARCH	50	1	64	26.5%
TRANSFORMER [34] (W/ RL)	SEARCH	512	1	8	29.6%
INTERNLM2-34B [51] (FEW-SHOT)	SEARCH	50	1	32	29.5%
COPRA (WITH GPT-4) [39]	CUSTOMIZED	-	60	1	29.9%
COPRA (WITH GPT-4) [39]	CUSTOMIZED	-	100	1	30.7%
INTERNLM2-7B [51] (FEW-SHOT)	SAMPLING	50	32	1	28.7%
INTERNLM2-7B [51] (FEW-SHOT)	SEARCH	50	1	32	30.3%
SFT (INTERNLM2-7B)	SAMPLING	50	32	1	29.5%
SFT (INTERNLM2-7B)	SEARCH	50	1	32	30.7%
<b>LEAN-CoT</b> (INTERNLM2-7B)	SAMPLING	50	32	1	32.8%
<b>LEAN-STaR (ITER-1)</b> (INTERNLM2-7B)	SAMPLING	50	32	1	34.0%
<b>LEAN-STaR (ITER-2)</b> (INTERNLM2-7B)	SAMPLING	50	32	1	<b>34.8%</b>
<b>LEAN-STaR (ITER-2)</b> (INTERNLM2-7B)	SAMPLING	50	64	1	<b>36.1%</b>

## 4 Experiments

We instantiate Lean-STaR using the best available open language model pre-trained on the Lean corpus (InternLM2-Math-base-7b [51]), and follow standard practice in using Lean’s Mathlib as the underlying training set (via the Lean Dojo dataset [50]). We generate an initial set of thoughts for Mathlib using GPT-4, perform two rounds of expert iteration, then evaluate the model on miniF2F [54], the de-facto standard benchmark for evaluating language-model based theorem provers. Our experimental results show that both retrospective rationale generation and expert iteration significantly improve the theorem-proving capabilities of language models in this setting. We describe our setup and findings in detail below.

### 4.1 Experimental Setup

We use *LeanDojo Benchmark 4 v9* as the supervised fine-tuning (SFT) dataset containing 231,240 data examples. We fine-tune for 1 epoch to obtain the SFT model. For the learning rate, we use a warmup in the first 20% steps from 0 to  $2 \times 10^{-5}$ , followed by a cosine schedule decaying to zero.

We randomly select 17,256 different successful proof trajectories from *LeanDojo Benchmark 4 dataset* [50], and use GPT-4-0125 [32] to annotate 52,438 thoughts from those proof trajectories. We filtered out all proof steps  $(s^i, a^i)$  for which  $a^i$  contains the newline symbol “\n” before annotating. We perform two iterations of expert iteration, and provide the details in Appendix A.1 due to space.

We evaluate our method on the *MiniF2F* benchmark [54]. We use a similar evaluation setting as previous works [50, 44, 51], but use our sampling method instead of best-first search for the evaluation

Table 2: Counts of problems successfully proved in *minif2f-test* benchmark, split by type and difficulty. The methods use sampling with  $N = 50$ ,  $K = 32$ . Thought-augmented methods improve performance on all categories, while Lean-STaR significantly improves Number Theory performance.

TOTAL		TEST SET SIZE	INTERNLM2-7B	SFT	LEAN-COT	LEAN-STAR (ITER-2)
IMO		20	0	0	0	0
AIME		15	2	1	2	3
AMC		45	3	3	7	5
MATH	ALGEBRA	LEVEL 5	14	1	2	3
		LEVEL 4	14	7	7	7
		LEVEL 3	14	9	9	11
		LEVEL 2	14	10	10	9
		LEVEL 1	14	9	10	10
	NUMBER THEORY	LEVEL 5	16	6	6	6
		LEVEL 4	11	5	5	4
		LEVEL 3	11	4	5	5
		LEVEL 2	11	6	5	5
		LEVEL 1	11	8	8	9
CUSTOM	ALGEBRA	18	0	1	1	
	NUMBER THEORY	8	0	0	0	
	INDUCTION	8	0	0	1	

of our thought-augmented theorem proving model as discussed in (§3.3). For each problem, Lean-STaR samples  $K = 32$  times in parallel with temperature  $T = 0.7$ , and limits the number of times a tactic can be generated to a total of  $N = 50$ . We also limit sampling to 10 minutes per problem. We choose these settings to resemble the inference budget used in our baselines, which follow previous work [44, 6, 51]. Namely, for best-first search baselines we use beam search to generate the next tactic with  $S = 32$ ,  $K = 1$  [44, 6, 51]. We do not compare with methods designed for other formal languages such as Jiang et al. [23], Xin et al. [49] since language differences greatly influence the pass rate due to the different tactics and automation. We also do not compare with Lample et al. [25] since they only report  $S = 32$ ,  $K = 64$  on best-first search, which is approximately equivalent to  $S = 1$ ,  $K = 512$  for the sampling method, which is too computationally expensive for us.

## 4.2 Main Results

Our main results are reported in Table 1. Lean-STaR gives a significant improvement over the previous state-of-the-art in Lean. For instance, with a similar inference budget, Lean-STaR achieves 34.8% versus 30.3% in InternLM2 [51] using best-first search and 30.7% in COPRA [39] using GPT-4. With a larger compute budget, Lean-STaR’s performance improves further to 36.1%.

**Thought augmentation improves theorem proving.** The first phase of Lean-STaR trains a model to interleave thoughts and tactics, by fine-tuning on a synthesized dataset of thought-augmented examples. The fine-tuned model from this phase, denoted LEAN-COT in Table 1, achieves a pass rate of 32.8%, which is higher than the model prior to this phase, denoted SFT (29.5%). We conclude that the first phase of Lean-STaR can improve the theorem proving ability of a language model, even one that is already specialized for generating tactics in Lean such as the SFT model.

**Bootstrapping improves thought-augmented theorem proving.** The second phase of Lean-STaR consists of generating new thoughts and tactics with the current language model, saving those that result in correct proofs, and training on the union of the initial thought-augmented dataset and the saved examples (i.e., expert iteration [34, 52, 36]). Refer to Appendix A.1 for details.

We perform two iterations of expert iteration, and present the results in Table 1, denoted LEAN-STAR. Each iteration improves the model’s theorem proving performance, from 32.8% (the initial model) to 34% (LEAN-STAR after iteration 1) to 34.8% (LEAN-STAR after iteration 2). Furthermore, we find that the model is amenable to further improvement via additional sampling, achieving 36.1%

Table 3: **Pass rates about InternLM2-Plus-7B on the minif2f-test dataset with Lean.** This table shows the pass rates of previous works and our work.  $S$  is the number of tactics attempted at each expanded node (assumed to be 1 in sampling) and  $K$  is the total number of search or sampling attempts per problem. In sampling we use temperature 0.7, and in search we use beam search when generating the next tactic. Note that we sample 32 examples twice when  $K = 64$  in sampling. In search we follow the setup in [51] and limit each search to 20 minutes.

APPROACH	DECODING	$N$	$K$	$S$	PASS RATE
INTERNLM2-PLUS-7B [51] (FEW-SHOT) (FROM PAPER)	SEARCH	1000	1	32	43.4%
INTERNLM2-PLUS-7B [51] (FEW-SHOT) (REPRODUCED)	SEARCH	1000	1	32	42.6%
INTERNLM2-PLUS-7B [51] (FEW-SHOT)	SAMPLING	50	32	1	40.9%
SFT (INTERNLM2-PLUS-7B) [51] (FEW-SHOT)	SAMPLING	50	32	1	41.3%
<b>LEAN-COT</b> (INTERNLM2-PLUS-7B)	SAMPLING	50	32	1	43.4%
<b>LEAN-STAR (ITER-1)</b> (INTERNLM2-7B)	SAMPLING	50	32	1	45.4%
INTERNLM2-PLUS-7B [51] (FEW-SHOT)	SAMPLING	50	64	1	42.2%
SFT (INTERNLM2-PLUS-7B) [51] (FEW-SHOT)	SAMPLING	50	64	1	43.4%
<b>LEAN-COT</b> (INTERNLM2-PLUS-7B)	SAMPLING	50	64	1	45.5%
<b>LEAN-STAR (ITER-1)</b> (INTERNLM2-PLUS-7B)	SAMPLING	50	64	1	<b>46.3%</b>

Table 4: Performance of SFT-Direct and our Lean-STaR at different search size or sampling times  $S \times K$ . We fix  $N = 50$ . We use beam search in search and temperature  $T = 0.7$  in sampling when generating the next tactic. We have  $K = 1$  in search and  $S = 1$  in sampling. Note that we sample 32 examples twice when  $K = 64$  in sampling.

	SFT-DIRECT (SEARCH)	SFT-DIRECT (SAMPLING)	LEAN-STAR (ITER-2) (SAMPLING)
$S \times K = 1$	13.5%	20.9%	21.7%
$S \times K = 2$	18.0% (+4.5%)	22.5% (+1.6%)	24.6% (+2.9%)
$S \times K = 4$	23.3% (+5.3%)	25.0% (+2.5%)	27.5% (+2.9%)
$S \times K = 8$	27.5% (+4.2%)	27.0% (+2.0%)	30.7% (+3.2%)
$S \times K = 16$	29.9% (+2.4%)	28.3% (+1.3%)	33.6% (+2.9%)
$S \times K = 32$	30.7% (+0.8%)	29.5% (+1.2%)	34.8% (+1.2%)
$S \times K = 64$	30.7% (+0.0%)	30.3% (+0.8%)	36.1% (+1.3%)

by doubling the sampling budget. We conclude that Lean-STaR’s second phase can further improve a model’s ability to generate thoughts and tactics that lead to correct proofs. We include three qualitative examples in the Appendix, which show the model interleaving thoughts and proof steps.

### 4.3 Performance Analysis by Types and Difficulties

Tasks in *minif2f-test* are manually formalized from Olympiad type problems, drawn from multiple sources including AIME, AMC, IMO problems, and problems from the MATH dataset [21]. These problems can have different levels of difficulty and types. Table 2 reports the number of problems successfully proved, partitioned by type and difficulty. We see that Lean-CoT improves performance in solving difficult problems on all categories, especially those from mathematics competitions. On top of these improvements, Lean-STaR’s improvements come mainly in Number Theory.

Table 5: Results for the InternLM2-plus-7b and our Lean-CoT, Lean-STaR, and expert iteration without CoT. We use sampling with  $N = 50$ ,  $K = 32$ , &  $T = 0.7$ .

APPROACH	# (CONTINUAL) TRAINING DATA	Pass@32	
INTERNLM2-PLUS-7B (FEW-SHOT)	-	40.9%	-
SFT	231, 240	41.3%	+0.4%
LEAN-COT	140, 000	43.4%	+2.1%
LEAN-STaR	60, 000	45.5%	+2.1%
EXPERT ITERATION (SFT)	60, 000	43.0%	+1.7%

#### 4.4 Search and sampling budget

Table 4 reports the trends of the pass rate against the search size or sampling budget  $S \times K$ . We find that Lean-STaR benefits more as  $K$  increases, especially when  $K$  is relatively large. The result suggests that additional sampling with thoughts improves performance, while additional sampling without thoughts may saturate. We believe this is because thoughts increase the diversity of outputs and contribute to exploration in the theorem proving space. Therefore, Lean-STaR is more scalable (in terms of inference-time compute), and may be amenable to further improvements with additional iterations of expert iteration.

#### 4.5 Experiments with stronger base model and more data

We instantiate Lean-STaR using a stronger language model (InternLM2-Math-plus-7b [51]), which was released after the experiment above. We follow a similar setup to the previous experiment.

In this experiment, we used 140, 000 thoughts annotated by GPT-4o [32] to fine-tune a model (“Lean-CoT”). Then we performed only one iteration of expert iteration and collected about 60, 000 (proof state, thoughts, next-tactic) pairs in data, named “STaR dataset”  $D_1$ . We further fine-tuned the Lean-CoT model on dataset  $D_1$  to get the Lean-STaR model.

Our new results are reported in Table 3. We can see that Lean-STaR still gives a significant improvement over the baseline. For instance, Lean-STaR achieves 45.4% versus 39.8% in InternLM-plus using sampling with a similar inference budget and 43.4% using best-first search with more inference budget reported in [51]. This results show that both retrospective rationale generation and expert iteration can improve the theorem-proving capabilities on a stronger base model.

#### 4.6 Experiments on expert iteration without CoT

Table 5 shows the result of expert iteration without CoT (i.e., using (state, tactic) pairs only) as well as the result of Lean-CoT and Lean-STaR. Expert iteration alone achieves 43.0%, which is less than Lean-STaR (45.4%). This shows that Lean-STaR’s performance gains do not only come from the use of expert iteration.

## 5 Conclusion & Limitations

In this paper, we presented Lean-STaR, a novel approach that significantly enhances the theorem-proving capabilities of language models in formal mathematics by integrating Chain-of-Thought (CoT) rationales into each proof step. Our method begins with generating synthetic rationales using ground-truth tactics retrospectively, followed by fine-tuning the language model to generate these rationales and predict subsequent tactics, resulting in the Lean-CoT model. We further improved this model using expert iteration, fine-tuning it on correct proofs it samples and verifies using the Lean solver. Our contributions include the introduction of the first thought-augmented theorem proving dataset, demonstrating that expert iteration can further improve performance, and achieving new state-of-the-art results on the miniF2F-test benchmark, increasing the pass rate from 30.3% to 36.1%.

These advancements are not only about improving the accuracy of automated theorem proving, but also offer a scalable and efficient framework for advancing human understanding of mathematics, which may lead to significant impacts in education, scientific discovery, and program verification [11, 24, 37, 4, 16, 31].

The primary limitation of our method is that its performance may be constrained by issues of computational scalability. Both Lean-CoT and Lean-STaR have been fine-tuned on a dataset that is not very large. Additionally, the use of GPT-4 to generate synthetic data may incur a significant cost and possibly introduce biases. Also, expert iteration could face a bottleneck due to CPU and IO limitations, which might slow down the process due to a sluggish speed of Lean ITP.

## References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [2] Ayush Agrawal, Siddhartha Gadgil, Navin Goyal, Ashvni Narayanan, and Anand Tadipatri. Towards a mathematics formalisation assistant using large language models. *arXiv preprint arXiv:2211.07524*, 2022.
- [3] Thomas Anthony, Zheng Tian, and David Barber. Thinking fast and slow with deep learning and tree search. *Advances in neural information processing systems*, 30, 2017.
- [4] Jeremy Avigad. Mathematics and the formal turn, 2023.
- [5] Zhangir Azerbayev, Bartosz Piotrowski, Hailey Schoelkopf, Edward W Ayers, Dragomir Radev, and Jeremy Avigad. Proofnet: Autoformalizing and formally proving undergraduate-level mathematics. *arXiv preprint arXiv:2302.12433*, 2023.
- [6] Zhangir Azerbayev, Hailey Schoelkopf, Keiran Paster, Marco Dos Santos, Stephen McAleer, Albert Q Jiang, Jia Deng, Stella Biderman, and Sean Welleck. Llemma: An open language model for mathematics. *arXiv preprint arXiv:2310.10631*, 2023.
- [7] Jasmin Christian Blanchette, Cezary Kaliszyk, Lawrence C Paulson, and Josef Urban. Hammering towards qed. *Journal of Formalized Reasoning*, 9(1):101–148, 2016.
- [8] Sascha Bohme and Tobias Nipkow. Sledgehammer: judgement day. In *Automated Reasoning: 5th International Joint Conference, IJCAR 2010, Edinburgh, UK, July 16-19, 2010. Proceedings 5*, pages 107–121. Springer, 2010.
- [9] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [10] Kevin Buzzard. Lean in 2024. <https://xenaproject.wordpress.com/2024/01/20/lean-in-2024/>, 2024.
- [11] Nathan C Carter and Kenneth G Monks. Lurch: a word processor that can grade students’ proofs. In *CICM Workshops*, 2013.
- [12] Wenhua Chen, Xueguang Ma, Xinyi Wang, and William W Cohen. Program of thoughts prompting: Disentangling computation from reasoning for numerical reasoning tasks. *arXiv preprint arXiv:2211.12588*, 2022.
- [13] Projet Coq. The coq proof assistant-reference manual. *INRIA Rocquencourt and ENS Lyon, version*, 5, 1996.
- [14] Lukasz Czajka and Cezary Kaliszyk. Hammer for coq: Automation for dependent type theory. *Journal of automated reasoning*, 61:423–453, 2018.
- [15] Leonardo De Moura, Soonho Kong, Jeremy Avigad, Floris Van Doorn, and Jakob von Raumer. The lean theorem prover (system description). In *Automated Deduction-CADE-25: 25th International Conference on Automated Deduction, Berlin, Germany, August 1-7, 2015, Proceedings 25*, pages 378–388. Springer, 2015.

- [16] Emily First. *Automating the Formal Verification of Software*. PhD thesis, 2023. URL [https://scholarworks.umass.edu/dissertations\\_2/2812](https://scholarworks.umass.edu/dissertations_2/2812).
- [17] Emily First, Markus Rabe, Talia Ringer, and Yuriy Brun. Baldur: Whole-proof generation and repair with large language models. In *Proceedings of the 31st ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering, ESEC/FSE 2023*, page 1229–1241, New York, NY, USA, 2023. Association for Computing Machinery. ISBN 9798400703270. doi: 10.1145/3611643.3616243. URL <https://doi.org/10.1145/3611643.3616243>.
- [18] Fabian Gloeckle, Baptiste Roziere, Amaury Hayat, and Gabriel Synnaeve. Temperature-scaled large language models for lean proofstep prediction. In *The 3rd Workshop on Mathematical Reasoning and AI at NeurIPS’23*, 2023.
- [19] Jesse Michael Han, Jason Rute, Yuhuai Wu, Edward W Ayers, and Stanislas Polu. Proof artifact co-training for theorem proving with language models. *arXiv preprint arXiv:2102.06203*, 2021.
- [20] Jesse Michael Han, Jason Rute, Yuhuai Wu, Edward Ayers, and Stanislas Polu. Proof artifact co-training for theorem proving with language models. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=rpxJc9j04U>.
- [21] Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv preprint arXiv:2103.03874*, 2021.
- [22] Yinya Huang, Xiaohan Lin, Zhengying Liu, Qingxing Cao, Huajian Xin, Haiming Wang, Zhenguo Li, Linqi Song, and Xiaodan Liang. Mustard: Mastering uniform synthesis of theorem and proof data. *arXiv preprint arXiv:2402.08957*, 2024.
- [23] Albert Q Jiang, Sean Welleck, Jin Peng Zhou, Wenda Li, Jiacheng Liu, Mateja Jamnik, Timothee Lacroix, Yuhuai Wu, and Guillaume Lample. Draft, sketch, and prove: Guiding formal theorem provers with informal proofs. *arXiv preprint arXiv:2210.12283*, 2022.
- [24] Dongyeop Kang, Andrew Head, Risham Sidhu, Kyle Lo, Daniel S Weld, and Marti A Hearst. Document-level definition detection in scholarly documents: Existing models, error analyses, and future directions. *arXiv preprint arXiv:2010.05129*, 2020.
- [25] Guillaume Lample, Timothee Lacroix, Marie-Anne Lachaux, Aurelien Rodriguez, Amaury Hayat, Thibaut Lavril, Gabriel Ebner, and Xavier Martinet. Hypertree proof search for neural theorem proving. *Advances in neural information processing systems*, 35:26337–26349, 2022.
- [26] Zhaoyu Li, Jialiang Sun, Logan Murphy, Qidong Su, Zenan Li, Xian Zhang, Kaiyu Yang, and Xujie Si. A survey on deep learning for theorem proving, 2024.
- [27] The mathlib Community. The lean mathematical library. In *Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs, CPP 2020*, pages 367–381, New York, NY, USA, 2020. Association for Computing Machinery. ISBN 9781450370974. doi: 10.1145/3372885.3373824. URL <https://doi.org/10.1145/3372885.3373824>.
- [28] Allen Newell and Herbert Simon. The logic theory machine—a complex information processing system. *IRE Transactions on information theory*, 2(3):61–79, 1956.
- [29] Tobias Nipkow, Markus Wenzel, and Lawrence C Paulson. *Isabelle/HOL: a proof assistant for higher-order logic*. Springer, 2002.
- [30] Maxwell Nye, Anders Johan Andreassen, Guy Gur-Ari, Henryk Michalewski, Jacob Austin, David Bieber, David Dohan, Aitor Lewkowycz, Maarten Bosma, David Luan, et al. Show your work: Scratchpads for intermediate computation with language models. *arXiv preprint arXiv:2112.00114*, 2021.
- [31] National Academies of Sciences. Artificial intelligence to assist mathematical reasoning: Proceedings of a workshop, 2023.
- [32] OpenAI. OpenAI: GPT-4, 2023. URL <https://openai.com/research/gpt-4>.

- [33] Stanislas Polu and Ilya Sutskever. Generative language modeling for automated theorem proving. *arXiv preprint arXiv:2009.03393*, 2020.
- [34] Stanislas Polu, Jesse Michael Han, Kunhao Zheng, Mantas Baksys, Igor Babuschkin, and Ilya Sutskever. Formal mathematics statement curriculum learning. *arXiv preprint arXiv:2202.01344*, 2022.
- [35] Markus N Rabe, Dennis Lee, Kshitij Bansal, and Christian Szegedy. Mathematical reasoning via self-supervised skip-tree training. *arXiv preprint arXiv:2006.04757*, 2020.
- [36] Avi Singh, John D Co-Reyes, Rishabh Agarwal, Ankesh Anand, Piyush Patil, Peter J Liu, James Harrison, Jaehoon Lee, Kelvin Xu, Aaron Parisi, et al. Beyond human data: Scaling self-training for problem-solving with language models. *arXiv preprint arXiv:2312.06585*, 2023.
- [37] Christian Szegedy. A promising path towards autoformalization and general artificial intelligence. In *Intelligent Computer Mathematics: 13th International Conference, CICM 2020, Bertinoro, Italy, July 26–31, 2020, Proceedings 13*, pages 3–20. Springer, 2020.
- [38] Terence Tao. <https://mathstodon.xyz/@tao/111287749336059662>, 2023.
- [39] Amitayush Thakur, Yeming Wen, and Swarat Chaudhuri. A language-agent approach to formal theorem-proving. *arXiv preprint arXiv:2310.04353*, 2023.
- [40] Haiming Wang, Huajian Xin, Chuanyang Zheng, Lin Li, Zhengying Liu, Qingxing Cao, Yinya Huang, Jing Xiong, Han Shi, Enze Xie, Jian Yin, Zhenguo Li, Heng Liao, and Xiaodan Liang. Lego-prover: Neural theorem proving with growing libraries, 2023.
- [41] Haiming Wang, Ye Yuan, Zhengying Liu, Jianhao Shen, Yichun Yin, Jing Xiong, Enze Xie, Han Shi, Yujun Li, Lin Li, et al. Dt-solver: Automated theorem proving with dynamic-tree sampling guided by proof-level value function. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 12632–12646, 2023.
- [42] Qingxiang Wang, Chad Brown, Cezary Kaliszzyk, and Josef Urban. Exploration of neural machine translation in autoformalization of mathematics in mizar. In *Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs*, pages 85–98, 2020.
- [43] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837, 2022.
- [44] Sean Welleck and Rahul Saha. Llmstep: Llm proofstep suggestions in lean. *arXiv preprint arXiv:2310.18457*, 2023.
- [45] Sean Welleck, Jiacheng Liu, Ronan Le Bras, Hannaneh Hajishirzi, Yejin Choi, and Kyunghyun Cho. Naturalproofs: Mathematical theorem proving in natural language. *arXiv preprint arXiv:2104.01112*, 2021.
- [46] Sean Welleck, Jiacheng Liu, Ximing Lu, Hannaneh Hajishirzi, and Yejin Choi. Naturalprover: Grounded mathematical proof generation with language models. *Advances in Neural Information Processing Systems*, 35:4913–4927, 2022.
- [47] Yuhuai Wu, Markus N Rabe, Wenda Li, Jimmy Ba, Roger B Grosse, and Christian Szegedy. Lime: Learning inductive bias for primitives of mathematical reasoning. In *International Conference on Machine Learning*, pages 11251–11262. PMLR, 2021.
- [48] Yuhuai Wu, Albert Qiaoju Jiang, Wenda Li, Markus Rabe, Charles Staats, Mateja Jamnik, and Christian Szegedy. Autoformalization with large language models. *Advances in Neural Information Processing Systems*, 35:32353–32368, 2022.
- [49] Huajian Xin, Haiming Wang, Chuanyang Zheng, Lin Li, Zhengying Liu, Qingxing Cao, Yinya Huang, Jing Xiong, Han Shi, Enze Xie, et al. Lego-prover: Neural theorem proving with growing libraries. *arXiv preprint arXiv:2310.00656*, 2023.

- [50] Kaiyu Yang, Aidan Swope, Alex Gu, Rahul Chalamala, Peiyang Song, Shixing Yu, Saad Godil, Ryan Prenger, and Anima Anandkumar. LeanDojo: Theorem proving with retrieval-augmented language models. In *Neural Information Processing Systems (NeurIPS)*, 2023.
- [51] Huaiyuan Ying, Shuo Zhang, Linyang Li, Zhejian Zhou, Yunfan Shao, Zhaoye Fei, Yichuan Ma, Jiawei Hong, Kuikun Liu, Ziyi Wang, Yudong Wang, Zijian Wu, Shuaibin Li, Fengzhe Zhou, Hongwei Liu, Songyang Zhang, Wenwei Zhang, Hang Yan, Xipeng Qiu, Jiayu Wang, Kai Chen, and Dahua Lin. Internlm-math: Open math large language models toward verifiable reasoning, 2024.
- [52] Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah Goodman. Star: Bootstrapping reasoning with reasoning. *Advances in Neural Information Processing Systems*, 35:15476–15488, 2022.
- [53] Xueliang Zhao, Wenda Li, and Lingpeng Kong. Decomposing the enigma: Subgoal-based demonstration learning for formal theorem proving, 2024. URL <https://openreview.net/forum?id=xLoxMv0695>.
- [54] Kunhao Zheng, Jesse Michael Han, and Stanislas Polu. Minif2f: a cross-system benchmark for formal olympiad-level mathematics. *arXiv preprint arXiv:2109.00110*, 2021.
- [55] Denny Zhou. Teach language models to reason. <https://dennyzhou.github.io/LLMs-Reason-Taiwan-2023.pdf>, 2023. Accessed: 2024-05-21.
- [56] Jin Peng Zhou, Charles Staats, Wenda Li, Christian Szegedy, Kilian Q Weinberger, and Yuhuai Wu. Don’t trust: Verify–grounding llm quantitative reasoning with autoformalization. *arXiv preprint arXiv:2403.18120*, 2024.
- [57] Jin Peng Zhou, Charles E Staats, Wenda Li, Christian Szegedy, Kilian Q Weinberger, and Yuhuai Wu. Don’t trust: Verify – grounding LLM quantitative reasoning with autoformalization. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=V5tdi14ple>.

## A Additional Experiment Setup

### A.1 Lean-STaR Expert Iteration

The second phase of Lean-STaR consists of generating new thoughts and tactics with the current language model, saving those that result in correct proofs, and training on the union of the initial thought-augmented dataset and the saved examples (i.e., expert iteration [34, 52, 36]). We perform two iterations of expert iteration, and provide details on our specific experimental setup below.

In each iteration we use sampling on the *LeanDojo Benchmark 4* dataset, and save the (state, thought, tactic) examples that are part of successful proofs. For each problem, we sample  $K = 32$  times in parallel with temperature  $T = 1.0$ , and limit the number of times a tactic can be generated to a total of  $N = 5$  per problem. Also, sampling is limited to 1 minute per problem. In this setup, each problem needs on average about 0.5 A100 minutes. We collect successfully sampled trajectories to produce a ‘‘STaR dataset’’  $D_1$ , and up to 3 proof trajectories were collected for each problem. We collected 32,231 different (proof state, thoughts, next-tactic) pairs in successful proof trajectories during expert iteration, which takes about 4 days with  $8 \times A100$  GPUs. Then, we further fine-tune SFT model for 1 epoch on the combination of GPT-4 annotated reasoning data and expert iteration data  $D_T \cup D_1$  to get the Lean-STaR model. We use the same learning rate setup that was used for the SFT model. In the second iteration, we generate a dataset  $D_2$  in a similar fashion. Then, we chose to further fine-tune model from iteration 1,  $M_1$ , on the generated dataset  $D_2$  (roughly 19k pairs).

The setup of experiment about InternLM2-plus is slightly different. The details are shown in Section 4.5 and Appendix E.

## B Statistics for our methods as well as the baselines

Table 6: Statistics for the baselines and our Lean-CoT, Lean-STaR on *MiniF2F* dataset. We use sampling method with hyperparameters  $N = 50$  &  $K = 32$  &  $T = 0.7$ .

APPROACH	# (CONTINUAL) TRAINING DATA	Pass@32	
INTERNL2-MATH-7B (FEW-SHOT)	-	28.7%	-
SFT	231,240	29.5%	+0.8%
<b>LEAN-COT</b>	52,438	32.8%	<b>+3.3%</b>
<b>LEAN-STAR (ITER-1)</b>	32,231	34.0%	+1.2%
<b>LEAN-STAR (ITER-2)</b>	19,324	<b>34.8%</b>	+0.8%

## C An Example and Explanation of A Formal Proof in Lean

An example of a formal proof in Lean with its visualization is shown in Figure 6, taken from [25]. In the proof, the tactic `induction k` is applied to the initial state  $(n \leq m \Rightarrow n + k \leq m + k)$  and the ITP converts the current state to subgoals `case 0`  $\wedge$  `case ih`:  $n \leq m \wedge n + k \leq m + k \Rightarrow n + (k + 1) \leq m + (k + 1)$ . The `case 0`:  $n \leq m$  is our hypothesis  $h_0$  so it can be proven by `case 0: exact h0` tactic. Then, we rewrite the `case ih` through the `nat.succ_le_succ_iff` which is a theorem in Lean library means  $n \leq m \Leftrightarrow n + 1 \leq m + 1$ . After tactics `case 0: exact h0` and `case ih: rw nat.succ_le_succ_iff`, the goal state is converted to  $n + k \leq m + k$  which is the hypothesis introduced by induction. Therefore, we can complete this proof using tactic `exact k_ih`.

```

theorem add_le_add_right (m n k : ℕ) (h₀ : n ≤ m)
 : n + k ≤ m + k :=
 induction k with
 | zero =>
 exact h₀
 | succ k ih =>
 rw Nat.succ_le_succ_iff
 exact ih

```

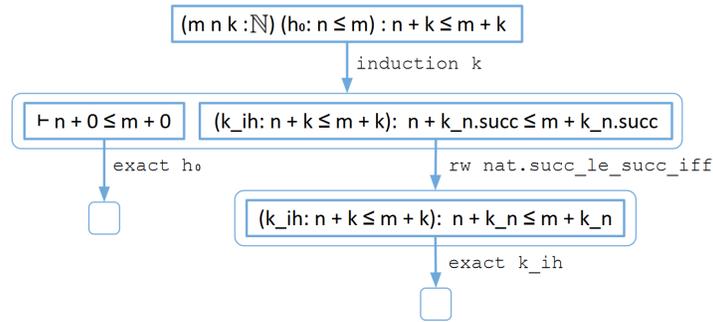


Figure 6: A example proof and its visualization of  $n \leq m \Rightarrow n + k \leq m + k$  in Lean, taken from [25]. The induction tactic reduces the initial statement to two subgoals. Then tactics `case 0: exact h0` and `case ih: rw nat.succ_le_succ_iff`, `case ih: exact k_ih` can be applied in turn to complete the proof.

## D Performance Analysis by Types and Difficulties using InternLM2-plus-7b

Table 7 reports the number of problems successfully proved, partitioned by type and difficulty using InternLM2-plus. We see that Lean-CoT improves performance mainly in Number Theory and Lean-STaR improves performance in solving difficult problems on all categories, which is the opposite of the performance of the InternLM2-base.

Table 7: Counts of problems successfully proved in *minif2f-test* benchmark using InternLM2-plus-7b, split by type and difficulty. The methods use sampling with  $N = 50, K = 32$ .

TOTAL			TEST SET SIZE	INTERNLM2-PLUS-7B	LEAN-COT	LEAN-STAR (ITER-1)
IMO			20	0	0	0
AIME			15	3	3	4
AMC			45	9	9	10
MATH	ALGEBRA	LEVEL 5	14	6	6	6
		LEVEL 4	14	9	9	9
		LEVEL 3	14	11	13	13
		LEVEL 2	14	11	11	11
		LEVEL 1	14	10	10	10
	NUMBER THEORY	LEVEL 5	16	7	7	7
		LEVEL 4	11	6	8	8
		LEVEL 3	11	6	7	9
		LEVEL 2	11	7	9	9
		LEVEL 1	11	10	10	10
CUSTOM	ALGEBRA		18	4	3	4
	NUMBER THEORY		8	0	0	0
	INDUCTION		8	1	1	1

## E Performance difference of joint training and continue training

As shown in Table 8, the joint training method performs better using InternLM2-base but training method performs much better using InternLM2-plus. It seems that there are no difference between these two methods. Therefore, this performance can be depend on the quantity of data or the model. (We use much more data when using InternLM2-plus and the quantity of "STaR data" is relatively small.)

Table 8: Performance difference of joint training and continue training on Lean-STaR. We use sampling method with hyperparameters  $N = 50$  &  $K = 32$  &  $T = 0.7$ . In continue training, we further fine-tune the Lean-CoT model on "STaR data" to get Lean-STaR model and in joint training we fine-tune the SFT model on combination of GPT-4 annotated reasoning data and "STaR data".

APPROACH	INTERNLM2-BASE-7B	INTERNLM2-PLUS-7B
<b>LEAN-CoT</b>	32.8%	43.4%
<b>LEAN-STAR (ITER-1)</b> (JOINT TRAINING)	<b>34.0%</b>	43.9%
<b>LEAN-STAR (ITER-1)</b> (CONTINUE TRAINING)	33.2%	<b>45.5%</b>

## F Retrospective Rationale Generation Prompt of GPT-4

Please act as a professional mathematician.  
Your goal is to accurately prove a math theorem in Lean4.  
You are given the first tactic that should be taken to prove the Given Theorem.

# Example:

```
Given Theorem:
```lean4
X : Type u_1
Y : Type u_2
inst†1 : TopologicalSpace X
inst† : TopologicalSpace Y
f : X →. Y
h : PContinuous f
⊢IsOpen (PFun.preimage f Set.univ)
```
```

```
Given Tactic:
```lean4
exact h _ isOpen_univ
```
```

Assistant Output:

### PLANNING OF REASONING

Given the above goal and the given the target tactic `exact h \_ isOpen\_univ`, I should produce a reasoning that only based on the goal, and conclude to the `exact h \_ isOpen\_univ`, but not in the hindsight format.

### REASONING

By directly using the hypothesis `h : PContinuous f`, we state that for any open set, its preimage via `f` is also open, and this applies to `Set.univ` as well.

### TACTIC

```

```lean4
exact h _ isOpen_univ
```

```

To achieve the goal, you have three jobs.

- # Write down the planning of reasoning.
- # Write down the reasoning that can result in the selection of the Given Tactic.
- # Write down the Given Tactic.

You have four principles to do this.

- # Craft reasoning that is comprehensive yet concise, contained ideally within two sentences.
- # Begin reasoning with the objective of the Given Theorem, ensuring logical progression, rather than constructing it retrospectively from the Given Tactic.
- # Avoid mentioning the Given Tactic and specific statement names from the Given Tactic throughout your reasoning.
- # Position the conclusion of the tactic after presenting all reasons, ensuring that details regarding the Given Tactic are not introduced at the start of your reasoning.

Your output should be strictly in the following format and should not contain extra content:

```

PLANNING OF REASONING

```

Given the above goal and the given the target tactic <Given Tactic>, I should produce a reasoning that only based on the goal, and conclude to the exact <Given Tactic>, but not in the hindsight format.

```

REASONING

```

```

<your reasoning to the Given Tactic>

```

```

TACTIC

```

```

<Given Tactic>

```

```

Given Theorem:
```lean4
{theorem["state_before"]}
```

```

```

Given Tactic:
```lean4
{theorem["tactic"]}
```

```

## G Examples of generated Lean proofs with thoughts

```

theorem aime_1990_p4 (x : ℝ) (h₀ : 0 < x) (h₁ : x ^ 2 - 10 * x - 29 ≠ 0)
(h₂ : x ^ 2 - 10 * x - 45 ≠ 0) (h₃ : x ^ 2 - 10 * x - 69 ≠ 0)
(h₄ : 1 / (x ^ 2 - 10 * x - 29) + 1 / (x ^ 2 - 10 * x - 45) - 2 / (x ^ 2 - 10 *
x - 69) = 0)
: x = 13 :=
norm_num at h₁ h₂ h₃ -- Reasoning: To prove `x = 13`, we examine the conditions
under which the given equation holds, specifically focusing on the
non-equality of the expressions involving `x ^ 2 - 10 * x - 29`, `x ^ 2 - 10 *
x - 45`, and `x ^ 2 - 10 * x - 69`. Simplifying these expressions using
properties of real numbers and algebra allows us to directly compare them with
their respective values, ultimately identifying `x = 13` as the unique
solution that satisfies all constraints.
field_simp at * -- Reasoning: To prove |(x = 13|), we leverage the given
equalities involving rational fractions of |(x^2 - 10x - c|) for various
constants |(c|), where |(0 < x|) and each |(x^2 - 10x - c|) is non-zero. By
algebraically manipulating these expressions, we aim to derive a relationship
among |(x|) and these constants, specifically focusing on |(13|), under the
given non-zero conditions for the quadratic expressions.
ring_nf at h₄ ⊢ -- Reasoning: To establish the equality `x = 13` under the
given conditions, we need to manipulate the algebraic expression given by `h₄`
to reveal its dependence on `x`, recognizing that the presence of `x` in the
expressions may affect the equation's truth value. The application of
algebraic transformations on both sides of the equation will facilitate the
identification of `x`'s value, taking into consideration the inequality
conditions provided (`h₁`, `h₂`, `h₃`).
nlinarith -- Reasoning: To prove |(x = 13|), we must manipulate the equation
given by |(h₄|) to isolate |(x|), using the algebraic properties of equality
and the assumption |(h₀|) which states |(0 < x|). This requires careful
rearrangement and application of algebraic identities to simplify and
rearrange terms, facilitating the direct application of the properties of real
numbers to reach the desired conclusion.

```

```

theorem amc12a_2002_p6 (n : ℕ) (h₀ : 0 < n)
: ∃ m, m > n ∧ ∃ p, m * p ≤ m + p :=
use n + 1, by linarith only [h₀] -- Reasoning: To demonstrate the existence of
such an `m` and `p` that satisfy the given inequalities, we leverage the
property of natural numbers that ensures an increase in `n` from `0` leads to
the possibility of finding such `m` and `p`. This approach is supported by the
fundamental property of natural numbers and their arithmetic operations,
suggesting that for a given `n` greater than `0`, there exists a successor `m`
and a number `p` that satisfy the conditions outlined.
exact <0, by simp > -- Reasoning: To demonstrate that there exists an |(n |in ℕ
|) such that |(n + 1) * p |leq n + 1 + p| holds for some |(p |in ℕ|), we
recognize that setting |(p = 0|) satisfies the inequality by the properties of
zero in arithmetic. This is because |(n + 1 > 0|) by assumption, ensuring the
left-hand side is non-negative and the right-hand side simplifies to |(n +
1|), making the inequality trivially true.

```

```

theorem aime_1983_p2 (x p : ℝ) (f : ℝ → ℝ) (h₀ : 0 < p ∧ p < 15) (h₁ : p ≤ x ∧ x
≤ 15)
(h₂ : f x = abs (x - p) + abs (x - 15) + abs (x - p - 15))
: 15 ≤ f x :=
cases' h₁ with h₁ h₂ -- Reasoning: Given a function $|f|$ defined over the real
numbers, where $|f(x)|$ equals the sum of the absolute values of the
differences $|x - p|$, $|x - 15|$, and $|x - p - 15|$, along with conditions
on $|p|$ and $|x|$ that ensure $|x|$ lies between $|p|$ and $|15|$ and $|p|$
is positive, we aim to show that $|f(x)| \geq 15$. To demonstrate this, we
consider all possible cases for the position of $|x|$ relative to $|p|$ and
 $|15|$, specifically at $|p|$ itself, between $|p|$ and $|15|$, and at $|15|$.
By evaluating $|f(x)|$ for each case, we can establish a lower bound of
 $|f(x)|$ that is greater than or equal to $|15|$.
simp [h₀, abs_of_nonneg (sub_nonneg.2 h₁), abs_of_nonneg (sub_nonneg.2 h₂), *]
-- Reasoning: The objective is to show that $|f(x)|$ is at least 15 for $|x|$
within the bounds $|p| \leq x \leq 15$, where $|p|$ is positive but less than
15. The provided expression for $|f(x)|$ suggests using properties of absolute
values and inequalities to simplify and analyze $|f(x)|$. By applying
simplification rules for absolute values and inequalities, along with the
given bounds, we aim to demonstrate the desired inequality $|f(x)| \geq 15$.
simp only [abs_of_nonneg] at * -- Reasoning: The objective is to establish an
inequality involving an expression with absolute values and a sum, where all
terms are functions of $|x|$. By recognizing that the absolute value functions
are always non-negative, we can simplify the given expression by removing the
absolute value symbols, thus focusing on the arithmetic manipulation of the
terms to demonstrate the inequality.
simp only [abs_of_nonneg, sub_add_eq_add_sub] at * -- Reasoning: The objective
is to demonstrate that the expression $15 \leq x - p + |x - 15| + |x - p - 15|$
holds given the conditions on p , x , and the function f . Since the
expression in question involves absolute values which inherently involve
non-negativity, manipulating these expressions to highlight their
non-negativity or equality is a logical initial step. This involves
recognizing that the absolute value of a difference can be rewritten as the
difference of absolute values, which simplifies the manipulation of the
expression to prove the inequality.
congr 1 -- Reasoning: To establish the inequality $15 \leq x + |x - 15| + |x - p
- 15| - p$, we recognize that the left-hand side of the inequality involves a
mix of additions and subtractions of real numbers. By introducing a congruence
transformation that simplifies operations involving absolute values, we aim to
align both sides of the inequality in a form that directly reflects the
properties of real numbers under these operations.
simp only [abs_of_nonpos (sub_nonpos_of_le h₂), abs_of_nonneg (sub_nonneg_of_le
h₁)] -- Reasoning: The objective is to prove an inequality involving absolute
values and subtractions that aligns the given conditions and constraints.
Simplification using the properties of absolute values and the provided bounds
can directly lead to the desired conclusion by expressing the absolute values
in terms of their underlying expressions and applying the given constraints.
simp [abs_of_pos, *] -- Reasoning: To prove the given inequality involving
absolute values, simplification using algebraic properties and given
hypotheses will directly lead us to the desired inequality by recognizing the
algebraic manipulation and application of the known bounds h_1 and h_2 , as
well as the non-negativity of p .
rw [abs_of_nonpos] -- Reasoning: The objective is to demonstrate that $15 \leq 15
+ |x - p - 15| - p$ under the given constraints on p and x . Given $p < 15$
and $p \leq x \leq 15$, it's apparent that $p - 15$ is non-positive. This
observation allows us to apply the property that the absolute value of a
non-positive number is equal to its negative value, thereby simplifying the
expression on the right-hand side of the inequality.
all_goals linarith -- Reasoning: The goal involves demonstrating a relationship
between expressions involving inequalities and subtraction. The simplification
of these expressions into a form that directly compares their numerical values
can lead to a straightforward application of known inequalities and algebraic
properties, demonstrating the inequality's validity under the given conditions.

```