

psifx - Psychological and Social Interactions Feature Extraction Package

Guillaume Rochette*^{1,2}  Matthew J. Vowels*^{1,2,3} 

¹ Institute of Psychology, UNIL, Switzerland

² CVSSP, University of Surrey, United Kingdom

³ The Sense, CHUV, Switzerland

Abstract

psifx is a *plug-and-play* multi-modal feature extraction toolkit, aiming to facilitate and democratize the use of state-of-the-art machine learning techniques for human sciences research. It is motivated by a need (a) to automate and standardize data annotation processes, otherwise involving expensive, lengthy, and inconsistent human labor, such as the transcription or coding of behavior changes from audio and video sources; (b) to develop and distribute open-source community-driven psychology research software; and (c) to enable large-scale access and ease of use to non-expert users. The framework contains an array of tools for tasks, such as speaker diarization, closed-caption transcription and translation from audio, as well as body, hand, and facial pose estimation and gaze tracking from video. The package has been designed with a modular and task-oriented approach, enabling the community to add or update new tools easily. We strongly hope that this package will provide psychologists and social scientists a simple and practical solution for efficiently a range of audio, linguistic, and visual features from audio and video, thereby creating new opportunities for in-depth study of real-time behavioral phenomena.

Keywords: multi-modal, video, audio, linguistic, feature extraction, Python, package.

1. Introduction

The study of human and social interactions is of principal interest to psychologists and social scientists. In order to study such interactions, psychologists need access to meaningful and interpretable features which represent these interactions and which can be used to facilitate reproducible research. Indeed, there exist many questions about human interactions which are simply unanswerable without access to the complex and rich information about behavior as it unfolds over time (Bulling, Heyman, and Bodenmann 2023; Gottman and Notarius 2000). In the context of psychotherapy outcomes and emotion research, for example, around half of the literature integrates a form of behavioral feature extraction to evaluate, understand, and improve mental health treatments, psychotherapeutic processes, and therapist training (Peluso and Freund 2018).

To arrive at a set of variables or features representing otherwise complex video and audio data, one can deconstruct behavioral interactions into a subset of explainable features. Such features

*These authors contributed equally to this work. Project Page: <https://psifx.github.io/psifx>

include *non-verbal* behaviors such as body and head pose, motion, gaze, facial expression, as well as *para-verbal* and *verbal* features including pitch and automatic transcription of spoken language, respectively. These features can be considered to be relatively ‘objective’ to the extent that they concern a representation of directly observable events, in contrast with more elusive psychological constructs such as stress, affect, or emotion, which are only indirectly measurable. Access to such low-dimensional, human interpretable representations of video and audio files facilitates a range of downstream research-related tasks (Friedlander, Lee, and Escudero 2019; Esplin, Anderson, Bean, and Whiting 2024), including the prediction of emotion from para-verbal features (Biggiogera, Boateng, Hilpert, Vowels, Bodenmann, Neysari, Nussbeck, and Kowatsch 2021), modeling empathetic actions/intent from text (Welivita and Pu 2020), or other statistical approaches intended to test and develop psychological theories.

Currently, the standard for extracting such complex information in the domain of psychology is the human observational coding process (Peluso and Freund 2018; Hilpert, Brick, Flueckiger, Vowels, Ceuleman, Kuppens, and Sels 2019; Gottman and Notarius 2000; Bulling *et al.* 2023), in which a team of humans rate various verbal, para-verbal and nonverbal behaviors as they occur second by second, or minute by minute, over the course of a recorded interaction. Unfortunately, there are two main disadvantages associated with human observational coding approaches. Firstly, and perhaps unsurprisingly, the utilization of human observational coding can be prohibitively expensive in terms of its cost in time and training (Bulling *et al.* 2023). Manual transcription, for example, takes between five and ten times longer than the duration of the audio itself (Bazillon, Estè, and Luzzati 2008). This expense has a concomitant negative impact on sample size and statistical power, requiring, as it does, an assignment of funds which could otherwise be used to recruit additional participants. Secondly, it has been known for some time that the use of human behavioral coding is not well standardized, such that individual coders may provide substantively different codes from those of each other, depending on their particular training, background, personal experiences etc. Harris and Lahey (1982) This variability makes it difficult to meaningfully compare, reproduce or aggregate results across datasets derived using independent coding teams. Thirdly, and finally, human behavioral coding is often narrow in scope, limiting the behaviors being annotated according to the specifics of the coding system. Altogether, human observational coding does not scale well to large datasets, particularly in an era where large scale datasets feature increasingly often in modern research and for which human observational coding becomes prohibitively impractical.

These problems seriously hinder progress in research involving behaviors associated with the visual, physical, and audible modalities, such as mental health research, thereby also affecting the design of effective interventions, training, and the dissemination and sharing of data. In order to reduce the cost of such observational coding, as well as to increase the consistency and standardization, researchers have just begun to explore the possibility of automating observational coding using various signal processing and machine learning techniques (Imel, Steyvers, and Atkins 2015; Imel, Pace, Soma, Tanana, Hirsch, Gibson, Georgiou, Narayanan, and Atkins 2019; Creed, Salama, Slevin, Tanana, Imel, Narayanan, and Atkins 2022; Atkins, Steyvers, Imel, and Smyth 2014; Bulling *et al.* 2023). Many non-domain specific, but highly relevant, state-of-the-art machine learning techniques are openly available. This includes skeletal pose estimation (Cao, Hidalgo, T., Wei, and Sheikh 2018), facial keypoints and expression representation (Baltrusaitis, Zadeh, Lim, and Morency 2018), speech features (Eyben, Wollmer, and Schuller 2010), and automatic transcription (Radford, Kim, Xu, Brockman, Mcleavey, and Sutskever 2023)

Sadly, and despite the efficacy of these works, there remains a number of key barriers to uptake in psychology and social science. In terms of the automated coding of audio and video, effective approaches have only just emerged in response to the dramatic progress following the success of deep learning approaches (Alom, Taha, Yakopcic, Westberg, Sidike, and et al. 2018). As such, convincing and powerful methods for effectively processing audio and video have only become available very recently, and it is perhaps no surprise that these techniques are underappreciated and disparately applied across the applied mental and behavioral health domains. There are technical hurdles to setup such bleeding-edge methods, such as containerizing the operating system and the stack of core libraries, but also the need to be familiar with technical concepts, such as low-level programming languages, source code compilation, dependency management, etc. Additional barriers appear for the usage and integration of said methods into a domain-specific workflow, such as high-level programming languages, data serialization, heterogeneous command-line interfaces, etc. These sets of skills lie beyond the typical education of empirical/applied researchers in the behavioral, psychological, or health domains. Finally, assuming that already knows about a particular method for which an easy-to-use implementation *does* exist, they may nonetheless find that the method itself lies behind a paywall, thereby again presenting a barrier to use both in terms of the cost itself, but also, in some cases, in terms of the ethical concerns relating to the sharing sensitive data with third-parties. Thus, there exist a number of challenges facing psychologists if they wish to explore complex human interactions which unfold dynamically over time.

The *open-source* project **psifx**, P Psychological and S Social I Interactions F Feature e Xtraction, provides:

- An integrative approach to automate the extraction of ‘objective’ non-verbal (body, hand, and head pose, facial keypoints, eye-gaze), para-verbal (speech features such as pitch, intonation, and speech rate), and verbal (automatic transcription and translation) features. Such features are crucial to moving towards a standardized data processing framework for downstream tasks relevant to the study of complex, dynamic interactions.
- Efficient parallelism and use of accelerated hardware architectures, enabling psychologists to efficiently process large-scale datasets and dramatically reduce the cost in comparison with the current standard of human behavioral coding.
- A simple setup and usage, as it takes a handful of instructions to setup, and provides a homogeneous command-line interface, foregoing programming language knowledge.
- A public, community-oriented, repository, as well as free-to-use Python package and containerized Docker image. This, in addition to the package’s usability, helps with reproducibility, as well as fostering a transparent approach to package development and inclusivity. Indeed, it is important that psychologists have the opportunity to participate and influence the development and maintenance of the project.
- A standardization of each task output, favoring open-source and human-readable data formats, as well as easy-to-run visualization tools to verify and explain the outputs.
- A means to process data locally, minimizing concerns regarding the sharing of sensitive data with third party data processing services.

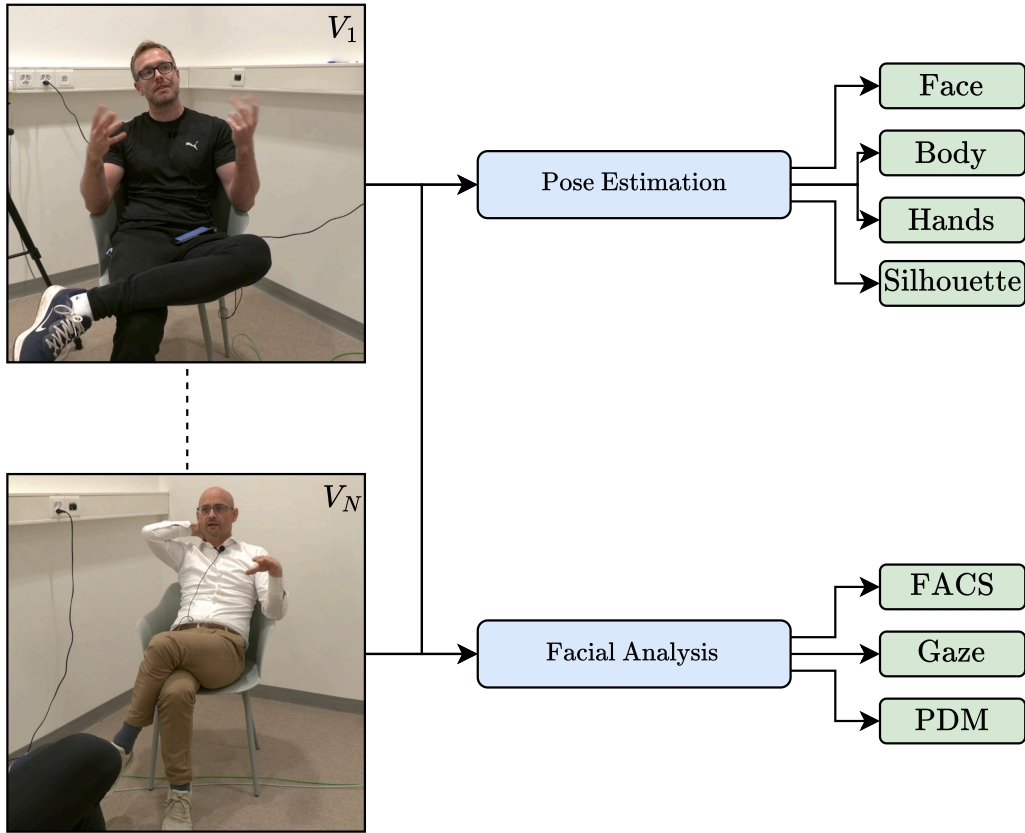


Figure 1: Overview of the video processing functionalities. For each synchronized video stream, we independently extract the entire pose of the body, face and hands, as well as facial action coding system units (FACS), eye-gaze and point distribution model (PDM)

psifx can be used to automatically diarize audio, transcribe language (or translate and transcribe to English), extract audio features such as speech-rate and fundamental frequency, and extract visual features such as hand, body, and head pose, facial expressions and eye gaze. Such features represent rich projections of audio and video data, and can then be used for downstream predictive or exploratory machine learning tasks relevant to psychological research, such as predicting psychotherapy session efficacy. **psifx** currently offers support for two input modalities, video and audio data, as they are minimally invasive means to capture essential behavioral information conveyed during human interactions.

Finally, we state the principal goal of **psifx**'s creators: *To provide empirical researchers with usable, modern, open, and community driven feature extraction tools*. Indeed, our goal is not to compete against the authors of the underlying feature extraction technologies, but rather to provide a key interface between these technologies and the researchers who wish to use them. In the remainder of the paper, we provide an overview of each of the included tools and examples of command line usage. We abstain from including reports on computational

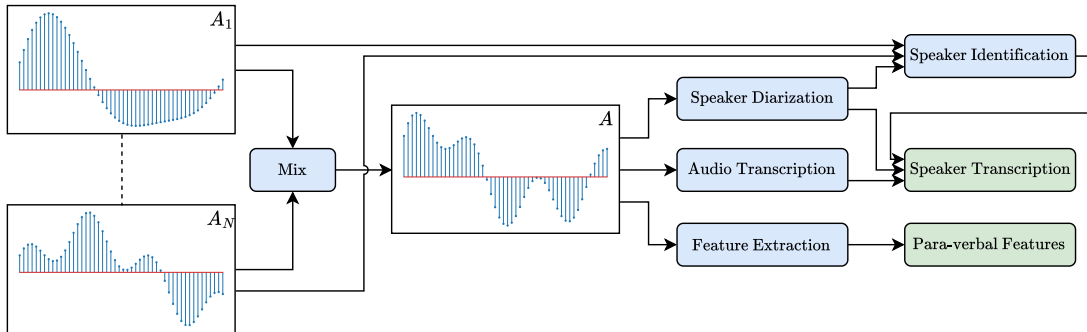


Figure 2: Overview of the audio processing functionalities. The synchronized audio tracks are blended together, the resulting mixed audio track is transcribed and diarized, thus enabling the re-identification of the speakers, yielding a complete speaker transcription, as well as para-verbal speech features extraction.

efficiency, as there is little-to-no overhead associated with the `psifx` pipeline, above that which is associated with each of the integrated methods. If readers are interested in the processing times associated with the underlying methods, they are encouraged to consult the original contributions.

2. Functionality

In this section, we describe the functionalities, and their respective tasks, contained in the package. An overview of the processing functionalities is given in Figs. 1 and 2, and the overall structure of the package described on Fig. 3. These figures illustrate the integrative nature of `psifx`; we define tasks providing a higher level of functionality than any of its individual components. The result is an easy-to-use, integrative audio-linguistic-visual processing pipeline and interface for psychologists, which facilitates a wide range of down-stream machine learning or statistical analysis tasks.

2.1. Installation

One of the most important advantages that `psifx` has is in regard to the simplified installation process. Despite the impressive performance of many open-source projects, the time and expertise required to install even just one such library can be significant. The associated difficulties increase when one wishes to install multiple libraries simultaneously, creating issues with incompatibility between package dependencies. In contrast, `psifx` provides a Python package installable with `pip`, as well as a ready-to-use containerized images, in which the external libraries are guaranteed to be compatible with one another. This provides a form of out-of-the-box practicality that most open-source projects simply do not have.

Assuming that a Python environment is set up, the package is downloaded and installed from PyPI with:

```
pip install psifx
```

To avoid potential conflicts between `psifx` dependencies and already installed software, we

```
psifx/  
├── audio/  
│   ├── diarization/  
│   │   └── pyannote  
│   ├── identification/  
│   │   └── pyannote  
│   ├── manipulation/  
│   │   ├── extraction  
│   │   ├── conversion  
│   │   ├── mixdown  
│   │   └── normalization  
│   ├── speech/  
│   │   └── opensmile  
│   └── transcription/  
│       └── whisper  
├── io/  
│   ├── json  
│   ├── rttm  
│   ├── tar  
│   ├── video  
│   ├── vtt  
│   └── wav  
├── video/  
│   ├── face/  
│   │   └── openface  
│   ├── manipulation/  
│   │   ├── trim  
│   │   ├── crop  
│   │   └── resize  
│   └── pose/  
│       └── mediapipe
```

Figure 3: Structure of the package **psifx**.

recommend to use isolated containers, through Docker for example. Assuming Docker is set up, the package, and its external dependencies, is downloaded and ran with:

```
docker run \  
  --user $(id -u):$(id -g) \  
  --mount type=bind,source=/path/to/data,target=/path/to/data \  
  --interactive \  
  --tty \  
  psifx/psifx:latest
```

In both cases, the user can directly use the command-line interface and/or import and build on top of the Python library.

In contrast, the installation procedure for a (single) well-known computer vision package may require upwards of 20 commands involving the installation of a series of low-level dependencies.

2.2. Video Processing

The parts of **psifx** which are concerned with the video data modality provide researchers with body, face and hand pose estimation, as well as facial keypoints, facial action units, and a point distribution model. The modules for the extraction of these features are described below. Currently, the two video processing modules are able to process data in real-time, but do not benefit yet from accelerated hardware architectures.

Human Pose Estimation

Human pose estimation aims at inferring the skeletal configuration of humans from images and videos and is relevant to any domain concerned with the tracking of human movement, ‘body language’, or pose, including psychotherapy and physiotherapy. These per-frame pose features have been shown to be useful across a diverse range of research involving motion energy analysis (Ramseyer 2020), including a study concerning students with Attention-deficit/hyperactivity disorder Sempere-Tortosa, Fernandez-Carrasco, Mora-Lizan, and Rizo-Maestre (2020), action recognition (Zhou, Meng, Liu, Wu, Gao, and Wang 2023), and the possibility to identify complex behaviors such as sustained attention in classroom settings (Zaletelj and Kosir 2017).

The task of pose estimation consists in locating semantically meaningful keypoints either in 2D or 3D. In a monocular setting, 2D estimation is usually considered to be easier, as it is essentially a pattern recognition problem, where the machine is tasked to pinpoint the various landmarks on the image plane, whereas its 3D counterpart is an ill-posed problem, because of perspective ambiguities, making the problem hard even for humans, and benefiting from stereo vision. Given the additional experimental constraints associated with the estimation of 3D keypoints from a calibrated stereo-camera setup, we opt to include monocular 2D skeleton pose estimation as an essential tool for analysing human motion from video with a view to inclusion of 3D pose estimation in the future.

Specifically, we integrate **MediaPipe** (MediaPipe 2024), an open-source pose estimation framework, by Google, and which estimates the body, face, and hand configurations, as well as the fitting of a detailed mesh for the face.

An example output can be seen on Fig. 4, and can be produced by,



Figure 4: On the right, visualization of the skeletal landmarks of both **MediaPipe** (excluding the face mesh) and **OpenFace 2.0**. On the left, binary segmentation mask of the silhouette from **MediaPipe**.

```
psifx video pose mediapipe inference \
  --video /path/to/input/video.mp4 \
  --poses /path/to/output/poses.tar.gz \
  --masks /path/to/output/mask.mp4
```

where the input is an **ffmpeg**-compatible video, and the output is a TAR archive containing the poses in the JSON format for every frames, as well as a video of the segmented silhouette.

Facial Expression Analysis

Facial analysis has been shown to be useful and of interest across a broad range of tasks, including the inference of internal states and emotions, attention analysis, and person recognition (Escalera, Baro, Guyon, Escalante, Tzimiropoulos, Valstar, Pantic, Cohn, and Kanade 2018; Mollahosseini, Hasani, and Mahoor 2017; Lucey, Cohn, Kanade, Saragih, Ambadar, and Matthews 2010).

We integrate **OpenFace2.0** (Baltrusaitis *et al.* 2018), an open-source framework providing gaze estimation, facial keypoints, facial action coding system units (FACS), a point distribution model, and head pose estimation.

These features can be extracted with,

```
psifx video face openface inference \
```



```
--video /path/to/input/video.mp4 \
--features /path/to/output/features.tar.gz
```

where the input is an **ffmpeg**-compatible video, and the output is a **TAR** archive containing the facial features in the JSON format for every frames.

2.3. Audio Processing

The parts of **psifx** which are concerned with the audio data modality provide researchers with verbal features including speaker diarization and re-identification, automatic transcription and translation into English, as well as para-verbal speech features. The modules for the extraction of these features are described below.

Speaker Diarization

Speaker diarization tries to find the answer to the question ‘who spoke when?’. To this end, we integrate **pyannote** (Bredin 2023; Plaquet and Bredin 2023), an open-source toolkit providing pre-trained machine learning pipeline for speaker diarization and audio embeddings, such that,

```
psifx audio diarization pyannote inference \
--audio /path/to/input/mixed/mono/audio.wav \
--diarization /path/to/output/diarization.rttm \
--num_speakers $NUM_SPEAKERS
```

where the input is the mixed mono normalized **WAV** track, and the output is a diarization **RTTM** file, i.e. Rich Transcription Time Marked format, which contains the start and end timings as well as a unique identifier for the active speaker.

This can be run either on CPU or accelerated with **CUDA**-enabled hardware. If the number of speaker was not explicited, **pyannote** will attempt to guess it.

Speaker Re-Identification

We integrate a unique functionality into **psifx** which enables users to infer the identity of the diarized speakers in the case where separate microphone channels for each speaker are available.

Since **pyannote** uses the mixed audio track, one can only infer the identity of the speaker for that mixed track, however it is not possible to directly trace back to which of the separate track it came from. To overcome this, we propose a speaker re-identification module, which uses the mixed audio track as well as all the original single audio tracks and the diarization results.

Using an ensemble of pre-trained speaker embedding models from **pyannote**, for each of the diarized entries, we temporally crop the audio tracks, both the single tracks and the mixed track. For each embedding model and each cropped tracks, we extract a feature embedding vector. Then, we measure the Euclidean distance between the single embedding vectors and the mixed embedding vectors to determine which single cropped track is most similar to the mixed cropped track. For each embedding model, we establish mappings between the diarized speakers and the single audio cropped tracks. Finally, we select the optimal mapping between

speakers and audio source, as the one which receives the highest agreement score amongst the embedding model.

This functionality enables us to determine the identity of the active speaker with respect to its source audio track, such that,

```
psifx audio identification pyannote inference \
  --mixed_audio /path/to/input/mixed/mono/audio.wav \
  --mono_audios \
    /path/to/input/single/mono/audio_1.wav \
    ...
    /path/to/input/single/mono/audio_N.wav \
  --diarization /path/to/input/diarization.rttm \
  --identification /path/to/output/identification.json
```

where the inputs are the mono normalized WAV, mixed and single, tracks and the diarization RTTM file, and the output is a simple JSON file, containing the mapping between the speaker identifiers and the single audio sources, as well the agreement score.

This can be run either on CPU or accelerated with CUDA-enabled hardware.

Audio Transcription

Audio transcription aims at answering the question ‘what is spoken?’. Manual transcription is time consuming, it takes for humans between five and ten times longer than the duration of the audio recording itself (Bazillon *et al.* 2008). It is an important task, opening a wide array of downstream natural language processing and text analytic opportunities to researchers, including analyses of communication (Biggiogera *et al.* 2021), automatic content coding in psychotherapy (Gaut, Steyvers, Imel, Atkins, and Smyth 2017).

We integrate OpenAI’s **Whisper** large language model (Radford *et al.* 2023) which provides automatic, high-accuracy transcription across a wide range of languages including Dutch, Spanish, English, Italian, French, German, Polish, Russian, Japanese, German etc., such that,

```
psifx audio transcription whisper inference \
  --audio /path/to/input/mono/audio.wav \
  --transcription /path/to/output/transcription.vtt \
  --model_name large
```

where the input is the mixed mono normalized WAV track, and the output is a VTT file, i.e. Web Video Text Track format, which can be can be opened in any text editor or "dragged-and-dropped" on its original video in a media player, such as **VLC**.

This can be run either on CPU or accelerated with CUDA-enabled hardware. Users can also choose to translate the audio directly to English. Moreover, users can choose the size/performance of the model between **tiny** (< 1GB), **base** (\approx 1GB), **small** (\approx 2GB), **medium** (\approx 5GB) and **large** (\approx 10GB). Finally, if the language is not declared, **Whisper** will attempt to infer the the language from the audio.

We integrate another unique functionality into **psifx** which allows to enhance the transcription and translation outputs. Indeed, **Whisper** only infers the spoken sentences and their respective start and end timings. However, using both **pyannote** diarization and re-identification results,

for each sentence, we can re-trace the identity of the speaker, by computing the intersection-over-unions between the sentence and diarization segments, and assigning the active speaker identity of the best match to that sentence, such that,

```
psifix audio transcription enhance \
  --transcription /path/to/input/transcription.vtt \
  --diarization /path/to/input/diarization.rttm \
  --identification /path/to/input/identification.json \
  --enhanced_transcription /path/to/output/enhanced/transcription.vtt
```

Para-Linguistic Speech Analysis

Para-verbal features have been used across a wide range of research including the study of interactions between partners (Hilpert *et al.* 2019), sentiment analysis (Majumder, Poria, Gangeshwar, Niyati, Rada, and Gelbukj 2019), and prediction of depressive symptoms (Cohn, Cummins, Epps, Goecke, Joshi, and Scherer 2018) and mental health disorders (Naderi, Soleimani, and Matwin 2019).

We integrate **OpenSmile** (Eyben *et al.* 2010), which provides up to 6373 para-verbal speech features, such as fundamental pitch, speech rate, loudness etc. Such features have been highlight to be important for extending analyses about ‘how is it spoken?’ rather than ‘what is spoken?’.

These features can be extracted with,

```
psifix audio speech opensmile inference
  --audio /path/to/input/mixed/mono/audio.wav \
  --diarization /path/to/input/diarization.rttm \
  --features /path/to/output/speech/features.tar.gz
```

where the inputs are the mixed mono normalized WAV track and the diarization RTTM file, the output is a TAR archive containing the features in the CSV format for diarized audio segments.

2.4. Utilities and Visualizations

For video processing, we offer manipulation utilities, such as temporal trimming, spatial cropping and re-sizing. As well as out-of-the-box visualization capabilities, for the body, face and hand poses, as well as face landmarks and gaze tracking. One can superimpose multiple features sets on a single video by simply feeding a processed visualization back into a subsequent visualization tool.

For audio processing, we offer manipulation functionalities, such as extracting audio from video, down-mixing multiple tracks into one, normalizing, e.g. setting the peak level to 0 dBFS, etc. And also the ability to plot the active speaker segments using the diarization results. Additionally, all produced transcriptions can directly be visualized in media players, such as **VLC**.

2.5. Maintenance and Automation

To prevent software decay and automate the deployment of new releases, we have defined a Continuous Integration and Continuous Deployment (CI/CD) pipelines, using **GitHub Actions**.

These workflows take care of automatically building and publishing the Python package to the PyPI repositories, as well as building and pushing the Docker container to DockerHub. Furthermore, the documentation and the reference pages are automatically generated by parsing the source code and published to the **GitHub Pages** associated with the project.

This kind of maintenance functionality and automation is crucial for the lifespan and long-term usability of the package, and fits with the motivational goal of its creators: To provide empirical researchers with usable, useful, open, and community driven feature extraction tools.

3. Data Quality and Package Requirements

Readers are encouraged to consult the original articles relating to the methods implemented within **psifx** for their evaluation and performance metrics. Note that the success of these methods is highly correlated to the quality of the data and recording conditions.

3.1. Recording Environment

The following observations can be made in terms of data quality:

- In multi-camera, multi-microphone setups, the video and audio should be synchronized, e.g. be gen-locked.
- Each video should contain no more than a single skeleton, as required by **MediaPipe**.
- A multi-microphone setup is best, with clear amplitude separation between the microphones. Ideally these microphones would be body-worn microphones (i.e. Lavallier, Lapel, etc.), placed on the collar of the participants for best diarization results.
- The camera resolution and framerate should be adequate to capture the facial and hand keypoints and movements.
- The lighting in the recording environment should ideally be diffuse and bright.
- The recording environment should be quiet and free from background noise.

Of course, in practice, one or more of these requirements may not be met, and it is up to the researchers to perform pilot tests to ensure their setup is adequate for the quality of the features being extracted.

3.2. Hardware and Software Requirements

Detailed installation and dependency instructions are continuously updated and published as part of the package documentation. It is important to note that certain modules benefit significantly from CUDA-enabled hardware, such as a Graphics Processing Unit (GPU). While it is strongly recommended to use such hardware, especially for large-scale data processing, it is not essential. All features can still be run on a CPU.

4. Future Work

At the time of writing, a number of current limitations of **psifx** are worth discussing, and these inform ongoing development work. The skeleton pose estimation module only detects one individual per video, so the video cameras should be positioned to capture one individual only, or at least cropped to show a single individual. This limitation informs ongoing work to explore and integrate alternative tools, in addition to MediaPipe, which can handle multiple individuals in a video frame.

Secondly, there are currently no language analysis tools in **psifx**, prompting efforts to integrate 'text' as another modality, including a range of Natural Language Processing tools for text embedding and language modeling, such as BERT (Devlin, Chang, Lee, and Toutanova 2019). Additionally, physiology is argued to be an important modality for (e.g.) indications of stress or anxiety (Taelman, Vandeput, Spaepen, and Van Huffel 2009), and may therefore also be useful for research into psychological and behavioral phenomena. This informs ongoing work to integrate Infrared / Thermal remote-sensing methods for photoplethysmography (heart rate) and respiration rate estimation.

Furthermore, the current diarization method uses multi-channel audio and is therefore uni-modal, potentially limiting its efficacy. This shortcoming informs ongoing work to develop a multi-modal approach to diarization that leverages both audio embeddings and movements in the keypoints around the mouth. Finally, while the GitHub repository incorporates automation for package and image builds, it does not yet include any unit tests. This omission slows down community-driven development, and integrating unit tests is a priority for the near future.

5. Conclusion

We have presented the open-source project **psifx**, an integrative package for multi-modal estimation of features relevant to psychological and social sciences. The aim of **psifx** is to standardize and streamline the annotation processes of human interactions in order to increase reliability and reproducibility in this field of research. But also to simplify and spread the uptake of state-of-the-art machine learning techniques in the community, by removing a number of technical barriers with respect to setup but also ease-of-use whilst retaining efficiency. Moreover, the open-source and community-driven aspects will help to shaped and nurture organic growth and increase the longevity to the project. We hope that **psifx** provides empirical researchers with usable, modern, open, and community driven extraction tools for non-verbal, para-verbal and verbal features.

Acknowledgements

The funding for this project was awarded to Prof. Dr. Peter Hilpert by the University of Lausanne.

References

Alom M, Taha T, Yakopcic C, Westberg S, Sidike P, et al (2018). "The history began

- from AlexNet: A comprehensive survey on deep learning approaches.” *arXiv preprint*, **arXiv:1803.01164**.
- Atkins D, Steyvers M, Imel Z, Smyth P (2014). “Scaling up the evaluation of psychotherapy: evaluating motivational interviewing fidelity via statistical text classification.” *Implement Sci.*, **9**(49). doi:<https://doi.org/10.1109/FG.2018.00019>.
- Baltrusaitis T, Zadeh A, Lim YC, Morency LP (2018). “OpenFace 2.0: Facial Behavior Analysis Toolkit.” *13th IEEE International Conference on Automatic Face and Gesture Recognition*.
- Bazillon T, Estè Y, Luzzati D (2008). “Manual vs Assisted Transcription of Prepared and Spontaneous Speech.” *Proceedings of the Sixth International Conference on Language Resources and Evaluation (LREC’08)*. doi:http://www.lrec-conf.org/proceedings/lrec2008/pdf/277_paper.pdf.
- Biggiogera J, Boateng G, Hilpert P, Vowels M, Bodenmann G, Neysari M, Nussbeck F, Kowatsch T (2021). “BERT meets LIWC: Exploring state-of-the-art language models for predicting communication behavior in couples’ conflict interactions.” *Companion Publication of the 2021 International Conference on Multimodal Interaction*, (385-389). doi:[10.1145/3461615.3485423](https://doi.org/10.1145/3461615.3485423).
- Bredin H (2023). “pyannote.audio 2.1 speaker diarization pipeline: principle benchmark, and recipe.” *Proc. INTERSPEECH 2023*.
- Bulling L, Heyman R, Bodenmann G (2023). “Bringing behavioral observation of couples into the 21st century.” *Journal of Family Psychology*, **37**(1), 1–9. doi:[10.1037/fam0001036](https://doi.org/10.1037/fam0001036).
- Cao Z, Hidalgo G, T S, Wei SE, Sheikh Y (2018). “OpenPose: Realtime multi-person 2D pose estimation using part affinity fields.” *arXiv:1812.08008v1*.
- Cohn JF, Cummins N, Epps J, Goecke R, Joshi J, Scherer S (2018). “Multimodal assessment of depression from behavioral signals.” *Handbook of Multimodal-Multisensor Interfaces*, **2**, 375–417.
- Creed T, Salama L, Slevin R, Tanana M, Imel Z, Narayanan S, Atkins D (2022). “Enhancing the quality of cognitive behavioral therapy in community mental health through artificial intelligence generated fidelity feedback (Project AFFECT): a study protocol.” *BMC Health Serv. Res.*, **22**(1). doi:<https://doi.org/10.1186/s12913-022-08519-9>.
- Devlin J, Chang M, Lee K, Toutanova K (2019). “BERT: Pre-training of deep bidirectional transformers for language understanding.” *arXiv preprint*, **arXiv:1810.04805v2**.
- Escalera S, Baro X, Guyon I, Escalante H, Tzimiropoulos G, Valstar M, Pantic M, Cohn J, Kanade T (2018). “Guest editorial: The computational face.” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, **40**(11), 2541–2545. doi:<https://doi.org/10.1109/TPAMI.2018.2869610>.
- Esplin S, Anderson S, Bean R, Whiting J (2024). “Behavioral indicators of the therapeutic alliance in relation to discontinuation in couple therapy.” *Contemporary Family Therapy*, **46**, 139–150. doi:<https://doi.org/10.1007/s10591-023-09685-6>.

- Eyben F, Wollmer M, Schuller B (2010). “Opensmile: the munich versatile and fast open-source audio feature extractor.” *Proceedings 18th ACM international conference on multimedia*, (1459-1642). doi:[10.1145/1873951.1874246](https://doi.org/10.1145/1873951.1874246).
- Friedlander M, Lee M, Escudero V (2019). “What we do and do not know about the nature and analysis of couple interaction.” *Couple and Family Psychology*, **8**(1). doi:[10.1037/cfp0000114](https://doi.org/10.1037/cfp0000114).
- Gaut G, Steyvers M, Imel Z, Atkins D, Smyth P (2017). “Content coding of psychotherapy transcripts using labeled topic models.” *IEEE J. Biomed. Health Inform.*, **21**(2), 4746–487. doi:<https://doi.org/10.1109/JBHI.2015.2503985>.
- Gottman J, Notarius C (2000). “Decade review: Observing marital interaction.” *Journal of Marriage and the Family*, **62**(4), 927–947. doi:<https://doi.org/10.1111/j.1741-3737.2000.00927.x>.
- Harris F, Lahey B (1982). “Recording system bias in direct observational methodology: A review and critical analysis of factors causing inaccurate coding behavior.” *Clinical Psychology Review*, **2**(4), 539–556. doi:[https://doi.org/10.1016/0272-7358\(82\)90029-0](https://doi.org/10.1016/0272-7358(82)90029-0).
- Hilpert P, Brick TR, Flueckiger C, Vowels MJ, Ceuleman E, Kuppens P, Sels L (2019). “What Can Be Learned From Couple Research: Examining Emotional Co-Regulation Processes in Face-to-Face Interactions.” *Journal of Counseling Psychology*.
- Imel Z, Pace B, Soma C, Tanana M, Hirsch T, Gibson J, Georgiou P, Narayanan S, Atkins D (2019). “Design feasibility of an automated, machine-learning based feedback system for motivational interviewing.” *Psychotherapy*, **56**(2), 318–328. doi:<https://doi.org/10.1037/pst0000221>.
- Imel Z, Steyvers M, Atkins D (2015). “Computational psychotherapy research: Scaling up the evaluation of patient–provider interactions.” *Psychotherapy*, **52**(1), 19–30. doi:<https://doi.org/10.1037/a0036841>.
- Lucey P, Cohn JF, Kanade T, Saragih J, Ambadar Z, Matthews I (2010). “The extended Cohn-Kanade dataset: a complete dataset for action unit and emotion-specified expression.” *IEEE Conference on Computer Vision and Pattern Recognition Workshops*, pp. 94–101.
- Majumder N, Poria S, Gangeshwar K, Niyati C, Rada M, Gelbukj A (2019). “Variational fusion for multimodal sentiment analysis.” *arXiv preprint*, **arxiv:1908.06008**.
- MediaPipe (2024). URL https://developers.google.com/mediapipe/solutions/vision/pose_landmarker/.
- Mollahosseini A, Hasani B, Mahoor MH (2017). “AffectNet: a database for facial expression, valence, and arousal computing in the wild.” *IEEE Transactions on Affective Computing*.
- Naderi H, Soleimani B, Matwin S (2019). “Multimodal deep learning for mental health disorders prediction from audio speech samples.” *33rd Conference on Neural Information Processing Systems*.

- Peluso P, Freund R (2018). “Therapist and client emotional expression and psychotherapy outcomes: A meta-analysis.” *Psychotherapy*, **55**(4), 461–472. doi:<https://doi.org/10.1037/pst0000165>.
- Plaquet A, Bredin H (2023). “Powerset multi-class cross entropy loss for neural speaker diarization.” *Proc. INTERSPEECH 2023*.
- Radford A, Kim J, Xu T, Brockman G, Mcleavey C, Sutskever I (2023). “Robust Speech Recognition via Large-Scale Weak Supervision.” *Proceedings of the 40th International Conference on Machine Learning, PMLR*, **202**, 28492–28518.
- Ramseyer F (2020). “Motion energy analysis MEA. A primer on the assessment of motion from video.” *Journal of Counseling Psychology*, **67**(4), 536–549. doi:<https://doi.org/10.1037.cou0000407>.
- Sempere-Tortosa M, Fernandez-Carrasco F, Mora-Lizan F, Rizo-Maestre C (2020). “Objective analysis of movement in subjects with ADHD. Multidisciplinary control tool for students in the classroom.” *International Journal of Environmental Research and Public Health*, **17**(15). doi:<https://doi.org/10.3390/ijerph17155620>.
- Taelman J, Vandeput S, Spaepen A, Van Huffel S (2009). “Influence of mental stress on heart rate and heart rate variability.” *IFMBE Proceedings*. doi:https://doi.org/10.1007/978-3-540-89208-3_324.
- Welivita A, Pu P (2020). “A taxonomy of empathetic response intents in human social conversations.” *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 4886–4899. doi:<https://doi.org/10.18653/v1/2020.coling-main.429>.
- Zaletelj J, Kosir A (2017). “Predicting students’ attention in the classroom from Kinect facial and body features.” *Journal of Image and Video Processing*, **80**. doi:<https://doi.org/10.1186/s13640-017-0228-8>.
- Zhou L, Meng X, Liu Z, Wu M, Gao Z, Wang P (2023). “Human pose-based estimation, tracking and action recognition with deep learning: A survey.” *arXiv preprint*, **arxiv:2310.13039**.

Affiliation:

Matthew J. Vowels

The Sense, CHUV, Switzerland

and

Inst. Psychology, University of Lausanne, Switzerland

and

CVSSP, University of Surrey, Guildford, United Kingdom

E-mail: matthew.vowels@chuv.ch