# Finding connected components of a graph using traversals associated with iterative methods for solving systems of linear equations

A.V. Prolubnikov

Novosibirsk State University, Novosibirsk, Russian Federation a.v.prolubnikov@mail.ru

Abstract. To solve many problems on graphs, graph traversals are used, the usual variants of which are the depth-first search and the breadth-first search. Implementing a graph traversal we consequently reach all vertices of the graph that belong to a connected component. The breadth-first search is the usual choice when constructing efficient algorithms for finding connected components of a graph. Methods of simple iteration for solving systems of linear equations with modified graph adjacency matrices and with the properly specified right-hand side can be considered as graph traversal algorithms. These traversal algorithms, generally speaking, turn out to be non-equivalent neither to the depth-first search nor the breadth-first search. The example of such a traversal algorithm is the one associated with the Gauss-Seidel method. For an arbitrary connected graph, to visit all its vertices, the algorithm requires not more iterations than that is required for BFS. For a large number of instances of the problem, fewer iterations will be required.

**Keywords:** graph traversals, connectivity problems on graphs.

### Introduction

Many problems from applications related to infrastructure reliability (transport networks, data networks, large integrated circuits, etc.) may be formulated as graph connectivity problems. These are problems such as finding connected components of a graph, finding its articulation points, bridges, etc.

Let G be a simple labeled graph, that is, an undirected graph without multiple edges and loops, V is the set of its vertices, E is the set of its edges, which have cardinalities n and m, respectively. We will assume that the vertices of the graph are labeled (numbered) in some, generally speaking, arbitrary order from 1 to n. A connected component of an undirected graph is a connected subgraph that is not part of any larger connected subgraph. The connected component is defined by the set of its vertices.

Graph traversal is the iterative process during which, begining from some starting vertex, transitions along the edges of the graph are implemented. The

traversal completed if all vertices of the connected component have been visited. By implementing graph traversal by an algorithm, we mean the iterative process of obtaining the vertices through which the sequential transitions along graph edges are carried out.

Graph traversals are natural tool that used to solve connectivity problems on graphs. Common options for graph traversal algorithms are the depth-first search and the breadth-first search.

The depth-first search (DFS) strategy [1] is to go as deep into a graph as possible. The search algorithm is described recursively: we go through all the edges incident to the current vertex; if an edge leads to a vertex that has not been visited previously, then we run the algorithm from this unconsidered vertex, and then return and continue to iterate over the edges. Return occurs if there are no edges left, which is incident to the current vertex and that lead to yet unvisited vertices of the connected component.

Usually, the breadth-first search (BFS) [1] used to find connected components computationally efficiently for large graphs. Implementing BFS, begining from a starting vertex that belongs to some connected component, we perform transitions to yet unvisited vertices that adjacent to the vertices visited at the previous iteration. At the process of such iterations, we construct reachability tree for the connected component of a graph. At the (k+1)-th level of this tree, there are vertices, which are reached from the starting vertex after sequential transitions along k edges of some simple chain in the graph. The construction of the reachability tree for a connected component can be done in the worst case in at least  $\ell_{\text{max}}$  iterations, where  $\ell_{\text{max}}$  is the length of the simple chain, which connects starting vertex to the vertex farthest from it.

BFS was first used by K. Zuse in 1945, but was not published until 1972 [2]. Subsequently, this algorithm was rediscovered in 1959 by E. Moore as an algorithm for finding the shortest path in a labyrinth [3] and was later independently rediscovered by Lee in the context of the problem of routing conductors on printed circuit boards [4].

Implementations and generalizations of BFS for the case of weighted graphs underlie many algorithms for solving discrete analysis and discrete optimization problems. For example, we do such kind of a graph traversal to find a tree of shortest paths to vertices of a graph, to check a graph for bipartiteness, to compute the maximum flow in a flow network and for many other problems.

For a graph G, let  $s \in V$  be the starting vertex. Algebraic BFS is an implementation of BFS through sequential multiplication of the vector  $x^{(k)}$  by the graph adjacency matrix A:

$$x^{(k+1)} = Ax^{(k)}, (1)$$

where  $x^{(0)} = e_s$ ,  $e_s$  is the s-th unit vector of the standard basis in  $\mathbb{R}^n$ , i.e., all of its components are zero except the s-th component. At each iteration, some components of the multiplied vector become non-zero. The indices of such components of  $x^{(k)}$  are numbers of the vertices visited after the k-th iteration of algebraic BFS.

Algebraic BFS is implemented in software libraries designed to most effectively leverage the features of modern computer architectures for parallel computing and memory optimization. They are focused on working with sparse graphs, which are most often found in applications with large graphs. Such low-level implementations in practice can be faster than implementations of theoretically optimal combinatorial BFS [5,6,7,8,9,10]. Since computational complexity of BFS is of O(m+n), for sparse graphs, that is those for which m = O(n), it allows to obtain algorithms with linear computational complexity [11], which is the best possible for the problem.

And although matrix computations can be efficiently parallelized for computing of the current level of reachability tree, due to its inevitable sequential nature, there are no sublinear implementations of BFS, i.e., there is no implementations with computational complexity of  $O(n^c)$ , where 0 < c < 1.

So, there are two fundamentally different computational approaches to numerical realization of graph traversal algorithms. These are combinatorial and algebraic (linear-algebraic) approaches.

When implementing a *combinatorial* approach, beginning from the starting vertex, the possible options for moving along the edges of a graph are consequently considered, and then we do transitions to yet unreached vertices along some selected edges.

Combinatorial traversal algorithms, being an asymptotically optimal, in practice may be too slow for solving real applied problems with large graphs. The main part of the algorithms is a combinatorial search on possible options for transitions from the current vertex. After this search is performed, we do the transitions. But it turn out to be too slow in comparison to linear-algebaic transformation (1) that gives all possible transitions at once and can be implemented in parallel.

For example, for the graph of a connectivity problem associated with real transport network of a large region, the presence of an edge means that the variable is included in some equation or inequality of a partially integer linear programming problem. The dimensions of the problem are  $n=367\,840$ ,  $m=53\,404\,685$ , and there are 224 connected components in the graph. While it takes about 100 min to find all the connected components using the linear transformation that performed by Gauss-Seidel iterations, it takes 48 hours to solve the instance using basic combinatorial scheme of BFS from [12].

When implementing an algebraic approach, at each iteration of the graph traversal we do some linear transformation of the state vector  $x^{(k)}$  to perform an iteration of the traversal. Analysis of components of the state vector allows us to determine the vertices visited after the iteration has been completed. A visit to a vertex  $i \in V$  is registered if the value of the i-th state vector's component ceases to be zero after the multiplication (1). An example of algebraic approach is algebraic BFS, which uses the operation of multiplying the state vector by adjacency matrix as the linear transformation.

The graph traversal algorithms we consider use another linear transformations, different from multiplying a vector by adjacency matrix. Namely, this is a transformations implemented by a methods of simple iteration for solving a system of linear equations. Applied to the systems of linear algebraic equations (further abbreviated as SLAE) with modified graph adjacency matrices and properly specified right-hand side, variations of simple iteration methods can be considered as graph traversal algorithms. These numerical methods may provide two ways for implementing graph traversal, one of which is performed by the Jacobi method and it is equivalent to BFS, and the other performed by the Gauss-Seidel method and it gives a traversal algorithm, which is not equivalent to BFS.

Unlike DFS and BFS, applied to a graph traversal, Gauss-Seidel iterations leverage given vertex numbering in a graph. Numbering (labeling) of vertices is a mandatory parameter of a problem instance that cannot be ignored performing computations. We call a simple chain in graph as *correct chain* if it is a chain with ascending order of numbers of vertices in it. The approach implemented by the Gauss-Seidel method gives a traversal algorithm, which is neither DFS nor BFS. At each iteration, at first, one BFS iteration is performed, and then, if only these chains exist, we perform transitions through all of the vertices that belong to the correct chains, which are outgoing from already reached vertices.

For an arbitrary connected graph, to visit all its vertices, the traversal associated with the Gauss-Seidel method requires a number of iterations that is no greater than that is required for BFS. For a large number of instances of the problem, fewer iterations will be required. If the graph has enough correct chains in it, even sequential implementation of this traversal algorithm can be faster than the parallel version of BFS.

### 1 Iterative numerical methods for solving SLAE and graph traversals associated with them

Let us consider iterations of the Jacobi method and iterations of the Gauss-Seidel method for solving a SLAE

$$Ax = b. (2)$$

Both of these methods are variations of the simple iteration method. The iterations of the Jacobi method (Jacobi iterations) are as follows:

$$x^{(k+1)} = b - D^{-1}Ax^{(k)},$$

where D is a diagonal matrix with diagonal elements of A. That is, for the i-th component of the approximate solution vector after the (k+1)-th iteration, we have

$$x_i^{(k+1)} = \frac{1}{a_{ii}} \left( b_i - \sum_{j \neq i} a_{ij} x_j^{(k)} \right). \tag{3}$$

Iterations of the Gauss-Seidel method  $(Gauss-Seidel\ iterations)$  have the following form:

$$(L+D)x^{(k+1)} = -Ux^{(k)} + b,$$

where L and U are matrices with, respectively, subdiagonal and supradiagonal elements of A, that is

$$x_i^{(k+1)} = \frac{1}{a_{ii}} \left( b_i - \sum_{l=1}^{i-1} a_{ij} x_j^{(k+1)} - \sum_{j=i+1}^n a_{ij} x_j^{(k)} \right). \tag{4}$$

Using these methods to solve SLAE for graph matrices, in order to achieve solvability of the systems and for convergence of the methods, we modify adjacency matrix of a graph by replacing its zero diagonal elements with sufficiently large value d>0. If the matrix A has diagonal dominance, that is, the following condition is met:

$$|a_{ii}| \ge \sum_{i \ne j} |a_{ij}|$$

for all  $i=\overline{1,n}$ , and at least one of these inequalities is strict, then iterations (3) and (4) converge to the exact solution that exists and that is unique for any right-hand side

Consider SLAE (2), where A is a modified graph adjacency matrix with diagonal dominance and  $b=e_s$ . The algorithms for graph traversals that we consider further, are the ones that we obtain implementing the iterations (3) and (4). After performing not more than n iterations (3) or (4) for  $x^{(0)} = d \cdot e_s$ , maybe without achieving convergence to the exact solution of the SLAE (2), we obtain a sequence of approximate solutions  $x^{(k)}$ . Further, rather than approximate solutions of a SLAE, we shall see them as a current value of the state vector  $x^{(k)}$  for iteration k.

Transitions between vertices of a graph can be registered using these computations. At the (k+1)-th iteration, the transition occurs from one of the vertices reached at the k-th iteration to some vertex  $i \in V$  if the following condition is met:

$$(x_i^{(k)} = 0) \text{ and } (x_i^{(k+1)} \neq 0).$$
 (5)

That is, the vertex i was not visited prior to the (k+1)-th iteration, and it is reached at this iteration. The *frontier*  $\mathcal{F}^{(k+1)}$  for the (k+1)-th iteration is the set of the vertices that ceases to be zero at this iteration.  $\mathcal{F}^{(0)} = \{s\}$ .

Performing Jacobi iterations or Gauss-Seidel iterations with the given initial value of the state vector and the right-hand side of the SLAE (2), we sequentially obtain frontiers of traversals and, finally, visit all vertices of a graph.

All of the simple iteration methods for solving SLAE give the same two traversal algorithms. One of them is given by (3), and, as we shall see, it is equivalent to BFS, and the other is given by (4), and it is not equivalent to BFS.

# 2 Using multiplication instead of division in Jacobi and Gauss-Seidel iterations

Since we do not need to achieve convergence to the exact solution of the SLAE (2) when performing iterations (3) and (4) to implement graph traversal, multiplication can be used instead of dividing in (3) and (4). Without affecting in

any way the graph traversal algorithms considered below and the proofs carried out, it makes text more compact. After this transformation, the values  $x_i^{(k+1)}$  become polynomials of d but not of 1/d.

Moreover, it makes practical sense to use multiplying instead of division in Jacobi and Gauss-Seidel iterations to perform graph traversal. Implementations of division with floating point machine numbers are several times slower than implementations of multiplication, so, after such a replacement, the time required for implementing graph traversal using the modified iterations will be shorter.

Thus, further, considering adjacency graph matrices with initially zero diagonal elements replaced by some d>0, we consider iterations for the two methods as, respectively,

$$x_i^{(k+1)} = \left(-b_i + \sum_{j \neq i} a_{ij} x_j^{(k)}\right) (-d) \tag{6}$$

and

$$x_i^{(k+1)} = \left(-b_i + \sum_{l=1}^{i-1} a_{ij} x_j^{(k+1)} + \sum_{j=i+1}^n a_{ij} x_j^{(k)}\right) (-d).$$
 (7)

### 3 BFS and CCS as combinatorial algorithms

A chain in a graph is a finite sequence of vertices in which each vertex except the last one is connected to the next one in the sequence by an edge. The length of the chain c we denote as  $\ell(c)$ , which is the number of edges in c. We call a chain as a correct chain if its vertices' labels, which are unique numbers, are given in ascending order, i.e., it is a chain  $c = \{i_0, i_1, \ldots, i_k\}, i_j \in V$ , such that  $(i_{j-1}, i_j) \in E, i_{j-1} < i_j, j = \overline{1,k}$ . Correct chains are simple chains, i.e., chains without self-intersections. A walk is a chain where edges and vertices both can be repeated in it.

Let us call as *Correct Chain Search* the traversal algorithm implemented by the iterations of the form (7). For short, we will abbreviate it as *CCS*. We consider both BFS and CCS graph traversals as algorithms of the two types: combinatorial algorithms and algebraic algorithms.

The similarity and the difference between BFS and the traversal algorithm that Gauss-Seidel iterations give are as follows. As for BFS, performing iterations (7), at first, we perform transitions along the edges that is incident to vertices reached at the previous iteration. The difference between these graph traversal algorithms is that if there are outgoing correct chains from the vertices visited at the current iteration, then at the same iteration, transitions through all vertices of these correct chains will be done.

This happens since, when performing the algebraic CCS, computations of individual components of the current state vector are performed using the values of the components, which have been computed earlier in the course of the current iteration. So, if vertex j is adjacent to vertex i and j < i, and the j-th component of the state vector ceases to be zero at the current iteration, then at the same iteration its value will be used for computing of the i-th component and it ceases

to be a zero too if it was zero before. On the contrary, the BFS state vector is updated based only on the results of individual computations for each component of the state vector. It is good to perform these computations in parallel but it not allows the frontier to be wider than neibourghood of the previous frontier vertices. For CCS, if there are correct chains that outgo from the neibourghood of the previous frontier, we traverse through them at the same iteration.

For (k+1)-th iteration of the combinatorial BFS,  $\mathcal{F}^{(k+1)}$  is a set of vertices reached by traversing edges, which are incident to vertices in  $\mathcal{F}^{(k)}$  and which not traversed in the course of the previous k iterations. Let  $\mathcal{N}$  denote the set of vertices that adjacent to vertices in  $\mathcal{F}^{(k)}$ ,  $\mathcal{C}^{(k)}$  is the set of vertices in V visited after k iterations of traversal algorithm.

```
 \begin{split} & \textbf{Combinatorial BFS} \; (G,s\!\in\!V) : \mathcal{C}; \\ 1 \quad k \leftarrow 0, \, x^{(0)} \leftarrow e_s, \, \mathcal{F}^{(0)} \leftarrow \{s\}, \, \mathcal{C}^{(0)} \leftarrow \{s\}; \\ 2 \quad & \textbf{while} \; \mathcal{C}^{(k)} \neq \mathcal{C}^{(k+1)} \colon \\ 3 \qquad \qquad \mathcal{N} \leftarrow \left\{ i \!\in\! V \backslash \mathcal{C}^{(k)} \,\middle|\, (\exists j \in \mathcal{F}^{(k)}) ((i,j) \!\in\! E) \right\}; \\ 4 \qquad \qquad \mathcal{F}^{(k+1)} \leftarrow \mathcal{N}; \\ 5 \qquad \qquad \mathcal{C}^{(k+1)} \leftarrow \mathcal{C}^{(k)} \cup \mathcal{F}^{(k+1)}; \\ 6 \qquad \qquad k \leftarrow k+1; \\ 7 \quad \mathcal{C} \leftarrow \mathcal{C}^{(k+1)}; \\ 8 \quad & \textbf{result} \leftarrow \mathcal{C}. \end{split}
```

Implementing iteration of CCS, in addition to traversing edges that incident to vertices in  $\mathcal{F}^{(k)}$ , we perform traversals of the correct chains that outgo from the vertices that reached through these incident edges. Let  $C(\tilde{s},i)$  be the set of all correct simple chains outgoing from vertex  $\tilde{s} \in \mathcal{N}$  and ending at vertex i.

```
 \begin{aligned}  & \textbf{Combinatorial CCS} \; (G,s \in V) : \mathcal{C}; \\ & 1 \quad k \leftarrow 0, \, x^{(0)} \leftarrow e_s, \, \mathcal{F}^{(0)} \leftarrow \{s\}, \, \mathcal{C}^{(0)} \leftarrow \{s\}; \\ & 2 \quad \textbf{while} \; \mathcal{C}^{(k)} \neq \mathcal{C}^{(k+1)}: \\ & 3 \quad \qquad \mathcal{N} \leftarrow \left\{ i \in V \setminus \mathcal{C}^{(k)} \; \middle| \; (\exists j \in \mathcal{F}^{(k)})((i,j) \in E) \right\}; \\ & 4 \quad \qquad \mathcal{F}^{(k+1)} \leftarrow \mathcal{N} \cup \left\{ i \in V \setminus (\mathcal{C}^{(k)} \cup \mathcal{N}) \; \middle| \; (\exists \tilde{s} \in \mathcal{N})(C(\tilde{s},i) \neq \varnothing) \right\}; \\ & 5 \quad \qquad \mathcal{C}^{(k+1)} \leftarrow \mathcal{C}^{(k)} \cup \mathcal{F}^{(k+1)}; \\ & 6 \quad \qquad k \leftarrow k+1; \\ & 7 \quad \mathcal{C} \leftarrow \mathcal{C}^{(k+1)}; \\ & 8 \quad \textbf{result} \leftarrow \mathcal{C}. \end{aligned}
```

At step 3 of both algorithms, we implement transitions along the edges incident to the vertices from the frontier  $\mathcal{F}^{(k)}$  obtained at the previous iteration. Additional transitions through correct chains from  $C(\tilde{s},i)$  implemented at step 4 of the **Combinatorial CCS**.

### 4 Algebraic versions of the combinatorial BFS and CCS

Let **F** denote the transformations of  $x \in \mathbb{R}^n$  of the form (6) or (7). For a given starting vertex s, the following algorithm gives the connected component  $\mathcal{C}$  to which s belongs.

Finding the connected component  $(G, s \in V) : C$ ;

```
\begin{array}{ll} 1 & k \leftarrow 0, \ x^{(0)} \leftarrow e_s, \ \mathcal{F}^{(0)} \leftarrow \{s\}, \ \mathcal{C}^{(0)} \leftarrow \{s\}; \\ 2 & \textbf{while} \ \mathcal{C}^{(k)} \neq \mathcal{C}^{(k+1)}: \\ 3 & x^{(k+1)} \leftarrow \textbf{F}\big(x^{(k)}\big); \\ 4 & \mathcal{F}^{(k+1)} \leftarrow \big\{i \in V(G) \ \big| \ \big(x_i^{(k)} = 0\big) \land \big(x_i^{(k+1)} \neq 0\big)\big\}; \\ 5 & \mathcal{C}^{(k+1)} \leftarrow \mathcal{C}^{(k)} \cup \mathcal{F}^{(k+1)}; \\ 6 & k \leftarrow k+1; \\ 7 & \mathcal{C} \leftarrow \mathcal{C}^{(k)}; \\ 8 & \textbf{result} \leftarrow \mathcal{C}. \end{array}
```

The algorithm that finds all connected components of a graph G is given below. Connected components are denoted as  $C_i$ ,  $i = \overline{1, K}$ , where K is the number of connected components of the graph G.

Finding all connected components  $(G): \{C_1, \ldots, C_K\};$ 

```
\begin{array}{lll} 1 & V' \leftarrow \varnothing, \ K \leftarrow 1; \\ 2 & \textbf{while} \ V' \neq V; \\ 3 & & \text{select} \ s \in V \setminus V'; \\ 4 & \mathcal{C}_K \leftarrow \textbf{Finding the connected component} \ (G,s); \\ 5 & V' \leftarrow V' \cup \mathcal{C}_K; \\ 6 & K \leftarrow K + 1; \\ 7 & \textbf{result} \leftarrow \{\mathcal{C}_1, \dots, \mathcal{C}_K\}. \end{array}
```

We find all connected components of a graph by sequentially choosing new starting vertices for traversals that we performs at the step 4 of the algorithm.

Let us show that iterations (6) give us the graph traversal algorithm, which is equivalent to the combinatorial BFS, and that iterations (7) give us the graph traversal algorithm, which is equivalent to the combinatorial CCS.

### 5 Jacobi iterations as implementation of the combinatorial BFS

Considering BFS, for starting vertex s and  $i \in \mathcal{F}^{(k+1)}$ , let C(s,i) be the set of simple chains, which connect s with i. All of the chains, if there is any, have the length k.

**Lemma 1.** For iterations (6), we have 
$$x_i^{(t)} = 0$$
,  $t = \overline{1, k}$ , and

$$x_i^{(k+1)} = \sum_{c \in C(s,i)} (-1)^{k+1} d^{k+2} \neq 0$$

if and only if  $i \in \mathcal{F}^{(k+1)}$  for the combinatorial BFS.

**Proof.** We carry out the proof by induction on the number k of iterations performed.

Let k=1. For  $(s,i)\in E$ , to obtain the values of  $x_i^{(1)}$  from equations (6), the value of  $x_s^{(0)}=d$  substituted into them, and we have  $x_i^{(1)}=-d^2\neq 0$  as a result. If the *i*-th equation in (6) does not contain  $x_s^{(k)}$  in its right-hand side, that is  $a_{is}=0$  and  $(s,i)\not\in E$ , then  $x_i^{(1)}=0$ . That is, Lemma 1 is true for this case.

Suppose Lemma 1 is true for the k-th iteration. That is, for t < k and  $i \in \mathcal{F}^{(k)}$ , we have  $x_i^{(t)} = 0$ , and

$$x_i^{(k)} = \sum_{c \in C(s,i)} (-1)^k d^{k+1} \neq 0.$$

Let us show that Lemma 1 is true for the (k+1)-th iteration too. Since Lemma 1 is true for the k-th iteration, for  $i \neq s$ , we have:

$$x_i^{(k+1)} = \left(\sum_{j=1}^n a_{ij} x_j^{(k)}\right) (-d) = \left(\sum_{(i,j)\in E} \left(\sum_{c\in C(s,j)} (-1)^k d^{k+1}\right)\right) (-d) = C(s,j)$$

$$= \left(\sum_{(i,j) \in E} \left(\sum_{c \in C(s,j)} (-1)^{k+1} d^{k+2}\right)\right) = \sum_{c \in C(s,i)} (-1)^{k+1} d^{k+2} \neq 0.$$

So, the condition (5) is met for  $i \in \mathcal{F}^{(k+1)}$ . Let us show that  $x_i^{(k+1)} = 0$  if  $i \notin \mathcal{F}^{(k+1)}$  and the vertex i was not visted at previous k iterations of the combinatorial BFS. This means that among the vertices j adjacent to i there are no ones for which there have been built simple chains of length k connecting s and j in the course of the previous k iterations. Since Lemma 1 is true for k, this means that for all such j we have  $x_j^{(k)} = 0$ . Therefore,

$$x_i^{(k+1)} = \left(\sum_{i=1}^n a_{ij} x_j^{(k)}\right) (-d) = \left(\sum_{(i,j) \in E}^n x_j^{(k)}\right) (-d) = 0 \cdot (-d) = 0.$$

Lemma 1 is proven.  $\Box$ 

Thus, by Lemma 1 and by (5), the iterations (6) produce the same frontiers  $\mathcal{F}^{(k)}$ ,  $k=1,2,\ldots$ , as iterations of the combinatorial BFS produce. This means that we obtain the same graph traversals during execution of the iterations. Theorem 1 follows from that.

**Theorem 1.** For a given graph G and starting vertex s, the combinatorial BFS and Jacobi iterations with  $b=e_s$  and  $x^{(0)}=d\cdot e_s$  give the same traversal.

### 6 Gauss-Seidel iterations as implementation of the combinatorial CCS

### 6.1 Computing components of the state vector through the chains outgoing from the current frontier

Considering the (k+1)-th iteration of the combinatorial CCS and iteration of the form (7) with the same number, we will use the following notation. Unlike to the previous section, we denote as  $C(\tilde{s},i)$  the set of simple chains connecting the vertices  $\tilde{s} \in \mathcal{F}^{(k)}$  with vertices  $i \in \mathcal{F}^{(k+1)}$ . Along edges of these chains transitions are made at (k+1)-th iteration of the combinatorial CCS. Let c+(j,i) denotes the chain obtained from c by connecting its last vertex j to vertex i by the edge  $(j,i) \in E$ .

All computations in iterations (6) and (7) can be decomposed into computations that implemented in accordance with traversals of individual chains (not necessary simple) connecting the starting vertex and the vertex i, for which the value  $x_i^{(k+1)}$  is computing.

We shall consider only simple chains since it will be enough for the proofs of the followed lemma and theorem. Indeed, when implemeting computations of the form (6) or (7), the computations for some set of walks from starting vertex to other vertices are constitute the set of all individual operations with machine numbers implemented in the course of one iteration.

Chains that can be traversed in the course of one iteration of combinatorial CCS, that is, chains  $c = \{i_0, i_1, \ldots, i_{\ell(c)}\} \in C(\tilde{s}, i), i_0 = \tilde{s}$ , are chains of the two types. A chain  $c \in C(\tilde{s}, i)$  is a chain of type (I) if  $i_0 < i_1$ , and the chain type is (II) if  $i_0 > i_1$ . For both type chains, maybe except the first edge  $(i_0, i_1)$ , we have  $i_{j-1} < i_j$  for  $j = \overline{1, \ell(c)}$ . Transition along the edge  $(i_0, i_1)$  is implemented at step 3 of the combinatorial CCS and transitions along subsequent edges of the chain are performed at the step 4.

For the vertices  $\tilde{s}, i \in V$ , let  $\ell(\tilde{s}, i) = \max\{\ell(c) \mid c \in C(\tilde{s}, i)\}$ .  $\ell(\tilde{s}, i)$  is the maximum length of a simple chain outgoing from  $\tilde{s} \in \mathcal{F}^{(k)}$  along which  $i \in \mathcal{F}^{(k+1)}$  is reached at the (k+1)-th iteration.

Let  $i_0 = \tilde{s}$ ,  $i_{\ell(c)} = i$  in the chain  $c = \{i_0, \ldots, i_{\ell(c)}\}$  and  $v_{\tilde{s}}$  is the value that is transmitted through the chain c that connects the vertex  $\tilde{s}$  and the vertex i. As a result of this transmission of  $v_{\tilde{s}}$ , by traversing the chain c, we obtain the contribution  $x_{i,c}^{(k+1)}$  into the whole value of  $x_i^{(k+1)}$  by this chain. There must be a chain through which the non-zero value  $v_{\tilde{s}}$  is transmitted to i to have  $x_i^{(k+1)} = 0$ .

So, for  $\tilde{s} \in \mathcal{F}^{(k)}$  and  $c \in C(\tilde{s}, i)$  we define  $x_{i,c}^{(k+1)}$  as the contribution of the value  $v_{\tilde{s}}$ , which transmitted along the chain  $c \in C(\tilde{s}, i)$  from  $\tilde{s}$  to i:

$$x_{i,c}^{(k+1)} = v_{\tilde{s}} \cdot (-d)^{\ell(c)}, \tag{8}$$

where

$$v_{\tilde{s}} = \begin{cases} x_{\tilde{s}}^{(k+1)}, & \text{if } c \text{ is a chain of type (I);} \\ x_{\tilde{s}}^{(k)}, & \text{if } c \text{ is a chain of type (II).} \end{cases}$$

Traversals along individual chains in (7) computationally performs by the following algorithm.

Chain traversal algorithm  $(c, v_{\tilde{s}}): x_{i,c}^{(k+1)};$ 

```
\begin{array}{lll} 1 & c' \leftarrow \varnothing; \\ 2 & x_{i_0,c'}^{(k+1)} \leftarrow v_{\tilde{s}}; \\ 3 & \textbf{for } t = \overline{1,\ell(c)}; \\ 4 & c'' \leftarrow c' + (i_{t-1},i_t); \\ 5 & x_{i_t,c''}^{(k+1)} \leftarrow x_{i_{t-1},c'}^{(k+1)} \cdot (-d); \\ 6 & c' \leftarrow c''; \\ 7 & \textbf{result} \leftarrow x_{i_t,c'}^{(k+1)}. \end{array}
```

We can decompose the set of all computations of an iteration (7) to computations of individual chains' contributions which implemented by **Chain traversal algorithm**. Using this decomposition, we can implement computations for an iteration of the form (7) in parallel.

For 
$$\tilde{s} \in \mathcal{F}^{(k)}$$
, we define  $x_{i(\tilde{s})}^{(k+1)}$  as
$$x_{i(\tilde{s})}^{(k+1)} = \sum_{c \in C(\tilde{s}, i)} x_{i,c}^{(k+1)}. \tag{9}$$

If  $C(\tilde{s},i)=\varnothing$  then  $x_{i(\tilde{s})}^{(k+1)}=0$  since there are no chains, through which the contributution  $v_{\tilde{s}}$  can be transmitted to i from  $\tilde{s}$ . The value  $x_{i(\tilde{s})}^{(k+1)}$  is the sum of all contributions to the value of  $x_i^{(k+1)}$ , which are transmitted through all chains in  $C(\tilde{s},i)$  at the course of the (k+1)-th iteration (7).

Note that during implementation of the algebraic CCS, reaching vertices from  $\mathcal{F}^{(k+1)}$  can be done not only along simple chains. Traversal of a chain of the type (II) can lead to the fact that a correct chain that otgoes from some vertex j already reached at the course of an iteration (7), at the same iteration will repeatedly pass through the vertex  $\tilde{s}$  from which j was reached. The value obtained along traversals of a such loops will be added to the initial value of  $x_{\tilde{s}}^{(k)}$ , further transmitted along the chains of  $C(\tilde{s},i)$ . That is, it will be included in  $v_{\tilde{s}}$  from (8) while  $\tilde{s}$  is revisited. This happens when  $\tilde{s} > j$ .

Consider the examples we have on Fig. 1. On the pic. 1. a) and pic. 1. b) of the Fig. 1, the values of  $x_i^{(k+1)}$  for the two first stages of the first iteration of the algebraic CCS (steps 3 and 4) for the graph are shown. The starting vertex is vertex 2. Transmitting from the loop  $c_1 = \{2, 1, 2\}$ , the value  $v_s = d$  contributes  $-d^4$  to  $x_3^{(1)}$  through the whole walk  $\{2, 1, 2, 3\}$ , which is traversed at the 1-st iteration. Adding the contribution of the simple chain  $c_2 = \{1, 3\}$ , which constitutes of the one edge (1, 3), we obtain the final value of  $x_3^{(1)}$  for the 1-st iteration as sum of contributions of the walk and the chain:

$$x_3^{(1)} = x_{3,2}^{(1)} = x_{3,c_2}^{(1)} = (x_2^{(1)} + x_{2,c_1}^{(1)}) \cdot (-d) = (d+d^3) \cdot (-d) = -d^2 - d^4,$$

since 
$$x_2^{(1)} = d$$
,  $x_{2,c_1}^{(1)} = d^3$ .

The pic. 2. of the Fig. 1 shows how do the contributions coming to the vertex 5 along two different correct chains, which traversed at one iteration of CSS, add together. These chains are  $c_1 = \{1, 3, 4, 5\}$  and  $c_2 = \{1, 2, 5\}$ . The starting vertex is vertex 1.

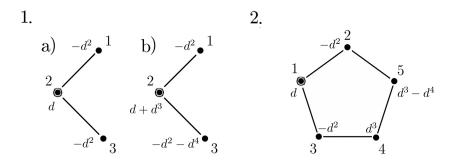


Fig. 1. Contributions of walks and chains.

### 6.2 Gauss-Seidel iterations as implementation of the combinatorial CCS

For  $i \neq s$ , we have from (7) that

$$x_i^{(k+1)} = \left(\sum_{j=1}^{i-1} a_{ij} x_j^{(k+1)} + \sum_{j=i+1}^n a_{ij} x_j^{(k)}\right) (-d) =$$

$$= \sum_{\substack{j < i \\ (i,j) \in E}} x_j^{(k+1)} \cdot (-d) + \sum_{\substack{j > i \\ (i,j) \in E}} x_j^{(k)} \cdot (-d).$$

That is

$$x_i^{(k+1)} = \sum_{\substack{j < i \\ (i,j) \in E}} x_j^{(k+1)} \cdot (-d) + \sum_{\substack{j > i \\ (i,j) \in E}} x_j^{(k)} \cdot (-d). \tag{10}$$

**Lemma 2.** Let  $i \in \mathcal{F}^{(k+1)}$  for the combinatorial CCS, and  $x_i^{(k+1)}$  is the value computed at the (k+1)-th iteration (7). Then

$$x_i^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}^{(k)}} x_{i(\tilde{s})}^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}^{(k)}} \sum_{c \in C(\tilde{s}, i)} x_{i, c}^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}^{(k)}} \sum_{c \in C(\tilde{s}, i)} v_{\tilde{s}} \cdot (-d)^{\ell(c)}.$$
(11)

**Proof.** We shall prove Lemma 2 by induction on the number of iterations of the combinatorial CCS and iterations of the form (7). We prove the basis of induction

and the inductive assumption by induction also. We perform it by induction on length of chains from  $C(\tilde{s}, i)$  for  $\tilde{s} \in \mathcal{F}^{(k)}$  and  $i \in \mathcal{F}^{(k+1)}$ .

Let us show that Lemma 2 is true for the 1-st iteration, that is, for k=1. The frontier at the 1-st iteration consists of a single starting vertex s:  $\mathcal{F}^{(0)} = \{s\}$ . Let  $i \in \mathcal{F}^{(1)}$  be such that  $\ell(s,i)=1$ . Then C(s,i) consists of a single chain  $c=\{s,i\}$  of length 1, i.e. it consists of the one edge  $(s,i) \in E$ . Thus we have  $x_{i,c}^{(1)} = -d^2$  by (8), since  $v_s = d$  at the 1-st iteration (7).

For the 1-st iteration (7), we have  $x_j^{(0)} = 0$  for all j > i,  $j \neq s$ . At the 1-st iteration, we also have  $x_j^{(1)} = 0$  for j < i,  $j \neq s$ . If it is not holds, then  $\ell(s,i) > 1$ , since there must be a chain  $c \in C(s,j)$  with  $\ell(c) > 1$  through which the value  $v_s = x_s^{(0)}$  is transmitted to j by chain traversal algorithm.

Consequently, all the terms in (10) are zero except for  $x_s^{(0)}$  or  $x_s^{(1)}$ , and we have

$$x_i^{(1)} = x_{i(s)}^{(1)} = x_{i,c}^{(1)} = -d^2,$$

where  $c = \{s, i\}$ . Thus, it is shown that Lemma 2 is true for vertices i reached at the 1-st iteration (7) along chains of length 1.

Suppose that Lemma 2 is true at the 1-st iteration of (7) for all such  $i \in \mathcal{F}^{(1)}$  that  $\ell(s,i) = l$ . Let us show that it will also be true for all such  $i \in \mathcal{F}^{(1)}$  that  $\ell(s,i) = l+1$ .

Since at the 1-st iteration  $x_i^{(0)} = 0$  for j > i,  $j \neq s$ , then from (10) we have:

$$x_i^{(1)} = \sum_{\substack{j < i, j \neq s, \\ (i, j) \in E}} x_j^{(1)} \cdot (-d) + \alpha \cdot v_s \cdot (-d), \tag{12}$$

where  $\alpha=1$  if  $(s,i)\in E$ , and  $\alpha=0$  otherwise. If  $x_j^{(1)}\neq 0$ , then this means that either j=s and  $\alpha=1$  or, if  $j\neq s$ , we have  $C(s,j)\neq \varnothing$ . For all  $c\in C(s,j)$ ,  $\ell(c)\leq \ell(s,j)\leq l$  since  $\ell(s,i)=l+1$ . Therefore, by the induction assumption on l, we obtain:

$$x_j^{(1)} = \sum_{c' \in C(s,j)} x_{j,c'}^{(1)}.$$
 (13)

Since  $x_{i,c}^{(1)} = x_{j,c'}^{(1)} \cdot (-d)$  for  $c' \in C(s,j)$ , c = c' + (j,i),  $c \in C(s,i)$ , then, substituting (13) into (12) and having  $v_s \cdot (-d) = x_{i,c}^{(1)}$  for  $c = \{s,i\}$ , we obtain

$$x_i^{(1)} = \sum_{c \in C(s,i)} x_{i,c}^{(1)} = x_{i(s)}^{(1)}$$
(14)

for both possible values of  $\alpha$ .

Thus, for the 1-st iteration, Lemma 2 is true for vertices  $i \in \mathcal{F}^{(1)}$  reached along chains in  $C(\tilde{s}, i)$  of any length.

Assuming that Lemma 2 is true for all iterations up to the k-th, let us show that it will also be true at the (k+1)-th iteration.

Consider  $i \in \mathcal{F}^{(k+1)}$  such that  $\ell(\tilde{s}, i) = 1$  for a vertex  $\tilde{s} \in \mathcal{F}^{(k)}$ . For this case, all chains  $c \in C(\tilde{s}, i)$  are edges  $(\tilde{s}, i) \in E$ , each of which, in (10), corresponds to a non-zero term of the form

$$x_{i,c}^{(k+1)} = x_{\tilde{s}}^{(k+1)} \cdot (-d)$$

if  $\tilde{s} < i$ , or

$$x_{i,c}^{(k+1)} = x_{\tilde{s}}^{(k)} \cdot (-d),$$

if  $\tilde{s} > i$ . Therefore we have:

$$x_i^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}^{(k)}} \sum_{c \in C(\tilde{s},i)} x_{i,c}^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}^{(k)}} x_{i(\tilde{s})}^{(k+1)}.$$

That is, Lemma 2 is true for  $i \in \mathcal{F}^{(k+1)}$  such that  $\ell(\tilde{s}, i) = 1$  for  $\tilde{s} \in \mathcal{F}^{(k)}$ .

Suppose that it is true for all  $i \in \mathcal{F}^{(k+1)}$  such that  $\ell(\tilde{s}, i) \leq l$ ,  $\tilde{s} \in \mathcal{F}^{(k)}$ . Let us show that it will also be true for all  $i \in \mathcal{F}^{(k+1)}$  such that  $\ell(\tilde{s}, i) = l+1$ .

Let  $\mathcal{F}_{1}^{(k)} = \{ \tilde{s} \in \mathcal{F}^{(k)} \mid \tilde{s} < i \}, \ \mathcal{F}_{2}^{(k)} = \{ \tilde{s} \in \mathcal{F}^{(k)} \mid \tilde{s} > i \}, \ \mathcal{F}_{1}^{(k)} \cup \mathcal{F}_{2}^{(k)} = \mathcal{F}^{(k)}.$  Consider the first term  $S_{1}$  in the right-hand side of (10):

$$S_1 = \sum_{\substack{j < i, \\ (i,j) \in E}} x_j^{(k+1)} \cdot (-d).$$

If j < i and  $x_j^{(k+1)} \neq 0$ , then  $C(\tilde{s}, j) \neq \emptyset$  by induction assumption on k. The length of each chain in  $C(\tilde{s}, i)$  is less than or equal to l, since otherwise  $\ell(\tilde{s}, i) > l+1$ . Therefore, by induction on l, we have

$$S_1 = \sum_{\tilde{s} \in \mathcal{F}_1^{(k)}} \sum_{c \in C(\tilde{s}, j)} x_{j, c}^{(k+1)} \cdot (-d).$$

Since by (8) we have  $x_{j,c}^{(k+1)} \cdot (-d) = x_{i,c'}^{(k+1)}$ , where c' = c + (j,i), then, taking into account (9), we obtain:

$$S_1 = \sum_{\tilde{s} \in \mathcal{F}_1^{(k)}} \sum_{c \in C(\tilde{s}, i)} x_{i, c}^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}_1^{(k)}} x_{i(\tilde{s})}^{(k+1)}.$$
 (15)

Consider the second term  $S_2$  in (10):

$$S_2 = \sum_{\substack{j > i, \\ (i, j) \in E}} x_j^{(k)} \cdot (-d).$$

By induction assumption on k, for j > i, we have  $x_j^{(k)} \neq 0$  if  $j \in \mathcal{F}_2^{(k)}$ . Therefore,

$$S_2 = \sum_{\tilde{s} \in \mathcal{F}_2^{(k)}} x_{i(\tilde{s})}^{(k+1)} \tag{16}$$

since  $x_{\tilde{s}}^{(k)}\cdot(-d)=x_{i,c}^{(k+1)}=x_{i(\tilde{s})}^{(k+1)}$  for chains of the form  $c=\{\tilde{s},i\},\ \ell(c)=1,$   $(\tilde{s},i)\in E.$ 

Adding  $S_1$  and  $S_2$ , from (15) and (16) we obtain:

$$x_i^{(k+1)} = S_1 + S_2 = \sum_{\tilde{s} \in \mathcal{F}_1^{(k)}} x_{i(\tilde{s})}^{(k+1)} + \sum_{\tilde{s} \in \mathcal{F}_2^{(k)}} x_{i(\tilde{s})}^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}^{(k)}} x_{i(\tilde{s})}^{(k+1)}.$$

This means that Lemma 2 is true at the (k+1)-th iteration for all  $i \in \mathcal{F}^{(k+1)}$  such that  $\ell(\tilde{s}, i) = l+1$ . Thus, by induction on l, Lemma 2 true for all vertices in  $\mathcal{F}^{(k+1)}$ , i.e., it is true for the (k+1)-th iteration. It means that, by the induction on k, it is true for an arbitrary k  $(k \le n)$ .  $\square$ 

**Theorem 2.** For a given graph G and starting vertex s, the combinatorial CCS and Gauss-Seidel iterations with  $b=e_s$  and  $x^{(0)}=d\cdot e_s$  give the same traversal.

**Proof.** To prove Theorem 2, it is necessary to show that, in the course of implementing iterations (7), the condition (5) for the vertex  $i \in V$  will be met if and only if  $i \in \mathcal{F}^{(k+1)}$  for the combinatorial CCS.

By the proven Lemma 2,

$$x_i^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}^{(k)}} \sum_{c \in C(\tilde{s},i)} v_{\tilde{s}} \cdot (-d)^{\ell(c)},$$

where  $v_{\tilde{s}} = O(d^{\ell(s,\tilde{s})}) \neq 0$ , and where  $\ell(s,\tilde{s})$  is the maximum length of a simple chain connecting the starting vertex s and the vertex  $\tilde{s} \in \mathcal{F}^{(k)}$ . By definition (8), when traversing along each edge of a such chain, the value  $v_{\tilde{s}}$ , which is a sum of powers d taken with some coefficients, is multiplied by -d. In this case, the same powers d in the resulting values  $x_{i,c}^{(k+1)}$  have the same sign, since they correspond to the same number of multiplications by -d implemented by **Chain traversal algorithm** for chains of the same lengths. Therefore, if  $C(\tilde{s},i)\neq\varnothing$ , then  $x_i^{(k+1)}\neq0$  and condition (5) is met for  $i\in\mathcal{F}^{(k+1)}$  of the combinatorial CCS after the (k+1)-th iteration.

Let  $i \in V \setminus \mathcal{C}^{(k+1)}$  for the combinatorial CCS, that is, vertex i is not reached after the (k+1)-th iteration. This means that  $C(\tilde{s}, i) = \emptyset$  for every  $\tilde{s} \in \mathcal{F}^{(k)}$ . By the proven Lemma 2, it follows from this that

$$x_i^{(k+1)} = \sum_{\tilde{s} \in \mathcal{F}^{(k)}} x_{i(\tilde{s})}^{(k+1)} = 0,$$

since we have  $x_{i(\tilde{s})}^{(k+1)} = 0$  if  $C(\tilde{s}, i) = \emptyset$ . So the condition (5) is not met for  $i \in V \setminus C^{(k+1)}$ .

Thus, each iteration of the combinatorial CCS will produce the same frontiers  $\mathcal{F}^{(k)}$ ,  $k=1,2,\ldots$ , as the iterations (7) produce. This means that we obtain the same graph traversals during execution of the iterations.  $\square$ 

## 7 Examples of graph traversals implemented by Jacobi and Gauss-Seidel iterations

For all examples considered in this sections, the starting vertex is vertex 1. We use d=2 for diagonal elements of graph matrices.

Let us compare the traversals implemented by BFS and CCS for the graph G presented at Fig. 2. For this graph, the transformation  $\mathbf{F}$  of the form (6) is given by the following equations:

$$\begin{cases}
x_1^{(k+1)} = \left(-1 + x_2^{(k)}\right) (-d), \\
x_2^{(k+1)} = \left(x_1^{(k)} + x_3^{(k)} + x_6^{(k)}\right) (-d), \\
x_3^{(k+1)} = \left(x_2^{(k)} + x_4^{(k)} + x_7^{(k)}\right) (-d), \\
x_4^{(k+1)} = \left(x_3^{(k)}\right) (-d), \\
x_5^{(k+1)} = \left(x_6^{(k)}\right) (-d), \\
x_6^{(k+1)} = \left(x_2^{(k)} + x_5^{(k)} + x_7^{(k)}\right) (-d), \\
x_7^{(k+1)} = \left(x_3^{(k)} + x_6^{(k)} + x_8^{(k)}\right) (-d), \\
x_7^{(k+1)} = \left(x_3^{(k)} + x_6^{(k)} + x_8^{(k)}\right) (-d), \\
x_8^{(k+1)} = \left(x_7^{(k)}\right) (-d).
\end{cases}$$
(17)




Fig. 2. Graph on 8 vertices.

Iterations of the traversal, which the algorithm gives for the graph, are presented at Fig. 3. It takes 4 iterations to complete the traversal of the graph using BFS, i.e., Jacobi iterations.

For an CCS iteration, the transformation **F** of the state vector  $x^{(k)}$  is given by the equations (18):

$$\begin{cases}
x_1^{(k+1)} = \left(-1 + x_2^{(k)}\right) d, \\
x_2^{(k+1)} = \left(x_1^{(k+1)} + x_3^{(k)} + x_6^{(k)}\right) (-d), \\
x_3^{(k+1)} = \left(x_2^{(k+1)} + x_4^{(k)} + x_7^{(k)}\right) (-d), \\
x_4^{(k+1)} = \left(x_3^{(k+1)}\right) (-d), \\
x_5^{(k+1)} = \left(x_6^{(k)}\right) (-d), \\
x_6^{(k+1)} = \left(x_2^{(k+1)} + x_5^{(k+1)} + x_7^{(k)}\right) (-d), \\
x_7^{(k+1)} = \left(x_3^{(k+1)} + x_6^{(k+1)} + x_8^{(k)}\right) (-d), \\
x_7^{(k+1)} = \left(x_3^{(k+1)} + x_6^{(k+1)} + x_8^{(k)}\right) (-d), \\
x_8^{(k+1)} = \left(x_7^{(k+1)}\right) (-d).
\end{cases} \tag{18}$$

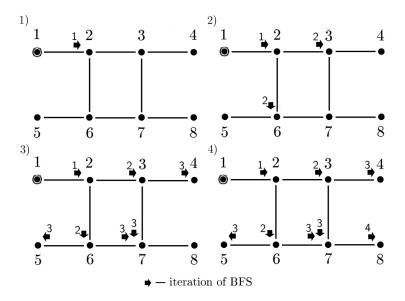


Fig. 3. Graph traversal implemented by BFS.

Implementing iterations (18), we obtain a traversal of the graph just for 2 iterations. As we may see, unlike BFS, when performing the first iteration (18) of CCS, a transition will be made along correct chains outgoing from vertex 2, which is reached from vertex 1 at the same iteration (Fig. 4).

The state vectors  $x^{(k)}$  and the sets  $\mathcal{C}^{(k)}$  of vertices reached after the k-th iterations of BFS and CCS implemented by iterations (17) and (18) are listed below.

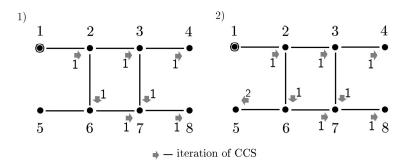


Fig. 4. Graph traversal implemented by CCS.

### BFS (implemented by (17)):

```
Initialization: x^{(0)} = (2,0,0,0,0,0,0,0), \mathcal{F}^{(0)} = \{1\}, \mathcal{C}^{(0)} = \{1\}.

1) x^{(1)} = (2,-4,0,0,0,0,0,0), \mathcal{F}^{(1)} = \{2\}, \mathcal{C}^{(1)} = \{1,2\};

2) x^{(2)} = (10,-4,8,0,0,8,0,0), \mathcal{F}^{(2)} = \{3,6\}, \mathcal{C}^{(2)} = \{1,2,3,6\};

3) x^{(3)} = (10,-52,8,-16,-16,8,-32,0), \mathcal{F}^{(3)} = \{5,7\}, \mathcal{C}^{(3)} = \{1,2,3,4,5,6,7\};

4) x^{(4)} = (106,-52,200,-16,-16,200,-32,64), \mathcal{F}^{(4)} = \{8\}, \mathcal{C}^{(4)} = \{1,2,3,4,5,6,7,8\}.

CCS (implemented by (18)):
```

$$\begin{array}{l} \text{Initialization:} \ x^{(0)} = (2,0,0,0,0,0,0,0), \ \mathcal{F}^{(0)} = \{1\}, \ \mathcal{C}^{(0)} = \{1\}. \\ 1) \ x^{(1)} = (2,-4,8,-16,0,8,-32,64), \ \mathcal{F}^{(1)} = \{2,3,4,6,7,8\}, \ \mathcal{C}^{(1)} = \{1,2,3,4,6,7,8\}; \\ 2) \ x^{(2)} = (10,-52,200,-400,-16,200,-928,1856), \ \mathcal{F}^{(2)} = \{5\}, \ \mathcal{C}^{(2)} = \{1,2,3,4,5,6,7,8\}. \end{array}$$

For the graph shown at Fig. 5, the transformation **F** of the state vector  $x^{(k)}$  of the form (6) is given by the equations (19):

$$\begin{cases}
x_1^{(k+1)} = \left(-1 + x_2^{(k)}\right)(-d), \\
x_2^{(k+1)} = \left(x_1^{(k)} + x_3^{(k)}\right)(-d), \\
x_3^{(k+1)} = \left(x_2^{(k)} + x_4^{(k)}\right)(-d), \\
x_4^{(k+1)} = \left(x_3^{(k)} + x_5^{(k)}\right)(-d), \\
x_5^{(k+1)} = \left(x_4^{(k)}\right)(-d).
\end{cases} (19)$$

The transformation  $\mathbf{F}$  implemented by CCS for the graph is as follows:

$$\begin{cases}
x_1^{(k+1)} = \left(-1 + x_2^{(k)}\right)(-d), \\
x_2^{(k+1)} = \left(x_1^{(k+1)} + x_3^{(k)}\right)(-d), \\
x_3^{(k+1)} = \left(x_2^{(k+1)} + x_4^{(k)}\right)(-d), \\
x_4^{(k+1)} = \left(x_3^{(k+1)} + x_5^{(k)}\right)(-d), \\
x_5^{(k+1)} = \left(x_4^{(k+1)}\right)(-d).
\end{cases} (20)$$




Fig. 5. Correct chain.

For the graph at Fig. 5, we have the correct chain outgoing from vertex 2, to which all other vertices of this graph belong except the starting one. So all vertices of this graph will be visited at the course of the first iteration of CCS (Fig. 6).




Fig. 6. Graph traversal implemented by CCS.

For BFS, it takes four iterations, which is the maximum possible number of iterations considering all possible starting vertices for a traversal.

### BFS (implemented by (19)):

```
\begin{array}{l} \text{Initialization:} \ x^{(0)} = (2,0,0,0,0), \ \mathcal{F}^{(0)} = \{1\}, \ \mathcal{C}^{(0)} = \{1\}. \\ 1) \ x^{(1)} = (2,-4,0,0,0), \ \mathcal{F}^{(1)} = \{2\}, \ \mathcal{C}^{(1)} = \{1,2\}; \\ 2) \ x^{(2)} = (10,-4,8,0,0), \ \mathcal{F}^{(2)} = \{3\}, \ \mathcal{C}^{(2)} = \{1,2,3\}; \\ 3) \ x^{(3)} = (10,-36,8,-16,0), \ \mathcal{F}^{(3)} = \{4\}, \ \mathcal{C}^{(3)} = \{1,2,3,4\}; \\ 4) \ x^{(4)} = (74,-36,104,-16,32), \ \mathcal{F}^{(3)} = \{5\}, \ \mathcal{C}^{(4)} = \{1,2,3,4,5\}. \\ \underline{CCS \ (implemented \ by \ (20))}: \\ \underline{Initialization:} \ x^{(0)} = (2,0,0,0,0), \ \mathcal{F}^{(0)} = \{1\}, \ \mathcal{C}^{(0)} = \{1\}. \\ 1) \ x^{(1)} = (2,-4,8,-16,32), \ \mathcal{F}^{(1)} = \{2,3,4,5\}, \ \mathcal{C}^{(1)} = \{1,2,3,4,5\}. \end{array}
```



Fig. 7. Incorrect ordered chain.

With different vertex numbering (Fig. 7) and with the same starting vertex 1, at every CCS iteration, there are no correct chains outgoing from visited vertices. Therefore, to reach all vertices of the graph, both BFS and CSS need to carry out 4 iterations, and the traversal implemented by CCS completely repeat the traversal implemented by BFS (Fig. 8).




Fig. 8. Graph traversal implemented by CCS.

#### 8 Unsigned CCS

The following transformation may be used as the transformation  ${\bf F}$  of the state vector:

$$x_i^{(k+1)} = \left(b_i + \sum_{l=1}^{i-1} a_{ij} x_j^{(k+1)} + \sum_{j=i+1}^n a_{ij} x_j^{(k)}\right) d.$$
 (21)

Let us call as unsigned CCS the algorithm Finding the connected component that uses (21) for F.

Unsigned CCS, implementing the same traversal as CCS, performs computations using only non-negative integer values. The absence of division and possible absence of even multiplication (for d=1) makes it possible to sagnificantly reduce the time required to implement graph traversal.

The transformation (21) is a modification of the transformation  $\mathbf{F}$  used by CSS. From a transformation of the form

$$x^{(k+1)} = (b - Lx^{(k+1)} - Ux^{(k)}) d,$$

we move on to a transformation of the form

$$x^{(k+1)} = (b + Lx^{(k+1)} + Ux^{(k)}) d.$$

If we don't take into account the multiplication by d, the unsigned CCS iteration is similar to the BFS iteration, in which each component of the state vector is computed using components with smaller indices already computed at this iteration. But at the same time, the multiplication (division) by d and getting inverse element for addition may be fundamental to apply the graph traversals to solve some discrete analysis problems. For example, implementation of CCS for perturbed graph matrices [13] gives an approach to solve the graph

isomorphism problem; it also may be leveraged to perform connectivity test using perturbations of a graph adjacency matrix elements [14] and to computationally solve other problems on graphs.

### 9 State vector regularization and vertex masking

Using multiplication in transformations (7) allows us to reduce the time it takes to implement graph traversal. For stability of computations, to prevent overflow or vanishing to zero of the state vector components, after a given number of iterations M, the state vector can be regularized:

$$x_i^{(k)} \to \frac{1}{d^M} x_i^{(k)}.$$
 (22)

In addition, without changing the order of the computational complexity of the algorithm, a significant acceleration of implementation of graph traversal can be achieved using vertex masking. Masking a vertex means excluding it from further computations. Masked vertices are the vertices from which new previously unvisited vertices cannot be reached in the course of next iterations of the traversal algorithm. We may both mask the vertices that belong to already founded connected components of a graph and mask already visited vertices of the currently constructed connected component. In the second case, when performing computations at the (k+1)-the iteration (7), vertices that belonged to frontier at the previous k-1 iterations are masked.

For economy of computer memory and to make computions faster, the computations must be carried out using a *portrait* of adjacency matrix. The portrait contains only non-zero elements of the matrix, i.e., it is the list of its edges. One iteration of the form (6) or (7) has computational complexity of O(m) since we can perform one iteration at one pass through the list of a graph edges.

# 10 Traversal of a graph and numbering (labeling) of its vertices

The presence of correct chains, determined by the numbering of the graph vertices, and the choice of the starting vertex are both determine the computational complexity of solving an individual instance of the problem by CCS.

The numbering of vertices is a mandatory parameter of an individual task of implementing graph traversal. Consider the graph for which it is assumed that information is regularly updated with addition of vertices and edges to the graph or with its deletion from it. Optimization of a numbering of graph vertices can be done by numbering them based on their distances from chosen root vertex (starting vertex). With optimal numbering of vertices, to construct a traversal, CCS will have the minimum possible computational complexity for traversal algorithms that is equal to O(m) since we have to do the only one iteration to traverse a graph. To achive this efficiency, we can renumber graph vertices

using rechability tree that we obtain after some of the executions of a traversal algorithm for the graph. If the enumeration of the graph vertices is close to the optimal in sense of having correct chains, the computational complexity of CCS also will be of O(m) for the graph.

Note that it may be natural to assign graph vertices numbers, which are reflects distances between objects they are represent. This happens, for example, when numbering objects for transport networks. Randomness in input data is inevitable but it can be minimized. A graph with solely random numbering of vertices, in this case, can be interpreted as a graph of a transport network stored in a database table with randomly generated numbers of records, which may happen in practice only hypothetically with long-term input of data as the network develops. And even for solely random enumerations, there are a lot of instances with correct chains.

### 11 The number of iterations required by BFS and CCS

Let us compare the number of iterations required by BFS and CCS to traverse a graph. Since we consider the number of connected components to be of order O(1) with respect to the problem dimension n, this value does not change the order of computational complexity of the algorithms. If we do not consider such details of technical realizations as parallelization of computations and masking of the vertices, the computational complexity of a graph traversal algorithm for connected graph is determined by the number of iterations required to visit all its vertices.

Let  $N_{\rm BFS}$  be the number of iterations, which BFS required to complete traversal of a connected graph, and let  $N_{\rm CCS}$  be the number of iterations, which CCS required for the same graph and the same starting vertex. The values  $N_{\rm BFS}$  and  $N_{\rm CCS}$  are determined by the choice of the starting vertex, but  $N_{\rm CCS}$  is also determined by the numbering of vertices in the given graph.

Since both BFS and CCS perform the transitions through edges incident the frontiers' vertices, we can assert that for any instance of a problem, the number of iterations required to reach all vertices of the connected component for CCS does not exceed the number of such iterations for BFS. At the same time, if, in the course of CCS iterations, we visit a vertex, from which at least one correct chain outgoes, then reachability of vertices from the starting one will be determined in fewer iterations than the algebraic BFS would require for it.

So, since the algorithms stop when we have visited all graph vertices, the following statement is true.

**Statement.** For the same starting vertex, CCS will complete its work in a number of iterations that is equal to or less than required for BFS.

#### Conclusions

We consider the methods of simple iterations as realizations of graph traversals when solving systems of linear algebraic equations associated with graphs. These

systems are systems with modified adjacency matrices of graphs and with the specified right-hand side. There are two different algorithms for graph traversal can be produced by this approach. One of them implemented by iterations of the Jacobi method and the other by iterations of the Gauss-Seidel method. The traversal associated with the Gauss-Seidel method is not equivalent to either the depth-first search or the breadth-first search. For any instance of the problem of finding connected components of a graph, the number of iterations required for such graph traversal does not exceed the number of iterations required for the breadth-first search for the same given starting vertex. For a large number of instances of the problem, fewer iterations will be required for the traversal associated with Gauss-Seidel iterations.

#### References

- 1. T. Cormen, C. Leiserson, R. Rivest, and C. Stein. Introduction to Algorithms. (3rd Ed). MIT Press, McGraw-Hill, 2010.
- 2. K. Zuse. Der Plankalkul. See pages 96 105 of the pdf file at the link (internal numbering 2.47 2.56). Konrad Zuse Internet Archive, 1972. URL: http://zuse.zib.de/item/gHI1cNsUuQweHB6.
- 3. E. Moore. The shortest path through a maze // Proceedings of the International Symposium on the Theory of Switching. Harvard University Press, 1959, pp. 285–292.
- 4. C. Lee. An Algorithm for Path Connections and Its Applications. IRE Transactions on Electronic Computers. 1961.
- S. Beamer, K. Asanovic, D. Patterson. Direction-optimized breadth-first search // Proceedings of the International Conference on High Performance Computing, Networking, Storage and Analysis, SC'12, 2012, pp. 12:1 – 12:10.
- 6. H.M. Bücker, C. Sohr. Reformulating a breadth-fist search algorithm on an undirected graph in the language of linear algebra // International Conference on Mathematics and Computers in Science and in Industry, 2014, pp. 2014.
- A. Buluç, T. Mattson, S. McMillan, J. Moreira, C. Yang. Design of the GraphBLAS API for C // IEEE International Parallel and Distributed Processing Symposium, IPDPS'17, 2017, pp. 643 – 652.
- 8. A. Azad and A. Buluç. A work-efficient parallel sparse matrix-sparse vector multiplication algorithm. In 2017 IEEE International Parallel and Distributed Processing Symposium, IPDPS 17, 2017, pp. 688 697.
- 9. C. Yang, A. Buluç, J.D. Owens. Graphblast: A high-performance linear algebra-based graph framework on the gpu. arXiv 1908.01407, 2019.
- C. Yang, Y. Wang, J.D. Owens. Fast sparse matrix and sparse vector multiplication algorithm on the GPU // In Proceedings of the 2015 IEEE International Parallel and Distributed Processing Symposium Workshop, IPDPSW'15, 2015, pp. 841 – 847.
- 11. P. Burkhardt. Optimal algebraic Breadth-First Search for sparse graphs // arXiv:1906.03113v4 [cs.DS]. 30 Apr 2021.
- 12. Code of combinatorial BFS from Breadth First Search' Wikipedia section. https://en.wikipedia.org/wiki/Breadth-first\_search.
- 13. A.V. Prolubnikov. Reduction of the graph isomorphism problem to equality checking of *n*-variables polynomials and the algorithms that use the reduction // arXiv.org, 2016. https://arxiv.org/abs/1512.03139

#### XXIV

14. A.V. Prolubnikov. Finding the connected components of the graph using perturbations of the adjacency matrix // arXiv.org, 2023. https://arxiv.org/pdf/2306.16389