

---

# A Benchmark for Fairness-Aware Graph Learning

---

Yushun Dong<sup>1</sup> Song Wang<sup>1</sup> Zhenyu Lei<sup>1</sup> Zaiyi Zheng<sup>1</sup>  
Jing Ma<sup>2</sup> Chen Chen<sup>1</sup> Jundong Li<sup>1</sup>

<sup>1</sup>University of Virginia, <sup>2</sup>Case Western Reserve University  
{yd6eb, sw3wv, vjd5zr, sjc4fq, zrh6du, jundong}@virginia.edu  
jing.ma5@case.edu

## Abstract

Fairness-aware graph learning has gained increasing attention in recent years. Nevertheless, there lacks a comprehensive benchmark to evaluate and compare different fairness-aware graph learning methods, which blocks practitioners from choosing appropriate ones for broader real-world applications. In this paper, we present an extensive benchmark on ten representative fairness-aware graph learning methods. Specifically, we design a systematic evaluation protocol and conduct experiments on seven real-world datasets to evaluate these methods from multiple perspectives, including group fairness, individual fairness, the balance between different fairness criteria, and computational efficiency. Our in-depth analysis reveals key insights into the strengths and limitations of existing methods. Additionally, we provide practical guidance for applying fairness-aware graph learning methods in applications. To the best of our knowledge, this work serves as an initial step towards comprehensively understanding representative fairness-aware graph learning methods to facilitate future advancements in this area.

## 1 Introduction

Graph-structured data has become ubiquitous across a plethora of real-world applications [31, 79, 18, 52], such as social network analysis [11, 43, 44], biological network modeling [88, 54, 89], and traffic pattern prediction [81, 5, 17]. To gain a deeper understanding of graph-structured data, graph learning methods, such as Graph Neural Networks (GNNs), are emerging as widely adopted and versatile methods to handle predictive tasks on graphs [75, 87, 74, 80]. However, as we aim for improving utility (e.g., accuracy in node classification tasks), existing graph learning methods have also been found to constantly exhibit algorithmic bias in recent studies, which has raised significant societal concern and attracted attention from both industry and academia [23, 12, 73, 21]. For example, financial agencies have been relying on GNNs to perform decision making in financial services [71, 65], e.g., determining whether each loan application should be approved or not based on transaction networks of bank clients. Nevertheless, the outcomes have been found to exhibit bias, such as racial disparities in the rejection rate [65]. As a consequence, addressing the fairness concerns for graph learning methods has become an urgent need [23, 16], especially under high-stake real-world applications such as financial lending [65, 46] and healthcare decision making [16, 4].

In recent years, various techniques, such as adversarial training [15, 36, 47, 13], optimization regularization [1, 35, 58], and graph structure learning [22, 85, 86], have been adopted to address the fairness concerns in graph learning methods. Nevertheless, despite these existing efforts, we have not yet seen extensive deployment of these fairness-aware graph learning methods. A primary obstacle lies in the lack of a comprehensive comparison across existing fairness-aware graph learning methods, which makes it difficult for practitioners to choose the appropriate ones to use. In fact, a comprehensive comparison of existing fairness-aware graph learning methods not only tells the best-in-class methods under different settings (e.g., different evaluation metrics and datasets from

different domains) but also provides a guideline for practitioners to understand the strengths and limitations of different methods in multiple aspects, such as utility, fairness, and efficiency. As such, comprehensively comparing the performances between different graph learning methods becomes an urgent need to facilitate a broader application of fairness-aware graph learning methods.

Multiple existing works have explored to compare different fairness-aware graph learning methods. For example, Chen et al. [10] proposed to categorize and compare existing fairness-aware GNNs by their input, main techniques, and tasks. However, the overwhelming focus on GNNs narrows down the scope of comparison. Another study from Laclau et al. [12] delivers a more comprehensive comparison of graph learning methods. However, it did not involve any quantitative performance comparison, which thus jeopardizes its practical value for practitioners. In fact, it is challenging to provide a quantitative performance comparison on fairness-aware graph learning methods due to their inconsistencies in terms of the studied fairness notions, experimental settings, and learning tasks. Therefore, lacking quantitative performance comparison becomes a common flaw for most of the related studies [16]. More recently, Qian et al. [55] took an early step to present a quantitative performance benchmark in the area of graph learning. However, they only focus on the comparison between two fairness-aware GNNs, which thus blocks a broader understanding of existing efforts in a broader area of graph learning. Therefore, comprehensive performance comparison between fairness-aware graph learning methods remains an underexplored topic.

In this paper, we take an initial step to comprehensively evaluate the performance differences between the most representative fairness-aware graph learning methods. Specifically, we first design a systematic evaluation protocol, which helps ensure consistent settings for the evaluation of different graph learning methods. Second, we collect ten of the most representative graph learning methods and present a comprehensive benchmark on seven real-world graph datasets (including five commonly used and two newly constructed ones) from different perspectives, such as different datasets, fairness notions, and evaluation metrics. Finally, we perform an in-depth analysis based on the experimental results and reveal key insights into the strengths and limitations associated with these fairness-aware graph learning methods. We also provide guidance for practitioners to choose appropriate ones to use, which further facilitates the practical significance of this study.

The main contributions of this paper are summarized as follows:

- **Experimental Protocol Design.** We design a systematic evaluation protocol, which enables the comparison between different fairness-aware graph learning methods under consistent settings. To the best of our knowledge, our work serves as the first step towards comprehensively evaluating the performance of fairness-aware graph learning methods.
- **Comprehensive Benchmark.** We conduct extensive experiments on seven real-world attributed graph datasets (including five commonly used and two newly constructed ones) and present a comprehensive benchmark over ten fairness-aware graph learning methods, which reveals key insights in understanding their strengths and limitations.
- **Multi-Perspective Analysis & Guidance.** We present four significant research questions and perform in-depth analysis from different perspectives based on the benchmarking results. Meanwhile, we also introduce a guide for practitioners to help them choose appropriate methods in real-world applications.

## 2 Preliminaries

**Background.** We use  $\mathcal{G} = \{\mathcal{V}, \mathcal{E}\}$  to denote a graph, where  $\mathcal{V}$  denotes the set of  $n$  nodes and  $\mathcal{E}$  represents the set of edges. Here, each node is equipped with an attribute vector, which makes the graph an attributed graph. In this paper, we focus on node classification, which is among the most widely studied graph learning tasks. Typically, in node classification, a graph machine learning model can be represented as a function  $f : (\mathcal{V}, \mathcal{E}) \rightarrow \hat{\mathbf{Y}} \in \mathbb{R}^{n \times c}$ , which maps each node  $v \in \mathcal{V}$  into a  $c$ -dimensional matrix  $\hat{\mathbf{Y}}$ . Each row in  $\hat{\mathbf{Y}}$  (denoted as  $\hat{\mathbf{y}}_i$  for the  $i$ -th row) is a vector indicating the predicted probability distribution across different classes, and  $c$  denotes the total number of classes. Meanwhile, the matrix of ground truth labels  $\mathbf{Y} \in \{0, 1\}^{n \times c}$  is provided as the supervision for optimization. The primary goal of fairness-aware graph machine learning is to ensure  $\hat{\mathbf{Y}}$  bears high levels of utility and fairness at the same time. Without loss of generality, we conduct benchmarking experiments on binary node classification (i.e.,  $c = 2$ ), which aligns with most works in this area [23].

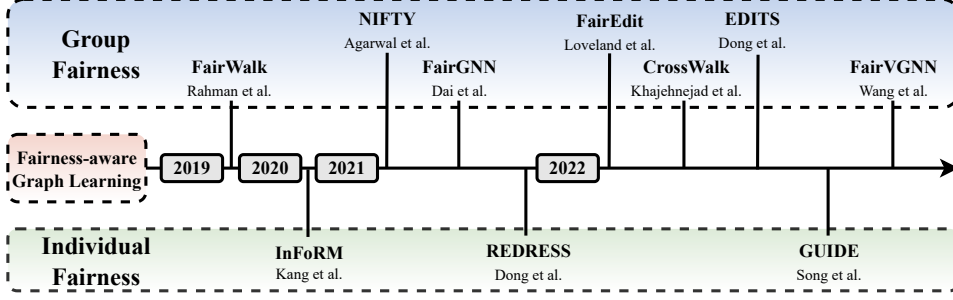


Figure 1: A timeline of the representative fairness-aware graph learning methods.

**Timeline of the Collected Graph Learning Models.** To provide a global understanding of fairness-aware graph learning methods, we present a high-level overview of the timeline of the representative explorations, which is shown in Figure 1. Specifically, we group these works by the fairness notions they focus on, including group fairness and individual fairness [23]. Group fairness emphasizes that the graph learning methods should not yield discriminatory predictions against any demographic subgroups [23, 29], where the subgroups are determined by certain categorical sensitive attributes such as gender or race [51, 25]. On the other hand, individual fairness argues that similar individuals should be treated similarly [25], i.e., the outcomes corresponding to a pair of individuals in the output space should be close to each other if they are close in the input space [23, 38].

**Notions and Metrics for Group Fairness.** Here, we present the representative notions and metrics under *Group Fairness*. (1) *Statistical Parity*. Statistical parity requires that the probability of yielding positive predictions should be the same across different demographic subgroups [23, 25]. Here, the rationale is that positive predictions correspond to beneficial decisions in a plethora of real-world applications [29]. A commonly used metric to quantify to what extent statistical parity is violated is  $\Delta_{SP}$ , which is given by

$$\Delta_{SP} = |P(\hat{Y} = 1 | S = 0) - P(\hat{Y} = 1 | S = 1)|, \quad (1)$$

where  $\hat{Y}, S \in \{0, 1\}$  denote random variables for the predicted label and the sensitive attribute of any given individual, respectively. (2) *Equal Opportunity*. Equal opportunity requires that the probability of yielding positive predictions should be the same for those who have a positive ground truth across different demographic subgroups [29]. Different from statistical parity, equal opportunity aims to protect individuals' advantaged qualifications against bias arising from subgroup membership [29].  $\Delta_{EO}$  is commonly used to measure to what extent equal opportunity is violated, which is given by

$$\Delta_{EO} = |P(\hat{Y} = 1 | Y = 1, S = 0) - P(\hat{Y} = 1 | Y = 1, S = 1)|, \quad (2)$$

where  $Y$  is the random variable of the ground truth for any given individual. (3) *Utility Difference-Based Fairness*. Its rationale is to reveal the largest utility gap between different demographic subgroups [3, 67, 57]. A commonly used metric is the maximum utility difference across all pairs of demographic subgroups (denoted as  $\Delta_{\text{Utility}}$  for simplicity).

**Notions and Metrics for Individual Fairness.** We now present the representative notions and metrics under *Individual Fairness*. Different from group fairness, individual fairness does not rely on sensitive attributes. Instead, the rationale of individual fairness is to *treat similar individuals similarly* [25]. We introduce three notions and their corresponding metrics below. (1) *Lipschitz-Based Individual Fairness*. This notion argues that the (scaled) distance between individuals in the output space should be smaller or equal to the corresponding distance in the input space [38]. The level of the exhibited bias under this notion is measured by

$$B_{\text{Lipschitz}} = \sum_i \sum_{j, j \neq i} \|\hat{\mathbf{y}}_i - \hat{\mathbf{y}}_j\|_F \cdot \mathbf{S}_{ij}, \quad (3)$$

where the  $\mathbf{S}$  is an oracle similarity matrix that describes the similarity between nodes in the input space. (2) *Ranking-Based Individual Fairness*. This notion requires that the rankings of the similarity between each individual and all other individuals should be the same between the input and output space [19]. The average top- $k$  similarity between the two ranking lists in the input and output spaces over all individuals is adopted as the fairness metric, where  $\text{NDCG}@k$  is a common ranking similarity

Table 1: Statistics of the collected real-world graph datasets.

Dataset	Pokec-z	Pokec-n	German Credit	Credit Defaulter	Recidivism	AMiner-S	AMiner-L
#Nodes	67,796	66,569	1,000	30,000	18,876	39,424	129,726
#Edges	882,765	729,129	24,970	200,526	403,977	52,460	591,039
#Attributes	276	265	27	13	18	5,694	5,694

metric, which we denote as  $B_{\text{ranking}}$ . (3) *Ratio-Based Individual Fairness*. This notion requires that different demographic subgroups should bear similar levels of individual fairness [64]. *Group Disparity of Individual Fairness (GDIF)* is introduced as the metric, which is given by

$$GDIF = \sum_{\substack{1 \leq i < j \leq m \\ i, j}} \max \left( \frac{B_{\text{Lipschitz}}^{(i)}}{B_{\text{Lipschitz}}^{(j)}}, \frac{B_{\text{Lipschitz}}^{(j)}}{B_{\text{Lipschitz}}^{(i)}} \right), \quad (4)$$

where  $B_{\text{Lipschitz}}^{(i)}$  and  $B_{\text{Lipschitz}}^{(j)}$  are the subgroup-level  $B_{\text{Lipschitz}}$  from two demographic subgroups  $i$  and  $j$ ;  $m$  is the total number of subgroups.

### 3 Benchmark Design

In this section, we introduce the design of our benchmark. Specifically, we first present the experimental settings and implementation details of our benchmark. Then we introduce four main research questions we aim to explore in this paper.

#### 3.1 Experimental Settings and Implementations

Here we introduce the experimental settings, including benchmark datasets, collected fairness-aware graph learning methods, and the implementation details regarding this newly introduced benchmark.

**Benchmark Datasets.** We collected seven real-world attributed graph datasets of different scales in this benchmark paper, including five existing commonly used ones and two newly constructed ones. These datasets include (1) *Pokec-z* [69]: social network data; (2) *Pokec-n* [69]: social network data; (3) *German Credit* [50]: a graph based on financial credit; (4) *Credit Defaulter* [78]: a graph over financial agency clients; (5) *Recidivism* [37]: a graph over defendants; (6) *AMiner-S* (newly constructed): a co-authorship graph over researchers; (7) *AMiner-L* (newly constructed): a co-authorship graph over researchers. We present the statistics of the collected attributed graph datasets above in Table 1, and a more detailed dataset introduction is given in Appendix.

**Fairness-Aware Graph Learning Models.** We collect ten of the most representative graph learning methods for comparison. We provide a brief introduction for each of them below, where the fairness notion they focus on is marked out in brackets. (1) *FairWalk (group fairness)*. FairWalk [56] is a fairness-aware graph learning method based on DeepWalk, where it achieves bias mitigation by balancing the transition probabilities between different demographic subgroups. (2) *CrossWalk (group fairness)*. CrossWalk [39] is a fairness-aware graph learning method based on DeepWalk, where it achieves bias mitigation by steering random walks across demographic subgroup boundaries for representation learning. (3) *FairGNN (group fairness)*. FairGNN [15] is a fairness-aware graph learning method based on GNNs, where it achieves bias mitigation by incorporating an adversary to wipe out the information of sensitive attributes in the learned node representations. (4) *NIFTY (group fairness)*. NIFTY [1] is a fairness-aware graph learning method based on GNNs, where it achieves bias mitigation with an additional optimization regularization term based on counterfactual sensitive attribute perturbation. (5) *EDITS (group fairness)*. EDITS [22] is a fairness-aware graph learning framework designed in a pre-processing manner, where it achieves bias mitigation by minimizing the distribution difference between nodes from different demographic subgroups in the node attribute space. (6) *FairEdit (group fairness)*. FairEdit [48] is a fairness-aware graph learning method based on GNNs, where it optimizes the performance on fairness by modifying the graph topology. (7) *FairVGNN (group fairness)*. FairVGNN [72] is a fairness-aware graph learning method based on GNNs, where it achieves bias mitigation by identifying and masking sensitive-correlated attribute dimensions. (8) *InFoRM (individual fairness)*. InFoRM [38] is a fairness-aware graph learning method that can be adapted to different models, where it achieves bias mitigation by incorporating a fairness-aware optimization objective based on the Lipschitz condition. (9) *REDRESS (individual*

*fairness*). REDRESS [19] is a fairness-aware graph learning method based on GNNs, where it proposes a fairness-aware optimization objective to improve performance on ranking-based fairness. (10) *GUIDE (individual fairness)*. GUIDE [64] is a fairness-aware graph learning method based on GNNs, where it incorporates a fairness-aware optimization objective to enforce similar levels of Lipschitz-based individual fairness across different demographic subgroups.

**Implementation Details.** All benchmarking experiments are implemented with PyGDebias 1.1.1 at <https://github.com/yushundong/PyGDebias> and performed on an Nvidia A100 GPU. We obtain the best hyper-parameters by selecting the lowest loss values on the validation node set via grid search, and all results are reported with standard deviation from three different runs. For all GNNs, we adopt the most widely used GCN unless otherwise specified. Comprehensive experimental details, including licenses and open-source URLs for reproducibility purposes, are introduced in Appendix.

### 3.2 Research Questions

#### RQ 1: How well can those representative methods perform under group fairness?

**Significance & Experimental Design.** Understanding the performance of graph learning methods in terms of group fairness is crucial since it addresses the bias that may arise in applications due to sensitive attributes such as race, gender, and age. We evaluate the collected methods focusing on group fairness on both utility and fairness. Here we adopt the AUC-ROC score as an exemplary metric for utility, while  $\Delta_{SP}$ ,  $\Delta_{EO}$ , and  $\Delta_{Utility}$  are utilized as the metrics for fairness (as in Section 2).

#### RQ 2: How well can those representative methods perform under individual fairness?

**Significance & Experimental Design.** Evaluating individual fairness helps to identify and reduce discriminatory practices at the individual level, which is more granular compared with group fairness. To answer this question, we evaluate the collected methods focusing on individual fairness from the perspective of both utility and fairness. Here, we adopt the AUC-ROC score for utility evaluation, while  $B_{Lipschitz}$ ,  $NDCG@k$ , and  $GDIF$  are adopted as the metrics for fairness (as in Section 2).

#### RQ 3: How well can existing methods balance different fairness criteria?

**Significance & Experimental Design.** Understanding how graph learning methods balance different fairness criteria is vital when multiple criteria need to be considered simultaneously [83, 63, 16]. Considering the scarcity of methods under individual fairness, we focus on group fairness for this research question. Specifically, we measure the average ranking corresponding to these methods on  $\Delta_{SP}$ ,  $\Delta_{EO}$ , and  $\Delta_{Utility}$ , where a lower average ranking indicates better performance.

#### RQ 4: How well can those representative methods perform in terms of efficiency?

**Significance & Experimental Design.** Ensuring that fairness-aware graph learning methods are computationally feasible is essential for their usability in real-world applications. To answer this question, we evaluate the collected methods by their utility vs. running time on each dataset. Better utility with less running time indicates better efficiency.

## 4 Empirical Investigation

### 4.1 Performance Under Group Fairness (RQ1)

We first perform experiments to answer RQ1. Specifically, we present the quantitative results corresponding to those graph learning methods focusing on group fairness in Table 2. Note that we present the results on AUC-ROC score (utility) and  $\Delta_{SP}$  (fairness) as an example, and the complete results are in Appendix. Here DeepWalk and GNN are added as baselines for shallow embedding methods and GNN-based methods, respectively. We observe that different methods yield different levels of trade-offs between utility and fairness. To better understand the strengths and limitations associated

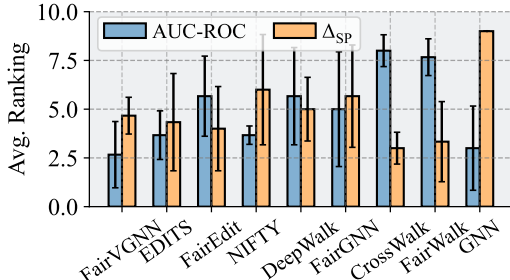


Figure 2: Average rankings on AUC-ROC score and  $\Delta_{SP}$  across all datasets. Methods are ranked in ascending order by the summation of two rankings.

Table 2: Comparison of graph learning methods focusing on group fairness. Note that results include AUC-ROC score and  $\Delta_{SP}$ , and complete results are in Appendix. The best ones are in **bold**; the second best ones are underlined; OOM denotes out-of-memory.

Metrics	Models	Pokec-z	Pokec-n	German Credit	Credit Defaulter	Recidivism	AMiner-S	AMiner-L
AUC-ROC Score	DeepWalk	66.50 ( $\pm 1.34$ )	61.85 ( $\pm 1.06$ )	56.90 ( $\pm 1.75$ )	53.61 ( $\pm 0.66$ )	87.18 ( $\pm 1.34$ )	73.58 ( $\pm 0.43$ )	82.68 ( $\pm 3.28$ )
	FairWalk	<u>64.92</u> ( $\pm 0.43$ )	<u>61.52</u> ( $\pm 0.34$ )	54.05 ( $\pm 0.83$ )	55.51 ( $\pm 0.29$ )	72.09 ( $\pm 0.11$ )	65.35 ( $\pm 0.54$ )	<u>88.72</u> ( $\pm 0.08$ )
	CrossWalk	58.99 ( $\pm 0.27$ )	62.98 ( $\pm 0.27$ )	51.42 ( $\pm 0.43$ )	54.50 ( $\pm 0.42$ )	82.89 ( $\pm 0.11$ )	64.44 ( $\pm 0.52$ )	<b>89.67</b> ( $\pm 0.04$ )
	GNN	64.16 ( $\pm 0.62$ )	67.05 ( $\pm 1.14$ )	<b>67.36</b> ( $\pm 3.59$ )	<u>62.62</u> ( $\pm 0.51$ )	84.60 ( $\pm 2.10$ )	<u>81.95</u> ( $\pm 1.46$ )	86.82 ( $\pm 0.11$ )
	FairGNN	<u>69.47</u> ( $\pm 1.04$ )	<u>68.51</u> ( $\pm 0.51$ )	52.91 ( $\pm 2.15$ )	56.73 ( $\pm 3.16$ )	<b>92.87</b> ( $\pm 2.42$ )	<b>86.23</b> ( $\pm 0.14$ )	OOM
	NIFTY	62.58 ( $\pm 0.14$ )	66.78 ( $\pm 0.82$ )	62.94 ( $\pm 5.78$ )	61.85 ( $\pm 0.70$ )	85.58 ( $\pm 0.83$ )	79.28 ( $\pm 0.15$ )	86.62 ( $\pm 0.69$ )
	EDITS	OOM	OOM	60.02 ( $\pm 1.10$ )	61.14 ( $\pm 0.36$ )	<u>92.34</u> ( $\pm 0.31$ )	OOM	OOM
	FairEdit	OOM	OOM	56.30 ( $\pm 2.33$ )	62.50 ( $\pm 0.61$ )	81.97 ( $\pm 0.48$ )	OOM	OOM
	FairVGNN	<b>71.19</b> ( $\pm 0.94$ )	<b>70.14</b> ( $\pm 0.55$ )	<u>65.48</u> ( $\pm 3.46$ )	<b>68.81</b> ( $\pm 0.81$ )	84.74 ( $\pm 2.70$ )	OOM	OOM
	$\Delta_{SP}$	DeepWalk	5.49 ( $\pm 1.07$ )	5.90 ( $\pm 0.88$ )	10.4 ( $\pm 1.01$ )	6.69 ( $\pm 0.31$ )	6.50 ( $\pm 0.18$ )	6.75 ( $\pm 0.29$ )
FairWalk		<b>0.60</b> ( $\pm 1.89$ )	<u>0.29</u> ( $\pm 2.12$ )	3.36 ( $\pm 1.01$ )	6.20 ( $\pm 0.32$ )	<b>4.67</b> ( $\pm 0.33$ )	<b>3.06</b> ( $\pm 0.32$ )	<b>4.28</b> ( $\pm 0.17$ )
CrossWalk		<u>1.75</u> ( $\pm 1.17$ )	<b>0.21</b> ( $\pm 1.63$ )	0.35 ( $\pm 1.75$ )	6.35 ( $\pm 0.51$ )	<u>5.14</u> ( $\pm 0.21$ )	3.59 ( $\pm 0.43$ )	<u>5.60</u> ( $\pm 0.42$ )
GNN		10.4 ( $\pm 1.46$ )	14.7 ( $\pm 0.40$ )	32.4 ( $\pm 1.93$ )	20.6 ( $\pm 4.34$ )	8.54 ( $\pm 0.10$ )	7.28 ( $\pm 0.31$ )	6.75 ( $\pm 0.00$ )
FairGNN		2.06 ( $\pm 1.82$ )	8.11 ( $\pm 1.16$ )	14.2 ( $\pm 0.83$ )	<u>2.51</u> ( $\pm 5.61$ )	7.48 ( $\pm 0.30$ )	5.36 ( $\pm 0.27$ )	OOM
NIFTY		2.48 ( $\pm 0.47$ )	2.42 ( $\pm 0.84$ )	<u>0.26</u> ( $\pm 0.41$ )	12.5 ( $\pm 3.64$ )	7.88 ( $\pm 0.43$ )	<u>3.25</u> ( $\pm 0.52$ )	5.86 ( $\pm 0.44$ )
EDITS		OOM	OOM	<b>0.18</b> ( $\pm 1.78$ )	10.7 ( $\pm 0.66$ )	7.36 ( $\pm 0.05$ )	OOM	OOM
FairEdit		OOM	OOM	3.15 ( $\pm 3.73$ )	<b>1.95</b> ( $\pm 0.21$ )	7.39 ( $\pm 0.50$ )	OOM	OOM
FairVGNN		6.33 ( $\pm 1.90$ )	5.31 ( $\pm 1.19$ )	3.13 ( $\pm 0.28$ )	9.93 ( $\pm 0.88$ )	6.54 ( $\pm 0.53$ )	OOM	OOM

with each algorithm, we calculate the average ranking of each method on datasets free from OOM. We show their average rankings (ordered by the summation of two average rankings) in Figure 2.

**Finding 1: Fairness-aware graph learning methods excel differently on group fairness.** According to Table 2 and Figure 2, we found that different fairness-aware graph learning methods exhibit different types of proficiency between utility and fairness. Specifically, we have the following observations. First, top-ranked methods (those ranked at the left in Figure 2)

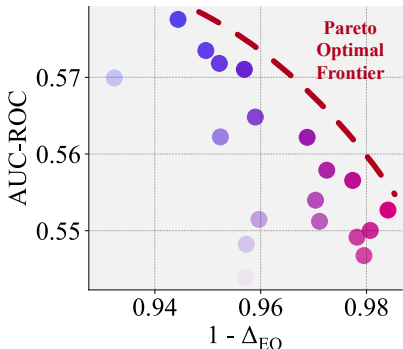


Figure 3: Pareto optimal frontier between AUC-ROC score and  $\Delta_{EO}$  from FairGNN on Credit Default.

hyper-parameter search in Figure 3. We observe that such a frontier implicitly prevents a graph learning model from further improving the performance under both evaluation metrics.

## 4.2 Performance Under Individual Fairness (RQ2)

We then answer RQ2 by comparing the performance of graph machine learning methods focusing on individual fairness. Similar to RQ1, we will explore their performance on both utility and fairness. Specifically, we choose the AUC-ROC score as an exemplary metric for utility, and we adopt the three metrics for individual fairness presented in Section 2 to measure the level of individual fairness. Without loss of generality, we adopt a common setting of  $k = 10$  for the ranking-based individual fairness metric  $NDCG@k$  [19]. We present the experimental results in Table 3, and the complete results with supplementary discussion are given in Appendix.

**Finding 2: Fairness-aware graph learning methods exhibit different levels of versatility on individual fairness.** According to Table 3, we have the following observations. First, in terms of utility, the vanilla GNN generally achieves the best utility across most datasets. The collected fairness-

Table 3: Comparison of graph learning methods focusing on individual fairness. Note that results include AUC-ROC score,  $B_{\text{Lipschitz}}$ , NDCG@ $k$ , and GDIF; complete results are in Appendix. The best ones are in **bold**; the second best ones are underlined; OOM denotes out-of-memory.

Metrics	Models	Pokec-z	Pokec-n	German Credit	Credit Defaulter	Recidivism	AMiner-S	AMiner-L
AUC-ROC Score	GNN	<b>66.50</b> ( $\pm 0.53$ )	<b>67.62</b> ( $\pm 0.76$ )	<b>69.70</b> ( $\pm 3.48$ )	62.29 ( $\pm 4.85$ )	<b>82.47</b> ( $\pm 1.41$ )	<b>82.23</b> ( $\pm 0.56$ )	<b>88.15</b> ( $\pm 0.11$ )
	InFoRM	60.53 ( $\pm 3.67$ )	64.12 ( $\pm 4.12$ )	63.61 ( $\pm 4.93$ )	62.72 ( $\pm 5.87$ )	<u>79.66</u> ( $\pm 6.58$ )	69.75 ( $\pm 5.18$ )	<u>73.72</u> ( $\pm 7.97$ )
	REDRESS	62.31 ( $\pm 6.52$ )	<u>64.70</u> ( $\pm 4.88$ )	63.79 ( $\pm 4.40$ )	<u>64.39</u> ( $\pm 5.25$ )	69.52 ( $\pm 5.58$ )	OOM	OOM
	GUIDE	<u>63.55</u> ( $\pm 3.62$ )	60.36 ( $\pm 4.43$ )	<u>65.56</u> ( $\pm 4.18$ )	<b>64.64</b> ( $\pm 3.86$ )	75.09 ( $\pm 5.41$ )	<u>73.34</u> ( $\pm 4.28$ )	OOM
$B_{\text{Lipschitz}}$	GNN	2.5e6 ( $\pm 2e4$ )	5.5e3 ( $\pm 3e3$ )	<u>3.6e3</u> ( $\pm 2e3$ )	1.3e4 ( $\pm 7e3$ )	1.2e7 ( $\pm 3e5$ )	2.2e6 ( $\pm 3e5$ )	<u>3.2e7</u> ( $\pm 5e5$ )
	InFoRM	<b>9.1e2</b> ( $\pm 1e2$ )	<b>3.4e3</b> ( $\pm 4e3$ )	<b>2.0e2</b> ( $\pm 7e2$ )	<b>5.2e1</b> ( $\pm 3e2$ )	<b>4.7e3</b> ( $\pm 9e3$ )	<b>9.7e3</b> ( $\pm 4e3$ )	<b>9.8e4</b> ( $\pm 3e3$ )
	REDRESS	2.0e5 ( $\pm 1e4$ )	1.9e5 ( $\pm 2e4$ )	7.0e3 ( $\pm 1e3$ )	1.2e4 ( $\pm 3e3$ )	<u>2.6e4</u> ( $\pm 6e3$ )	OOM	OOM
	GUIDE	<u>1.8e3</u> ( $\pm 3e2$ )	<u>4.0e3</u> ( $\pm 6e2$ )	6.4e3 ( $\pm 9e2$ )	<u>4.2e3</u> ( $\pm 3e2$ )	1.1e5 ( $\pm 1e4$ )	<u>1.5e4</u> ( $\pm 7e3$ )	OOM
NDCG@ $k$	GNN	44.56 ( $\pm 0.59$ )	37.01 ( $\pm 0.26$ )	31.42 ( $\pm 1.49$ )	<u>39.01</u> ( $\pm 1.05$ )	15.31 ( $\pm 0.32$ )	<b>43.74</b> ( $\pm 0.70$ )	<b>37.75</b> ( $\pm 0.19$ )
	InFoRM	48.78 ( $\pm 3.62$ )	44.09 ( $\pm 3.00$ )	<u>35.89</u> ( $\pm 3.69$ )	37.11 ( $\pm 3.18$ )	19.81 ( $\pm 1.74$ )	38.85 ( $\pm 2.07$ )	<u>33.34</u> ( $\pm 1.70$ )
	REDRESS	<b>54.30</b> ( $\pm 3.08$ )	<b>48.53</b> ( $\pm 3.85$ )	<b>42.82</b> ( $\pm 3.62$ )	<b>42.74</b> ( $\pm 2.11$ )	<b>25.30</b> ( $\pm 1.96$ )	OOM	OOM
	GUIDE	<u>49.02</u> ( $\pm 2.72$ )	<u>47.27</u> ( $\pm 4.72$ )	32.70 ( $\pm 2.02$ )	37.38 ( $\pm 2.69$ )	<u>21.50</u> ( $\pm 2.18$ )	<u>39.16</u> ( $\pm 2.26$ )	OOM
GDIF	GNN	<u>111.92</u> ( $\pm 0.81$ )	232.16 ( $\pm 24.2$ )	<u>125.87</u> ( $\pm 11.1$ )	166.78 ( $\pm 36.1$ )	112.78 ( $\pm 1.29$ )	<u>114.05</u> ( $\pm 1.17$ )	<b>112.72</b> ( $\pm 1.21$ )
	InFoRM	118.07 ( $\pm 10.2$ )	<u>116.17</u> ( $\pm 5.65$ )	136.94 ( $\pm 10.3$ )	<u>160.62</u> ( $\pm 11.2$ )	112.90 ( $\pm 8.66$ )	125.36 ( $\pm 11.4$ )	<u>127.84</u> ( $\pm 8.51$ )
	REDRESS	167.56 ( $\pm 7.12$ )	124.08 ( $\pm 10.8$ )	139.98 ( $\pm 8.84$ )	163.84 ( $\pm 5.75$ )	<u>109.58</u> ( $\pm 7.33$ )	OOM	OOM
	GUIDE	<b>108.75</b> ( $\pm 5.89$ )	<b>110.58</b> ( $\pm 9.36$ )	<b>112.35</b> ( $\pm 8.27$ )	<b>149.97</b> ( $\pm 5.14$ )	<b>104.17</b> ( $\pm 8.21$ )	<b>112.28</b> ( $\pm 7.80$ )	OOM

aware graph learning methods generally sacrifice a certain level of utility in order to improve the level of individual fairness. Second, in terms of fairness, we observe that these methods exhibit different levels of versatility. Specifically, InFoRM, REDRESS, and GUIDE yield the best performance on those individual fairness goals they are equipped with by design, i.e., Lipschitz-based fairness (measured with  $B_{\text{Lipschitz}}$ ), ranking-based fairness (measured by NDCG@ $k$ ), and ratio-based fairness (measured by GDIF), respectively. However, GUIDE also delivers the second best  $B_{\text{Lipschitz}}$  and NDCG@ $k$  on four out of the seven datasets at the same time, which makes it the most versatile method among the studied three. This implies that compared with the other two methods, GUIDE contributes to a more general improvement in terms of the levels of individual fairness instead of only optimizing one objective and sacrificing others. Such an advantage can be attributed to the compositional design of its objective function, which consists of different fairness objectives [64]. Similar versatility is also observed in InFoRM, which yields the second-best performance on GDIF in three out of the seven datasets. Hence, we conclude that these methods exhibit different levels of versatility under individual fairness.

### 4.3 Trade-off Between Different Fairness Criteria (RQ3)

We now answer RQ3 by comparing the performance of fairness-aware graph learning methods under different fairness metrics. Considering the scarcity of methods under individual fairness, here we focus on group fairness and discuss the results over individual fairness in Appendix. Specifically, for each of the three group fairness metrics given in Section 2, we calculate the average ranking of each method on those datasets free from OOM, and we present the comparison of their average rankings in Figure 4. Generally, a good trade-off indicates that the superiority in one fairness metric does not significantly sacrifice the fairness levels measured by other metrics.

**Finding 3: Fairness-aware graph learning methods struggle for a balance.** According to Figure 4, we have the following observations. First, fairness-aware graph learning methods

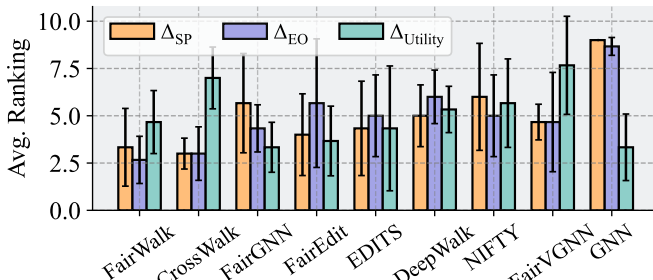


Figure 4: Average rankings on  $\Delta_{\text{SP}}$ ,  $\Delta_{\text{EO}}$ , and  $\Delta_{\text{Utility}}$  across all datasets. Methods are ranked in ascending order by the summation of average rankings on all three fairness metrics.

based on shallow embedding methods, i.e., FairWalk and CrossWalk, generally outperform those GNN-based ones when considering the balance over all three fairness metrics. Notably, they also achieve the best performance on both  $\Delta_{\text{SP}}$  and  $\Delta_{\text{EO}}$ . This aligns with the observations shown in Section 4.1, which can be attributed to the absence of bias brought by node attributes. Second, we note that the utility

difference-based fairness (measured with  $\Delta_{\text{Utility}}$ ) is not an explicit optimization goal for any of these methods. Despite this, top-ranked fairness-aware methods based on GNNs (e.g., FairGNN and FairEdit) clearly outperform those based on shallow embedding methods in terms of  $\Delta_{\text{Utility}}$ . This can be attributed to the superior fitting ability of GNNs and informative node attributes, which implicitly helps ensure that no subgroup bears significantly worse performance than others. Based on the above observations, we conclude that these methods always struggle for a balance between different fairness metrics, and one method can hardly do well on all of them.

#### 4.4 Computational Efficiency (RQ4)

Finally, we answer RQ4 by comparing the computational efficiency of the collected fairness-aware graph learning methods. Here, we utilize running time in seconds to measure efficiency, and we also collect the associated utility (measured with AUC-ROC score). We present an exemplary comparison across all collected graph learning models (two baselines and ten fairness-aware ones) on the Credit Default dataset in Figure 5. The comparison on other datasets is presented and discussed in Appendix.

**Finding 4: Fairness-aware graph learning methods generally sacrifice efficiency.**

According to Figure 5, we have the following observations. First, fairness-aware graph learning methods based on GNNs exhibit a clear sacrifice on efficiency, where EDITS under group fairness and REDRESS under individual fairness sacrifice the most.

This can be attributed to their computationally expensive optimization strategy: EDITS requires optimizing the whole graph topology, while REDRESS calculates different similarity rankings (across all nodes) in every learning epoch. In contrast to the clear sacrifice on efficiency, we also observe that most fairness-aware graph learning methods maintain a relatively high level of utility, which remains consistent with the general utility assessment shown in Section 4.1. Second, although those based on shallow embedding methods bear longer running time (than most GNN-based ones), they only marginally sacrifice efficiency. A primary reason is that compared with GNN-based ones, they usually do not introduce much additional computation in the calculation and optimization of the objective function. In fact, both FairWalk and CrossWalk facilitate their fairness levels by adopting different transition probability distributions to perform random walks on graphs. Meanwhile, we also notice that those based on shallow embedding methods generally bear worse utility than the GNN-based ones, which is also consistent with the discussion in Section 4.1. Based on the observations above, we conclude that these fairness-aware methods generally sacrifice efficiency compared with the vanilla baseline methods.

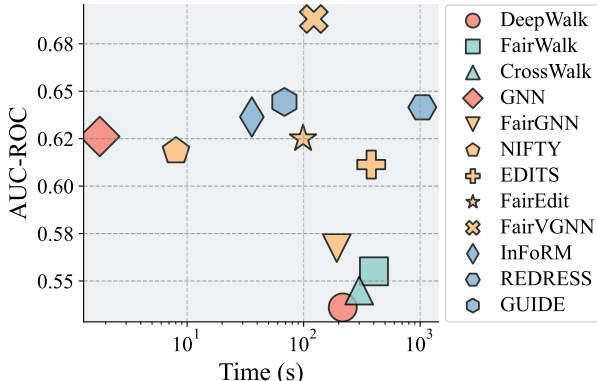


Figure 5: An exemplary comparison of AUC-ROC and running time across different collected graph learning methods on Credit Default dataset.

## 5 A Guide for Practitioners

Based on the discussion above, we conclude that each fairness-aware graph learning method bears its strengths and limitations from different perspectives. Therefore, it becomes crucial to select the most suitable methods to use carefully. To assist practitioners in making informed decisions in real-world applications, this section provides a guide to help choose the most appropriate fairness-aware graph learning methods such that their strengths can be fully leveraged to address fairness-related concerns while maintaining a proper level of performance.

Specifically, we propose to organize this guide from two perspectives, including group fairness and individual fairness. From the perspective of group fairness, if the main priority is to achieve the best performance on typical group fairness metrics such as  $\Delta_{\text{SP}}$  and  $\Delta_{\text{EO}}$ , while utility and efficiency are less of a concern, fairness-aware shallow embedding methods including FairWalk and CrossWalk are recommended choices. The reason is that these methods can generally achieve



top-ranked performance in terms of group fairness, although the corresponding utility and efficiency are usually inferior to GNN-based methods. If the main priority is to achieve a good balance between utility and group fairness, GNN-based methods such as FairVGNN, EDITS, FairEdit, and NIFTY are recommended. This is because these methods usually achieve a more satisfactory trade-off between utility and fairness compared with those based on shallow embedding methods. Furthermore, we note that FairGNN maintains a better trade-off among all three fairness metrics, which makes it more suitable for applications with significant emphasis on optimizing different types of fairness. From the perspective of individual fairness, since each method bears a different fairness optimization goal, we recommend selecting the one with the most desired goal of individual fairness. Meanwhile, we notice that GUIDE achieves a superior balance between  $B_{\text{Lipschitz}}$  and GDIF compared with the other two methods. Hence, GUIDE is recommended if a generally higher level of individual fairness is desired.

## 6 Related Works

**Benchmarking Graph Learning Methods.** Existing studies have explored two mainstream benchmarks for graph learning methods, i.e., usability-oriented ones and trustworthiness-oriented ones. Specifically, usability-oriented ones focus on evaluating models’ capabilities in accomplishing specific graph learning tasks, including node classification [62, 33, 49], link prediction [7, 61, 68], and representation learning [66, 59]. In addition to those focusing on utility (e.g., F1-score in node classification tasks), a few existing studies also explored efficiency, such as comparisons on training time [60] and memory usage [32]. On the other hand, trustworthiness-oriented ones mainly aim to provide comprehensive analysis on how well graph learning models can be trusted, such as studies from the perspective of robustness [6, 90] and interpretability [2, 77]. However, from the perspective of algorithmic fairness, existing benchmarks remain scarce. To the best of our knowledge, Qian et al. [55] took an initial step towards developing a fairness-aware graph learning benchmark. However, only two representative works are evaluated in their benchmark, which limits the insights it reveals. Different from the existing efforts above, our work serves as an initial step towards a comprehensive benchmark on fairness-aware graph learning methods, which reveals key insights on their strengths and limitations to facilitate broader applications.

**Fairness-Aware Graph Learning.** In graph learning tasks, unfairness can be defined with different criteria and exhibited from different perspectives [23, 84, 20, 24]. In general, two fairness notions are the most widely discussed ones by existing studies, i.e., group fairness and individual fairness. Specifically, group fairness emphasizes that the learning methods should not yield discriminatory predictions or decisions targeting individuals belonging to any particular sensitive subgroup (race, gender, mainetc.) [25]. Common approaches to mitigate the bias revealed by the notion of group fairness include rebalancing [39, 27, 14, 9], adversarial learning [15, 40, 76, 8], edge rewiring [22, 45, 41, 34], and orthogonal projection [53, 82]. On the other hand, *individual fairness* notion requires models to treat similar individuals similarly [25]. Existing works that mitigate the bias revealed by individual fairness include optimization with constraints [28] and regularizations [26, 19, 38, 42]. Despite the abundant efforts, there still lacks a comprehensive benchmark to facilitate the understanding of those representative fairness-aware graph learning methods. To handle such an issue, our work presents a comprehensive benchmark to provide a guide of selection based on the quantitative results over a wide range of representative fairness-aware graph learning methods.

## 7 Conclusion

In this paper, we introduced a comprehensive benchmark for fairness-aware graph learning methods, which bridges a critical gap between the current literature and broader applications. Specifically, we designed a systematic evaluation protocol, collected ten representative methods, and conducted extensive experiments on seven real-world attributed graph datasets from various domains. Our in-depth analysis revealed key insights into the strengths and limitations of existing methods in terms of group fairness, individual fairness, balancing different fairness criteria, and computational efficiency. These findings, along with the practical guide we provided, offer valuable guidance for practitioners to select appropriate methods based on their specific requirements. While we focused on the node classification task in this paper, evaluations on other graph learning tasks remain a future direction to be explored, which will further enrich the understanding of the performance of these methods and expand their applicability across a wider range of applications.

## References

- [1] Chirag Agarwal, Himabindu Lakkaraju, and Marinka Zitnik. Towards a unified framework for fair and stable graph representation learning. In *Uncertainty in Artificial Intelligence*, pages 2114–2124. PMLR, 2021.
- [2] Chirag Agarwal, Owen Queen, Himabindu Lakkaraju, and Marinka Zitnik. An explainable ai library for benchmarking graph explainers. 2018.
- [3] Junaid Ali, Mahmoudreza Babaei, Abhijnan Chakraborty, Baharan Mirzasoleiman, Krishna P. Gummadi, and Adish Singla. On the fairness of time-critical influence maximization in social networks, 2021.
- [4] Joshua W Anderson and Shyam Visweswaran. Algorithmic individual fairness for healthcare: A scoping review. *medRxiv*, pages 2024–03, 2024.
- [5] Gowtham Atluri, Anuj Karpatne, and Vipin Kumar. Spatio-temporal data mining: A survey of problems and methods. *ACM Computing Surveys (CSUR)*, 51(4):1–41, 2018.
- [6] Aleksandar Bojchevski and Stephan Günnemann. Certifiable robustness to graph perturbations. *Advances in Neural Information Processing Systems*, 32, 2019.
- [7] Antoine Bordes, Nicolas Usunier, Alberto Garcia-Duran, Jason Weston, and Oksana Yakhnenko. Translating embeddings for modeling multi-relational data. *Advances in neural information processing systems*, 26, 2013.
- [8] Avishek Joey Bose and William L. Hamilton. Compositional fairness constraints for graph embeddings, 2019.
- [9] Maarten Buyl and Tijl De Bie. Debayes: a bayesian method for debiasing network embeddings, 2021.
- [10] April Chen, Ryan A Rossi, Namyong Park, Puja Trivedi, Yu Wang, Tong Yu, Sungchul Kim, Franck Dernoncourt, and Nesreen K Ahmed. Fairness-aware graph neural networks: A survey. *ACM Transactions on Knowledge Discovery from Data*, 18(6):1–23, 2024.
- [11] Eunjoon Cho, Seth A Myers, and Jure Leskovec. Friendship and mobility: user movement in location-based social networks. In *Proceedings of the 17th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 1082–1090, 2011.
- [12] Manvi Choudhary, Charlotte Laclau, and Christine Largeron. A survey on fairness for machine learning on graphs. *arXiv preprint arXiv:2205.05396*, 2022.
- [13] Zicun Cong, Baoxu Shi, Shan Li, Jaewon Yang, Qi He, and Jian Pei. Fairsample: Training fair and accurate graph convolutional neural networks efficiently. *IEEE Transactions on Knowledge and Data Engineering*, 2023.
- [14] Sean Current, Yuntian He, Saket Gurukar, and Srinivasan Parthasarathy. Fairegm: Fair link prediction and recommendation via emulated graph modification. In *Equity and Access in Algorithms, Mechanisms, and Optimization*, EAAMO '22. ACM, October 2022.
- [15] Enyan Dai and Suhang Wang. Say no to the discrimination: Learning fair graph neural networks with limited sensitive attribute information, 2021.
- [16] Enyan Dai, Tianxiang Zhao, Huaisheng Zhu, Junjie Xu, Zhimeng Guo, Hui Liu, Jiliang Tang, and Suhang Wang. A comprehensive survey on trustworthy graph neural networks: Privacy, robustness, fairness, and explainability. *arXiv preprint arXiv:2204.08570*, 2022.
- [17] Austin Derrow-Pinion, Jennifer She, David Wong, Oliver Lange, Todd Hester, Luis Perez, Marc Nunkesser, Seongjae Lee, Xueying Guo, Brett Wiltshire, et al. Eta prediction with graph neural networks in google maps. In *Proceedings of the 30th ACM International Conference on Information & Knowledge Management*, pages 3767–3776, 2021.

- [18] Guimin Dong, Mingyue Tang, Zhiyuan Wang, Jiechao Gao, Sikun Guo, Lihua Cai, Robert Gutierrez, Bradford Campbel, Laura E Barnes, and Mehdi Boukhechba. Graph neural networks in iot: A survey. *ACM Transactions on Sensor Networks*, 19(2):1–50, 2023.
- [19] Yushun Dong, Jian Kang, Hanghang Tong, and Jundong Li. Individual fairness for graph neural networks: A ranking based approach. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*, pages 300–310, 2021.
- [20] Yushun Dong, Oyku Deniz Kose, Yanning Shen, and Jundong Li. Fairness in graph machine learning: Recent advances and future perspectives. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 5794–5795, 2023.
- [21] Yushun Dong, Zhenyu Lei, Zaiyi Zheng, Song Wang, Jing Ma, Alex Jing Huang, Chen Chen, and Jundong Li. Pygdebias: A python library for debiasing in graph learning. In *Companion Proceedings of the ACM on Web Conference 2024*, pages 1019–1022, 2024.
- [22] Yushun Dong, Ninghao Liu, Brian Jalaian, and Jundong Li. Edits: Modeling and mitigating data bias for graph neural networks. In *Proceedings of the ACM web conference 2022*, pages 1259–1269, 2022.
- [23] Yushun Dong, Jing Ma, Song Wang, Chen Chen, and Jundong Li. Fairness in graph mining: A survey. *IEEE Transactions on Knowledge and Data Engineering*, 2023.
- [24] Yushun Dong, Binchi Zhang, Hanghang Tong, and Jundong Li. Elegant: Certified defense on the fairness of graph neural networks. *arXiv preprint arXiv:2311.02757*, 2023.
- [25] Cynthia Dwork, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Richard Zemel. Fairness through awareness. In *Proceedings of the 3rd innovations in theoretical computer science conference*, pages 214–226, 2012.
- [26] Wei Fan, Kunpeng Liu, Rui Xie, Hao Liu, Hui Xiong, and Yanjie Fu. Fair graph auto-encoder for unbiased graph representations with wasserstein distance. In *2021 IEEE International Conference on Data Mining (ICDM)*, pages 1054–1059, 2021.
- [27] Golnoosh Farnadi, Pigi Kouki, Spencer K. Thompson, Sriram Srinivasan, and Lise Getoor. A fairness-aware hybrid recommender system, 2018.
- [28] Shubham Gupta and Ambedkar Dukkipati. Protecting individual interests across clusters: Spectral clustering with guarantees. *ArXiv*, abs/2105.03714, 2021.
- [29] Moritz Hardt, Eric Price, and Nati Srebro. Equality of opportunity in supervised learning. *Advances in neural information processing systems*, 29, 2016.
- [30] Erhu He, Yiqun Xie, Alexander Sun, Jacob Zwart, Jie Yang, Zhenong Jin, Yang Wang, Hassan Karimi, and Xiaowei Jia. Fair graph learning using constraint-aware priority adjustment and graph masking in river networks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 22087–22095, 2024.
- [31] Weihua Hu, Matthias Fey, Marinka Zitnik, Yuxiao Dong, Hongyu Ren, Bowen Liu, Michele Catasta, and Jure Leskovec. Open graph benchmark: Datasets for machine learning on graphs. *Advances in neural information processing systems*, 33:22118–22133, 2020.
- [32] Shenyang Huang, Farimah Poursafaei, Jacob Danovitch, Matthias Fey, Weihua Hu, Emanuele Rossi, Jure Leskovec, Michael Bronstein, Guillaume Rabusseau, and Reihaneh Rabbany. Temporal graph benchmark for machine learning on temporal graphs, 2023.
- [33] Mohammad Rasool Izadi, Yihao Fang, Robert Stevenson, and Lizhen Lin. Optimization of graph neural networks with natural gradient descent, 2020.
- [34] Zeinab S. Jalali, Weixiang Wang, Myunghwan Kim, Hema Raghavan, and Sucheta Soundarajan. *On the Information Unfairness of Social Networks*, pages 613–521.
- [35] Zhimeng Jiang, Xiaotian Han, Chao Fan, Zirui Liu, Na Zou, Ali Mostafavi, and Xia Hu. Fmp: Toward fair graph message passing against topology bias. *arXiv preprint arXiv:2202.04187*, 2022.

- [36] Zhimeng Jiang, Xiaotian Han, Chao Fan, Zirui Liu, Na Zou, Ali Mostafavi, and Xia Hu. Chasing fairness in graphs: A gnn architecture perspective. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 21214–21222, 2024.
- [37] Kareem L Jordan and Tina L Freiburger. The effect of race/ethnicity on sentencing: Examining sentence type, jail length, and prison length. *Journal of Ethnicity in Criminal Justice*, 13(3):179–196, 2015.
- [38] Jian Kang, Jingrui He, Ross Maciejewski, and Hanghang Tong. Inform: Individual fairness on graph mining. In *Proceedings of the 26th ACM SIGKDD international conference on knowledge discovery & data mining*, pages 379–389, 2020.
- [39] Ahmad Khajehnejad, Moein Khajehnejad, Mahmoudreza Babaei, Krishna P. Gummadi, Adrian Weller, and Baharan Mirzasoleiman. Crosswalk: Fairness-enhanced node representation learning, 2022.
- [40] Moein Khajehnejad, Ahmad Asgharian Rezaei, Mahmoudreza Babaei, Jessica Hoffmann, Mahdi Jalili, and Adrian Weller. Adversarial graph embeddings for fair influence maximization over social networks, 2020.
- [41] O. Deniz Kose and Yanning Shen. Fair node representation learning via adaptive data augmentation, 2022.
- [42] Preethi Lahoti, Krishna P. Gummadi, and Gerhard Weikum. Operationalizing individual fairness with pairwise fair representations. *Proceedings of the VLDB Endowment*, 13(4):506–518, December 2019.
- [43] Jure Leskovec, Daniel Huttenlocher, and Jon Kleinberg. Signed networks in social media. In *Proceedings of the SIGCHI conference on human factors in computing systems*, pages 1361–1370, 2010.
- [44] Jure Leskovec and Julian McAuley. Learning to discover social circles in ego networks. *Advances in neural information processing systems*, 25, 2012.
- [45] Peizhao Li, Yifei Wang, Han Zhao, Pengyu Hong, and Hongfu Liu. On dyadic fairness: Exploring and mitigating bias in graph connections. In *International Conference on Learning Representations*, 2021.
- [46] Yanying Li, Yue Ning, Rong Liu, Ying Wu, and Wendy Hui Wang. Fairness of classification using users’ social relationships in online peer-to-peer lending. In *Companion Proceedings of the Web Conference 2020*, pages 733–742, 2020.
- [47] Hongyi Ling, Zhimeng Jiang, Youzhi Luo, Shuiwang Ji, and Na Zou. Learning fair graph representations via automated data augmentations. In *International Conference on Learning Representations (ICLR)*, 2023.
- [48] Donald Loveland, Jiayi Pan, Aaresh Farrokh Bhatena, and Yiyang Lu. Fairedit: Preserving fairness in graph neural networks through greedy graph editing. *arXiv preprint arXiv:2201.03681*, 2022.
- [49] Sitao Luan, Chenqing Hua, Qincheng Lu, Jiaqi Zhu, Mingde Zhao, Shuyuan Zhang, Xiao-Wen Chang, and Doina Precup. Is heterophily a real nightmare for graph neural networks to do node classification?, 2021.
- [50] Kolby Nottingham Markelle Kelly, Rachel Longjohn. The uci machine learning repository.
- [51] Ninareh Mehrabi, Fred Morstatter, Nripsuta Saxena, Kristina Lerman, and Aram Galstyan. A survey on bias and fairness in machine learning. *ACM computing surveys (CSUR)*, 54(6):1–35, 2021.
- [52] Annamalai Narayanan, Mahinthan Chandramohan, Rajasekar Venkatesan, Lihui Chen, Yang Liu, and Shantanu Jaiswal. graph2vec: Learning distributed representations of graphs. *arXiv preprint arXiv:1707.05005*, 2017.

- [53] John Palowitch and Bryan Perozzi. Monet: Debiasing graph embeddings via the metadata-orthogonal training unit, 2020.
- [54] Georgios A Pavlopoulos, Maria Secrier, Charalampos N Moschopoulos, Theodoros G Soldatos, Sophia Kossida, Jan Aerts, Reinhard Schneider, and Pantelis G Bagos. Using graph theory to analyze biological networks. *BioData mining*, 4:1–27, 2011.
- [55] Xiaowei Qian, Zhimeng Guo, Jialiang Li, Haitao Mao, Bingheng Li, Suhang Wang, and Yao Ma. Addressing shortcomings in fair graph learning datasets: Towards a new benchmark. *arXiv preprint arXiv:2403.06017*, 2024.
- [56] Tahleen Rahman, Bartlomiej Surma, Michael Backes, and Yang Zhang. Fairwalk: Towards fair graph embedding. 2019.
- [57] Aida Rahmattalabi, Shahin Jabbari, Himabindu Lakkaraju, Phebe Vayanos, Max Izenberg, Ryan Brown, Eric Rice, and Milind Tambe. Fair influence maximization: A welfare optimization approach. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 11630–11638, 2021.
- [58] Aida Rahmattalabi, Phebe Vayanos, Anthony Fulginiti, Eric Rice, Bryan Wilder, Amulya Yadav, and Milind Tambe. Exploring algorithmic fairness in robust graph covering problems. *Advances in neural information processing systems*, 32, 2019.
- [59] Feiliang Ren, Juchen Li, Huihui Zhang, Shilei Liu, Bochao Li, Ruicheng Ming, and Yujia Bai. Knowledge graph embedding with atrous convolution and residual learning, 2020.
- [60] Anwar Said, Roza G. Bayrak, Tyler Derr, Mudassir Shabbir, Daniel Moyer, Catie Chang, and Xenofon Koutsoukos. Neurograph: Benchmarks for graph machine learning in brain connectomics, 2023.
- [61] Chao Shang, Yun Tang, Jing Huang, Jinbo Bi, Xiaodong He, and Bowen Zhou. End-to-end structure-aware convolutional networks for knowledge base completion, 2018.
- [62] Oleksandr Shchur, Maximilian Mumme, Aleksandar Bojchevski, and Stephan Günnemann. Pitfalls of graph neural network evaluation. *Relational Representation Learning Workshop, NeurIPS 2018*, 2018.
- [63] Anuj Kumar Sirohi, Anjali Gupta, Sayan Ranu, Sandeep Kumar, and Amitabha Bagchi. Graphgini: Fostering individual and group fairness in graph neural networks. *arXiv preprint arXiv:2402.12937*, 2024.
- [64] Weihao Song, Yushun Dong, Ninghao Liu, and Jundong Li. Guide: Group equality informed individual fairness in graph neural networks. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 1625–1634, 2022.
- [65] Zixing Song, Yuji Zhang, and Irwin King. Towards fair financial services for all: A temporal gnn approach for individual fairness on transaction networks. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management*, pages 2331–2341, 2023.
- [66] Julian Stier and Michael Granitzer. Deepgg: a deep graph generator. In *Advances in Intelligent Data Analysis XIX: 19th International Symposium on Intelligent Data Analysis, IDA 2021, Porto, Portugal, April 26–28, 2021, Proceedings*, page 325. Springer Nature.
- [67] Ana-Andreea Stoica, Jessy Xinyi Han, and Augustin Chaintreau. Seeding network influence in biased networks and the benefits of diversity. In *Proceedings of The Web Conference 2020*, pages 2089–2098, 2020.
- [68] Fabian M. Suchanek, Gjergji Kasneci, and Gerhard Weikum. Yago: a core of semantic knowledge. In *Proceedings of the 16th International Conference on World Wide Web, WWW '07*, page 697–706, New York, NY, USA, 2007. Association for Computing Machinery.
- [69] Lubos Takac and Michal Zabovsky. Data analysis in public social networks. In *International scientific conference and international workshop present day trends of innovations*, volume 1, 2012.

- [70] Huaiyu Wan, Yutao Zhang, Jing Zhang, and Jie Tang. Aminer: Search and mining of academic social networks. *Data Intelligence*, 1(1):58–76, 2019.
- [71] Jianian Wang, Sheng Zhang, Yanghua Xiao, and Rui Song. A review on graph neural network methods in financial applications. *arXiv preprint arXiv:2111.15367*, 2021.
- [72] Yu Wang, Yuying Zhao, Yushun Dong, Huiyuan Chen, Jundong Li, and Tyler Derr. Improving fairness in graph neural networks via mitigating sensitive attribute leakage. In *Proceedings of the 28th ACM SIGKDD conference on knowledge discovery and data mining*, pages 1938–1948, 2022.
- [73] Le Wu, Lei Chen, Pengyang Shao, Richang Hong, Xiting Wang, and Meng Wang. Learning fair representations for recommendation: A graph-based perspective. In *Proceedings of the Web Conference 2021*, pages 2198–2208, 2021.
- [74] Shiwen Wu, Fei Sun, Wentao Zhang, Xu Xie, and Bin Cui. Graph neural networks in recommender systems: a survey. *ACM Computing Surveys*, 55(5):1–37, 2022.
- [75] Zonghan Wu, Shirui Pan, Fengwen Chen, Guodong Long, Chengqi Zhang, and S Yu Philip. A comprehensive survey on graph neural networks. *IEEE transactions on neural networks and learning systems*, 32(1):4–24, 2020.
- [76] Bingke Xu, Yue Cui, Zipeng Sun, Liwei Deng, and Kai Zheng. Fair representation learning in knowledge-aware recommendation. In *2021 IEEE International Conference on Big Knowledge (ICBK)*, pages 385–392, 2021.
- [77] Han Xuanyuan, Pietro Barbiero, Dobrik Georgiev, Lucie Charlotte Magister, and Pietro Lió. Global concept-based interpretability for graph neural networks via neuron analysis, 2023.
- [78] I-Cheng Yeh and Che-hui Lien. The comparisons of data mining techniques for the predictive accuracy of probability of default of credit card clients. *Expert systems with applications*, 36(2):2473–2480, 2009.
- [79] Zhitao Ying, Dylan Bourgeois, Jiaxuan You, Marinka Zitnik, and Jure Leskovec. Gnnexplainer: Generating explanations for graph neural networks. *Advances in neural information processing systems*, 32, 2019.
- [80] Jiaxuan You, Rex Ying, and Jure Leskovec. Position-aware graph neural networks. In *International conference on machine learning*, pages 7134–7143. PMLR, 2019.
- [81] Haitao Yuan and Guoliang Li. A survey of traffic prediction: from spatio-temporal data to intelligent transportation. *Data Science and Engineering*, 6(1):63–85, 2021.
- [82] Ziqian Zeng, Rashidul Islam, Kamrun Naher Keya, James Foulds, Yangqiu Song, and Shimei Pan. Fair representation learning for heterogeneous information networks, 2021.
- [83] Duna Zhan, Dongliang Guo, Pengsheng Ji, and Sheng Li. Bridging the fairness divide: Achieving group and individual fairness in graph neural networks. *arXiv preprint arXiv:2404.17511*, 2024.
- [84] Binchi Zhang, Yushun Dong, Chen Chen, Yada Zhu, Minnan Luo, and Jundong Li. Adversarial attacks on fairness of graph neural networks. *arXiv preprint arXiv:2310.13822*, 2023.
- [85] Guixian Zhang, Debo Cheng, Guan Yuan, and Shichao Zhang. Learning fair representations via rebalancing graph structure. *Information Processing & Management*, 61(1):103570, 2024.
- [86] Yue Zhang and Arti Ramesh. Learning fairness-aware relational structures. *arXiv preprint arXiv:2002.09471*, 2020.
- [87] Jie Zhou, Ganqu Cui, Shengding Hu, Zhengyan Zhang, Cheng Yang, Zhiyuan Liu, Lifeng Wang, Changcheng Li, and Maosong Sun. Graph neural networks: A review of methods and applications. *AI open*, 1:57–81, 2020.
- [88] Marinka Zitnik, Monica Agrawal, and Jure Leskovec. Modeling polypharmacy side effects with graph convolutional networks. *Bioinformatics*, 34(13):i457–i466, 2018.

- [89] Marinka Zitnik and Jure Leskovec. Predicting multicellular function through multi-layer tissue networks. *Bioinformatics*, 33(14):i190–i198, 2017.
- [90] Daniel Zügner and Stephan Günnemann. Certifiable robustness and robust training for graph convolutional networks. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, page 246–256, 2019.

## A Documentation of New Datasets

### A.1 Dataset Introduction and Intended Uses

**Introduction of New Datasets.** In this benchmark, we introduce two new crafted datasets: AMiner-S and AMiner-L, which are coauthor networks constructed from the AMiner network [70] in two different ways. The AMiner-S dataset is extracted from AMiner by its largest connected component, and contains 39,424 nodes, 52,460 edges, and 5,694 attributes in total. Here the nodes denote the researchers, the edges represent the co-authorship between researchers, and the attributes are created from the abstracts of the associated papers. In addition, the sensitive attribute is the continent of the affiliation of each researcher belongs to, and the task associated with this dataset is to predict the primary research field of each researcher. The AMiner-L dataset is extracted from AMiner by random walk, which has 129,726 nodes, 591,039 edges, and 5,694 attributes in total. All the settings including the sensitive attribute and the associated tasks are the same with AMiner-S. It is worth-noting that both datasets AMiner-S and AMiner-L are anonymous and thus have no privacy concern, which ensures compliance with privacy regulations such as the General Data Protection Regulation (GDPR) and allows for broader sharing and usage across institutions.

**Intended Uses.** The two datasets are designed for research in the field of graph learning, especially designed for fairness-related research on graphs. The datasets allow researchers to evaluate their fairness-aware graph learning algorithms, thus empower them to measure and mitigate bias that may exhibit by graph learning algorithms.

### A.2 Dataset and Benchmark URLs

The two newly constructed datasets AMiner-S and AMiner-L are accessible through PyGDebias<sup>1</sup> library. Note that the two new datasets are extracted from the AMiner dataset<sup>2</sup>. Specifically, for all datasets that we use as benchmark in this paper, we store and maintain them, e.g., AMiner-S<sup>3</sup> and AMiner-L<sup>4</sup>, based on Google Drive and GitHub to ensure security and convenience. Meanwhile, the PyGDebias library provides an automatic procedure to access them via downloading from the same source. Specifically, PyGDebias is integrated with a convenient interface where all datasets could be downloaded and used via importing the *dataset* sub-module in the library. Each dataset in this sub-module is formatted as a python class, where they could be instantiated and provide designated information associated with it such as attributes and sensitive features.

### A.3 Croissant URLs

To ensure convenient access to the details regarding the two new datasets (i.e., AMiner-L and AMiner-S), we construct the two new datasets in the Croissant format<sup>5</sup> here: [https://drive.google.com/drive/folders/1zw\\_iRjWvqvzKXAnGBU71dyD6b5RBMPF4?usp=sharing](https://drive.google.com/drive/folders/1zw_iRjWvqvzKXAnGBU71dyD6b5RBMPF4?usp=sharing), e.g., the croissant metadata includes essential information such as the license details, a brief description, and citation guidelines for each dataset.

### A.4 Author Statement

We bear all responsibility in case of violation of rights. All datasets are under BSD-2-Clause license.

<sup>1</sup><https://github.com/yushundong/PyGDebias>

<sup>2</sup>We provide the url of the AMiner dataset here for convenience <https://www.aminer.org/citation>

<sup>3</sup>AMiner-S: [https://github.com/PyGDebias-Team/data/tree/main/2023-7-26/raw\\_Small](https://github.com/PyGDebias-Team/data/tree/main/2023-7-26/raw_Small)

<sup>4</sup>AMiner-L: [https://drive.google.com/file/d/1wYb0wP8XgWsAhGpt\\_o3fpMZDM-yIATFQ/view](https://drive.google.com/file/d/1wYb0wP8XgWsAhGpt_o3fpMZDM-yIATFQ/view)

<sup>5</sup><https://github.com/mlcommons/croissant>

## A.5 Hosting, Licensing, and Maintenance Plans

PyGDebias library is hosted and maintained on GitHub, where we have provided access to all the datasets used in this paper. In addition, the datasets are hosted and maintained on Google Drive and GitHub according to their sizes, which ensures their long-term availability. PyGDebias library and all datasets are under BSD-2-Clause license. To enhance the robustness and facilitate consistent support for future research works, we committed to a comprehensive maintenance plan for both the PyGDebias library and the datasets. Specifically, all authors in this paper will maintain the usability and stability of PyGDebias to facilitate the advancement of fairness-aware graph learning research. Additionally, *GitHub Action*<sup>6</sup> are adopted to ensure each update of the library upholds consistent stability of the library. Meanwhile, *CodeQL*<sup>7</sup> are adopted to perform automate security checks and identify potential vulnerabilities proactively. These toolkits help ensure a broader contributions for the further development of PyGDebias.

## B Reproducibility

In this section, we will introduce the details of the experiments for the purpose of reproducibility. We first provide a detailed description of benchmark datasets employed in this study. Subsequently, we describe the implementation of the experiments on these datasets, followed by an in-depth explanation of code basis and hardware support of the implementation.

**Benchmark Datasets.** We collected seven real-world attributed graph datasets in this benchmark paper, including five existing commonly used ones and two newly constructed ones. We provide a brief introduction for each as follows. (1) *Pokec-z* [69]. The Pokec-z dataset is sampled from Pokec, which is the most popular on-line social network in Slovakia. Pokec contains anonymized data of the whole social network in 2012, in which the profiles contain gender, age, hobbies, interest, education, working field, etc. Here the region corresponding to each user is considered as the sensitive attributes, and the task is to predict the working field of each user. (2) *Pokec-n* [69]. The Pokec-n dataset is sampled from Pokec as well, while the users in Pokec-n come from different geographical regions compared with those in Pokec-z. Pokec-n shares the same settings on sensitive attributes and predictive task as those of Pokec-z. (3) *German Credit* [50]. The German Credit dataset is a credit graph, where nodes represent clients in a German bank and they are connected based on the similarity of their credit accounts. Here the task is to classify the credit risks of clients into high/low, and gender is considered as the sensitive attribute. (4) *Credit Defaulter* [78]. Credit contains clients who are connected based on the similarity of their spending and payment patterns. Here the task is to classify whether each client will default on the credit card payment or not, and age is considered as the sensitive attribute. (5) *Recidivism* [37]. Recidivism dataset is a graph of defendants who got released on bail at the U.S state courts during 1990-2009. These defendants are connected based on the similarity of past criminal records and demographics. The task is to determine whether a defendant deserves bail or not, and their race is considered as the sensitive attribute. (6) *AMiner-S (newly constructed)*. AMiner-S is a co-author graph we extracted from the AMiner network [70] by its largest connected component. Here nodes represent the researchers in different fields, and edges denote the co-authorship between researchers. The sensitive attribute is the continent of the affiliation each researcher belongs to, and the task is to predict the primary research field of each researcher. (7) *AMiner-L (newly constructed)*. AMiner-L is a co-author graph we extracted from the AMiner network by random walk. Compared with AMiner-S, AMiner-L bears a larger scale. AMiner-L shares the same settings on sensitive attributes and predictive task as those of AMiner-S.

**Experimental Settings.** All experiments are implemented based on PyGDebias 1.1.1 and repeated for three times. For a fair comparison, we perform a grid search to tune hyperparameters for all algorithms. For most of the experiments, we adopt Adam optimizer. All major experiments can be conveniently executed with the provided open-source code.

**Graph Learning Models.** We implement all fairness-aware graph learning algorithms with their official open-source code. The graph learning models and their associated code links are listed below.

- *FairWalk*: <https://github.com/EnderGed/Fairwalk>.
- *CrossWalk*: <https://github.com/ahmadkhajehnejad/CrossWalk>.

<sup>6</sup><https://docs.github.com/en/actions>

<sup>7</sup><https://codeql.github.com/docs/index.html>



Table 4: Performance comparison between different group fairness-aware graph learning models. The best ones are in **Bold**, and OOM represents out-of-memory.

Metrics	Models	Pokec-z	Pokec-n	German Credit	Credit Defaulter	Recidivism	AMiner-S	AMiner-L
ACC	DeepWalk	66.44 ( $\pm 1.33$ )	63.58 ( $\pm 1.06$ )	62.52 ( $\pm 3.59$ )	71.64 ( $\pm 0.48$ )	90.14 ( $\pm 1.52$ )	86.35 ( $\pm 0.27$ )	88.54 ( $\pm 1.56$ )
	FairWalk	64.62 ( $\pm 0.34$ )	61.08 ( $\pm 0.33$ )	<b>68.70</b> ( $\pm 0.00$ )	69.48 ( $\pm 0.27$ )	75.32 ( $\pm 0.10$ )	79.75 ( $\pm 0.08$ )	<u>96.18</u> ( $\pm 0.01$ )
	CrossWalk	57.98 ( $\pm 0.23$ )	61.58 ( $\pm 0.27$ )	63.85 ( $\pm 1.59$ )	67.07 ( $\pm 0.12$ )	88.05 ( $\pm 0.10$ )	79.73 ( $\pm 0.12$ )	<b>96.21</b> ( $\pm 0.03$ )
	GNN	66.04 ( $\pm 0.43$ )	<u>68.12</u> ( $\pm 1.09$ )	66.94 ( $\pm 1.01$ )	76.41 ( $\pm 1.88$ )	86.68 ( $\pm 2.50$ )	<u>89.97</u> ( $\pm 0.62$ )	91.21 ( $\pm 0.01$ )
	FairGNN	66.41 ( $\pm 1.00$ )	66.80 ( $\pm 0.52$ )	67.32 ( $\pm 2.52$ )	<b>79.91</b> ( $\pm 14.1$ )	<u>90.77</u> ( $\pm 2.98$ )	<b>92.22</b> ( $\pm 0.18$ )	OOM
	NIFTY	63.35 ( $\pm 0.13$ )	<b>68.26</b> ( $\pm 0.81$ )	64.13 ( $\pm 2.16$ )	65.55 ( $\pm 0.09$ )	86.49 ( $\pm 0.74$ )	89.27 ( $\pm 0.03$ )	91.92 ( $\pm 0.19$ )
	EDITS	OOM	OOM	62.25 ( $\pm 4.95$ )	71.02 ( $\pm 0.34$ )	<b>90.99</b> ( $\pm 0.14$ )	OOM	OOM
	FairEdit	OOM	OOM	65.93 ( $\pm 2.84$ )	71.01 ( $\pm 3.63$ )	83.86 ( $\pm 0.44$ )	OOM	OOM
	FairVGNN	<b>67.52</b> ( $\pm 3.77$ )	68.09 ( $\pm 0.51$ )	<b>70.10</b> ( $\pm 0.58$ )	<u>78.66</u> ( $\pm 4.29$ )	85.69 ( $\pm 5.37$ )	OOM	OOM
AUC-ROC Score	DeepWalk	66.50 ( $\pm 1.34$ )	61.85 ( $\pm 1.06$ )	56.90 ( $\pm 1.75$ )	53.61 ( $\pm 0.66$ )	87.18 ( $\pm 1.34$ )	73.58 ( $\pm 0.43$ )	82.68 ( $\pm 3.28$ )
	FairWalk	64.92 ( $\pm 0.43$ )	61.52 ( $\pm 0.34$ )	54.05 ( $\pm 0.83$ )	55.51 ( $\pm 0.29$ )	72.09 ( $\pm 0.11$ )	65.35 ( $\pm 0.54$ )	<u>88.72</u> ( $\pm 0.08$ )
	CrossWalk	58.99 ( $\pm 0.27$ )	62.98 ( $\pm 0.27$ )	51.42 ( $\pm 0.43$ )	54.50 ( $\pm 0.42$ )	82.89 ( $\pm 0.11$ )	64.44 ( $\pm 0.52$ )	<b>89.67</b> ( $\pm 0.04$ )
	GNN	64.16 ( $\pm 0.62$ )	67.05 ( $\pm 1.14$ )	<b>67.36</b> ( $\pm 3.59$ )	<u>62.62</u> ( $\pm 0.51$ )	84.60 ( $\pm 2.10$ )	<u>81.95</u> ( $\pm 1.46$ )	86.82 ( $\pm 0.11$ )
	FairGNN	<u>69.47</u> ( $\pm 1.04$ )	<u>68.51</u> ( $\pm 0.51$ )	52.91 ( $\pm 2.15$ )	56.73 ( $\pm 3.16$ )	<b>92.87</b> ( $\pm 2.42$ )	<b>86.23</b> ( $\pm 0.14$ )	OOM
	NIFTY	62.58 ( $\pm 0.14$ )	66.78 ( $\pm 0.82$ )	62.94 ( $\pm 5.78$ )	61.85 ( $\pm 0.70$ )	85.58 ( $\pm 0.83$ )	79.28 ( $\pm 0.15$ )	86.62 ( $\pm 0.69$ )
	EDITS	OOM	OOM	60.02 ( $\pm 1.10$ )	61.14 ( $\pm 0.36$ )	<u>92.34</u> ( $\pm 0.31$ )	OOM	OOM
	FairEdit	OOM	OOM	56.30 ( $\pm 2.33$ )	62.50 ( $\pm 0.61$ )	81.97 ( $\pm 0.48$ )	OOM	OOM
	FairVGNN	<b>71.19</b> ( $\pm 0.94$ )	<b>70.14</b> ( $\pm 0.55$ )	<u>65.48</u> ( $\pm 3.46$ )	<b>68.81</b> ( $\pm 0.81$ )	84.74 ( $\pm 2.70$ )	OOM	OOM
$\Delta_{SP}$	DeepWalk	5.49 ( $\pm 1.07$ )	5.90 ( $\pm 0.88$ )	10.4 ( $\pm 1.01$ )	6.69 ( $\pm 0.31$ )	6.50 ( $\pm 0.18$ )	6.75 ( $\pm 0.29$ )	6.41 ( $\pm 0.46$ )
	FairWalk	<b>0.60</b> ( $\pm 1.89$ )	<u>0.29</u> ( $\pm 2.12$ )	3.36 ( $\pm 1.01$ )	6.20 ( $\pm 0.32$ )	<b>4.67</b> ( $\pm 0.33$ )	<b>3.06</b> ( $\pm 0.32$ )	<b>4.28</b> ( $\pm 0.17$ )
	CrossWalk	<u>1.75</u> ( $\pm 1.17$ )	<b>0.21</b> ( $\pm 1.63$ )	0.35 ( $\pm 1.75$ )	6.35 ( $\pm 0.51$ )	<u>5.14</u> ( $\pm 0.21$ )	3.59 ( $\pm 0.43$ )	<u>5.60</u> ( $\pm 0.42$ )
	GNN	10.4 ( $\pm 1.46$ )	14.7 ( $\pm 0.40$ )	32.4 ( $\pm 1.93$ )	20.6 ( $\pm 4.34$ )	8.54 ( $\pm 0.10$ )	7.28 ( $\pm 0.31$ )	6.75 ( $\pm 0.00$ )
	FairGNN	2.06 ( $\pm 1.82$ )	8.11 ( $\pm 1.16$ )	14.2 ( $\pm 0.83$ )	<u>2.51</u> ( $\pm 5.61$ )	7.48 ( $\pm 0.30$ )	5.36 ( $\pm 0.27$ )	OOM
	NIFTY	2.48 ( $\pm 0.47$ )	2.42 ( $\pm 0.84$ )	<u>0.26</u> ( $\pm 0.41$ )	12.5 ( $\pm 3.64$ )	7.88 ( $\pm 0.43$ )	<u>3.25</u> ( $\pm 0.52$ )	5.86 ( $\pm 0.44$ )
	EDITS	OOM	OOM	<b>0.18</b> ( $\pm 1.78$ )	10.7 ( $\pm 0.66$ )	7.36 ( $\pm 0.05$ )	OOM	OOM
	FairEdit	OOM	OOM	3.15 ( $\pm 3.73$ )	<b>1.95</b> ( $\pm 0.21$ )	7.39 ( $\pm 0.50$ )	OOM	OOM
	FairVGNN	6.33 ( $\pm 1.90$ )	5.31 ( $\pm 1.19$ )	3.13 ( $\pm 0.28$ )	9.93 ( $\pm 0.88$ )	6.54 ( $\pm 0.53$ )	OOM	OOM
$\Delta_{EO}$	DeepWalk	7.31 ( $\pm 1.19$ )	4.85 ( $\pm 2.07$ )	13.7 ( $\pm 2.17$ )	5.79 ( $\pm 1.21$ )	4.48 ( $\pm 0.38$ )	11.5 ( $\pm 1.47$ )	11.1 ( $\pm 3.11$ )
	FairWalk	<b>0.20</b> ( $\pm 1.35$ )	<b>0.08</b> ( $\pm 2.47$ )	2.68 ( $\pm 0.86$ )	4.40 ( $\pm 0.64$ )	<b>1.34</b> ( $\pm 1.03$ )	2.54 ( $\pm 1.90$ )	<b>2.44</b> ( $\pm 1.01$ )
	CrossWalk	1.27 ( $\pm 0.96$ )	<u>1.46</u> ( $\pm 1.10$ )	4.59 ( $\pm 1.83$ )	<u>1.16</u> ( $\pm 0.60$ )	<u>1.70</u> ( $\pm 0.50$ )	<u>2.23</u> ( $\pm 0.79$ )	<u>4.50</u> ( $\pm 1.77$ )
	GNN	8.99 ( $\pm 1.07$ )	17.2 ( $\pm 1.13$ )	23.4 ( $\pm 1.48$ )	19.2 ( $\pm 4.41$ )	6.85 ( $\pm 0.23$ )	12.3 ( $\pm 0.65$ )	8.87 ( $\pm 0.22$ )
	FairGNN	<u>0.29</u> ( $\pm 1.06$ )	9.84 ( $\pm 0.98$ )	9.31 ( $\pm 0.03$ )	1.62 ( $\pm 5.94$ )	3.60 ( $\pm 0.24$ )	6.26 ( $\pm 0.60$ )	OOM
	NIFTY	3.25 ( $\pm 0.47$ )	6.17 ( $\pm 0.88$ )	3.37 ( $\pm 0.45$ )	9.89 ( $\pm 3.73$ )	3.14 ( $\pm 0.24$ )	<b>0.70</b> ( $\pm 1.54$ )	6.63 ( $\pm 0.22$ )
	EDITS	OOM	OOM	<u>2.19</u> ( $\pm 7.06$ )	7.74 ( $\pm 0.48$ )	4.63 ( $\pm 0.53$ )	OOM	OOM
	FairEdit	OOM	OOM	10.1 ( $\pm 2.95$ )	<b>0.94</b> ( $\pm 0.24$ )	7.04 ( $\pm 0.63$ )	OOM	OOM
	FairVGNN	2.41 ( $\pm 2.09$ )	7.61 ( $\pm 0.85$ )	<b>1.80</b> ( $\pm 0.10$ )	7.34 ( $\pm 0.39$ )	5.62 ( $\pm 0.45$ )	OOM	OOM
$\Delta_{Utility}$	DeepWalk	3.38 ( $\pm 1.48$ )	<u>0.21</u> ( $\pm 1.27$ )	17.0 ( $\pm 4.27$ )	6.61 ( $\pm 0.96$ )	<u>0.68</u> ( $\pm 1.53$ )	0.95 ( $\pm 0.39$ )	2.28 ( $\pm 1.14$ )
	FairWalk	4.04 ( $\pm 0.36$ )	0.24 ( $\pm 0.40$ )	10.6 ( $\pm 1.05$ )	2.33 ( $\pm 0.39$ )	1.95 ( $\pm 0.32$ )	<u>0.39</u> ( $\pm 0.32$ )	<b>1.43</b> ( $\pm 0.10$ )
	CrossWalk	0.93 ( $\pm 0.26$ )	2.86 ( $\pm 0.46$ )	16.8 ( $\pm 2.18$ )	9.27 ( $\pm 0.46$ )	1.96 ( $\pm 0.16$ )	5.10 ( $\pm 0.20$ )	1.88 ( $\pm 0.12$ )
	GNN	2.19 ( $\pm 1.09$ )	2.57 ( $\pm 1.21$ )	<u>2.90</u> ( $\pm 1.19$ )	4.63 ( $\pm 2.63$ )	1.26 ( $\pm 2.66$ )	<b>0.33</b> ( $\pm 0.74$ )	<u>1.60</u> ( $\pm 0.04$ )
	FairGNN	<b>0.18</b> ( $\pm 1.02$ )	<b>0.02</b> ( $\pm 0.60$ )	9.19 ( $\pm 2.71$ )	<b>1.42</b> ( $\pm 12.13$ )	1.52 ( $\pm 2.96$ )	3.72 ( $\pm 0.15$ )	OOM
	NIFTY	<u>0.64</u> ( $\pm 0.30$ )	1.85 ( $\pm 0.82$ )	3.35 ( $\pm 3.25$ )	3.75 ( $\pm 0.98$ )	4.60 ( $\pm 0.77$ )	4.70 ( $\pm 0.09$ )	4.22 ( $\pm 0.16$ )
	EDITS	OOM	OOM	3.06 ( $\pm 5.28$ )	11.6 ( $\pm 2.25$ )	<b>0.29</b> ( $\pm 0.17$ )	OOM	OOM
	FairEdit	OOM	OOM	<b>0.44</b> ( $\pm 4.66$ )	<u>2.10</u> ( $\pm 4.61$ )	2.75 ( $\pm 0.43$ )	OOM	OOM
	FairVGNN	6.79 ( $\pm 3.65$ )	0.87 ( $\pm 0.64$ )	17.1 ( $\pm 0.68$ )	6.71 ( $\pm 3.63$ )	2.31 ( $\pm 6.06$ )	OOM	OOM

- *FairGNN*: <https://github.com/EnyanDai/FairGNN>.
- *NIFTY*: <https://github.com/chirag126/nifty>. Under MIT license.
- *EDITS*: <https://github.com/yushundong/EDITS>.
- *FairEdit*: <https://github.com/royull/FairEdit>.
- *FairVGNN*: <https://github.com/yuwvandy/fairvgnn>.
- *InFoRM*: <https://github.com/jiank2/inform>. Under MIT license.
- *REDRESS*: <https://github.com/yushundong/REDRESS>.
- *GUIDE*: <https://github.com/mikesong724/GUIDE>. Under MIT license.

Table 5: Performance comparison between different individual fairness-aware graph learning models. The best ones are in **Bold**, and OOM represents out-of-memory.

Metrics	Models	Pokec-z	Pokec-n	German Credit	Credit Defaulter	Recidivism	AMiner-S	AMiner-L
ACC	GNN	<b>65.71</b> ( $\pm 0.54$ )	<b>68.50</b> ( $\pm 0.77$ )	<b>67.13</b> ( $\pm 2.12$ )	<b>74.43</b> ( $\pm 3.60$ )	<b>84.55</b> ( $\pm 1.56$ )	<b>90.06</b> ( $\pm 0.32$ )	<b>93.12</b> ( $\pm 0.11$ )
	InFoRM	61.87 ( $\pm 3.75$ )	<u>66.08</u> ( $\pm 3.66$ )	59.40 ( $\pm 5.09$ )	<u>69.36</u> ( $\pm 5.21$ )	<u>80.52</u> ( $\pm 5.94$ )	87.41 ( $\pm 5.61$ )	<u>89.05</u> ( $\pm 5.21$ )
	REDRESS	62.35 ( $\pm 4.28$ )	65.39 ( $\pm 4.62$ )	<u>63.08</u> ( $\pm 4.86$ )	68.12 ( $\pm 4.70$ )	77.77 ( $\pm 7.35$ )	OOM	OOM
	GUIDE	<u>62.86</u> ( $\pm 5.54$ )	63.01 ( $\pm 5.63$ )	60.93 ( $\pm 3.91$ )	67.07 ( $\pm 6.67$ )	80.06 ( $\pm 5.20$ )	<u>87.66</u> ( $\pm 5.46$ )	OOM
AUC-ROC Score	GNN	<b>66.50</b> ( $\pm 0.53$ )	<b>67.62</b> ( $\pm 0.76$ )	<b>69.70</b> ( $\pm 3.48$ )	62.29 ( $\pm 4.85$ )	<b>82.47</b> ( $\pm 1.41$ )	<b>82.23</b> ( $\pm 0.56$ )	<b>88.15</b> ( $\pm 0.11$ )
	InFoRM	60.53 ( $\pm 3.67$ )	64.12 ( $\pm 4.12$ )	63.61 ( $\pm 4.93$ )	62.72 ( $\pm 5.87$ )	<u>79.66</u> ( $\pm 6.58$ )	69.75 ( $\pm 5.18$ )	<u>73.72</u> ( $\pm 7.97$ )
	REDRESS	62.31 ( $\pm 6.52$ )	<u>64.70</u> ( $\pm 4.88$ )	63.79 ( $\pm 4.40$ )	<u>64.39</u> ( $\pm 5.25$ )	69.52 ( $\pm 5.58$ )	OOM	OOM
	GUIDE	<u>63.55</u> ( $\pm 3.62$ )	60.36 ( $\pm 4.43$ )	<u>65.56</u> ( $\pm 4.18$ )	<b>64.64</b> ( $\pm 3.86$ )	75.09 ( $\pm 5.41$ )	<u>73.34</u> ( $\pm 4.28$ )	OOM
$\Delta_{SP}$	GNN	<u>10.19</u> ( $\pm 0.26$ )	14.27 ( $\pm 0.36$ )	<b>32.97</b> ( $\pm 5.82$ )	20.51 ( $\pm 1.37$ )	8.56 ( $\pm 0.37$ )	7.24 ( $\pm 0.11$ )	<u>6.57</u> ( $\pm 0.13$ )
	InFoRM	<b>4.74</b> ( $\pm 0.50$ )	<b>6.62</b> ( $\pm 0.42$ )	<u>34.15</u> ( $\pm 3.67$ )	25.97 ( $\pm 0.79$ )	7.57 ( $\pm 0.26$ )	<b>1.45</b> ( $\pm 0.24$ )	<b>2.12</b> ( $\pm 0.39$ )
	REDRESS	16.35 ( $\pm 0.65$ )	23.75 ( $\pm 1.58$ )	42.28 ( $\pm 1.62$ )	<b>10.84</b> ( $\pm 0.65$ )	<b>2.01</b> ( $\pm 0.58$ )	OOM	OOM
	GUIDE	15.81 ( $\pm 0.22$ )	<u>13.23</u> ( $\pm 0.67$ )	39.18 ( $\pm 1.78$ )	<u>17.34</u> ( $\pm 1.07$ )	<u>4.58</u> ( $\pm 0.44$ )	<u>2.15</u> ( $\pm 0.41$ )	OOM
$\Delta_{EO}$	GNN	<u>9.20</u> ( $\pm 0.87$ )	<u>17.47</u> ( $\pm 0.47$ )	<b>23.34</b> ( $\pm 7.89$ )	18.76 ( $\pm 1.29$ )	6.98 ( $\pm 1.20$ )	12.07 ( $\pm 1.77$ )	<u>8.98</u> ( $\pm 0.47$ )
	InFoRM	<b>3.02</b> ( $\pm 0.24$ )	<b>9.13</b> ( $\pm 0.43$ )	<u>30.22</u> ( $\pm 3.38$ )	26.21 ( $\pm 1.11$ )	5.45 ( $\pm 0.33$ )	<b>2.58</b> ( $\pm 0.21$ )	<b>5.69</b> ( $\pm 0.26$ )
	REDRESS	20.64 ( $\pm 0.28$ )	26.01 ( $\pm 1.42$ )	37.57 ( $\pm 1.99$ )	<b>10.38</b> ( $\pm 0.32$ )	<b>0.10</b> ( $\pm 0.62$ )	OOM	OOM
	GUIDE	10.93 ( $\pm 0.30$ )	20.45 ( $\pm 0.90$ )	36.74 ( $\pm 1.43$ )	<u>16.72</u> ( $\pm 1.50$ )	<u>2.29</u> ( $\pm 0.23$ )	<u>3.26</u> ( $\pm 0.22$ )	OOM
$\Delta_{Utility}$	GNN	<u>2.37</u> ( $\pm 0.63$ )	<u>2.68</u> ( $\pm 0.70$ )	<b>1.44</b> ( $\pm 3.79$ )	<b>4.84</b> ( $\pm 3.52$ )	<b>0.12</b> ( $\pm 1.58$ )	<b>0.99</b> ( $\pm 0.33$ )	<u>1.03</u> ( $\pm 0.16$ )
	InFoRM	2.45 ( $\pm 4.76$ )	4.86 ( $\pm 5.50$ )	<u>7.63</u> ( $\pm 5.54$ )	13.87 ( $\pm 4.04$ )	<u>0.46</u> ( $\pm 5.82$ )	8.42 ( $\pm 7.59$ )	<b>0.46</b> ( $\pm 7.31$ )
	REDRESS	8.65 ( $\pm 5.87$ )	<b>1.85</b> ( $\pm 5.17$ )	8.14 ( $\pm 5.70$ )	<u>7.79</u> ( $\pm 4.81$ )	4.60 ( $\pm 7.09$ )	OOM	OOM
	GUIDE	<b>1.73</b> ( $\pm 4.84$ )	5.55 ( $\pm 4.23$ )	12.63 ( $\pm 3.23$ )	10.99 ( $\pm 6.08$ )	1.84 ( $\pm 5.59$ )	<u>1.36</u> ( $\pm 5.53$ )	OOM
$B_{Lipschitz}$	GNN	2.5e6 ( $\pm 2e4$ )	5.5e3 ( $\pm 3e3$ )	<u>3.6e3</u> ( $\pm 2e3$ )	1.3e4 ( $\pm 7e3$ )	1.2e7 ( $\pm 3e5$ )	2.2e6 ( $\pm 3e5$ )	3.2e7 ( $\pm 5e5$ )
	InFoRM	<b>9.1e2</b> ( $\pm 1e2$ )	<b>3.4e3</b> ( $\pm 4e3$ )	<b>2.0e2</b> ( $\pm 7e2$ )	<b>5.2e1</b> ( $\pm 3e2$ )	<b>4.7e3</b> ( $\pm 9e3$ )	<b>9.7e3</b> ( $\pm 4e3$ )	<b>9.8e4</b> ( $\pm 3e3$ )
	REDRESS	2.0e5 ( $\pm 1e4$ )	1.9e5 ( $\pm 2e4$ )	7.0e3 ( $\pm 1e3$ )	1.2e4 ( $\pm 3e3$ )	<u>2.6e4</u> ( $\pm 6e3$ )	OOM	OOM
	GUIDE	<u>1.8e3</u> ( $\pm 3e2$ )	<u>4.0e3</u> ( $\pm 6e2$ )	6.4e3 ( $\pm 9e2$ )	<u>4.2e3</u> ( $\pm 3e2$ )	1.1e5 ( $\pm 1e4$ )	<u>1.5e4</u> ( $\pm 7e3$ )	OOM
NDCG@k	GNN	44.56 ( $\pm 0.59$ )	37.01 ( $\pm 0.26$ )	31.42 ( $\pm 1.49$ )	<u>39.01</u> ( $\pm 1.05$ )	15.31 ( $\pm 0.32$ )	<b>43.74</b> ( $\pm 0.70$ )	<b>37.75</b> ( $\pm 0.19$ )
	InFoRM	48.78 ( $\pm 3.62$ )	44.09 ( $\pm 3.00$ )	<u>35.89</u> ( $\pm 3.69$ )	37.11 ( $\pm 3.18$ )	19.81 ( $\pm 1.74$ )	38.85 ( $\pm 2.07$ )	<u>33.34</u> ( $\pm 1.70$ )
	REDRESS	<b>54.30</b> ( $\pm 3.08$ )	<b>48.53</b> ( $\pm 3.85$ )	<b>42.82</b> ( $\pm 3.62$ )	<b>42.74</b> ( $\pm 2.11$ )	<b>25.30</b> ( $\pm 1.96$ )	OOM	OOM
	GUIDE	<u>49.02</u> ( $\pm 2.72$ )	<u>47.27</u> ( $\pm 4.72$ )	32.70 ( $\pm 2.02$ )	37.38 ( $\pm 2.69$ )	<u>21.50</u> ( $\pm 2.18$ )	<u>39.16</u> ( $\pm 2.26$ )	OOM
GDIF	GNN	<u>111.92</u> ( $\pm 0.81$ )	232.16 ( $\pm 24.2$ )	<u>125.87</u> ( $\pm 11.1$ )	166.78 ( $\pm 36.1$ )	112.78 ( $\pm 1.29$ )	<u>114.05</u> ( $\pm 1.17$ )	<b>112.72</b> ( $\pm 1.21$ )
	InFoRM	118.07 ( $\pm 10.2$ )	<u>116.17</u> ( $\pm 5.65$ )	136.94 ( $\pm 10.3$ )	<u>160.62</u> ( $\pm 11.2$ )	112.90 ( $\pm 8.66$ )	125.36 ( $\pm 11.4$ )	<u>127.84</u> ( $\pm 8.51$ )
	REDRESS	167.56 ( $\pm 7.12$ )	124.08 ( $\pm 10.8$ )	139.98 ( $\pm 8.84$ )	163.84 ( $\pm 5.75$ )	<u>109.58</u> ( $\pm 7.33$ )	OOM	OOM
	GUIDE	<b>108.75</b> ( $\pm 5.89$ )	<b>110.58</b> ( $\pm 9.36$ )	<b>112.35</b> ( $\pm 8.27$ )	<b>149.97</b> ( $\pm 5.14$ )	<b>104.17</b> ( $\pm 8.21$ )	<b>112.28</b> ( $\pm 7.80$ )	OOM

All graph learning algorithms above have been implemented in our PyGDebias library <sup>8</sup> under BSD-2-Clause license.

**Hardware.** We conduct all experiments with NVIDIA A6000 GPU (48GB memory), AMD EPYC CPU (2.87 GHz), and 512GB of RAM.

**Dependencies.** We list all major packages and their associated versions in our implementation.

- python == 3.9.0
- pygdebias == 1.1.1
- torch == 1.12.0+cu116
- torch-cluster == 1.6.0
- torch-geometric == 2.1.0
- cuda == 11.6
- pandas == 1.4.3
- numpy == 1.22.4
- networkx == 2.8.5
- dgl == 1.1.2+cu116
- scikit-learn == 1.1.1
- scipy == 1.9.0

<sup>8</sup><https://github.com/yushundong/PyGDebias>

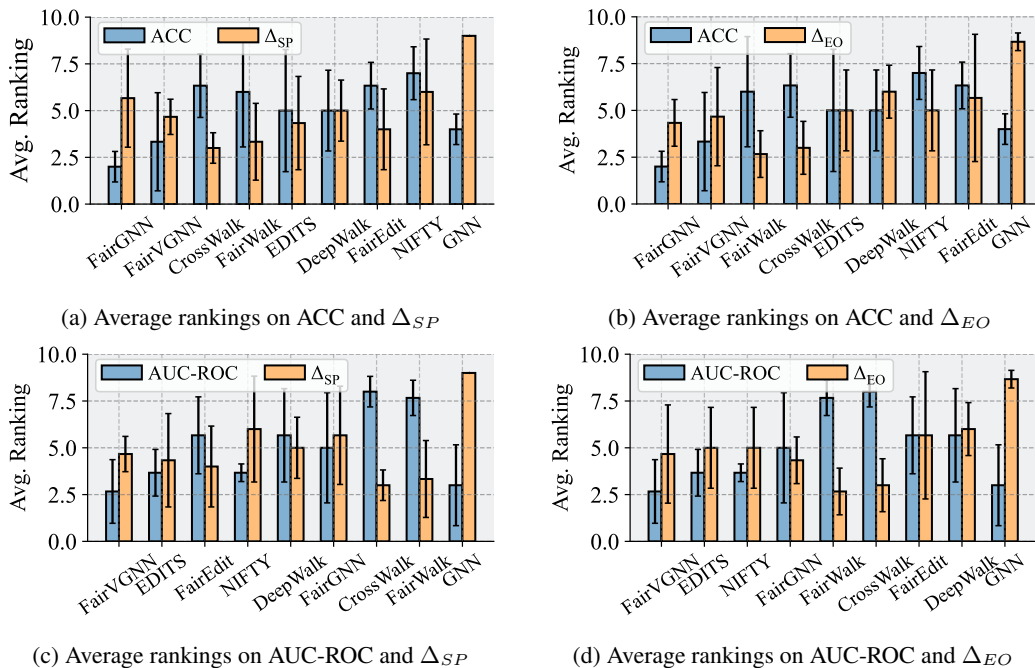


Figure 6: Average rankings on ACC, AUC-ROC,  $\Delta_{SP}$ , and  $\Delta_{EO}$  across all datasets. Methods are ranked in ascending order by the summation of average rankings on all three fairness metrics.

## C Supplementary Results & Discussion

**Supplementary Discussion on RQ1.** We perform additional experiments on graph learning algorithms focusing on group fairness and present the results in Table 4 and Figure 6. According to the comprehensive empirical results, we have the consistent observation that different fairness-aware graph learning methods show different advantages in balancing utility and fairness. Specifically, we observe that GNN-based algorithms are among the highest-ranking methods (e.g., most top-ranked results come from GNN-based methods), which verifies the advantage of GNNs in achieving both utility and fairness objectives due to their exceptional fitting ability. In addition, fairness-aware shallow embedding methods achieve the best performance with respect to fairness, especially on the traditional fairness metrics  $\Delta_{SP}$  and  $\Delta_{EO}$ . This observation is mainly attributed to the absence of bias encoded in the node attributes. All observations above align with the observations reported in Section 4.1, which demonstrate the consistency over the performance of the studied fairness-aware graph learning methods on a wide range of datasets and metrics.

**Supplementary Discussion on RQ2.** We provide additional results on the performance of graph learning methods focusing on individual fairness in Table 5. We have the following observations. First, all fairness-aware graph learning methods generally sacrifice a certain degree of utility so as to improve the level of individual fairness. Second, different methods exhibit different levels of versatility, where GUIDE can yield competitive performance on more combinations of datasets and metrics compared to other methods. All these observations above align with the finding in the main text, which demonstrate the consistency over a wide range of datasets and metrics.

**Supplementary Discussion on RQ3.** We further discuss RQ3 based on the additional results in Table 4 and Table 5. Specifically, we find that shallow embedding methods and GNN-based methods excel on different fairness metrics, which also implies a struggle for a balance between different fairness metrics. This observation align with the finding in the main text, which demonstrate the consistency over a wide range of datasets and metrics.

**Supplementary Discussion on RQ4.** We present additional results on the computational efficiency of the collected fairness-aware graph learning methods in Figure 7. We found that fairness-aware graph learning methods generally sacrifice efficiency. Specifically, GNN-based fairness-aware graph learning algorithms exhibit a clear sacrifice on efficiency, which can be attributed to their

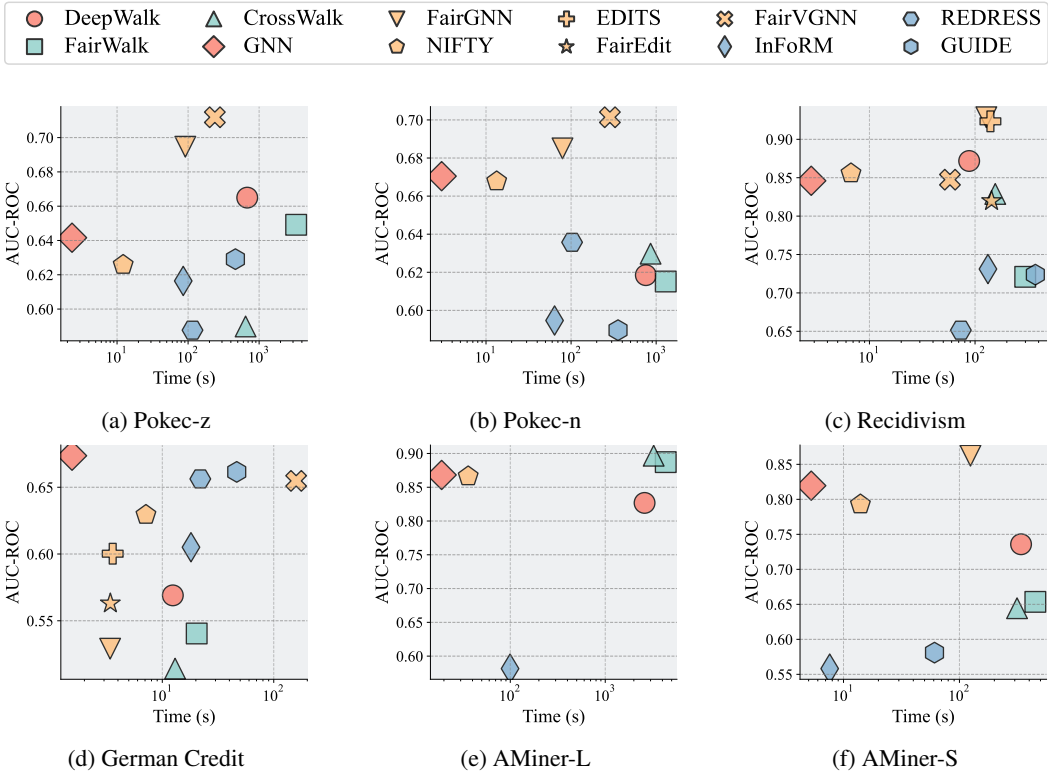


Figure 7: The comparison of AUC-ROC and running time across different fairness-aware graph learning methods on different datasets.

computationally expensive optimization strategy. Meanwhile, algorithms based on shallow embedding methods only marginally sacrifice efficiency, which is resulted from the marginal improvement of additional computation burden in the optimization process compared to those GNN-based ones. All observations above align with the finding in the main text, which demonstrate the consistency over a wide range of datasets.

## D Broader Impacts

This paper presents a comprehensive benchmark for fairness-aware graph learning, which provides extensive evaluation and comparison of existing fairness-aware graph learning algorithms. As a result, we provide insights and guidance to empower better fairness-aware graph learning algorithms in the future, and help facilitate broader applications such as financial lending [65, 46], healthcare decision making [16, 4], and policy making [30]. At the same time, we note that our work does not have significant negative social impacts we feel necessary to mention here.