

ROLeR: Effective Reward Shaping in Offline Reinforcement Learning for Recommender Systems

Yi Zhang
uqyzha91@uq.edu.au
The University of Queensland, CSIRO DATA61
Brisbane, Australia

Jiajun Liu
jjajun.liu@csiro.au
CSIRO DATA61, The University of Queensland
Brisbane, Australia

Ruihong Qiu
r.qiu@uq.edu.au
The University of Queensland
Brisbane, Australia

Sen Wang
sen.wang@uq.edu.au
The University of Queensland
Brisbane, Australia

ABSTRACT

Offline reinforcement learning (RL) is an effective tool for real-world recommender systems with its capacity to model the dynamic interest of users and its interactive nature. Most existing offline RL recommender systems focus on model-based RL through learning a world model from offline data and building the recommendation policy by interacting with this model. Although these methods have made progress in the recommendation performance, the effectiveness of model-based offline RL methods is often constrained by the accuracy of the estimation of the reward model and the model uncertainties, primarily due to the extreme discrepancy between offline logged data and real-world data in user interactions with online platforms. To fill this gap, a more accurate reward model and uncertainty estimation are needed for the model-based RL methods. In this paper, a novel model-based Reward Shaping in Offline Reinforcement Learning for Recommender Systems, **ROLeR**, is proposed for reward and uncertainty estimation in recommendation systems. Specifically, a non-parametric reward shaping method is designed to refine the reward model. In addition, a flexible and more representative uncertainty penalty is designed to fit the needs of recommendation systems. Extensive experiments conducted on four benchmark datasets showcase that ROLeR achieves state-of-the-art performance compared with existing baselines. Source code can be downloaded at [this address](#).

CCS CONCEPTS

• Information systems → Recommender systems.

KEYWORDS

Offline Reinforcement Learning, Recommendation Systems

ACM Reference Format:

Yi Zhang, Ruihong Qiu, Jiajun Liu, and Sen Wang. 2024. ROLeR: Effective Reward Shaping in Offline Reinforcement Learning for Recommender Systems.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
CIKM '24, October 21–25, 2024, Boise, Idaho, USA

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM ISBN 978-1-4503-XXXX-X/18/06
<https://doi.org/XXXXXXXX.XXXXXXX>

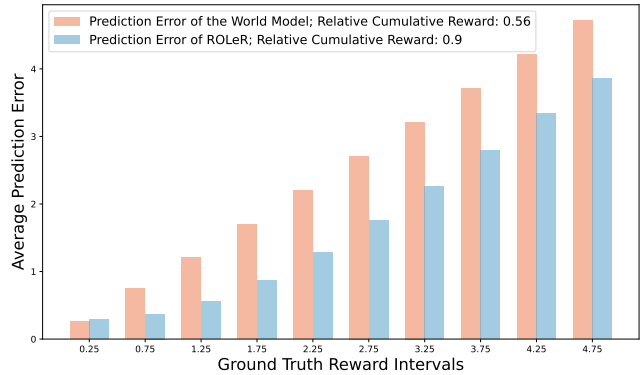


Figure 1: The reward estimation error of a world model and ROLeR across different intervals. Our training-free reward shaping constantly outperforms that of the current world model, reaching a higher relative cumulative reward.

In *Proceedings of the 33rd ACM International Conference on Information and Knowledge Management (CIKM '24)*, October 21–25, 2024, Boise, Idaho, USA. ACM, New York, NY, USA, 11 pages. <https://doi.org/XXXXXXXX.XXXXXXX>

1 INTRODUCTION

Recommender systems (RS) serve as a forever-running engine on online platforms with large volumes of data to create personalised experiences for massive users through services like content recommendations and targeted advertising [2, 3]. The performance of the recommender systems significantly bolsters a company's market competitiveness, especially in industries where user engagement and retention are essential to the business.

To dynamically model user preference, over the past few years, reinforcement learning (RL) [38] has been incorporated into recommender systems by modeling the entire recommendation process as an interactive problem [1]. In this process, interactions between users and the recommender system are formulated as a sequence of states, actions, and rewards within an environment. The RL-based approaches can continuously learn and adapt from each user interaction, being able to adjust quickly to changing user preferences and behaviors [13], optimizing users' long-term engagement [44]. Despite the effectiveness of RL, it is unrealistic for an uncompleted recommender system to perform expensive online interactions with users to collect training data [4, 5, 7, 10].

Although these methods have made progress in the recommendation performance, the effectiveness of RL methods is often constrained by the accuracy of the estimation of the reward model and the model uncertainties. This is because of the extreme discrepancy between offline data and real-world data on online platforms. Recent methods [7, 55] target at the Matthew Effect logged in the offline data with an entropy penalty to enhance the recommendation diversity. Others focus on the individual perspective for the filter bubble issue [10, 26] in user preference. The efficiency of these model-based offline reinforcement learning (RL) methods is frequently limited by the precision of the reward model estimation and uncertainty in the reward model, which are predominantly attributed to the significant disparity between offline logged data and real-world data in user interactions on online platforms. Revisiting the literature of offline RL for RS, it is worth noting that neither behaving conservatively nor encouraging exploration can empower the policy to learn from offline data under the influence of an inaccurate reward estimation. In Figure 1, we demonstrate the influence of the accuracy of the reward functions on a benchmark dataset – KuaiRec [8]. The reward prediction error of the state-of-the-art method, DORL [7], is generally high in all reward intervals in the red bar. An ideal situation would require the reward estimation error to be smaller for an effective RS development.

To address the aforementioned problems, we propose a novel model-based **R**eward **R**eshaping in **O**ffline **R**einforcement **L**earning method for **R**ecommender **S**ystems, **ROLeR** to improve the reward function during policy learning and decouple the uncertainty penalty with the ensemble of the world model. In RS, although the users' tastes may vary from person to person and change over time, finding similar users who share analogous interests is feasible. Based on this intuition, we try to discover the patterns within the user-item interactions from offline data. We find that both the users' historical interaction data and the learned user embedding from the world model can be used as user indicator features. And if the indicator features of one user match that of another user, their feedback on a certain group of items can be mutually inferred. Thus, we regard a user's indicator feature as a soft label to retrieve its nearest neighbors. Then, the user's feedback on a certain item can be inferred by that from these neighbors. In other words, our reward shaping method is a non-parametric clustering-based one, simple yet effective. The accuracy of the reward function can be substantially improved. On the other hand, to cooperate with our reward shaping module, we develop an uncertainty estimation method based on the quality of the clustering. The distance between a user and its nearest neighbors is used as the uncertainty, measuring the utility of current reward estimation. Therefore, this uncertainty penalty works as the complementary for the reward shaping part, releasing the need of an ensemble of world models. Our contributions are summarised as:

- We find out the accuracy of the reward function prediction substantially determines the RS performance and propose a novel reward shaping method that is non-parametric for model-based offline RL for RS.
- We develop a new uncertainty penalty that integrates with the reward shaping part for better generalization capacity and does not rely on an ensemble of world models.

- We demonstrate the effectiveness of the proposed ROLeR on four recommendation benchmarks, KuaiRand, KuaiEnv, Coat and Yahoo, to showcase the superior performance among the state-of-the-art methods and strong baselines.

2 RELATED WORK

2.1 RL in Recommendation Systems

Since supervised RSs have difficulties in capturing the dynamics of user preference [5, 32–35, 51], more deep RL [38] methods are employed. Some directions [46, 52] focuses on formulating the RS to a Markov Decision Process (MDP), investigating the state representation [14, 24], user profiling [22, 56], and action representation [23]. Further, based on the transition modeling, the literature can be divided into model-based methods and model-free methods. Model-based RL [49, 50] utilizes offline data to build the transition model. Further, model-free RL [6, 20] gains more attention especially when an online interaction environment is available, including Double DQN [40] to model the user dynamics [54] and utilizing a multi-agent setting [27] to tackle the sub-optimum issue [53].

2.2 Offline Reinforcement Learning

Recently, offline RL has attracted great attention from the research community [25, 31]. The gap between the learned policy and the real data results in the overestimation issue [19, 43]. To solve this problem, model-free methods regulate the policy learning to be conservative. For instance, BCQ [6] avoid using the out-of-distribution (OOD) experience in policy iteration. Besides, CQL [20] constrains the usage of OOD data in the iteration of the state-action value function. CRR [45] limits the policy improvement conditioning on the discrepancy between the behavior policy and the learning policy. Though they achieve high accuracy in value estimation, they are also limited in policy improvement [48]. To deal with the extrapolate error introduced by the world model, recent methods such as MOREL [18] and MOPO [50] use the distances calculated through an ensemble of world models to penalize the overestimated values. COMBO [49] penalizes the rewards that tend to be OOD and controls the degree of pessimism based on a sampling distribution.

3 PRELIMINARIES

3.1 Interactive Recommendation

The interactive recommendation is a comprehensive simulation of real-world recommendations where the systems need to continuously recommend items to users.

3.2 Reinforcement Learning Formulation

Reinforcement Learning (RL) aims to make a sequence of decisions to maximize the long-term return. RL problems can be formulated as a Markov Decision Process (MDP) with a tuple $G = \langle S, A, T, r, \gamma \rangle$. S is the state space and each $s \in S$ refers to a specific state. A is the action space consisting of all the potential actions. T stands for the state transition of the environment as $T\{s_t, a_t, s_{t+1}\} = P(s_{t+1}|s = s_t, a = a_t)$. It describes the dynamics of the environment. R is the reward function as $r_t = R(s_t, a_t)$, representing the reward of taking action a_t at state s_t . At last, γ is the discount factor used to balance the current reward and future return. The objective of RL is to learn a policy π which can maximize the long-term return: $G_t =$

$\sum_{s=s_t}^T \gamma^t r(s_t, \mathbf{a}_t)$, where s_t stands for the start state, T is the last state and t is the timestep. In addition, the state value function and state-action value function of a given policy π are $V_\pi(s) = \mathbb{E}_\pi[G_t | s = s_t]$ and $Q_\pi(s, \mathbf{a}) = \mathbb{E}_\pi[G_t | s = s_t, \mathbf{a} = \mathbf{a}_t]$, respectively. In finite MDP, where the state space and action space are finite, an optimal policy, π_* , whose expected return is no less than that of all other policies. Theoretically, it can be learned through policy iteration and value iteration with the Bellman Equation:

$$V_{k+1}(s) = \max_{\mathbf{a}} \sum_{s', r} P(s', r | s, \mathbf{a}) [r + \gamma V_k(s')], \quad (1)$$

$$Q_{k+1}(s, \mathbf{a}) = \sum_{s', r} P(s', r | s, \mathbf{a}) [r + \gamma \max_{\mathbf{a}'} Q_k(s', \mathbf{a}')], \quad (2)$$

where k is the iteration index and we use \mathcal{T} to represent the Bellman Operator in the following paragraphs.

3.3 Offline Reinforcement Learning

Compared to expensive online interaction, offline data are usually abundant and easily accessible. Therefore, offline RL, which investigates how to utilize offline datasets to train policies, attracts increasing attention in current research due to its potential efficiency. The offline dataset $D = \{(s_t, \mathbf{a}_t, s_{t+1}, r_t)\}$ is collected by one or more behavior policies π_{B_i} . One intuitive challenge of offline RL is aroused by the inevitable gap between the distribution of offline data and the evaluated environment. It is difficult for the learning policy to estimate the value function on rarely seen and even unseen states. Directly using the online RL methodologies tends to overestimate the value functions on these states due to the maximization over available actions during decision making. The corresponding solutions can be categorized into two classes. The model-free offline RL adds constraints on the behavior policies and the learning policy to avoid risky decisions. But it limits the generation of offline RL. The model-based offline RL simulates the environments based on the offline datasets to enable the learning agent to interact with them. Then, they introduce the uncertainty estimation as a penalty in the reward function to encourage conservative actions by $r = \hat{r} - \lambda_U P_U$. This branch suits the RS since the offline interactions are highly sparse. Diving into model-based offline RL for RS, it first models both the transition function and reward function to obtain a world model denoted as $G' = \langle S, \mathbf{A}, \hat{T}, \hat{R}, \gamma \rangle$, where \hat{T} and \hat{R} are the estimated transition and reward functions.

In addition, many recent efforts in this domain rely on an ensemble of world models to calculate uncertainty. It unnecessarily binds the world model learning and uncertainty penalty.

4 METHOD

4.1 Problem Definition

Considering reinforcement learning for the recommendation system, we demonstrate the problem formulation in this part. Recalling the MDP tuple $G = \langle S, \mathbf{A}, T, r, \gamma \rangle$, each $s \in S$ corresponds to a user state which usually consists of the users' side information such as personal interests and dynamic features like the recent interaction history. The action space \mathbf{A} is the item set and each action \mathbf{a} corresponds to one action \mathbf{a}_t . The reward $r(s_t, \mathbf{a}_t)$ is from the feedback of recommending item \mathbf{a}_t at state s_t . It depends on the specific datasets, *for instance*, the reward can be the watched ratio in a short

video platform or ratings for a film forum. The transition function here is special as it is also a state tracker used for encoding states autoregressively: $s' = f(s, \mathbf{a}, r)$. So it can be implemented using sequential models. At last, the ultimate goal of the recommendation system is to learn a policy π which can maximize the cumulative user experience: $\arg \max_{\pi} \mathbb{E}_{\tau \sim \pi} [\sum_{(s, \mathbf{a}) \in \tau} \gamma^t r(s, \mathbf{a})]$, where τ is a trajectory sampled with policy π . In this paper, we focus on the model-based offline RL. And we follow a state-of-the-art method – DORL to completely illustrate the whole learning process. It usually consists of two stages: world model learning with offline interaction history and train the recommendation policy on this environment.

4.2 World Model Learning

In this part, we mainly focus on the simulation of an environment. The input for this stage is the offline history. They are used as the training set of a supervised prediction model. In DORL and CIRS, they use DeepFM. The outputs are the item embedding, user embedding, predicted reward and uncertainty and entropy estimation.

Item Embedding, \mathbf{e}_i , comes from the item ID and item features like the tags for music and categories for movies.

$$\mathbf{e}_i = f_I(i_{id}, \mathbf{F}_{id}^i), \quad (3)$$

where f_I is the item encoder and \mathbf{F}^i is the item features.

User Embedding, \mathbf{e}_u , is similar to item embedding for user ID and other static features. It is also considered as time-invariant.

$$\mathbf{e}_u = f_U(u_{id}, \mathbf{F}_{id}^u), \quad (4)$$

where f_U is the user encoder and \mathbf{F}^u is the user features.

Reward Prediction is the core output of the world model. If we formulate the feedback of all the users towards all the items as a matrix, this matrix is usually highly sparse based on the offline interaction data, which is one typical characteristic of RS. The function of reward prediction, \hat{r} , is to answer the “what if” queries and complement the matrix. However, the quality of this matrix complement and its influence have not been investigated before. In recent methods [7, 10], the reward is the average of multiple world models:

$$\bar{r} = \frac{1}{M} \sum_{j=1}^M W_j(\mathbf{e}_i, \mathbf{e}_u), \quad (5)$$

where M is the number of world models, and W_j is the j -th one.

Uncertainty Penalty is widely used in offline RL to estimate the risk of taking a certain action. One representative direction utilizes an ensemble of world models to calculate the distances within the ensemble as a measure of uncertainty. In DORL, it formulates the world model as a Gaussian probabilistic model (GPM) and calculates the uncertainty of one interaction, \mathbf{x} , as $P_U(\mathbf{x}) := \max_{k \in E} \sigma_{\theta_k}^2$, where k is the index in world model ensemble E , and $\sigma_{\theta_k}^2$ is the variance of corresponding GPM. Thus, the estimated reward in Equation (5) has been changed to:

$$\bar{r}' = \bar{r} - \lambda_U P_U, \quad (6)$$

where λ_U is the uncertainty coefficient to adjust its scale and the uncertainty estimation naturally binds with the world model. If the world model is inaccurate, the uncertainty will be impacted.

Entropy Penalty is a critical contribution of DORL. Though it is calculated with the offline data rather than based on the world model, it is also implemented in the first stage of training. Thus, we introduce it here to ensure a complete illustration and consistency with the implementation of DORL. The entropy penalty is calculated as the summation of a k -order entropy, which takes recent k interactions as a pattern and counts the frequency of the next item matching the current pattern.

$$P_E = -D_{\text{KL}}(\pi_\beta(\cdot|s)||\pi_u(\cdot|s)), \quad (7)$$

where π_β and π_u are the behavior policy and the uniform distribution, respectively. It is an effective penalty that encourages the policy to explore the world model and improves the cumulative rewards. The final reward function during the policy learning is:

$$r = \bar{r} - \lambda_U P_U + \lambda_E P_E, \quad (8)$$

where λ_E is the coefficient for the entropy used to control its scale. In this way, DORL successfully alleviates the Matthew Effect.

4.3 State Tracker

State tracker models the transition function, $s' = f(s, a, r)$, during the policy learning. It is also the state encoder that combines both the static and dynamic information as:

$$s' = f(s, \mathbf{e}_i, \mathbf{a}, \hat{r}|\mathbf{e}_u), \quad (9)$$

where \mathbf{u}_i , \hat{r} , and \mathbf{a} come from the world model introduced in the last section. In the implementation of DORL, the static user embedding is not considered in its state tracker. In addition, the f is implemented as the average of recent w item embedding concatenating with the estimated rewards \hat{r} , where w is named as window size:

$$\mathbf{s}_{t+1} = \frac{1}{w} \sum_{j=t-w+1}^t [\mathbf{a}_j \oplus \hat{r}(\mathbf{s}_j, \mathbf{a}_j)]. \quad (10)$$

Since the average tracker loses the order information, in our implementation, we turn to an attention tracker which enhances the cumulative reward in most cases.

4.4 Action Representation

In the current setting, the item embedding from the world model is used to initialize action representation during policy learning since each item corresponds to one action.

$$\mathbf{a}_t = \mathbf{e}_i. \quad (11)$$

On one hand, the action representation also influences policy learning. On the other hand, the inaccurate reward estimation from DeepFM intrigues us to doubt the quality of item embeddings. Thus, we find that replacing the current item embedding with a random initialization sampled from a standard normalization can enhance the cumulative rewards in many settings. Since this interesting direction is not our current focus, we leave it as our future direction.

4.5 Policy Learning Pipeline

In this part, we illustrate the policy learning process by interacting with the world model. Since the states are continuous, policy gradient or actor-critic algorithms are often used as baselines. We follow the implementation of DORL to build our method based on Advantage Actor-Critic [29] (A2C).

The general pipeline for actor-critic algorithms is: The agent interacts with the world model to sample interaction trajectories, $\tau = \{(s_t, \mathbf{a}_t, s_{t+1}, r_t)\}$, using current policy π_θ where θ refers to the parameters representing the policy network. Then, the critic estimates the value function, either $V(s)$ or $Q(s, \mathbf{a})$, for the current π_θ . It uses τ to update its estimation, aiming to minimize the two parts between the Bellman equation ((1) or (2)). Next, the actor updates θ by ascending the gradient of the expected cumulative reward estimated by the critic, aiming to maximize it. To sum up, the objective function of the critic is:

$$L_{\text{critic}} = \mathbb{E}_\tau \left[\left(r_t + \gamma \max_{\mathbf{a}'} Q(s_{t+1}, \mathbf{a}'; \phi) - Q(s_t, \mathbf{a}_t; \phi) \right)^2 \right], \quad (12)$$

where ϕ represents the parameters of the critic network estimating $Q(s, \mathbf{a})$. The objective of the actor is:

$$J_{\text{actor}} = \mathbb{E}_\tau [\log \pi_\theta(\mathbf{a}_t | s_t) \cdot A(s_t, \mathbf{a}_t)]. \quad (13)$$

In A2C, the advantage function, $A_{\pi_\theta} = Q_{\pi_\theta}(s, \mathbf{a}) - V_{\pi_\theta}(s)$, is introduced to accelerate the learning process.

4.6 Reward Shaping

The reward functions for most existing world models are inaccurate. The reason is also one of the main challenges of RS: the offline data is too sparse to comprehensively reflect users' true feedback. To overcome this problem, we need to dig out the intrinsic patterns in the offline data. Intuitive thought is that within a short time interval, some users may exhibit similar interests in a group of items, forming a cluster. Within this user cluster and the group of items, the feedback of a specific user toward a certain item may be inferred from the other users' feedback. Thus, based on our exploration and observation, a non-parametric reward shaping method that accounts for the specialties of RS is proposed to improve the prediction of the reward functions.

Unlike training the reward model from extremely sparse offline data, user representation learning is comparably more informative thanks to the existence of static side information from users [42]. In addition, the user interaction history or the counterfactual interaction history can also be used to identify the users. We use this user information as their indicator features, denoted as u for brevity. For each user in the evaluation environment, we utilize its indicator features to retrieve similar users in the training environment based on an appropriate distance metric using a clustering method. Here we adopt a soft-label k NN to discover the user clusters in the offline data. Then, the reward correction is estimated by aggregating the feedback of these nearest neighbors:

$$\tilde{r}_u(s, \mathbf{a}) = \frac{1}{k} \sum_{u' \in k\text{NN}(u)} r_{u'}(s, \mathbf{a}), \quad (14)$$

In this paper, we use averaging as our aggregation function. The choice of k depends on some statistics of the offline datasets. They will be elaborated in the experiment section.

4.7 Uncertainty Penalty

As many current uncertainty estimations in offline RL for RecSys rely on an ensemble of world models [7, 16], the uncertainty penalty inevitably suffers from the inaccurate prediction of the reward

Algorithm 1 Offline A2C Training with k NN Reward Shaping.**Input:**

Offline dataset D ; Learned world model E (Environment); Total training epoch K ; Number of trajectories in each epoch N

Output:

The learned policy, π_θ ;

- 1: Initialize the policy and critic network parameters, θ and ϕ ;
- 2: Calculate the k NN-based reward \tilde{r} by Eq. (14);
- 3: Calculate the k NN-based uncertainty \tilde{P}_U by Eq. (15);
- 4: Calculate the entropy penalty P_E by Eq. (7);
- 5: Derive the reward function r by Eq. (16);
- 6: **for** each epoch $k = 0, 1, 2, \dots, K$ **do**
- 7: $n=0$
- 8: **while** $n < N$ **do**
- 9: The actor samples a trajectory τ with current policy π_θ by interacting with the environment E ;
- 10: Calculate advantages $A(\mathbf{s}_t, \mathbf{a}_t) = Q(\mathbf{s}_t, \mathbf{a}_t) - V(\mathbf{s}_t)$ and the cumulative reward for each time step in τ ;
- 11: Update the critic, *i.e.*, ϕ , by Eq. (12);
- 12: Update the actor, *i.e.*, θ , by ascending the policy gradient of Eq. (13);
- 13: $n = n + 1$;
- 14: **end while**
- 15: **end for**
- 16: **return** the policy π_θ ;

functions. Thus, considering the special difficulties in our setting, we propose to penalize the distances between a user and its nearest neighbors in Eq.(14) as the uncertainty. Then, we have,

$$\tilde{P}_U = \frac{1}{k} \sum_{u' \in k\text{NN}(u)} d(u, u'), \quad (15)$$

where $d(\cdot)$ is the distance metric. Intuitively, it works as a complementary to our reward shaping method since it considers both the clustering quality and the conditions of the dataset to enhance the generalization. When the dataset is extremely sparse, the retrieved nearest neighbors for mutual inference may be less representative. Thus, our uncertainty penalty can effectively reduce the chance of making risky decisions. Specifically, we use the cosine distance as d in our implementation. Extensive experiments about the design and estimation of uncertainty penalty are conducted in Section 6.4.

4.8 Algorithm Overview

Now the reward function for policy learning is derived as,

$$r = \tilde{r} \times (1 - \tilde{P}_U) + \lambda_E P_E. \quad (16)$$

We summarize the overall training process in the Algorithm 1. In the evaluation process, given a user and its recent interaction trajectories, the state tracker calculates its state representation with Equation (10). Then, this representation along with the action representation obtained through Equation (11) are fed into the learned policy π_θ . The policy recommends one item to the user. This process lasts until the user quits interaction.

5 PERFORMANCE LOWER BOUND

In the simulated MDP from the world model, $\hat{G} = \langle S, A, T, \hat{r}, \gamma \rangle$, the \hat{r} is estimated by our reward shaping method. Under the actor-critic framework, our analysis mainly focuses on the Bellman

Error in the critic since ideally, if the critic can perfectly estimate the ground truth value function, the actor can make the best decisions from a finite action space accordingly.

We are interested in the closeness of the estimated value function learned on \hat{G} and the underlying ground truth value function corresponding to G in the evaluation environment: $|V^* - V_\pi|, \forall s \in S$. To conduct meaningful analysis, we need to make some mild assumptions on the distances between a user and its near neighbors. We denote \hat{Q}^* as the optimal state-action value function of \hat{G} , \mathcal{T} as the Bellman Operator and d as the distance metric for selecting nearest neighbors.

ASSUMPTION 1. (*Lipschitz continuity*) For any two transitions $(\mathbf{s}, \mathbf{a}), (\mathbf{s}', \mathbf{a}') \in S \times A$, the difference of their estimated value function after value iteration is Lipschitz continuous:

$$|\mathcal{T}\hat{Q}(\mathbf{s}, \mathbf{a}) - \mathcal{T}\hat{Q}(\mathbf{s}', \mathbf{a}')| \leq L \cdot d[(\mathbf{s}, \mathbf{a}), (\mathbf{s}', \mathbf{a}')]. \quad (17)$$

where L is the Lipschitz constant. This assumption bounds the differences in the value function estimation between any two neighborhood state-action pairs under the Bellman Operation of the evaluation environment. Based on the statistics of the offline data, we also need to consider the quality of the clustering. We use $d_m := \max_{(\mathbf{s}_i, \mathbf{a}_i)} d[(\mathbf{s}_i, \mathbf{a}_i), (\mathbf{s}_j, \mathbf{a}_j)], (\mathbf{s}_i, \mathbf{a}_i) \in S \times A, (\mathbf{s}_j, \mathbf{a}_j) \in k\text{NN}((\mathbf{s}_i, \mathbf{a}_i))$ to represent the maximal distance between the feedback of a user and that of its nearest neighbors. In addition, the size of offline data and the number of neighbors are noted as N and K , respectively. Then, we can derive the discrepancy between the estimated value function and the ground truth one in the following theorem.

THEOREM 1. For offline data of size N , \hat{Q}^* is its optimal value function with respect to its world model. If $\mathcal{T}\hat{Q}^*$ is L -smooth, then with probability at least $1 - \delta$,

$$|V_{\hat{\pi}^*} - V^*| \leq \frac{2(L \cdot d_m + Q_m \cdot \epsilon(k, N, \delta))}{1 - \gamma}, \quad (18)$$

where ϵ is a little quantity and Q_m is the maximal Q-value. This theorem provides our reward shaping method with a theoretical guarantee that when the users' behaviors are not too irrelevant to form a meaningful clustering and the sparsity of the offline data is limited, then the policy learned with the world model is lower bounded.

5.1 Proof Sketch

In this part, we proof sketch of the Theorem (1). Before it starts, a Lemmas from [30] will be introduced at first.

Lemma 1. Let $\epsilon_- \geq 0$ and $\epsilon_+ \geq 0$ be constants such that $\forall (s, a) \in (S, A), -\epsilon_- \leq Q(s, a) - \mathcal{T}Q(s, a) \leq \epsilon_+$. The return V^π from the greedy policy over Q satisfies:

$$\forall s \in S, V^\pi(s) \geq V^*(s) - \frac{\epsilon_- + \epsilon_+}{1 - \gamma} \quad (19)$$

Proof: We denote the value function for the real environment G and the world model \hat{G} as Q and \hat{Q} . Applying the Bellman Operator on the same state-action pair of two environments is different as their reward functions differ. Thus, we use \mathcal{T} and $\hat{\mathcal{T}}$ to denote them. To build a bridge between these two operators, we define a cross-environment Bellman Operator as a bridge to bind G and \hat{G} :

$$\tilde{\mathcal{T}}Q(s, a) = \hat{r} + \gamma \max_{a'} Q(s', a') + \mathcal{T}\hat{Q}(s, a) - \mathcal{T}\hat{Q}(s_i, a_i), \quad (20)$$

where $(s_i, a_i) \in k\text{NN}(s, a)$

Then, we decompose the Bellman Error as:

$$\hat{Q}(s, a) - \mathcal{T}\hat{Q}(s, a) = \hat{Q}(s, a) - \tilde{\mathcal{T}}\hat{Q}(s, a) + \tilde{\mathcal{T}}\hat{Q}(s, a) - \mathcal{T}\hat{Q}(s, a). \quad (21)$$

We focus on the right-hand side, taking the first two terms as one unit:

$$\mathcal{I} = \frac{1}{k} \sum_{i \in k\text{NN}(s, a)} [\mathcal{T}\hat{Q}(s, a) - \mathcal{T}\hat{Q}(s_i, a_i)]; \quad (22)$$

Due to our assumption 1 about the Lipschitz continuity, we have:

$$-L \cdot d_m \leq \mathcal{I} \leq L \cdot d_m; \quad (23)$$

Now we need to bound $\mathcal{I}\mathcal{I} = \tilde{\mathcal{T}}\hat{Q}(s, a) - \mathcal{T}\hat{Q}(s, a)$. We have

$$E[\tilde{\mathcal{T}}\hat{Q}(s, a)] = \mathcal{T}\hat{Q}(s, a) \quad (24)$$

We denote $C(N, K)$ as the largest number of clusters in a dataset. According to the Hoeffding inequality, given real number $\delta \in (0, 1)$, we have,

$$P\left(|\mathcal{T}\hat{Q}(s, a) - \mathcal{T}\hat{Q}(s, a)| \geq Q_m \sqrt{\frac{1}{2k} \ln \frac{2C(N, k)}{\delta}}\right) \leq \delta, \quad (25)$$

where Q_m is the maximal Q-value.

Then, we obtain that with probability at least $1 - \delta$, $|\mathcal{I}\mathcal{I}| \leq \epsilon(k, N, \delta)$. Putting \mathcal{I} and $\mathcal{I}\mathcal{I}$ together, we have,

$$-(L \cdot d_m + \epsilon(k, N, \delta)) \leq \hat{Q}(s, a) - \mathcal{T}\hat{Q}(s, a) \leq L \cdot d_m + \epsilon(k, N, \delta). \quad (26)$$

Use Eq. (19) in Lemma 1, the Theorem is proved.

6 EXPERIMENT

In this section, we begin with introducing the experiment setup including the datasets we use, evaluation metric, the state-of-the-art method, and other baselines. Then, we investigate the following questions:

- (RQ1) How does ROLeR perform compared with other baselines?
- (RQ2) How do the reward shaping and uncertainty penalty in ROLeR contribute to its performance?
- (RQ3) What is the most effective design of the uncertainty penalty?
- (RQ4) What is the impact of the world model in ROLeR?
- (RQ5) Is ROLeR robust to the critical hyperparameters?

6.1 Setup

6.1.1 Datasets. We conduct experiments on four datasets including two newly proposed challenging short-video interaction datasets and two typical datasets. The statistics are listed in Table 1.

KuaiRec [8] is a video dataset that contains a fully-observed user-item interaction matrix used for evaluation. Within this matrix, each user's feedback towards any item is known. The normalized viewing time of a video is used as a reward signal. The training data is from the standard interaction history containing popularity bias, which makes it difficult to learn a recommendation policy.

KuaiRand-Pure [9] is also a video dataset that contains user-item interaction collected by randomly inserting the target videos in the standard recommendation stream. This part is used to simulate a fully observed interaction matrix like KuaiRec for evaluation, while

Table 1: Dataset Statistics.

Dataset	Usage	No. of Users	No. of Items	Interaction Coverage
KuaiRec	Train	7176	10728	16.277%
	Test	1411	3327	99.620%
KuaiRand	Train	27285	7551	0.697%
	Test	27285	7583	0.573%
Coat	Train	290	300	8.046%
	Test	290	300	5.287%
Yahoo	Train	15400	1000	2.024%
	Test	5400	1000	1.000%

the data collected in the standard stream serves as the training set. The "is_click" signal is used as the reward.

Coat [36] is a shopping dataset. It consists of the user ratings, a five-point scale, on the self-selected items and uniformly sampled ones. These two parts of data are used for training and testing, respectively. The ratings are used as reward signals.

Yahoo [28] is a music dataset with training set and testing set collection similar to Coat. The ratings on the user-selected items are used for training, while those on the randomly picked items are for testing. Similarly, the ratings are treated as reward signals.

6.1.2 Evaluation. In the scope of RL for recommender systems, the objective of RS is to maximize long-term user satisfaction, which can be formulated as the return, *i.e.*, cumulative reward. For the detailed evaluation setting, we follow the same manners as in DORL [7] and [10]: The same item will not be recommended twice to a user. A quitting mechanism is applied as the termination condition: the interaction will terminate when a user receives M items of the same category in the recent N transitions. We keep $M = 0, N = 4$ as in DORL, which means for every four transitions, the items' categories should differ. The maximum user-item interaction length is set to 30 and the cumulative reward is evaluated after every training epoch on 100 testing trajectories. The final cumulative reward is averaged across 200 epochs. In addition, to enable in-depth analysis, the cumulative reward is decomposed into the interaction length and single-step recommendation reward. They are regarded as metrics as well. Majority category domination (MCD) was originally proposed in DORL as a reference of the Matthew effect, which should be controlled in a suitable range. For readability, we still overbold the smallest MCD in each dataset. In addition, due to the definition of *most popular categories* in DORL, the calculation of MCD is not supported on Coat and Yahoo.

While the testing set of KuaiRec is fully observable and can be directly used as the reward function during policy evaluation, the reward functions for the other three datasets are estimated with the testing data by DeepFM models. To ensure a fair comparison, we use exactly the same reward functions as in DORL on all datasets.

6.1.3 Baselines. The baselines include five model-based offline RL methods, including two state-of-the-art, four model-free offline RL methods, and two vanilla bandit-based methods. To ensure a fair comparison, on each dataset, we use the same DeepFM [11] model to learn the world model for model-based offline RL methods.

Table 2: The performance summary of all methods on KuaiRand and KuaiRec. (Bold: best; Underline: runner-up)

Exp	KuaiRand				KuaiRec			
	$R_{tra} \uparrow$	$R_{reach} \uparrow$	Length \uparrow	MCD	$R_{tra} \uparrow$	$R_{reach} \uparrow$	Length \uparrow	MCD
UCB	1.6510 \pm 0.1515	0.3725 \pm 0.0278	4.4312 \pm 0.2121	0.7886 \pm 0.0235	3.6059 \pm 0.6092	0.8531 \pm 0.1145	4.2190 \pm 0.3892	0.8112 \pm 0.0582
ϵ -greedy	1.7109 \pm 0.1258	0.3510 \pm 0.0251	4.8804 \pm 0.2700	0.7735 \pm 0.0239	3.5152 \pm 0.7315	0.8276 \pm 0.1286	4.2186 \pm 0.4049	0.8226 \pm 0.0482
SQN	0.9117 \pm 0.9292	0.1818 \pm 0.0584	4.6007 \pm 3.7125	0.6208 \pm 0.1865	4.6730 \pm 1.2149	<u>0.9125 \pm 0.0551</u>	5.1109 \pm 1.2881	0.6860 \pm 0.0931
CRR	1.4812 \pm 0.1236	0.2258 \pm 0.0151	6.5613 \pm 0.3519	0.7326 \pm 0.0187	4.1631 \pm 0.2535	0.8945 \pm 0.0365	4.6541 \pm 0.2150	0.8648 \pm 0.0168
CQL	2.0323 \pm 0.1070	0.2258 \pm 0.0119	9.0000 \pm 0.0000	0.7778 \pm 0.0000	2.5062 \pm 1.7665	0.6843 \pm 0.2279	3.2239 \pm 1.3647	0.3858 \pm 0.3853
BCQ	0.8515 \pm 0.0523	0.4246 \pm 0.0164	2.0050 \pm 0.0707	0.9983 \pm 0.0236	2.1234 \pm 0.0815	0.7078 \pm 0.0272	3.0000 \pm 0.0000	0.6667 \pm 0.0000
MBPO	10.9325 \pm 0.9457	0.4307 \pm 0.0210	25.3446 \pm 1.8190	0.3061 \pm 0.0403	12.0426 \pm 1.3115	0.7701 \pm 0.0290	15.6461 \pm 1.6373	<u>0.3621 \pm 0.0465</u>
IPS	3.6287 \pm 0.6763	0.2163 \pm 0.0141	16.8213 \pm 3.1824	0.2010 \pm 0.1156	12.8326 \pm 1.3531	0.7673 \pm 0.0234	16.7270 \pm 1.6834	0.2150 \pm 0.0644
MOPO	10.9344 \pm 0.9634	<u>0.4367 \pm 0.0193</u>	25.0019 \pm 1.8911	0.3433 \pm 0.0289	11.4269 \pm 1.7500	0.8917 \pm 0.0505	12.8086 \pm 1.8502	0.4793 \pm 0.0619
DORL	11.8500 \pm 1.0361	0.4284 \pm 0.0223	27.6091 \pm 2.1208	<u>0.2960 \pm 0.0356</u>	20.4942 \pm 2.6707	0.7673 \pm 0.0264	26.7117 \pm 3.4190	0.3792 \pm 0.0149
ROLeR	13.4553 \pm 1.5086	0.4574 \pm 0.0332	29.2700 \pm 2.3225	0.4049 \pm 0.0356	33.2457 \pm 2.6403	1.2293 \pm 0.0511	27.0131 \pm 1.3986	0.4439 \pm 0.0212
GT Reward	14.3689 \pm 1.9708	0.4993 \pm 0.0488	28.5582 \pm 2.4114	0.4109 \pm 0.0397	36.7475 \pm 3.4738	1.5600 \pm 0.0405	23.5653 \pm 2.1824	0.5594 \pm 0.0267

Table 3: The performance summary of all methods on Coat and Yahoo. (Bold: best; Underline: runner-up). Due to the definition of MCD, its calculation is not supported on Coat and Yahoo.

Exp	Coat			Yahoo		
	$R_{tra} \uparrow$	$R_{reach} \uparrow$	Length \uparrow	$R_{tra} \uparrow$	$R_{reach} \uparrow$	Length \uparrow
UCB	73.6713 \pm 1.8105	2.4557 \pm 0.0604	30.0000 \pm 0.0000	66.7578 \pm 1.2539	2.2253 \pm 0.0418	30.0000 \pm 0.0000
ϵ -greedy	72.0042 \pm 1.6054	2.4001 \pm 0.0535	30.0000 \pm 0.0000	64.3439 \pm 1.2911	2.1448 \pm 0.0430	30.0000 \pm 0.0000
SQN	72.6142 \pm 2.0690	2.4205 \pm 0.0690	30.0000 \pm 0.0000	57.7270 \pm 5.7506	1.9242 \pm 0.1917	30.0000 \pm 0.0000
CRR	67.3830 \pm 1.6274	2.2461 \pm 0.0542	30.0000 \pm 0.0000	57.9941 \pm 1.6752	1.9331 \pm 0.0558	30.0000 \pm 0.0000
CQL	68.9835 \pm 1.8659	2.2995 \pm 0.0622	30.0000 \pm 0.0000	62.2909 \pm 3.3466	2.0764 \pm 0.1116	30.0000 \pm 0.0000
BCQ	68.8012 \pm 1.7627	2.2934 \pm 0.0588	30.0000 \pm 0.0000	61.7388 \pm 1.7808	2.0580 \pm 0.0594	30.0000 \pm 0.0000
MBPO	71.1930 \pm 2.0943	2.3731 \pm 0.0698	30.0000 \pm 0.0000	64.5500 \pm 2.1567	2.1517 \pm 0.0719	30.0000 \pm 0.0000
IPS	73.8872 \pm 1.8417	2.4629 \pm 0.0614	30.0000 \pm 0.0000	57.8499 \pm 1.7955	1.9283 \pm 0.0599	30.0000 \pm 0.0000
MOPO	71.1805 \pm 2.0560	2.3727 \pm 0.0685	30.0000 \pm 0.0000	65.5098 \pm 2.0996	2.1837 \pm 0.0700	30.0000 \pm 0.0000
DORL	71.3992 \pm 2.0640	2.3800 \pm 0.0688	30.0000 \pm 0.0000	66.3509 \pm 2.2237	2.2117 \pm 0.0741	30.0000 \pm 0.0000
ROLeR	76.1603 \pm 2.1200	2.5387 \pm 0.0707	30.0000 \pm 0.0000	68.3637 \pm 1.8550	2.2788 \pm 0.0618	30.0000 \pm 0.0000
GT Reward	80.0895 \pm 2.4545	2.6696 \pm 0.0818	30.0000 \pm 0.0000	68.8791 \pm 3.2867	2.2960 \pm 0.1096	30.0000 \pm 0.0000

- ϵ -greedy: This method uses the world model predicted reward as its reward function to make a decision with probability $1 - \epsilon$ and takes actions randomly with probability ϵ .
- UCB: Upper Confidence Bound bandit algorithm [21], estimates an upper confidence bound and favors the actions with the highest confidence bounds to balance the exploration and exploitation.
- SQN: Self-supervised Q-learning [47], adopts a dual-headed architecture where one focuses on the cross-entropy loss and the other is designed for RL tasks which we use for recommendation.
- BCQ: Batch-Constrained deep Q-learning [6], selectively updating policies based on high-confidence data, effectively sidelining ambiguous or uncertain data.
- CQL: Conservative Q-Learning [20], constrains the usage of OOD data to update the state-action value function.
- CRR: Critic Regularized Regression [45], updates the policy conditioning on the discrepancy in the behavior policies.
- MBPO: Model-Based Policy Optimization [15], is a baseline that trains an actor-critic policy on the learned world model.
- MOPO: Model-based Offline Policy Optimization [50], proposes to penalize the uncertainty which is calculated through an ensemble of world models.
- IPS: Inverse Propensity Scoring [39], is a statistics-based sample re-weighting method. An actor-critic policy is learned based on the world model after re-weighting the offline data.
- DORL: Debiased model-based Offline RL [7], designs the uncertainty penalty and introduces the entropy penalty to encourage

diverse recommendation and alleviate the Matthew Effect. Current state-of-the-art (SOTA) on both KuaiRec and KuaiRand.

- CIRS: Counterfactual Interactive Recommender System [10], introduces a causal model to infer the user preference in the training of a PPO [37] algorithm. CIRS is also a SOTA method on KuaiRec. The official repository of CIRS only covers KuaiRec in the four datasets.
- GT Reward: it trains the recommendation policy with the reward function from the testing environment, serving as a reference policy of one performance upper bound. The RL algorithm utilized is *A2C*, which is the same as DORL and ROLeR.

6.2 Overall Performance (RQ1)

For our ROLeR, we have two key hyperparameters: the coefficients of the entropy penalty and the number of nearest neighbors. We simply tune k from 5 to 50, 25 to 200, 10 to 35, and 10 to 100 on KuaiRec, KuaiRand, Coat, and Yahoo, respectively.

The detailed performance on four datasets is listed in Table 2 and 3. The corresponding curves for KuaiRand and KuaiRec are in Figure 2. The first row is the main evaluation metric: cumulative reward followed by average interaction length and single-step reward as the second and third rows, respectively. We first analyze the results in a more specific view, *i.e.*, the interaction length and the single-step reward. Then, we compile our observations on cumulative rewards, detailing the insights gleaned from the experiments.

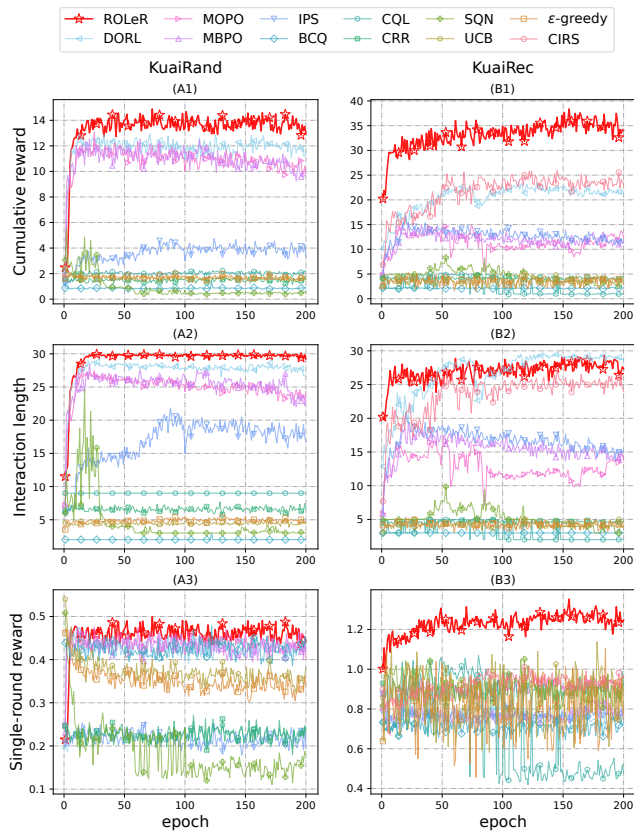


Figure 2: The overall performance on KuaiRand and KuaiRec.

ROLeR achieves the longest interaction on four datasets. In the second row of Figure 2, it shows the interaction length of all methods on KuaiRand and KuaiRec. In KuaiRec, the curves in *B3* can be classified into three levels. DORL, CIRS, and ROLeR are at the top level, converging to the interaction upper bound as 30. It is obvious that ROLeR can reach an interaction length of 20 at the first epoch, longer than other baselines. It showcases that ROLeR can avoid recommending risky items at an early training stage. The second level consists of other model-based offline RL methods, such as MBPO and IPS, while the model-free offline methods are difficult to reach at a length of 5. This observation is instructive in RecSys while both the model-based and model-free methods adopt a conservative design, the regularization on the discrepancy of the behavior policies and learning policy limits the actual action space, rendering the early quitting problem. However, learning a world model as a solution to this problem is not as effective as expected since most of them still struggle to reach the upper bound. Similar observations can be found on the KuaiRand dataset, but its performance is more differentiable. Combining the detailed values in *Length* columns of Table 2, we believe that ROLeR’s longest interaction length is due to ROLeR’s more precise understanding of the environment compared to other baseline methods. Specifically, the ROLeR policy is more effective at making recommendations when choosing between a risky high-reward item and a conservative low-reward item to ensure the interaction length.

As for Coat and Yahoo, due to the lesser overlap of item categories compared to those in KuaiRec and KuaiRand, all baseline methods can easily reach the maximum interaction length without triggering the termination condition as shown in the *Length* columns in Table 3. So, we turn to the analysis of single-step reward.

ROLeR achieves the closest single-step reward to the reference policy trained by ground truth reward functions on all datasets. The single-step reward range for KuaiRand is $0 \sim 1$ and $0 \sim 5$ for the other three datasets. Looking into the last row of Figure 2, the ROLeR significantly outperforms all baseline methods by a large margin on KuaiRec. This is the major contribution of more accurate reward functions. On KuaiRand, Coat, and Yahoo, though the differences of single-step reward, shown by the R_{each} columns in Table 2 and 3, across all baselines are not so significant as KuaiRec, ROLeR can still utilize the "inconspicuous" differences to steadily accumulated to significant advantages in the long-term reward.

As for MCD, the experiment results show that it should be controlled to be less than 0.5. In detail, a large MCD (> 0.5) leads to shorter interaction trajectories, such as CQL and BCQ, resulting in limited cumulative rewards. On the other hand, the baselines with minimal MCD do not achieve the longest trajectories and highest cumulative reward, such as IPS, on both datasets.

To summarize the superiority of ROLeR and draw valuable insights from the experiments, we focus on the cumulative reward in the first row of Figure 2 and the R_{tra} columns in Table 2 and 3. On four datasets, ROLeR significantly outperforms the baseline methods, yielding a sub-optimal performance to the reference policy. Comparing the performance of ROLeR with other baselines, the influence of the accuracy of the world models is vital. It verifies the motivation of this work. In addition, in the RL algorithm design, ROLeR uses the plain A2C while baseline methods such as CIRS and CQL use advanced algorithms like PPO [37] and SAC[12]. The result comparison demonstrates that before diving into a delicate policy design, pursuing an accurate world model for model-based methods in recommender systems is more fundamental and effective.

6.3 Ablation Study (RQ2)

In this part, we investigate the significance of the proposed components: the non-parametric reward shaping and the uncertainty penalty on four datasets. Our experiments on KuaiRec are based on DORL with Transformer [41] state tracker inspired by SASRec [17] and Gaussian initialized item embedding, which are effective designs that can improve the performance of DORL. As for the other three datasets, these techniques cannot consistently increase the cumulative reward, so we continue to use the original DORL. Intuitively, ROLeR has three variants. One adapts the reward shaping but keeps the world model based uncertainty penalty. We denote this version as *ROLeR without kr*. Another one keeps the world model predicted reward and changes to k NN-based uncertainty penalty denoted as *ROLeR without ku*. As described in Section 4.7, the uncertainty penalty collaborates with the k NN reward shaping and cannot be directly applied to the reward functions from world models. Thus, an alternative version, *i.e.*, $\bar{r} - \lambda_U \tilde{P}_U + \lambda_E P_E$, is tested.

From Table 4, either the reward shaping method or uncertainty penalty can improve the cumulative rewards compared to DORL. This observation is especially obvious for *ROLeR without ku*, emphasizing on the contribution of the non-parametric reward shaping.

Table 4: Ablation studies on ROLeR’s components with R_{tra} .

Methods	ku	kr	KuaiRec	KuaiRand	Coat	Yahoo
DORL	×	×	24.4308 ± 1.6768	11.8500 ± 1.0335	71.3992 ± 2.0588	66.3509 ± 2.2181
ROLeR	√	×	23.4512 ± 1.4973	12.5136 ± 1.3781	72.6059 ± 1.8019	66.1680 ± 1.7706
	×	√	30.7430 ± 2.1178	12.7339 ± 1.3681	72.6055 ± 1.8186	68.0083 ± 1.8920
	√	√	33.2457 ± 2.6337	13.4553 ± 1.5049	76.1603 ± 2.1147	68.3637 ± 1.8504

Table 5: Uncertainty penalty design of ROLeR with R_{tra} .

Methods	KuaiRec	KuaiRand	Coat	Yahoo
DORL	24.4308 ± 1.6768	11.8500 ± 1.0335	71.3992 ± 2.0588	66.3509 ± 2.2181
$r \times \frac{\lambda}{d}$	17.5296 ± 1.4775	5.9727 ± 0.7820	66.8383 ± 2.1119	52.7376 ± 1.7133
$\mathcal{N}(r, \lambda d)$	31.3588 ± 2.2046	11.5336 ± 1.2343	74.3904 ± 1.7987	66.8826 ± 1.7944
$r - \lambda d_{min}$	30.7615 ± 2.2389	12.6348 ± 1.3889	75.3494 ± 1.9297	67.2455 ± 1.8898
$r - \lambda d_{avg}$	31.5732 ± 2.1560	10.6609 ± 2.7965	75.1499 ± 2.0620	66.1912 ± 1.7949
$r - \lambda d_{max}$	31.4333 ± 2.0677	12.6874 ± 1.3913	72.3764 ± 1.8067	67.3516 ± 1.6982
$r - \lambda d$	33.2457 ± 2.6337	13.3310 ± 1.5288	74.7558 ± 1.8794	66.9811 ± 1.8107
$r \times (1 - d)$	31.1419 ± 2.4650	13.4553 ± 1.5049	76.1603 ± 2.1147	68.3637 ± 1.8504

Combining the results of the last two rows of this table, it is easy to find that the uncertainty penalty serves as a constructive complementary to the reward shaping, enabling ROLeR to suit different datasets. The superiority of ROLeR over the other variant demonstrates the effectiveness of its core components.

6.4 The Design of Uncertainty Penalty (RQ3)

As illustrated in Section 4.7, the uncertainty penalty can adjust the way and degree of reward rectification to influence generalization. To investigate the most effective design of the uncertainty penalty, we conduct extensive experiments about the possible variants of the current uncertainty penalty across four datasets, and the results are shown in Table 5. We denote the distances between a user and its nearest neighbours as d in this table, and $d_{min}/d_{avg}/d_{max}$ represents the minimum/mean/maximum of the distances. $\mathcal{N}(\cdot, \cdot)$ is the Gaussian distribution. In addition, the λ for each variant is tuned and the optimal choice is different. We omit the subscript of λ and the entropy penalty, P_E , for simplicity. The r for all variants in this table denotes the reward function after our reward shaping.

In the second line of Table 5, we use the inverse of the distances as the uncertainty penalty to discount the probabilities of recommending highly uncertain items, *i.e.*, $r \times \frac{\lambda}{d}$. As it tends to penalize the uncertainty too sharply, it yields the smallest cumulative reward across four datasets. In the next line, sampling from a Gaussian distribution with the predicted r as mean and uncertainty penalty as the variance *i.e.*, $\mathcal{N}(r, \lambda d)$, is also a conservative way to avoid risky recommendation. This variant implicitly penalizes the uncertainty by changing the deterministic reward into a Gaussian-distributional reward. Unfortunately, this variant does not perform robustly across four datasets. The following three variants, *i.e.*, $r - \lambda d_{min}/d_{avg}/d_{max}$, serve as intuitive ways to adjust the degree of the uncertainty penalty. The corresponding results demonstrate that such a direct design is not sufficient to estimate the uncertainty in offline model-based RL for RecSys. The last second variant achieves the highest cumulative reward on KuaiRec. We believe it benefits from the special coverage of KuaiRec compared to the other datasets. As the training set of KuaiRec is comparably dense, the distances between a user and its nearest neighbors are capable

of estimating the uncertainty. On the other three datasets, the last variant offers the highest return. Since we use the cosine distance as d , then $1 - d$ indicates the cosine similarity. Thus, this variant uses the weighted average of nearest neighbors to refine the reward functions during mutual inference. To summarize, the uncertainty penalty design of ROLeR demonstrates robust performance across four datasets, suggesting its effectiveness compared to other variants. Considering the diverse properties of each dataset, how to automatically decide the most suitable uncertainty design will be a challenging yet meaningful topic that will be our future work.

6.5 The Impact of World Model (RQ4)

When summarizing the utility of the world model in policy learning, it trains the item embedding used as the initialization of action representation, predicts the user-item feedback as the estimated rewards, and estimates the uncertainty. In implementing ROLeR on KuaiRec, our reward model and uncertainty penalty are estimated from the offline data. We find that both initializing the action representation from a standard distribution and applying a Transformer state tracker can improve the cumulative reward in most of our testing settings as exemplified in Table 6. In this table, *att* and *avg* mean the transformer state tracker and average state tracker, respectively. a_G and a_t mean whether to initialize the action representation at the beginning of policy training or not. We believe the inaccuracy of the world model does not only hurt the estimation of the reward function but the action representation. In addition, as recent interaction history is available, the former Avg. state tracker used in DORL can hardly capture the order information. That is the reason we turn to the Transformer state tracker on KuaiRec. However, this is not the case for the other three datasets. The original testing matrix for KuaiRand is extremely sparse (see Table 1). To make it a fully observed evaluation environment, the user-item feedback matrix is completed through emulation. We hypothesize that may explain why the order information is not so informative.

6.6 Hyperparameter Sensitivity(RQ5)

In ROLeR, the major hyperparameter we introduced is the number of nearest neighbors k . Thus, we investigate the influence of k on the cumulative rewards. Considering the size and sparsity of the datasets, we test ROLeR in [5, 10, 15, 20, 30, 40, 50] for KuaiRec, [25, 50, 75, 100, 150, 200] for KuaiRand, [10, 15, 20, 25, 30, 35] for Coat, and [10, 20, 40, 60, 80, 100] for Yahoo.


We draw two line charts to show the relationship between the cumulative rewards and k in Figure 3. The dashed lines in each subplot represent the performance of DORL. We can observe that across a large range of k , the cumulative rewards change within a reasonable range, usually less than 2 across all datasets. In addition, ROLeR with diverse k choices constantly surpasses current SOTA on four datasets. It shows the robustness of the proposed ROLeR against its core hyperparameter.

7 CONCLUSION

In this paper, we identify that the reward function prediction is inaccurate in the world model of current model-based offline reinforcement learning for recommender systems. We verify that this

Table 6: The world model impact on KuaiRec

Variants	$R_{tra} \uparrow$	Variants	$R_{tra} \uparrow$
DORL	20.494 ± 2.670	ROLeR w. avg & a_t	27.030 ± 2.560
DORL w. att	22.895 ± 1.454	ROLeR w. avg	29.273 ± 2.983
DORL w. a_G	22.060 ± 1.098	ROLeR w. a_t	28.874 ± 2.377
DORL w. att & a_G	24.431 ± 1.677	ROLeR	33.246 ± 2.640

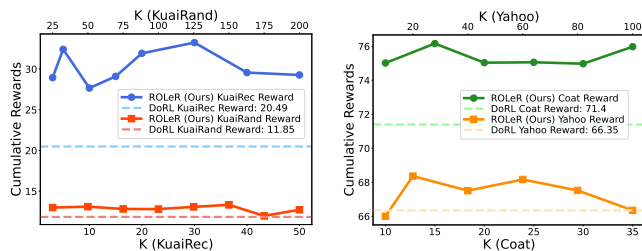**Figure 3: Robustness w.r.t. different ks on four datasets.**

inaccuracy can lead to a decrease in the user’s long-term satisfaction. Thus, we introduce a non-parametric clustering-based reward shaping method to effectively improve the cumulative reward by enhancing the users’ interaction length and single-step reward. In addition, to release the dependence on an ensemble of world models, an in-cluster distance-based uncertainty penalty is proposed to refine the reward shaping by inhibiting risky recommendations. Empirically, we conduct extensive experiments on four challenging datasets. Our method outperforms all baseline methods including the current state-of-the-art.

8 ACKNOWLEDGMENTS

This work is supported by projects DE200101610, CE200100025 funded by Australian Research Council, and CSIRO’s Science Leader project R-91559.

REFERENCES

- M Mehdi Afsar, Trafford Crump, and Behrouz Far. 2022. Reinforcement learning based recommender systems: A survey. *Comput. Surveys* 55, 7 (2022), 1–38.
- Jesús Bobadilla, Fernando Ortega, Antonio Hernando, and Abraham Gutiérrez. 2013. Recommender systems survey. *Knowledge-based systems* 46 (2013), 109–132.
- Robin Burke. 2002. Hybrid recommender systems: Survey and experiments. *User modeling and user-adapted interaction* 12 (2002), 331–370.
- Xiacong Chen, Siyu Wang, Julian McAuley, Dietmar Jannach, and Lina Yao. 2023. On the opportunities and challenges of offline reinforcement learning for recommender systems. *ACM Transactions on Information Systems* (2023).
- Xiacong Chen, Lina Yao, Julian McAuley, Guanglin Zhou, and Xianzhi Wang. 2023. Deep reinforcement learning in recommender systems: A survey and new perspectives. *Knowledge-Based Systems* 264 (2023), 110335.
- Scott Fujimoto, David Meger, and Doina Precup. 2019. Off-policy deep reinforcement learning without exploration. In *International conference on machine learning*. PMLR, 2052–2062.
- Chongming Gao, Kexin Huang, Jiawei Chen, Yuan Zhang, Biao Li, Peng Jiang, Shiqi Wang, Zhong Zhang, and Xiangnan He. 2023. Alleviating matthew effect of offline reinforcement learning in interactive recommendation. *arXiv preprint arXiv:2307.04571* (2023).
- Chongming Gao, Shijun Li, Wenqiang Lei, Jiawei Chen, Biao Li, Peng Jiang, Xiangnan He, Jiaxin Mao, and Tat-Seng Chua. 2022. KuaiRec: A fully-observed dataset and insights for evaluating recommender systems. In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management*. 540–550.
- Chongming Gao, Shijun Li, Yuan Zhang, Jiawei Chen, Biao Li, Wenqiang Lei, Peng Jiang, and Xiangnan He. 2022. KuaiRand: An Unbiased Sequential Recommendation Dataset with Randomly Exposed Videos. In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management*. 3953–3957.
- Chongming Gao, Shiqi Wang, Shijun Li, Jiawei Chen, Xiangnan He, Wenqiang Lei, Biao Li, Yuan Zhang, and Peng Jiang. 2023. CIRS: Bursting filter bubbles by counterfactual interactive recommender system. *ACM Transactions on Information Systems* 42, 1 (2023), 1–27.
- Huifeng Guo, Ruiming Tang, Yunming Ye, Zhenguo Li, and Xiuqiang He. 2017. DeepFM: a factorization-machine based neural network for CTR prediction. In *Proceedings of the 26th International Joint Conference on Artificial Intelligence (IJCAI’17)*. 1725–1731.
- Tuomas Haarnoja, Aurick Zhou, Pieter Abbeel, and Sergey Levine. 2018. Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor. In *International Conference on Machine Learning*. PMLR, 1861–1870.
- Daocheng Hong, Yang Li, and Qiwen Dong. 2020. Nonintrusive-sensing and reinforcement-learning based adaptive personalized music recommendation. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*. 1721–1724.
- Jin Huang, Harrie Oosterhuis, Bunyamin Cetinkaya, Thijs Rood, and Maarten de Rijke. 2022. State encoders in reinforcement learning for recommendation: A reproducibility study. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*. 2738–2748.
- Michael Janner, Justin Fu, Marvin Zhang, and Sergey Levine. 2019. When to trust your model: Model-based policy optimization. *Advances in neural information processing systems* 32 (2019).
- Olivier Jeunen and Bart Goethals. 2021. Pessimistic reward models for off-policy learning in recommendation. In *Proceedings of the 15th ACM Conference on Recommender Systems*. 63–74.
- Wang-Cheng Kang and Julian McAuley. 2018. Self-attentive sequential recommendation. In *2018 IEEE international conference on data mining (ICDM)*. IEEE, 197–206.
- Rahul Kidambi, Aravind Rajeswaran, Praneeth Netrapalli, and Thorsten Joachims. 2020. More: Model-based offline reinforcement learning. *Advances in neural information processing systems* 33 (2020), 21810–21823.
- Aviral Kumar, Justin Fu, Matthew Soh, George Tucker, and Sergey Levine. 2019. Stabilizing off-policy q-learning via bootstrapping error reduction. *Advances in Neural Information Processing Systems* 32 (2019).
- Aviral Kumar, Aurick Zhou, George Tucker, and Sergey Levine. 2020. Conservative q-learning for offline reinforcement learning. *Advances in Neural Information Processing Systems* 33 (2020), 1179–1191.
- Tze Leung Lai and Herbert Robbins. 1985. Asymptotically efficient adaptive allocation rules. *Advances in applied mathematics* 6, 1 (1985), 4–22.
- Yu Lei and Wenjie Li. 2019. Interactive recommendation with user-specific deep reinforcement learning. *ACM Transactions on Knowledge Discovery from Data (TKDD)* 13, 6 (2019), 1–15.
- Yu Lei, Hongbin Pei, Hanqi Yan, and Wenjie Li. 2020. Reinforcement learning based recommendation with graph convolutional q-network. In *Proceedings of the 43rd international ACM SIGIR conference on research and development in information retrieval*. 1757–1760.
- Yu Lei, Zhitao Wang, Wenjie Li, and Hongbin Pei. 2019. Social attentive deep q-network for recommendation. In *Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval*. 1189–1192.
- Sergey Levine, Aviral Kumar, George Tucker, and Justin Fu. 2020. Offline reinforcement learning: Tutorial, review, and perspectives on open problems. *arXiv preprint arXiv:2005.01643* (2020).
- Ping Liu, Karthik Shivaram, Aron Culotta, Matthew A Shapiro, and Mustafa Bilgic. 2021. The interaction between political typology and filter bubbles in news recommendation algorithms. In *Proceedings of the Web Conference 2021*. 3791–3801.
- Ryan Lowe, Yi I Wu, Aviv Tamar, Jean Harb, OpenAI Pieter Abbeel, and Igor Mordatch. 2017. Multi-agent actor-critic for mixed cooperative-competitive environments. *Advances in neural information processing systems* 30 (2017).
- Benjamin M Marlin and Richard S Zemel. 2009. Collaborative prediction and ranking with non-random missing data. In *Proceedings of the third ACM conference on Recommender systems*. 5–12.
- Volodymyr Mnih, Adria Puigdomenech Badia, Mehdi Mirza, Alex Graves, Timothy Lillicrap, Tim Harley, David Silver, and Koray Kavukcuoglu. 2016. Asynchronous methods for deep reinforcement learning. In *International conference on machine learning*. PMLR, 1928–1937.
- Jason Patis and Ronald Parr. 2013. PAC optimal exploration in continuous space Markov decision processes. In *Proceedings of the AAAI Conference on Artificial Intelligence*. Vol. 27. 774–781.
- Rafael Figueiredo Prudencio, Marcos ROA Maximo, and Esther Luna Colombini. 2023. A survey on offline reinforcement learning: Taxonomy, review, and open problems. *IEEE Transactions on Neural Networks and Learning Systems* (2023).
- Ruihong Qiu, Zi Huang, and Hongzhi Yin. 2021. Memory augmented multi-instance contrastive predictive coding for sequential recommendation. In *International Conference on Data Mining*. IEEE, 519–528.

- [33] Ruihong Qiu, Zi Huang, Hongzhi Yin, and Zijian Wang. 2022. Contrastive learning for representation degeneration problem in sequential recommendation. In *Proceedings of the fifteenth ACM international conference on web search and data mining*. 813–823.
- [34] Ruihong Qiu, Jingjing Li, Zi Huang, and Hongzhi Yin. 2019. Rethinking the item order in session-based recommendation with graph neural networks. In *International conference on information and knowledge management*. 579–588.
- [35] Ruihong Qiu, Hongzhi Yin, Zi Huang, and Tong Chen. 2020. Gag: Global attributed graph neural network for streaming session-based recommendation. In *Proceedings of the 43rd international ACM SIGIR conference on research and development in information retrieval*. 669–678.
- [36] Tobias Schnabel, Adith Swaminathan, Ashudeep Singh, Navin Chandak, and Thorsten Joachims. 2016. Recommendations as treatments: Debiasing learning and evaluation. In *International Conference on Machine Learning*. PMLR, 1670–1679.
- [37] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347* (2017).
- [38] Richard S Sutton and Andrew G Barto. 2018. *Reinforcement learning: An introduction*. MIT press.
- [39] Adith Swaminathan and Thorsten Joachims. 2015. Counterfactual risk minimization: Learning from logged bandit feedback. In *International Conference on Machine Learning*. PMLR, 814–823.
- [40] Hado Van Hasselt, Arthur Guez, and David Silver. 2016. Deep reinforcement learning with double q-learning. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 30.
- [41] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems* 30 (2017).
- [42] Hengliang Wang and Kedian Mu. 2020. Aspect-Level Attributed Network Embedding via Variational Graph Neural Networks. In *Database Systems for Advanced Applications: 25th International Conference, DASFAA 2020, Jeju, South Korea, September 24–27, 2020, Proceedings, Part II 25*. Springer, 398–414.
- [43] Ruosong Wang, Dean P Foster, and Sham M Kakade. 2020. What are the statistical limits of offline RL with linear function approximation? *arXiv preprint arXiv:2010.11895* (2020).
- [44] Yuyan Wang, Mohit Sharma, Can Xu, Sriraj Badam, Qian Sun, Lee Richardson, Lisa Chung, Ed H Chi, and Minmin Chen. 2022. Surrogate for long-term user experience in recommender systems. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 4100–4109.
- [45] Ziyu Wang, Alexander Novikov, Konrad Zolna, Josh S Merel, Jost Tobias Springenberg, Scott E Reed, Bobak Shahriari, Noah Siegel, Caglar Gulcehre, Nicolas Heess, et al. 2020. Critic regularized regression. *Advances in Neural Information Processing Systems* 33 (2020), 7768–7778.
- [46] Yilin Xiao, Liang Xiao, Xiaozhen Lu, Hailu Zhang, Shui Yu, and H Vincent Poor. 2020. Deep-reinforcement-learning-based user profile perturbation for privacy-aware recommendation. *IEEE Internet of Things Journal* 8, 6 (2020), 4560–4568.
- [47] Xin Xin, Alexandros Karatzoglou, Ioannis Arapakis, and Joemon M Jose. 2020. Self-supervised reinforcement learning for recommender systems. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*. 931–940.
- [48] Haoran Xu, Li Jiang, Li Jianxiong, and Xianyuan Zhan. 2022. A policy-guided imitation approach for offline reinforcement learning. *Advances in Neural Information Processing Systems* 35 (2022), 4085–4098.
- [49] Tianhe Yu, Aviral Kumar, Rafael Rafailov, Aravind Rajeswaran, Sergey Levine, and Chelsea Finn. 2021. Combo: Conservative offline model-based policy optimization. *Advances in neural information processing systems* 34 (2021), 28954–28967.
- [50] Tianhe Yu, Garrett Thomas, Lantao Yu, Stefano Ermon, James Y Zou, Sergey Levine, Chelsea Finn, and Tengyu Ma. 2020. Mopo: Model-based offline policy optimization. *Advances in Neural Information Processing Systems* 33 (2020), 14129–14142.
- [51] Shuai Zhang, Lina Yao, Aixin Sun, and Yi Tay. 2019. Deep learning based recommender system: A survey and new perspectives. *ACM computing surveys (CSUR)* 52, 1 (2019), 1–38.
- [52] Xiangyu Zhao, Long Xia, Liang Zhang, Zhuoye Ding, Dawei Yin, and Jiliang Tang. 2018. Deep reinforcement learning for page-wise recommendations. In *Proceedings of the 12th ACM conference on recommender systems*. 95–103.
- [53] Xiangyu Zhao, Long Xia, Lixin Zou, Hui Liu, Dawei Yin, and Jiliang Tang. 2020. Whole-chain recommendations. In *Proceedings of the 29th ACM international conference on information & knowledge management*. 1883–1891.
- [54] Guanjie Zheng, Fuzheng Zhang, Zihan Zheng, Yang Xiang, Nicholas Jing Yuan, Xing Xie, and Zhenhui Li. 2018. DRN: A deep reinforcement learning framework for news recommendation. In *Proceedings of the 2018 world wide web conference*. 167–176.
- [55] Yu Zheng, Chen Gao, Liang Chen, Depeng Jin, and Yong Li. 2021. DGCN: Diversified recommendation with graph convolutional networks. In *Proceedings of the Web Conference 2021*. 401–412.
- [56] Lixin Zou, Long Xia, Zhuoye Ding, Jiaying Song, Weidong Liu, and Dawei Yin. 2019. Reinforcement learning to optimize long-term user engagement in recommender systems. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 2810–2818.