

# SurvReLU: Inherently Interpretable Survival Analysis via Deep ReLU Networks

Xiaotong Sun  
University of Arkansas  
Fayetteville, AR, USA  
xs018@uark.edu

Peijie Qiu  
Washington University in St. Louis  
St. Louis, MO, USA  
peijie.qiu@wustl.edu

Shengfan Zhang  
University of Arkansas  
Fayetteville, AR, USA  
shengfan@uark.edu

## ABSTRACT

Survival analysis models time-to-event distributions with censorship. Recently, deep survival models using neural networks have dominated due to their representational power and state-of-the-art performance. However, their "black-box" nature hinders interpretability, which is crucial in real-world applications. In contrast, "white-box" tree-based survival models offer better interpretability but struggle to converge to global optima due to greedy expansion. *In this paper, we bridge the gap between previous deep survival models and traditional tree-based survival models through deep rectified linear unit (ReLU) networks.* We show that a deliberately constructed deep ReLU network (SurvReLU) can harness the interpretability of tree-based structures with the representational power of deep survival models. Empirical studies on both simulated and real survival benchmark datasets show the effectiveness of the proposed SurvReLU in terms of performance and interoperability. The code is available at <https://github.com/xs018/SurvReLU>.

## CCS CONCEPTS

• **Computing methodologies** → **Machine learning; Machine learning algorithms; Neural networks.**

## KEYWORDS

Survival analysis; Interpretability; Tree-based Algorithm

### ACM Reference Format:

Xiaotong Sun, Peijie Qiu, and Shengfan Zhang. 2024. SurvReLU: Inherently Interpretable Survival Analysis via Deep ReLU Networks. In *Proceedings of the 33rd ACM International Conference on Information and Knowledge Management (CIKM '24)*, October 21–25, 2024, Boise, ID, USA. ACM, New York, NY, USA, 5 pages. <https://doi.org/10.1145/XXXXXX.XXXXXX>

## 1 INTRODUCTION

Survival analysis is a prominent area of interest in statistics. Unlike time series analysis, which identifies patterns at regular time intervals [3, 5, 23], survival analysis models the time-to-event distribution. Time-to-event data involves censorship due to incomplete follow-up records [20], making the true time-to-event distribution unknown. In the early stages, survival analysis is approached

from traditional statistics. The non-parametric Kaplan-Meier estimator [12] models the time-to-event data with counting statistics but ignores time-dependent covariates. Cox proportional hazards (CPH) model [6] addresses this limitation by proposing a semi-parametric model that approximates the true hazard rate by combining a baseline hazard rate with a linear combination of covariates. However, this linear relationship between the risk function and covariates is easily violated in real scenarios.


To alleviate this linear constraint, deep neural networks are introduced to statistical survival models [9], due to their power to approximate arbitrary functions. Following this vein, DeepSurv [13] replaces the linear model in CPH with a multi-layer perceptron (MLP) while retaining the CPH framework. To improve scalability and reduce computational overhead in DeepSurv, [18] proposes a case-control approximation to the Cox partial likelihood, which better leverages stochastic optimization in deep learning. Beyond deep CPH models, assumption-free deep survival models have also been explored. In particular, [19] directly learns the distribution of survival times using a deep neural network by jointly maximizing the likelihood of the first hitting time and the corresponding event while minimizing a concordance-like ranking loss. To further capture dependencies between time slots, a deep recurrent neural network is proposed to model the cumulative risk function [27]. In parallel, [4] proposes an adversarial learning scheme to directly learn the non-parametric time-to-event distribution. Despite achieving state-of-the-art performance, these deep survival models remain challenging to interpret due to their "black-box" nature.

Tree-based survival models [10, 15] are competing approaches to deep survival models. These models either minimize local homogeneity [10] (measured by log-rank test) or maximize local heterogeneity [28] (measured by Kullback–Leibler divergence) between branches at each splitting node. [16] then proposes an oblique survival tree using a non-axis-aligned splitting rule as opposed to axis-aligned splitting rules in [10, 15]. [11, 15] extend these concepts to random (oblique) survival forests to enhance their generalizability. Although these "white-box" tree-based survival models offer more interpretability compared to deep survival models, they are typically shown to be inferior to deep survival models [13, 18, 19, 27]. This may be due to their inability to guarantee convergence to global optima because of their greedy expansion and reliance on predefined splitting rules.

In this paper, we show that a thoughtfully designed ReLU network can achieve interpretability, by forming a tree structure, and maintain the representational power of a neural network. Specifically, we establish an explicit connection between the ReLU network and previous tree-based survival models, leveraging ReLU networks' ability to partition the input space into locally homogeneous regions like a tree (Sec. 2.1). Second, we introduce a novel

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).  
CIKM '24, October 21–25, 2024, Boise, ID, USA.

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.  
ACM ISBN 979-8-4007-0436-9/24/10  
<https://doi.org/10.1145/XXXXXX.XXXXXX>

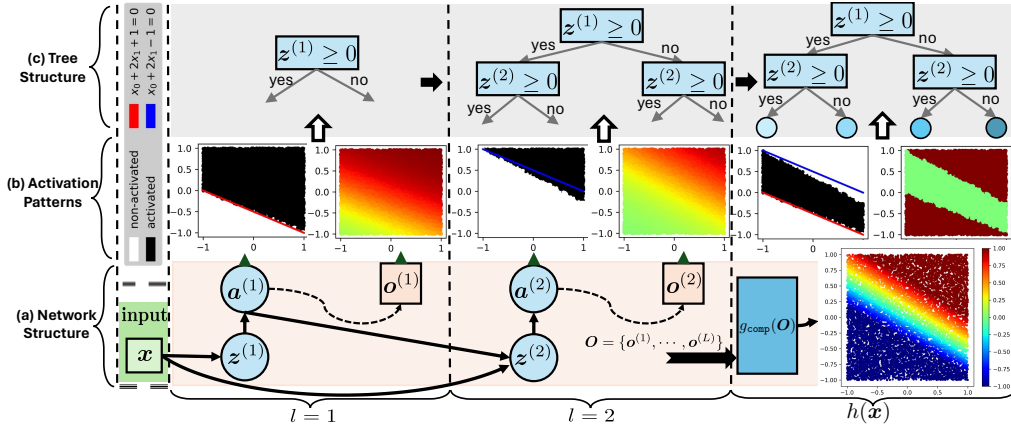

**Figure 1: Illustrative example to approximate a linear hazard function:  $h(x) = x_0 + 2x_1$ : (a) the network structure of the proposed SurvReLU network, (b) the decision boundary at each partitioning/layer, and (c) the resulting tree structures, respectively.**

statistically-driven method to dynamically optimize the topology of the ReLU network specifically for survival analysis (Sec. 2.2). This can help compact the tree structure and improve the interpretability. To this end, we construct the novel ReLU network that is inherently interpretable like a tree (termed SurvReLU). Third, we show that SurvReLU can be optimized end-to-end with a flexible choice of loss functions (Sec. 2.3). Experiments on both simulated and real datasets demonstrate the effectiveness of the proposed SurvReLU in terms of both performance and interpretability.

## 2 METHOD

The right-censored survival data is given in the form of  $N$  triples  $\{\mathbf{x}, T, E\}_{n=1}^N$ , where  $\mathbf{x}, T, E$  denote the  $d$ -dimensional covariates, the time of record, and an event indicator, respectively. With the random variable  $t$  representing time, the objective is to model the probability of the event occurring over time  $t$ . This is commonly formulated to compute the survival function  $S(t)$ : the probability that an event occurs beyond time  $t$ ,

$$S(t) = \mathbb{P}(T > t) = 1 - \int_0^t f(s) ds, \quad (1)$$

where  $T$  is the true event time, and  $f(t)$  denotes the probability density function. Alternatively, the hazard rate:

$$h(t) = \frac{f(t)}{S(t)} = \lim_{\Delta t \rightarrow 0} \frac{\mathbb{P}(t \leq T < t + \Delta t | T \geq t)}{\Delta t}, \quad (2)$$

which specifies the risk at time  $t$ , is rather commonly used in most survival models [4, 6, 10, 13, 15, 18, 19, 27]. We also follow the same convention to predict hazard rate in this paper. Following this definition, most previous survival models can be abstracted as  $h_{\mathbf{x}}(t) = g_{\theta}(\mathbf{x}, t)$ , where  $g(\cdot)$  is a function parameterized by  $\theta$  that maps covariates  $\mathbf{x}$  to the corresponding hazard rate. Accordingly, the function  $g(\cdot)$  can be a linear model [6], nonlinear neural networks [13, 18, 19, 27], and non-parametric survival trees [10, 11, 28].

*The key purpose of this paper is to bridge the gap between previous deep survival models and survival trees via a ReLU network.* Similar to tree-based models, ReLU networks can partition input space into locally homogeneous and disjoint polyhedrons [21, 22, 25]. Instead of using predefined partitioning rules in previous survival trees, the

ReLU network learns partitioning rules from input data. This empowers the ReLU network to have the same representational power as neural networks, i.e., approximating arbitrary functions [25].

### 2.1 Network Architecture

A deep ReLU network is an MLP with ReLU activation functions. Given an  $L$ -layer ReLU network, the output from the  $l$ -th layer with  $l \in \{1, \dots, L\}$  can be expressed as

$$\mathbf{a}^{(l)} = \sigma(\mathbf{z}^{(l)}), \quad \mathbf{z}^{(l)} = \mathbf{W}^{(l)} \mathbf{a}^{(l-1)} + \mathbf{b}^{(l)}, \quad \mathbf{a}^{(0)} = \mathbf{x}, \quad (3)$$

where  $\sigma(\cdot)$  denotes the activation function,  $\mathbf{W}^{(l)}$  and  $\mathbf{b}^{(l)}$  are the weight matrix and bias vector, respectively.

The end-to-end behavior of the ReLU network is uniquely determined by its activation pattern [21, 22, 25], i.e., the derivative of the ReLU activation function w.r.t. its input  $\mathbf{o}^{(l)} = \partial \mathbf{a}^{(l)} / \partial \mathbf{z}^{(l)}$ . Once the activation patterns  $\mathbf{O} = \{\mathbf{o}^{(1)}, \dots, \mathbf{o}^{(L)}\}$  of the ReLU network are fixed, the partitioning of the input space is uniquely determined, as  $\mathbf{o}^{(l)}$  is locally constant (see [22]). Since any function taking locally constant input remains locally constant, we can use a composite function  $g_{\text{comp}}$  to map the activation patterns to the hazard rate  $g_{\text{comp}} : \mathbf{O} \rightarrow h(\mathbf{x})$ , where  $g_{\text{comp}}$  can be any models (e.g., linear model and MLP). As a result, the activation patterns  $\mathbf{O}$  and composite function  $g_{\text{comp}}$  in the ReLU network serve as the nodes and the leaves in survival trees, respectively. Unlike the previous tree-based survival models where the leaf node is restricted to either Nelson–Aalen estimator [15] or CPH model [11], the learnable composite function enables integration of more advanced loss functions (e.g., ranking loss [19]; see discussion in Sec. 2.3).

One notable difference between survival trees [10, 11, 28] and the ReLU network is the dependence of input  $\mathbf{x}$  at each partitioning/layer. To incorporate  $\mathbf{x}$  at each layer, Eq. (3) is modified as

$$\mathbf{z}^{(l)} = \mathbf{W}^{(l)} \text{concat}[\mathbf{x}; \mathbf{a}^{(l-1)}] + \mathbf{b}^{(l)}, \quad \forall l > 2, \quad (4)$$

where  $\text{concat}[\cdot]$  denotes concatenation operation. The resulting network architecture is shown in Fig. 1(a). This modification enables the partitioning of polyhedrons at each layer to resemble a non-axis-aligned tree-splitting rule, where the absolute value of the weight in  $\mathbf{W}^{(l)}$  indicates the importance of each covariate at

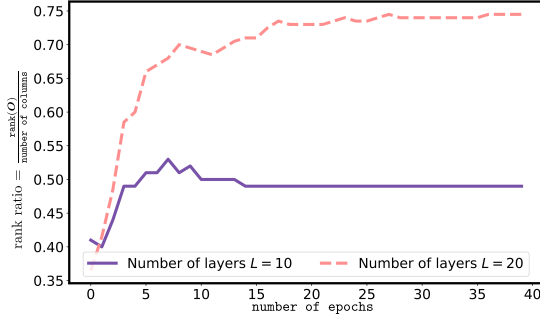


Figure 2: The change of rank ratio of matrix  $O$  over time.

current partitioning. It is worth noting that a sparse weight matrix  $W^{(l)}$  (i.e.,  $W^{(l)}$  has only one nonzero entry) can also lead to an axis-aligned splitting rule. Up to now, we have established the explicit connection between the ReLU network and previous axis-aligned [10, 28] and non-axis-aligned [11] survival trees. Since the derived ReLU network itself is a neural network, its connection to other networks (e.g., standard MLPs) used in [13, 18, 19, 27] is trivial.

## 2.2 Statistically-Driven Topology Optimization

Although we have constructed a ReLU network whose behavior inherently resembles a tree, it is not specifically optimized for survival analysis. One notable limitation of the previously derived ReLU network in Sec. 2.1 is that its network topology is defined a priori. This implies that the tree constructed by the ReLU network is fully expanded (i.e., a dense tree).

As the activation patterns  $O$  uniquely encoded the partitioning of input space in the derived ReLU network, the topology of the learned tree structure can be reflected by  $O$ . We observe that the activation patterns matrix  $O$  is typically low-ranked (see Fig. 2). This suggests that the learned ReLU network, however, produces a sparse tree topology: some partitions/nodes should be pruned. Based on this observation, we employ the log-rank test to localize which partition should be pruned. Specifically, at each forward pass, we can reconstruct the tree structure of the derived ReLU network recursively (see Fig. 1(c)). Simultaneously, we can perform the log-rank test at each splitting node and merge the nodes whose  $p$ -value from the log-rank test is less than 0.05 ( $p < 0.05$ ) by setting the corresponding activation patterns to 0. This enables us to dynamically optimize the derived ReLU network’s topology and automatically prune the resulting tree structures.

*But when to perform the proposed topology optimization remains an open challenge.* Model performance may deteriorate when optimizing network topology after training [24]. However, optimizing network topology at early training iterations may restrict its representational capacity [2]. Again, we can leverage the rank of the activation patterns  $O$  to decide when to optimize the network topology. To achieve this, we keep track of the changes in the rank of the matrix  $O$  over time. Once the topology of the learned tree structures is unchanged, we optimize the network topology.

To this end, we have constructed a ReLU network that is inherently interpretable like a survival tree but has a topology that can be learned and dynamically optimized. We term this novel ReLU network as *SurvReLU*, as it is tailored for survival analysis.

### Algorithm 1 SurvReLU Training (single iteration)

**Input:** Batch data:  $\{\mathbf{x}, T, E\}_{n=1}^N$ , ReLU network:  $\{g_\theta; g_{\text{comp}}\}$

- 1: **for**  $l = 1 : L$  **do**
- 2:  $\mathbf{z}^{(l)} = W^{(l)} \text{concat}[\mathbf{x}_n; \mathbf{a}^{(l-1)}] + \mathbf{b}^{(l)}; \mathbf{a}^{(l)} = \sigma(\mathbf{z}^{(l)})$
- 3: compute activation patterns  $o_n^{(l)}$  at  $l$ -th layer
- 4: reconstruct the tree node at  $l$ -th layer (see Fig. 1(c))
- 5: log-rank test on two partitions ( $\mathbf{z}^{(l)} \geq 0$  and  $\mathbf{z}^{(l)} < 0$ )
- 6: update the tree structure topology (as specified in Sec. 2.2)
- 7: **end for**
- 8:  $h(\mathbf{x}_n) = g_{\text{comp}}(\{o_n^{(1)}, \dots, o_n^{(L)}\})$
- 9: compute loss and update network parameters by SGD

Table 1: Performance comparison using  $C_\tau^{td}[P(C > \tau) = 10^{-8}]$ .

Methods	Simulated Linear	Simulated Gaussian	SUPPORT	METABRIC
CPH [6]	0.774 (0.772, 0.775)	0.507 (0.505, 0.509)	$0.569 \pm 0.010$	$0.636 \pm 0.012$
DeepSurv [13]	0.774 (0.772, 0.776)	0.649 (0.647, 0.651)	$0.611 \pm 0.007$	$0.652 \pm 0.012$
Cox-CC [18]	0.775 (0.757, 0.789)	0.649 (0.627, 0.672)	$0.613 \pm 0.003$	$0.649 \pm 0.009$
DeepHit [19]	0.777 (0.760, 0.795)	0.658 (0.637, 0.679)	$0.641 \pm 0.004$	$0.677 \pm 0.016$
ST [10]	0.694 (0.676, 0.715)	0.571 (0.544, 0.591)	$0.554 \pm 0.007$	$0.563 \pm 0.014$
OST [11]	0.681 (0.658, 0.701)	0.541 (0.518, 0.562)	$0.542 \pm 0.005$	$0.556 \pm 0.013$
RSF [15]	0.765 (0.763, 0.766)	0.646 (0.643, 0.648)	$0.614 \pm 0.004$	$0.643 \pm 0.011$
ORSF [11]	0.774 (0.758, 0.794)	0.631 (0.605, 0.649)	$0.636 \pm 0.006$	$0.674 \pm 0.014$
SurvReLU (Cont.)	<b>0.780 (0.768, 0.795)</b>	<b>0.660 (0.636, 0.678)</b>	$0.620 \pm 0.005$	$0.659 \pm 0.009$
SurvReLU (Disc.)	<b>0.780 (0.764, 0.797)</b>	0.659 (0.639, 0.682)	<b>0.645 <math>\pm</math> 0.005</b>	<b>0.679 <math>\pm</math> 0.017</b>

## 2.3 Model Learning

The proposed SurvReLU can be optimized in an end-to-end fashion. A summary of training a single iteration of SurvReLU is specified in Algorithm 1. It is noteworthy that the optimization of network topology (line 4-6 in Algorithm 1) is only performed when the rank of matrix  $O^{(l)}$  is unchanged as discussed in Sec. 2.2.

**Loss function.** The end-to-end parameterization of SurvReLU enables a flexible choice of the loss function. We consider both continuous-time [13] and discrete-time [19] survival losses in this paper due to their popularity and success; while other choices can be alternatives (e.g., adversarial loss [4]). The resulting models are named SurvReLU (Cont.) and SurvReLU (Disc.), respectively.


**Complexity analysis.** Compared to standard MLP, SurvReLU computes the derivative of each neuron w.r.t.  $\mathbf{x}$ , which requires an additional back-propagation (i.e.,  $O(L^3)$ ). By utilizing the dynamic programming trick outlined in [22], this can be reduced to  $O(L^2)$ . The log-rank test also introduces additional computation, which will take  $O(N \log N)$  to sort the time  $T$ . However, this can be handled once at the very beginning of each training iteration.

## 3 EXPERIMENTS AND RESULTS

We conducted experiments on two simulated and real datasets.

*Simulated:* The simulated datasets were sourced from [13], consisting of a training ( $N = 4000$ ), validation ( $N = 1000$ ), and testing ( $N = 1000$ ) set. Each sample includes  $d = 10$  covariates (i.e.,  $x_0, x_1, \dots, x_9$ ) drawn from a uniform distribution on  $[-1, 1]$ . The event time  $T$  was generated based on an exponential Cox model. Further information about the simulation process can be found in [13]. These simulated datasets encompass two subcategories characterized by either a linear risk function (i.e.,  $x_1: h(\mathbf{x}) = x_0 + 2x_1$ ) or a Gaussian risk function (i.e.,  $h(\mathbf{x}) = \log(\lambda_{\max}) \exp(-(x_0^2 + x_1^2)/2r^2)$ ;  $\lambda_{\max} = 5.0$  and  $r = 0.5$ ).



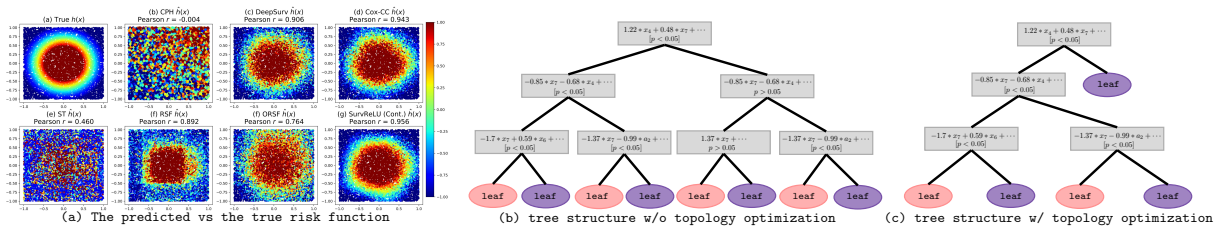

**Figure 3: (a) The predicted risk function versus the true Gaussian risk function on the simulated Gaussian dataset. (b) and (c): The resulting tree structures of SurvReLU w/ and w/o the proposed topology optimization in Sec. 2.2 on METABRIC dataset.**

*Real:* Two popular benchmark datasets were used: (i) SUPPORT dataset, originating from the Study to Understand Prognoses Preference Outcomes and Risks of Treatment [14]. It comprises 8873 patients (patients with missing features were dropped) with 14 covariates. The censorship rate within this dataset stands at approximately 32%. (ii) METABRIC dataset is designed to improve breast cancer treatment recommendations [7], including gene expression and clinical data for 1,980 patients. The data was processed to integrate four gene indicators and five clinical features, resulting in a total of 9 covariates. The proportion of censorship is around 42%.


### 3.1 Experiments

*Evaluation metrics.* The evaluation of the performance for survival analysis was carried out by the time-dependent concordance index ( $C_\tau^{td}$ ). Specifically, the C-index is designed to assess a model’s ability to predict the ordering of event times through ranking.

*Experimental setup.* (i) On the simulated datasets, we adhere to the default training, validation, and testing data splits outlined in [13]. All the covariates are z-scored to have a zero mean and unit variance. The 95% confidence intervals are obtained by bootstrapping [13]. (ii) We conduct five-fold cross-validation for the real datasets (i.e., SUPPORT and METABRIC) to thoroughly assess the performance and generalizability of all methods. The mean ( $\pm$  standard deviation) of C-index is reported. For preprocessing, we apply one-hot encoding to all categorical variables and z-score for all numerical variables. (iii) The hyperparameter tuning for the proposed model (i.e., learning rate, batch size, and  $L$ ) is carried out by the random search [1]. The optimal learning rate is found to be 0.1. The batch size is set to 1024. We recommend a large batch size to ensure stable statistics in the log-rank test. The optimal number of layers is [6, 30, 16, 14] for simulated Linear, simulated Gaussian, SUPPORT, and METABRIC, respectively. All the experiments are implemented in PyTorch and performed on a Nvidia GTX 1080Ti.

### 3.2 Results

**Main results.** As shown in Table 1, the proposed SurvReLU competes favorably with other deep survival models and tree-based survival models on both simulated and real datasets in terms of  $C^{td}$ . We observe that (i) on the simulated datasets, SurvReLU(Cont.) and SurvReLU(Cont.) achieve similar performance but still outperform other competing methods. Remarkably, SurvReLU can approximate the true Linear/Gaussian risk function as effectively as other deep survival models (see Fig. 3(a)). However, the other axis-aligned and even non-axis-aligned tree-based survival models show inferior performance in modeling the risk function. This suggests that

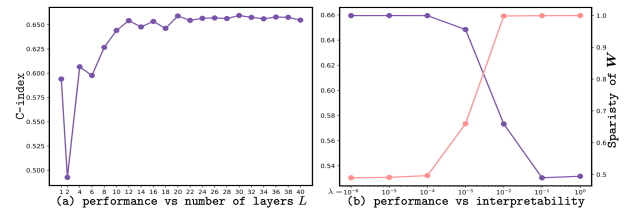

**Figure 4: Ablations on (a) number of layers  $L$  and (b) sparsity of weight matrix  $W$  using the simulated Gaussian dataset.**

SurvReLU retains the representational capacity of a neural network. Although SurvReLU has a non-axis-aligned partitioning rule similar to ORSF, we conjecture that the superiority of SurvReLU over other tree-based survival models arises from its end-to-end optimization instead of greedy expansion (e.g., fitting a CPH at each split in ORSF). (ii) On the real datasets, SurvReLU (Cont.) outperforms other competing continuous-time deep survival models (DeepSurv and Cox-CC). SurvReLU (Disc.) achieves even better performance than discrete-time DeepHit and outperforms other tree-based survival models, even without the use of ensembles. Importantly, SurvReLU results in a compact tree structure that is inherently as interpretable as tree-based survival models (Fig. 3(b) and (c)), a feature none of the other deep survival models can provide. **Ablation studies.** We conduct ablation on the number of layers  $L$  in a SurvReLU network as well the sparsity of the weight matrices  $W = \{W^{(1)}, \dots, W^{(L)}\}$ . The sparsity of  $W$  is enforced by recursively soft-thresholding  $W$  with a strength  $\lambda$  [8, 17, 26]. We observed that (i) similar to many deep survival models, the performance of SurvReLU typically saturates after reaching a certain number of layers (e.g.,  $L = 20$  in Fig. 4(a)). (ii) The performance of SurvReLU is traded-off with the sparsity of  $W$  and hence the interpretability of the model (Fig. 4(b)). This is because a more sparse  $W$  pushes SurvReLU to result in a tree structure with an axis-aligned partitioning rule (see Sec. 2.1), which is better to interpret.

## 4 CONCLUSION AND FUTURE WORK

In this paper, we bridge the gap between deep survival models and survival trees by proposing a statistically-driven ReLU network for survival analysis (SurvReLU). Experimental results on both simulated and real datasets show that SurvReLU competes favorably with previous deep and tree-based survival models. Notably, it retains the interpretability of tree-based models without compromising performance. Unlike other tree-based models, SurvReLU does not use model ensembles, which could be explored in the future to enhance its generalizability and performance.

## REFERENCES

- [1] James Bergstra and Yoshua Bengio. 2012. Random search for hyper-parameter optimization. *Journal of machine learning research* 13, 2 (2012).
- [2] Davis Blalock, Jose Javier Gonzalez Ortiz, Jonathan Frankle, and John Guttag. 2020. What is the state of neural network pruning? *Proceedings of machine learning and systems* 2 (2020), 129–146.
- [3] Wei Cao, Dong Wang, Jian Li, Hao Zhou, Lei Li, and Yitan Li. 2018. Brits: Bidirectional recurrent imputation for time series. *Advances in neural information processing systems* 31 (2018).
- [4] Paidamoyo Chapfuwa, Chenyang Tao, Chunyuan Li, Courtney Page, Benjamin Goldstein, Lawrence Carin Duke, and Ricardo Henao. 2018. Adversarial time-to-event modeling. In *International Conference on Machine Learning*. PMLR, 735–744.
- [5] Xiwen Chen, Peijie Qiu, Wenhui Zhu, Huayu Li, Hao Wang, Aristeidis Sotiras, Yalin Wang, and Abolfazl Razi. 2024. TimeMIL: Advancing Multivariate Time Series Classification via a Time-aware Multiple Instance Learning. In *Forty-first International Conference on Machine Learning*. <https://openreview.net/forum?id=AxmefV2NEf>
- [6] David R Cox. 1992. Regression models and life-tables. *Breakthroughs in statistics. Stat. Soc* 372 (1992), 527–541.
- [7] Christina Curtis, Sohrab P Shah, Suet-Feung Chin, Gulisa Turashvili, Oscar M Rueda, Mark J Dunning, Doug Speed, Andy G Lynch, Shamith Samarajiva, Yinyin Yuan, et al. 2012. The genomic and transcriptomic architecture of 2,000 breast tumours reveals novel subgroups. *Nature* 486, 7403 (2012), 346–352.
- [8] David L Donoho. 1995. De-noising by soft-thresholding. *IEEE transactions on information theory* 41, 3 (1995), 613–627.
- [9] David Faraggi and Richard Simon. 1995. A neural network model for survival data. *Statistics in medicine* 14, 1 (1995), 73–82.
- [10] Louis Gordon and Richard A Olshen. 1985. Tree-structured survival analysis. *Cancer treatment reports* 69, 10 (1985), 1065–1069.
- [11] Byron C Jaeger, D Leann Long, Dustin M Long, Mario Sims, Jeff M Szychowski, Yuan-I Min, Leslie A McClure, George Howard, and Noah Simon. 2019. Oblique random survival forests. *The annals of applied statistics* 13, 3 (2019), 1847.
- [12] Edward L Kaplan and Paul Meier. 1958. Nonparametric estimation from incomplete observations. *Journal of the American statistical association* 53, 282 (1958), 457–481.
- [13] Jared L Katzman, Uri Shaham, Alexander Cloninger, Jonathan Bates, Tingting Jiang, and Yuval Kluger. 2018. DeepSurv: personalized treatment recommender system using a Cox proportional hazards deep neural network. *BMC medical research methodology* 18, 1 (2018), 1–12.
- [14] William A Knaus, Frank E Harrell, Joanne Lynn, Lee Goldman, Russell S Phillips, Alfred F Connors, Neal V Dawson, William J Fulkerson, Robert M Califf, Norman Desbiens, et al. 1995. The SUPPORT prognostic model: Objective estimates of survival for seriously ill hospitalized adults. *Annals of internal medicine* 122, 3 (1995), 191–203.
- [15] UB Kogalur, H Ishwaran, EH Blackstone, and MS Lauer. 2008. Random survival forests. *Annals of Applied Statistics* 2 (2008).
- [16] Malgorzata Kretowska. 2019. Oblique survival trees in discrete event time analysis. *IEEE Journal of Biomedical and Health Informatics* 24, 1 (2019), 247–258.
- [17] Aditya Kusupati, Vivek Ramanujan, Raghav Somani, Mitchell Wortsman, Prateek Jain, Sham Kakade, and Ali Farhadi. 2020. Soft threshold weight reparameterization for learnable sparsity. In *International Conference on Machine Learning*. PMLR, 5544–5555.
- [18] Håvard Kvamme, Ørnulf Borgan, and Ida Scheel. 2019. Time-to-event prediction with neural networks and Cox regression. *arXiv preprint arXiv:1907.00825* (2019).
- [19] Changhee Lee, William Zame, Jinsung Yoon, and Mihaela Van Der Schaar. 2018. Deephit: A deep learning approach to survival analysis with competing risks. In *AAAI*, Vol. 32.
- [20] Elisa T Lee and John Wang. 2003. *Statistical methods for survival data analysis*. Vol. 476. John Wiley & Sons.
- [21] Guang-He Lee, David Alvarez-Melis, and Tommi S. Jaakkola. 2019. Towards Robust, Locally Linear Deep Networks. In *International Conference on Learning Representations*. <https://openreview.net/forum?id=SylCrnCcFX>
- [22] Guang-He Lee and Tommi S. Jaakkola. 2020. Oblique Decision Trees from Derivatives of ReLU Networks. In *ICLR*.
- [23] Bryan Lim and Stefan Zohren. 2021. Time-series forecasting with deep learning: a survey. *Philosophical Transactions of the Royal Society A* 379, 2194 (2021), 20200209.
- [24] Pavlo Molchanov, Stephen Tyree, Tero Karras, Timo Aila, and Jan Kautz. 2016. Pruning convolutional neural networks for resource efficient inference. *arXiv preprint arXiv:1611.06440* (2016).
- [25] Guido F Montufar, Razvan Pascanu, Kyunghyun Cho, and Yoshua Bengio. 2014. On the number of linear regions of deep neural networks. *Advances in neural information processing systems* 27 (2014).
- [26] Peijie Qiu, Pan Xiao, Wenhui Zhu, Yalin Wang, and Aristeidis Sotiras. 2023. SC-MIL: Sparsely Coded Multiple Instance Learning for Whole Slide Image Classification. *arXiv preprint arXiv:2311.00048* (2023).
- [27] Kan Ren, Jiarui Qin, Lei Zheng, Zhengyu Yang, Weinan Zhang, Lin Qiu, and Yong Yu. 2019. Deep recurrent survival analysis. In *AAAI*, Vol. 33. 4798–4805.
- [28] Yuchen Wang, Kan Ren, Weinan Zhang, Jun Wang, and Yong Yu. 2016. Functional bid landscape forecasting for display advertising. In *Machine Learning and Knowledge Discovery in Databases: European Conference, ECML PKDD 2016, Riva del Garda, Italy, September 19-23, 2016, Proceedings, Part I* 16. Springer, 115–131.