

Label Alignment and Reassignment with Generalist Large Language Model for Enhanced Cross-Domain Named Entity Recognition

Ke Bao^{1*}

School of Computer Science
Fudan University

Chonghuan Yang²

School of Computer Science
Fudan University

Abstract

Named entity recognition on the in-domain supervised and few-shot settings have been extensively discussed in the NLP community and made significant progress. However, cross-domain NER, a more common task in practical scenarios, still poses a challenge for most NER methods. Previous research efforts in that area primarily focus on knowledge transfer such as correlate label information from source to target domains but few works pay attention to the problem of label conflict. In this study, we introduce a label alignment and reassignment approach, namely LAR, to address this issue for enhanced cross-domain named entity recognition, which includes two core procedures: label alignment between source and target domains and label reassignment for type inference. The process of label reassignment can significantly be enhanced by integrating with an advanced large-scale language model such as ChatGPT. We conduct an extensive range of experiments on NER datasets involving both supervised and zero-shot scenarios. Empirical experimental results demonstrate the validation of our method with remarkable performance under the supervised and zero-shot out-of-domain settings compared to SOTA methods.

1 Introduction

Named entity recognition (NER) aims to identify mentions of rigid designators within text that correspond to predefined entity types such as person, location, and organization, etc. (Nadeau and Sekine, 2007), influencing a variety of downstream tasks in natural language processing (Cheng and Erk, 2020; Guo et al., 2009; Aone et al., 1999; Aliod et al., 2006; Hartley, 2003). In recent years, deep learning and pretraining language models have garnered significant attention due to its success across various fields. A number of advanced NER methods based on deep models perform excellently (Li

*Corresponding author

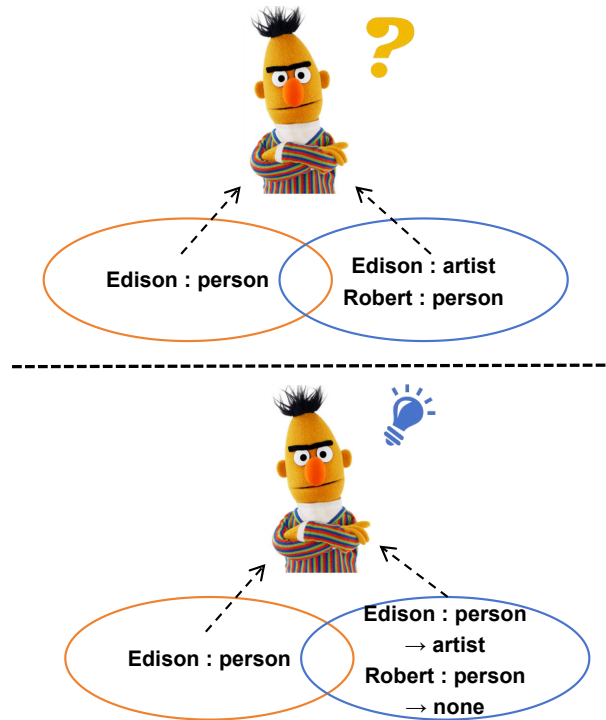


Figure 1: Due to the label conflict problem, the training without label alignment encounters conflicting knowledge among entities with similar context semantics on both the source and target domain datasets, while training with aligned labels can avoid this issue.

et al., 2022; Shahzad et al., 2021; Shen et al., 2022, 2023a,b), while a substantial amount of annotated data are available. However, these well-trained deep models usually struggle to perform as well on out-of-domain datasets.

To deal with these issues, some research works delve into cross-domain NER, which aims to study how to improve the performance on target domain with typically scarce supervised data by leveraging resource-rich source domain data. A portion of previous research works connect cross-domain NER and transfer learning, enabling deep networks to simultaneously adapt to data distributions of both source and target domains through multi-task learn-

ing or continual learning approaches (Liu et al., 2020; Wang et al., 2020a; Jia et al., 2019; Jia and Zhang, 2020). Some studies attempt to compare and correlate label information across source and target domain datasets to transfer type knowledge (Hu et al., 2022; Zheng et al., 2022; Chen et al., 2023; Wang et al., 2023), while other studies get domain-specific entity knowledge through data augmentation techniques (Chen et al., 2021; Liu et al., 2021a; Yang et al., 2022).

In this study, we continue to explore cross-domain NER from the label perspective, but we address the label conflict problem neglected by previous research, depicted in Figure 1. Target domain datasets typically have more Fine-grained annotation than that of source domain datasets, which leads to inconsistent entity knowledge. To deal with this problem, we introduce a label alignment and reassignment approach solving the knowledge conflict problem for enhanced cross-domain NER, the workflow of which is described in Figure 1. In the process of label alignment, our pretrained language model trained well on source domain distribution will predict pseudo labels with original types on target domain distribution. Then, we classify every entity type of target domain dataset into corresponding original entity types. After that, we obtain a relationship mapping table between source and target types. In the process of label reassignment, we make the model learn the mapping based on target domain datasets. In this way, we observe performance improvements across all target domain datasets, but there is still a problem that our model is not able to assign types with high confidence. Because it's a little difficult for it to discriminate between similar entity types (e.g., "person" and "politician", "event" and "election") with limited supervised data. Fortunately, this problem can be effectively alleviated by incorporating an external knowledge source such as using a generalist LLM. In our experiments, we use GPT-3.5 to enhance the reassignment process that enables our method to perform in the zero-shot setting and observe substantial improvements in the supervised setting. We summarize the main contributions as follows:

- 1) We introduce a label alignment and reassignment approach for enhanced cross-domain named entity recognition, which addresses the label conflict problem and can be applied in both supervised and zero-shot scenarios.

- 2) We enhance type inference by leveraging GPT-3.5 in the process of label reassignment, enabling our method to perform excellently in the zero-shot setting.

- 3) Empirical experiments under supervised and zero-shot out-of-domain settings as well as the supervised in-domain setting show good performances, validating the effectiveness of our method.

2 Related Work

2.1 Named Entity Recognition

The studies on Named Entity Recognition can be categorized based on modeling paradigm. The most common approach is sequence labeling, which assigns a predefined tag (e.g., from the BIO scheme) to each token in a sequence (Huang et al., 2015; Alex et al., 2007; Wang et al., 2020b; Arora and Park, 2023). Some studies reformulate NER as a span-level classification task, which involves enumerating all possible spans within a text and classifying them as valid mentions along with their types (Xu et al., 2017; Luan et al., 2019; Yamada et al., 2020; Ye et al., 2022). Additionally, a number of studies (Lu and Roth, 2015; Muis and Lu, 2018; Katiyar and Cardie, 2018; Wang and Lu, 2018), design hypergraph structures to address overlapped NER by representing potential mentions in an exponential manner. Others utilize sequence-to-sequence generation paradigm modeling NER tasks (Gillick et al., 2016; Straková et al., 2019; Lewis et al., 2020; Yan et al., 2021; Fei et al., 2021; Liu et al., 2022). Recently, unified information extraction frameworks have sparked heated debate and perform excellently on NER datasets (Lu et al., 2022; Lou et al., 2023).

2.2 Cross-Domain Named Entity Recognition

Domain-specific named entity recognition with limited supervised data is a more common scenario in practice. Therefore, cross-domain NER aiming to enhance the performance in specific-domain by leveraging rich domain-agnostic data, has drawn substantial attention in recent years. Liu et al. (2021a) performs continuous training on a large unlabeled corpus related to target domains, which effectively improves model performance and can be applied to other methods. Jia et al. (2019) utilizes a parameter generation network to merge cross-domain language modeling with NER. Hu et al. (2022) introduces an autoregressive paradigm to strengthen the connection between label and

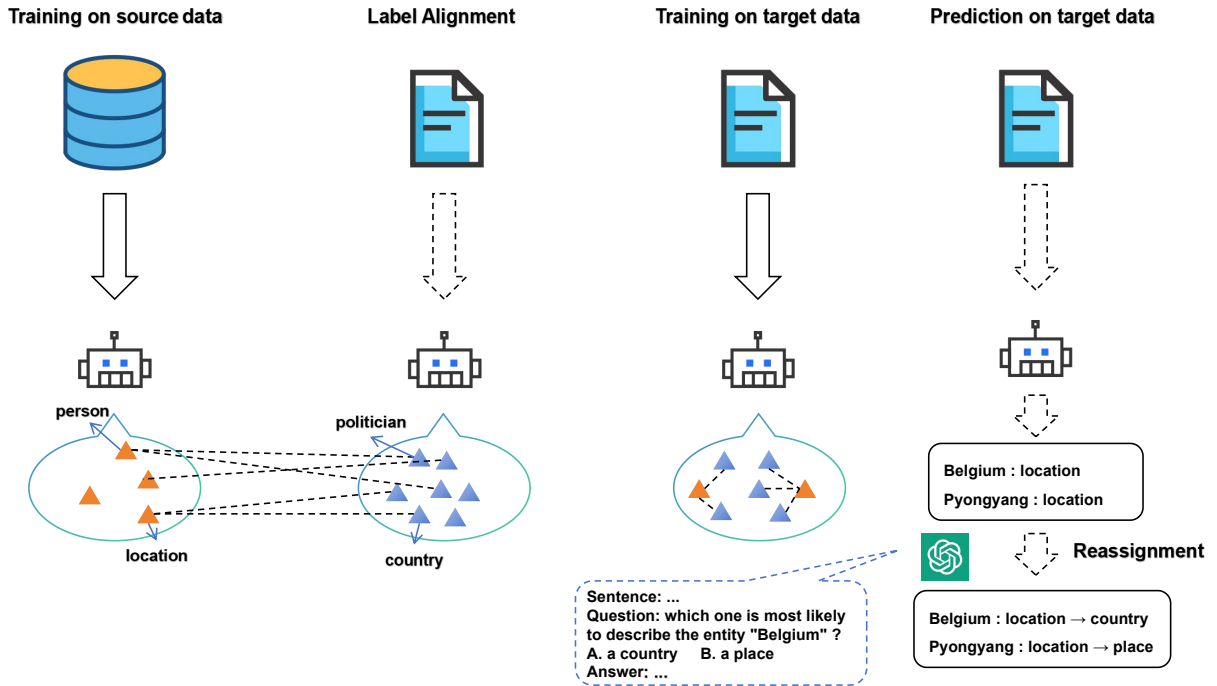


Figure 2: The workflow of our method, which includes all the steps from training to prediction. The solid arrows represent training processes, and the dotted arrows represent inference processes.

text. Chen et al. (2023) proposes a unified model for all target domain datasets based on collaborative domain-prefix tuning. Yang et al. (2022) uses rationale-centric data augmentation to improve the model’s generalization ability. Wang et al. (2023) automatically extracts entity type-related features to enhance knowledge transfer based on mutual information criteria.

2.3 Using LLM on Named Entity Recognition

Large-scale language models, e.g., ChatGPT, Gemini and LLaMA have demonstrated impressive performances in many fields due to their surprising emergent abilities (OpenAI, 2023; Anil et al., 2023; Touvron et al., 2023; Wei et al., 2022). Han et al. (2023) evaluates ChatGPT on a series of IE tasks. Zhou et al. (2023) enables LLaMA-7B to generalize on unseen domains with the help of knowledge distillation from ChatGPT. Sainz et al. (2023) provides annotation guides for types on zero-shot information extraction.

3 Methodology

3.1 Preliminary

Conventional NER tasks aim to extract an entity collection $E = \{e_1, \dots, e_n\}$ from a given sentence $S = \{w_1, \dots, w_m\}$. On this basis, the cross-domain NER task assumes that there are different data dis-

tributions, a well-sampled source dataset \mathcal{D}_s and several low-resource target datasets \mathcal{D}_t . Typically, source domain data has more general entity types while target domain data is developed from a specific application field. Therefore, Cross-domain NER aims to improve the model performance on \mathcal{D}_t by transferring entity knowledge from \mathcal{D}_s .

There are many prevailing extraction paradigms for named entity recognition. To keep up with the current development of language models and make it have good type extensibility, we explore the theory of label alignment and reassignment based on a sequence-to-sequence generation paradigm. Specifically, we use the identical architecture to ES-SDE introduced by Guo et al. (2024) but without handling of unmentioned targets, which consists of an instruction I , an input sentence S , a textual label Y with linear format of multiple predictions. We fine-tune a autoregressive pretrained language model to maximize the conditional probability $\mathcal{P}(Y|I, S)$.

3.2 Label Alignment and Reassignment

The overall workflow of our method is demonstrated in Figure 2, which consists of four steps from training to prediction.

Training on source domain. As with other cross-domain NER methods, we first train a genera-

tive language model \mathcal{M} on the source domain data \mathcal{D}_s under the standard supervised setting. Every input sentence is added with the same simple instruction prefix which includes all the types on \mathcal{D}_s . After that, \mathcal{M} is equipped with entity knowledge from \mathcal{D}_s . We name the initial model as \mathcal{M}_s .

Label Alignment. The step is to match every target entity type with the most relevant source entity type. Specifically, we use \mathcal{M}_s to predict all samples in the train set of \mathcal{D}_t , obtaining corresponding pseudo labels. Then we compare pseudo labels and gold labels, and determine the mapping relationship between source domain types and target domain types based on the statistical results. For example, the type "musician" on \mathcal{D}_t is assigned to the type "person" on \mathcal{D}_s due to the fact that the majority of entities occurring in pseudo labels with type "musician" is predicted to be type "person" by \mathcal{M}_s . However, there are some entities with certain target entity types that may not be recognized at all on account of the limitation of source domain knowledge. To address this issue, we generalize these unrecognized types as miscellaneous. After this process, each target entity type should have one and only one corresponding source entity type. In the usual case, source entity types are more general than target entity types, resulting in a one-two-more mapping relationship. Additionally, we consider a zero-shot out-of-domain scenario without any labeled data on target domains. In this scenario, we can prompt a general large language model like ChatGPT to produce synthetic labels as the replacement of gold labels.

Training on target domain. We regard every sample on \mathcal{D}_t as a triplet (S, Y_s, Y_t) , wherein Y_s and Y_t denote entity types on source domain and target domain respectively. In order to maximize the use of the prior knowledge of model \mathcal{M}_s , we modify the textualized labels only slightly, represented as $Y_s : S_{i:j} \Rightarrow Y_t$ called label reassignment. In this way, we perform supervised fine-tuning of \mathcal{M}_s on the target domain dataset \mathcal{D}_t to get a new model with target domain entity knowledge, namely \mathcal{M}_t .

Prediction on target domain. \mathcal{M}_t has a basic target entity knowledge and is able to perform inference on unseen data. Theoretically, we can write the inference process with label reassignment as the dot product of $\mathcal{P}_{\mathcal{M}}(Y_s, S_{i:j}|S, I)$ and $\mathcal{P}_{\mathcal{M}}(Y_t|Y_s, S_{i:j}, S, I)$, which measure the model recognition degree of entity knowledge in source

Dataset	Type Num	Sentence Num		
		Train	Dev	Test
CoNLL03	4	14,987	3,466	3,684
Politics	9	200	541	651
Science	17	200	450	543
Music	13	100	380	456
Literature	12	100	400	416
AI	14	100	350	431
Movie	14	7,816	-	1,953
Restaurant	8	7,660	-	1,521

Table 1: The statistics of all datasets used in our experiments.

domain and target domain respectively. In practice, we observe that the values of the latter are usually less than that of the former on gold labels of target development sets. This means \mathcal{M}_t has greater ability to recognize entities with types in source domain types than target domain. This phenomenon is easy to explain and understand. On the one hand, target entity types are more refined and complex than source entity types. On the other hand, target domain datasets have only a few supervised samples, on which fine-tuned language models get inadequately trained.

3.3 Enhanced Inference with LLM

Based on the previous assumption, if the discrimination ability between similar types could be effectively improved, the model performance will also be improved. Naturally, an external knowledge source will be helpful for this issue, such as resorting to API-based LLMs. Considering the conditional probability $\mathcal{P}_{\mathcal{M}}(Y_t|Y_s, S_{i:j}, S, I)$, we can regard it as a classification task, the type collection of which depends on the mapping relationship. Furthermore, we transfer this classification task into a multiple-choice question that is very easy to understand by LLMs. A specific prompt example of the multiple-choice question is demonstrated in Figure 2. What’s more, this enhanced inference with LLM enables our method to adapt to unseen data distributions, greatly enriching its application scenario.

Model	Politics	Science	Music	Literature	AI	Average
FLAIR (Akbik et al., 2018)	69.54	64.71	65.60	61.35	52.48	62.73
Cross-domain LM (Jia et al., 2019)	68.44	64.31	63.56	59.59	53.70	61.92
DAPT (Liu et al., 2021a)	72.05	68.78	75.71	69.04	62.56	69.63
LightNER (Chen et al., 2022)	72.78	66.74	72.28	65.17	35.82	62.56
LANER (Hu et al., 2022)	71.65	69.29	73.07	67.98	61.72	68.74
Cp-NER (Chen et al., 2023)	73.41	74.65	78.08	<u>70.84</u>	64.53	<u>72.30</u>
UniNER-7B (Zhou et al., 2023)	66.90	<u>70.80</u>	70.60	64.90	62.90	67.22
LAR-base w/o EI	73.80	68.82	74.30	69.46	63.85	70.05
LAR-base	<u>78.34</u>	66.27	74.40	69.74	<u>66.35</u>	71.02
LAR-large w/o EI	74.49	70.66	76.29	70.0	63.56	71.0
LAR-large	79.45	67.14	<u>77.22</u>	72.43	68.48	72.94

Table 2: The experimental results on in-domain supervised setting. EI denotes enhanced inference with a general language model.

4 Experiment

4.1 Experimental Settings

Dataset. Following previous related works, we conduct our experiments on these classic NER datasets: CoNLL03 (Sang and Meulder, 2003), CrossNER (Liu et al., 2021b), MIT-Movie (Liu et al., 2013b) and MIT-Restaurant (Liu et al., 2013a). CoNLL03, including four generic entity types: PER, LOC, ORG and MISC, generally is chosen as the source domain dataset. CrossNER, which is commonly used as the target domain dataset, is drawn from Wikipedia and contains five different domain datasets: politics, natural science, music, literature, and AI. Movie and Restaurant corpus consist of user utterances for movie and restaurant domains with 12 and 8 classes. For all datasets, we follow their official splits of train, validation, and test sets. The statistics of these datasets are summarized in Table 1.

Configuration. In our experiments, we use Flan-T5 (Chung et al., 2022) as the fine-tuned foundation language model and GPT-3.5-turbo as external knowledge access assistant. For the enhanced inference technique, we only provide one example as demonstration on both supervised and zero-shot out-of-domain setting, which aims to offer LLM a canonical output format rather than context knowledge. We use AdamW (Loshchilov and Hutter, 2019) as optimizer with learning rate=5e-5 and batch size=8 for all training scripts. The code of this work is implemented through PyTorch, Transformers (Wolf et al., 2020) and

OpenAI API ¹.

4.2 Baselines

To explore the performance of our method, we compare it to some most advanced methods for cross-domain NER, which include both supervised and zero-shot out-of-domain settings.

- **FLAIR** (Akbik et al., 2018): This leverages the internal states of a character language model to produce contextual string embedding and then integrate them into the NER model.
- **Cross-domain LM** (Jia et al., 2019): This employs a parameter generation network to combine cross-domain language modeling and NER, thereby enhancing The model performance.
- **DAPT** (Liu et al., 2021a): DAPT employs a large unlabeled corpus related to a specific domain, which is based on BERT and fine-tunes it on the CrossNER benchmark.
- **LANER** (Hu et al., 2022): This method introduces a new approach for cross-domain named entity recognition by utilizing an autoregressive framework to strengthen the connection between labels and tokens.
- **LightNER** (Chen et al., 2022): This work utilizes a pluggable prompting method to improve NER performance in low-resource settings.
- **FactMix** (Yang et al., 2022): A two-step rationale-centric data augmentation method to improve the model’s generalization ability, demonstrating strong few-shot learning ability on cross-domain NER task.
- **CP-NER** (Chen et al., 2023): This approach

¹<https://platform.openai.com/docs/overview>

Model	Additional Annotation	Politics	Science	Music	Literature	AI	Average
FactMix-base (Yang et al., 2022)	No	44.66	34.13	23.75	28.89	32.09	32.70
PLTR-base (Wang et al., 2023)	No	47.56	34.87	30.52	30.80	33.87	35.52
UniNER-7B (Zhou et al., 2023)	Yes	60.80	<u>61.10</u>	<u>65.0</u>	59.40	<u>53.50</u>	59.96
UniNER-13B (Zhou et al., 2023)	Yes	<u>61.40</u>	63.50	<u>64.50</u>	<u>60.90</u>	54.20	<u>60.9</u>
LAR-base	No	<u>68.56</u>	45.54	61.15	<u>61.99</u>	43.07	56.06
LAR-base+	Yes	74.33	52.18	67.07	64.38	49.98	61.58

Table 3: The experimental results on zero-shot out-of-domain setting. For LAR-base+, 20% samples randomly selected from each target domain dataset are labeled by prompting ChatGPT.

utilizes text-to-text generation grounding domain-related instructors to transfer knowledge to new domain NER tasks, achieving state of the art performance.

- **PLTR** (Wang et al., 2023): A prompt learning method with type-related features to address implicit knowledge transfer issue in a limited data scenario, getting remarkable performances under both the supervised and zero-shot out-of-domain settings.

- **UniNER** (Zhou et al., 2023): This study explores targeted distillation with mission-focused instruction tuning to train student models that can excel in a broad application, also outperforming general large language models by a large margin.

4.3 Results on supervised OOD setting

We evaluate the low-resource supervised learning ability of our method on CrossNER datasets and the results are shown in Table 2. The F1 scores indicate that our method can compete with the most advanced cross-domain NER method. Especially while the base model is Flan-T5-large, our method achieves the highest average score on five target domain datasets. As well as, we report the performances of two variants which are not enhanced by GPT-3.5. They outperform all baselines other than the recent work Cp-NER, but they still perform 1.5 percent less than the enhanced models on average. It is clear that enhanced inference by using GPT-3.5 in the label reassignment process generally improves model performance not requiring any extra context knowledge but it struggles in certain specific domains such as science. Without enhanced inference, our method based on adaptive label alignment also outperforms most of the baselines.

4.4 Results on zero-shot OOD setting

The results of our method and baselines on the zero-shot out-of-domain setting are reported in

Dataset	Comparable baseline	LAR	w/ EI
CoNLL03	92.93 (Chen et al., 2022)	92.63	-
ACE05	86.69 (Zhou et al., 2023)	85.56	86.79
AI	56.36 (Liu et al., 2021a)	56.80	58.27
Music	73.39 (Liu et al., 2021a)	73.33	74.69
GENIA	77.54 (Zhou et al., 2023)	77.08	77.21

Table 4: The results on supervised in-domain setting. We use Flan-T5-large as the fine-tuned foundation model.

Table 3. LAR-base is trained on the source domain dataset and directly performs on downstream datasets, while LAR-base+ represents label augmentation by using GPT-3.5, which is prompted to randomly produce predicted labels for 20% samples on each target domain datasets. It’s clear that our method achieves excellent performances compared to the baselines, getting 56.06% and 61.58% F1 scores respectively. Even without label augmentation, our method also approaches the most advanced open NER method. It only underperforms UniNER-7B by 3.9 percentage points. These experimental results indicate our method has strong out-of-domain generalization ability if the source data distribution is partially close to that of target domains.

4.5 Results on supervised in-domain setting

To validate the stability of our approach, we also evaluate the model on the supervised in-domain setting. In this case, all entity types are visible, so the model doesn’t entail the label alignment process. However, enhanced inference still can be applied for label reassignment. For example, if we observe the model performs poorly when classifying entity types, the inference process may be enhanced with the help of ChatGPT. Specifically, the supervised in-domain experiment results of our method are demonstrated in Table 4. On the CoNLL03 dataset, LAR without enhanced inference achieves close

Dataset	Proportion	Base		Large	
		Ori	LA	Ori	LA
Movie	1%	50.14	52.84	56.73	54.87
	5%	60.24	62.69	62.63	64.41
	10%	64.50	65.56	66.38	65.99
Restaurant	1%	55.89	58.78	60.67	61.50
	5%	69.16	70.37	71.29	71.77
	10%	72.83	74.15	74.11	75.08

Table 5: The results of ablation study on label alignment. Ori denotes direct transfer learning from the source domain to the target domain without using label alignment.

Dataset	Type	Direct Inference	Enhanced Inference
Politics	politician	79.59	85.36 (+5.77)
	person	77.97	84.75 (+4.78)
	country	89.95	95.93 (+5.98)
	event	79.59	90.26 (+10.67)
	election	94.01	95.62 (+1.61)
Science	scientist	84.93	92.57 (+7.64)
	award	82.19	90.41 (+8.22)
	protein	83.33	82.05 (-1.28)
	university	86.92	85.38 (-1.54)
	miscellaneous	84.62	70.77 (-13.85)
Music	band	92.64	93.72 (+1.08)
	song	89.87	94.71 (+4.84)
	album	91.87	94.58 (+2.71)
	genre	92.40	88.91 (-3.49)
	instrument	77.27	95.45 (+18.18)

Table 6: The results of type-wise quantitative analysis about direct inference (by Flan-T5-large) and enhanced inference (by GPT-3.5).

performance with the baseline. On the ACE05-Ent dataset, the entities with type "GPE" are reassigned by GPT-3.5, with the performance improved by around 1.2%. On the AI dataset and the Music dataset, our method significantly exceeds the baseline method through enhancing inference on type "programming language", "country", "instrument", "conference", and "person". We also use enhanced inference on type "DNA" of GENIA dataset, which leads to a little improvement on the performance. Even though our method is not designed for in-domain NER, it still exhibits performance close to some general NER methods.

5 Analysis

5.1 Label Alignment

To explore the functionality and effectiveness of label alignment, we conducted an ablation experiment on two datasets under the low-resource setting, and the results are shown in Table 5. We set CoNLL03 as the source domain dataset and MIT-Movie, MIT-Restaurant as the target domain

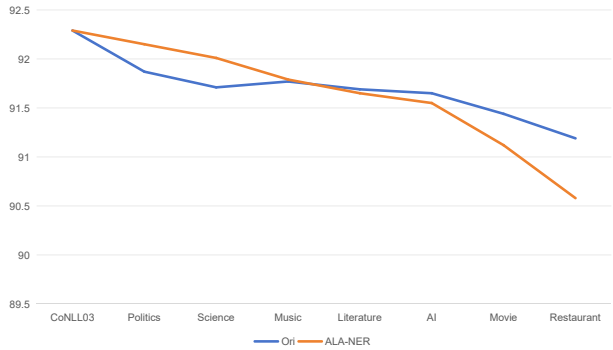


Figure 3: The trend of performance degradation of our model when it is applied to continuous learning.

datasets. To imitate the low-resource supervised learning scenario, we randomly assigned 1%, 5%, and 10% of the training set as supervised data on the target domains. For every result of the original transfer and the label alignment transfer, we report the average scores of 5 experiments. From the results, the model performance with label alignment is clearly higher than that of original transfer learning which directly learns entity knowledge from different domains regardless of label relationships. With less supervised data and smaller model setups, this gain effect becomes even more pronounced. It indicates that label alignment is able to augment model transfer ability in low-resource supervised learning scenarios.

5.2 Label Reassignment

Label reassignment is an important part of our method, which greatly influences the model performance. There are two inference forms in the label reassignment process, direct inference and enhanced inference. The former depends on knowledge and extrapolation of the model itself, while the latter resorts to an extra knowledge source to enhance model ability for inference. In Table 6, we investigate the accuracy of direct inference and enhanced inference on target domain types. From the results, enhanced inference demonstrates higher scores than direct inference on most types, especially event (+10.67%), award (+8.22%) and instrument (+18.18%). However, enhanced inference also performs badly on some types, e.g. miscellaneous (-13.85%) and genre (-3.49%). As well as, using ChatGPT helps discriminate similar types when target domain types conflict with source domain types e.g. politician and person. Because we do not provide in-context knowledge for ChatGPT, the results of enhanced inference also apply

w/o Alignment

Source types: person, organization, location, miscellaneous.

Target types: politician, person, organization, political party, event, election, country, location, miscellaneous.

Input: Filipinos suspended the independence campaign during the First World War and supported the United States and the Allies of World War I against the German Empire .

Answer (Flan-T5-large): miscellaneous : Filipinos \n event : First World War \n country : United States \n organization : Allies of World War I \n organization : German Empire \n

Answer (Ground): miscellaneous : Filipinos \n event : First World War \n country : United States \n country : Allies \n event : World War I \n country : German Empire \n

w/ Alignment

Source types: person, organization, location, miscellaneous

Target types: politician, organization, political party, event, election, country, place, none.

Input: Locker-Lampson took Einstein to meet Winston Churchill at his home , and later , Austen Chamberlain and former Prime Minister David Lloyd George .

Answer (Flan-T5-large): person : Locker-Lampson -> politician \n person : Einstein -> politician \n person : Winston Churchill -> politician \n person : Austen Chamberlain -> politician \n person : David Lloyd George -> politician \n

Answer (GPT-3.5): person : Locker-Lampson -> none \n person : Einstein -> none \n person : Winston Churchill -> none \n person : Austen Chamberlain -> none \n person : David Lloyd George -> politician \n

Figure 4: The successful and failure extraction cases of our method with and without label alignment. The instances that are predicted incorrectly are marked in red and the missing instances are marked in orange. The samples and ground labels originate from the test set of the Politics dataset.

to the zero-shot out-of-domain setting. In addition, we observe GPT-3.5 is more confident in type classification than Flan-T5-large through repeated sampling from answers and logits when candidate entity types are similar, which indicates enhanced inference is capable of handling more difficult samples.

5.3 Continual Learning Capability

Many cross-domain NER methods suffer from the catastrophic amnesia problem and are not able to perform in the continual learning paradigm. Figure 3 shows the performance of our method trained by continual learning on a set of NER datasets. Initially, the Flan-T5-base is trained on CoNLL03, getting 92.29 scores. We then add the training data from target domains in turn and continuously observe its performance on the CoNLL03 dataset. The results show that there is a decreasing trend regardless of whether label alignment is used. But as more target domain data is used for continuous learning, the LAR decline is significantly more gradual than the original training style. One pos-

sible reason is that our approach eliminates the problem of overlapping labels between different data sets, avoiding knowledge conflicts to a certain extent.

5.4 Case Analysis

In this section, we display two extraction cases presented in Figure 4 to show the predictive preferences of our model. Firstly, the top part of the picture is an extraction case of our model without label alignment. There are some overlapped entity types between the source type collection and the target type collection, which results in the output of the model being more biased towards the source domain knowledge that has a more significant impact on the model than the target domain knowledge. For this example, the model tends to incorrectly classify the countries as organizations, which can be rectified and restricted according to the type relationship mapping after label alignment. On the other hand, the bottom of the picture shows a sample predicted by Flan-T5-large and GPT-3.5 based on label alignment. Clearly, GPT-3.5 dis-

criminate between entity types about person and politician more accurately. In this case, there is no obvious evidence in the context to indicate that Locker-Lampson, Einstein, and Winston Churchill are politicians. This result implies that GPT-3.5 is more cautious in making inferences of entity type than the fine-tuned language model which is limited with scarce attainable supervised data.

6 Conclusion

In this study, we introduce a label alignment and reassignment approach to address the label conflict problem on the cross-domain NER task. Our method incorporates a generalist large language model to enhance entity type inference in prediction, which enables our model to perform well in both the supervised and zero-shot out-of-domain setting. To validate the effectiveness of our method, we conduct a series of empirical experiments across different settings and in-depth analysis for each important part of the approach. The experimental results demonstrate our model has the good performances on out-of-domain NER datasets and the robustness on the in-domain and continual learning settings.

References

- Alan Akbik, Duncan Blythe, and Roland Vollgraf. 2018. [Contextual string embeddings for sequence labeling](#). In *Proceedings of the 27th International Conference on Computational Linguistics, COLING 2018, Santa Fe, New Mexico, USA, August 20-26, 2018*, pages 1638–1649. Association for Computational Linguistics.
- Beatrice Alex, Barry Haddow, and Claire Grover. 2007. [Recognising nested named entities in biomedical text](#). In *Biological, translational, and clinical language processing, BioNLP@ACL 2007, Prague, Czech Republic, June 29, 2007*, pages 65–72. Association for Computational Linguistics.
- Diego Mollá Aliod, Menno van Zaanen, and Daniel Smith. 2006. [Named entity recognition for question answering](#). In *Proceedings of the Australasian Language Technology Workshop, ALTA 2006, Sydney, Australia, November 30-December 1, 2006*, pages 51–58. Australasian Language Technology Association.
- Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M. Dai, Anja Hauth, Katie Millican, David Silver, Slav Petrov, Melvin Johnson, Ioannis Antonoglou, Julian Schrittwieser, Amelia Glaese, Jilin Chen, Emily Pitler, Timothy P. Lillicrap, Angeliki Lazaridou, Orhan Firat, James Molloy, Michael Isard, Paul Ronald Barham, Tom Hennigan, Benjamin Lee, Fabio Viola, Malcolm Reynolds, Yuanzhong Xu, Ryan Doherty, Eli Collins, Clemens Meyer, Eliza Rutherford, Erica Moreira, Kareem Ayoub, Megha Goel, George Tucker, Enrique Piñeras, Maxim Krikun, Iain Barr, Nikolay Savinov, Ivo Danihelka, Becca Roelofs, Anaïs White, Anders Andreassen, Tamara von Glehn, Lakshman Yagati, Mehran Kazemi, Lucas Gonzalez, Misha Khalman, Jakub Sygnowski, and et al. 2023. [Gemini: A family of highly capable multimodal models](#). *CoRR*, abs/2312.11805.
- Chinatsu Aone, Mary Ellen Okurowski, James Gorlinsky, and Bjornar Larsen. 1999. [A trainable summarizer with knowledge acquired from robust NLP techniques](#). *Advances in Automatic Text Summarization*.
- Jatin Arora and Youngja Park. 2023. [Split-ner: Named entity recognition via two question-answering-based classifications](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, pages 416–426. Association for Computational Linguistics.
- Shuguang Chen, Gustavo Aguilar, Leonardo Neves, and Tamar Solorio. 2021. [Data augmentation for cross-domain named entity recognition](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 7-11 November, 2021*, pages 5346–5356. Association for Computational Linguistics.
- Xiang Chen, Lei Li, Shumin Deng, Chuanqi Tan, Changliang Xu, Fei Huang, Luo Si, Huajun Chen, and Ningyu Zhang. 2022. [Lightner: A lightweight tuning paradigm for low-resource NER via pluggable prompting](#). In *Proceedings of the 29th International Conference on Computational Linguistics, COLING 2022, Gyeongju, Republic of Korea, October 12-17, 2022*, pages 2374–2387. International Committee on Computational Linguistics.
- Xiang Chen, Lei Li, Shuofei Qiao, Ningyu Zhang, Chuanqi Tan, Yong Jiang, Fei Huang, and Huajun Chen. 2023. [One model for all domains: Collaborative domain-prefix tuning for cross-domain NER](#). In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence, IJCAI 2023, 19th-25th August 2023, Macao, SAR, China*, pages 5030–5038. ijcai.org.
- Pengxiang Cheng and Katrin Erk. 2020. [Attending to entities for better text understanding](#). In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pages 7554–7561. AAAI Press.

- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Y. Zhao, Yanping Huang, Andrew M. Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. 2022. [Scaling instruction-finetuned language models](#). *CoRR*, abs/2210.11416.
- Hao Fei, Donghong Ji, Bobo Li, Yijiang Liu, Yafeng Ren, and Fei Li. 2021. [Rethinking boundaries: End-to-end recognition of discontinuous mentions with pointer networks](#). In *Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021, Thirty-Third Conference on Innovative Applications of Artificial Intelligence, IAAI 2021, The Eleventh Symposium on Educational Advances in Artificial Intelligence, EAAI 2021, Virtual Event, February 2-9, 2021*, pages 12785–12793. AAAI Press.
- Dan Gillick, Cliff Brunk, Oriol Vinyals, and Amarnag Subramanya. 2016. [Multilingual language processing from bytes](#). In *NAACL HLT 2016, The 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, San Diego California, USA, June 12-17, 2016*, pages 1296–1306. The Association for Computational Linguistics.
- Biyang Guo, He Wang, Wenyilin Xiao, Hong Chen, Zhuxin Lee, Songqiao Han, and Hailiang Huang. 2024. [Sample design engineering: An empirical study of what makes good downstream fine-tuning samples for llms](#). *CoRR*, abs/2404.13033.
- Jiafeng Guo, Gu Xu, Xueqi Cheng, and Hang Li. 2009. [Named entity recognition in query](#). In *Proceedings of the 32nd Annual International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR 2009, Boston, MA, USA, July 19-23, 2009*, pages 267–274. ACM.
- Ridong Han, Tao Peng, Chaozhao Yang, Benyou Wang, Lu Liu, and Xiang Wan. 2023. [Is information extraction solved by chatgpt? an analysis of performance, evaluation criteria, robustness and errors](#). *CoRR*, abs/2305.14450.
- Bba Hartley. 2003. Improving machine translation quality with automatic named entity recognition. In *EAMT '03 Proceedings of the 7th International EAMT workshop on MT and other Language Technology Tools, Improving MT through other Language Technology Tools: Resources and Tools for Building MT*.
- Jinpeng Hu, He Zhao, Dan Guo, Xiang Wan, and Tsung-Hui Chang. 2022. [A label-aware autoregressive framework for cross-domain NER](#). In *Findings of the Association for Computational Linguistics: NAACL 2022, Seattle, WA, United States, July 10-15, 2022*, pages 2222–2232. Association for Computational Linguistics.
- Zhiheng Huang, Wei Xu, and Kai Yu. 2015. [Bidirectional LSTM-CRF models for sequence tagging](#). *CoRR*, abs/1508.01991.
- Chen Jia, Liang Xiao, and Yue Zhang. 2019. [Cross-domain NER using cross-domain language modeling](#). In *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, pages 2464–2474. Association for Computational Linguistics.
- Chen Jia and Yue Zhang. 2020. [Multi-cell compositional LSTM for NER domain adaptation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 5906–5917. Association for Computational Linguistics.
- Arzoo Katiyar and Claire Cardie. 2018. [Nested named entity recognition revisited](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. [BART: denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 7871–7880. Association for Computational Linguistics.
- Jingye Li, Hao Fei, Jiang Liu, Shengqiong Wu, Meishan Zhang, Chong Teng, Donghong Ji, and Fei Li. 2022. [Unified named entity recognition as word-word relation classification](#). In *Thirty-Sixth AAAI Conference on Artificial Intelligence, AAAI 2022, Thirty-Fourth Conference on Innovative Applications of Artificial Intelligence, IAAI 2022, The Twelfth Symposium on Educational Advances in Artificial Intelligence, EAAI 2022 Virtual Event, February 22 - March 1, 2022*, pages 10965–10973. AAAI Press.
- Jingjing Liu, Panupong Pasupat, Scott Cyphers, and James R. Glass. 2013a. [Asgard: A portable architecture for multilingual dialogue systems](#). In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2013, Vancouver, BC, Canada, May 26-31, 2013*, pages 8386–8390. IEEE.
- Jingjing Liu, Panupong Pasupat, Yining Wang, Scott Cyphers, and James R. Glass. 2013b. [Query understanding enhanced by hierarchical parsing structures](#). In *2013 IEEE Workshop on Automatic Speech Recognition and Understanding, Olomouc, Czech Republic, December 8-12, 2013*, pages 72–77. IEEE.
- Tianyu Liu, Yuchen Eleanor Jiang, Nicholas Monath, Ryan Cotterell, and Mrinmaya Sachan. 2022. [Autoregressive structured prediction with language models](#). In *Findings of the Association for Computational*

- Linguistics: EMNLP 2022, Abu Dhabi, United Arab Emirates, December 7-11, 2022*, pages 993–1005. Association for Computational Linguistics.
- Zihan Liu, Genta Indra Winata, and Pascale Fung. 2020. [Zero-resource cross-domain named entity recognition](#). In *Proceedings of the 5th Workshop on Representation Learning for NLP, RepL4NLP@ACL 2020, Online, July 9, 2020*, pages 1–6. Association for Computational Linguistics.
- Zihan Liu, Yan Xu, Tiezheng Yu, Wenliang Dai, Ziwei Ji, Samuel Cahyawijaya, Andrea Madotto, and Pascale Fung. 2021a. [Crossner: Evaluating cross-domain named entity recognition](#). In *Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021, Thirty-Third Conference on Innovative Applications of Artificial Intelligence, IAAI 2021, The Eleventh Symposium on Educational Advances in Artificial Intelligence, EAAI 2021, Virtual Event, February 2-9, 2021*, pages 13452–13460. AAAI Press.
- Zihan Liu, Yan Xu, Tiezheng Yu, Wenliang Dai, Ziwei Ji, Samuel Cahyawijaya, Andrea Madotto, and Pascale Fung. 2021b. [Crossner: Evaluating cross-domain named entity recognition](#). In *Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021, Thirty-Third Conference on Innovative Applications of Artificial Intelligence, IAAI 2021, The Eleventh Symposium on Educational Advances in Artificial Intelligence, EAAI 2021, Virtual Event, February 2-9, 2021*, pages 13452–13460. AAAI Press.
- Ilya Loshchilov and Frank Hutter. 2019. [Decoupled weight decay regularization](#). In *7th International Conference on Learning Representations, ICLR 2019, New Orleans, LA, USA, May 6-9, 2019*. OpenReview.net.
- Jie Lou, Yaojie Lu, Dai Dai, Wei Jia, Hongyu Lin, Xianpei Han, Le Sun, and Hua Wu. 2023. [Universal information extraction as unified semantic matching](#). In *Thirty-Seventh AAAI Conference on Artificial Intelligence, AAAI 2023, Thirty-Fifth Conference on Innovative Applications of Artificial Intelligence, IAAI 2023, Thirteenth Symposium on Educational Advances in Artificial Intelligence, EAAI 2023, Washington, DC, USA, February 7-14, 2023*, pages 13318–13326. AAAI Press.
- Wei Lu and Dan Roth. 2015. [Joint mention extraction and classification with mention hypergraphs](#). In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing, EMNLP 2015, Lisbon, Portugal, September 17-21, 2015*, pages 857–867. The Association for Computational Linguistics.
- Yaojie Lu, Qing Liu, Dai Dai, Xinyan Xiao, Hongyu Lin, Xianpei Han, Le Sun, and Hua Wu. 2022. [Unified structure generation for universal information extraction](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2022, Dublin, Ireland, May 22-27, 2022*, pages 5755–5772. Association for Computational Linguistics.
- Yi Luan, Dave Wadden, Luheng He, Amy Shah, Mari Ostendorf, and Hannaneh Hajishirzi. 2019. [A general framework for information extraction using dynamic span graphs](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 3036–3046. Association for Computational Linguistics.
- Aldrian Obaja Muis and Wei Lu. 2018. [Learning to recognize discontinuous entities](#). *CoRR*, abs/1810.08579.
- David Nadeau and Satoshi Sekine. 2007. A survey of named entity recognition and classification. *Linguisticae Investigationes*, 30(1):págs. 3–26.
- OpenAI. 2023. [GPT-4 technical report](#). *CoRR*, abs/2303.08774.
- Oscar Sainz, Iker García-Ferrero, Rodrigo Agerri, Oier Lopez de Lacalle, German Rigau, and Eneko Agirre. 2023. [Gollie: Annotation guidelines improve zero-shot information-extraction](#). *CoRR*, abs/2310.03668.
- Erik F. Tjong Kim Sang and Fien De Meulder. 2003. [Introduction to the conll-2003 shared task: Language-independent named entity recognition](#). In *Proceedings of the Seventh Conference on Natural Language Learning, CoNLL 2003, Held in cooperation with HLT-NAACL 2003, Edmonton, Canada, May 31 - June 1, 2003*, pages 142–147. ACL.
- Moemmur Shahzad, Ayesha Amin, Diego Esteves, and Axel-Cyrille Ngonga Ngomo. 2021. [Inferner: an attentive model leveraging the sentence-level information for named entity recognition in microblogs](#). In *Proceedings of the Thirty-Fourth International Florida Artificial Intelligence Research Society Conference, North Miami Beach, Florida, USA, May 17-19, 2021*.
- Yongliang Shen, Kaitao Song, Xu Tan, Dongsheng Li, Weiming Lu, and Yueting Zhuang. 2023a. [Diffusioner: Boundary diffusion for named entity recognition](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, pages 3875–3890. Association for Computational Linguistics.
- Yongliang Shen, Zeqi Tan, Shuhui Wu, Wenqi Zhang, Rongsheng Zhang, Yadong Xi, Weiming Lu, and Yueting Zhuang. 2023b. [Promptner: Prompt locating and typing for named entity recognition](#). pages 12492–12507.
- Yongliang Shen, Xiaobin Wang, Zeqi Tan, Guangwei Xu, Pengjun Xie, Fei Huang, Weiming Lu, and Yueting Zhuang. 2022. [Parallel instance query network for named entity recognition](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL*

- 2022, Dublin, Ireland, May 22-27, 2022, pages 947–961. Association for Computational Linguistics.
- Jana Straková, Milan Straka, and Jan Hajic. 2019. [Neural architectures for nested NER through linearization](#). In *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, pages 5326–5331. Association for Computational Linguistics.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurélien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023. [Llama: Open and efficient foundation language models](#). *CoRR*, abs/2302.13971.
- Bailin Wang and Wei Lu. 2018. [Neural segmental hypergraphs for overlapping mention recognition](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, pages 204–214. Association for Computational Linguistics.
- Jing Wang, Mayank Kulkarni, and Daniel Preotiuc-Pietro. 2020a. [Multi-domain named entity recognition with genre-aware and agnostic inference](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 8476–8488. Association for Computational Linguistics.
- Jue Wang, Lidan Shou, Ke Chen, and Gang Chen. 2020b. [Pyramid: A layered model for nested named entity recognition](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 5918–5928. Association for Computational Linguistics.
- Zihan Wang, Ziqi Zhao, Zhumin Chen, Pengjie Ren, Maarten de Rijke, and Zhaochun Ren. 2023. [Generalizing few-shot named entity recognizers to unseen domains with type-related features](#). pages 2228–2240.
- Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. 2022. [Emergent abilities of large language models](#). *Trans. Mach. Learn. Res.*, 2022.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations, EMNLP 2020 - Demos, Online, November 16-20, 2020*, pages 38–45. Association for Computational Linguistics.
- Mingbin Xu, Hui Jiang, and Sedtawut Watcharawitayakul. 2017. [A local detection approach for named entity recognition and mention detection](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics, ACL 2017, Vancouver, Canada, July 30 - August 4, Volume 1: Long Papers*, pages 1237–1247. Association for Computational Linguistics.
- Ikuya Yamada, Akari Asai, Hiroyuki Shindo, Hideaki Takeda, and Yuji Matsumoto. 2020. [LUKE: deep contextualized entity representations with entity-aware self-attention](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16-20, 2020*, pages 6442–6454. Association for Computational Linguistics.
- Hang Yan, Tao Gui, Junqi Dai, Qipeng Guo, Zheng Zhang, and Xipeng Qiu. 2021. [A unified generative framework for various NER subtasks](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021*, pages 5808–5822. Association for Computational Linguistics.
- Linyi Yang, Lifan Yuan, Leyang Cui, Wenyang Gao, and Yue Zhang. 2022. [Factmix: Using a few labeled in-domain examples to generalize to cross-domain named entity recognition](#). pages 5360–5371.
- Deming Ye, Yankai Lin, Peng Li, and Maosong Sun. 2022. [Packed levitated marker for entity and relation extraction](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2022, Dublin, Ireland, May 22-27, 2022*, pages 4904–4917. Association for Computational Linguistics.
- Junhao Zheng, Haibin Chen, and Qianli Ma. 2022. [Cross-domain named entity recognition via graph matching](#). In *Findings of the Association for Computational Linguistics: ACL 2022, Dublin, Ireland, May 22-27, 2022*, pages 2670–2680. Association for Computational Linguistics.
- Wenxuan Zhou, Sheng Zhang, Yu Gu, Muhao Chen, and Hoifung Poon. 2023. [Universalner: Targeted distillation from large language models for open named entity recognition](#). *CoRR*, abs/2308.03279.