

Adaptive Contrastive Search: Uncertainty-Guided Decoding for Open-Ended Text Generation

Esteban Garces Arias^{1,2}, Julian Rodemann¹, Meimingwei Li¹, Christian Heumann¹, Matthias Aßenmacher^{1,2}

¹Department of Statistics, LMU Munich, ²Munich Center for Machine Learning (MCML)

Correspondence: esteban.garcesarias@stat.uni-muenchen.de

Abstract

Decoding from the output distributions of large language models to produce high-quality text is a complex challenge in language modeling. Various approaches, such as beam search, sampling with temperature, k -sampling, nucleus p -sampling, typical decoding, contrastive decoding, and contrastive search, have been proposed to address this problem, aiming to improve coherence, diversity, as well as resemblance to human-generated text. In this study, we introduce adaptive contrastive search, a novel decoding strategy extending contrastive search by incorporating an adaptive degeneration penalty, guided by the estimated uncertainty of the model at each generation step. This strategy is designed to enhance both the creativity and diversity of the language modeling process while at the same time producing coherent and high-quality generated text output. Our findings indicate performance enhancement in both aspects, across different model architectures and datasets, underscoring the effectiveness of our method in text generation tasks. Our code base, datasets, and models are publicly available.

1 Introduction

The Transformer (Vaswani et al., 2017) plays a key role in various generative natural language processing (NLP) tasks such as generating stories, completing contextual text, and dialogue systems. However, the conventional method of training these models using maximum likelihood estimation (MLE) and decoding to the most probable sequence often results in substantial shortcomings. This can lead to repetitive and uncreative text generation, a problem known as degeneration.

To address this issue, previous approaches have aimed to adjust the decoding strategy by incorporating sampling from less probable vocabularies. While this helps reduce repetitiveness, it introduces the problem of semantic inconsistency (Welleck

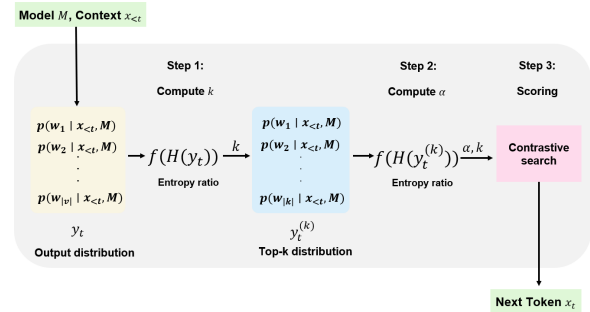


Figure 1: Visualization of the adaptive contrastive search process: A three-step procedure utilizing entropy as a proxy for model uncertainty to guide the automated adaptation of the contrastive search parameters.

et al., 2020). The sampled text may stray from or even contradict the original context provided by a human-written prompt.

In response, contrastive search (CS, Su et al., 2022) has been introduced. It employs a fixed balance between model confidence and degeneration penalty throughout the generation process, maintaining a blend of likelihood and diversity. However, it is important to note that this fixed weighting requires hyperparameter tuning and overlooks the unique demands of each generation step, where a different balance between model confidence and degeneration penalty might be desirable and even more effective.

We address this limitation by proposing adaptive contrastive search (ACS), an adaptive approach that automatically adjusts the hyperparameters of conventional CS. This method evaluates the model’s uncertainty at each generation step and adjusts the weighting of both components, without the need for manual intervention. The experimental outcomes demonstrate the effectiveness of our method, as it performs well in the task of open-ended text generation across different architectures and datasets.

Contributions Our contributions can be summarized as follows:

1. We introduce an adaptive CS method based on the work by Su et al. (2022) that measures the uncertainty of the model at each time step to automatically adjust the number of candidate tokens and the degeneration penalty.
2. We conduct comprehensive experiments to compare our approach to various established decoding methods, such as nucleus sampling (Holtzman et al., 2019), contrastive decoding (CD, Li et al., 2023), and CS (Su et al., 2022), for open-ended text generation.
3. We offer new insights into MAUVE and its correlation with human judgments, highlighting the need for a more robust metric that better aligns with human preferences when evaluating decoding strategies for open-ended text generation.
4. Our code and datasets and results are publicly available under [this link](#).

2 Related work

Decoding methods are generally categorized into two types: deterministic and stochastic.

Deterministic Methods. These approaches focus on choosing the text continuation with the highest probability according to the model’s probability distribution. Prominent examples are beam search and greedy search. Recently, studies by Shao et al. (2017); Vijayakumar et al. (2018); Paulus et al. (2017); Klein et al. (2017) have demonstrated that solely maximizing the output probability frequently leads to degenerated or repetitive text sequences, problem that has been addressed by stochastic, sampling-based methods.

Stochastic Methods. Top- k , proposed by Fan et al. (2018), samples from a subset of tokens $V^{(k)}$ that represent the tokens with the higher scores in the output distribution. Alternatively, nucleus- p sampling (Holtzman et al., 2019) samples from the smallest subset S with a total probability mass above a threshold p ; specifically, S is the smallest subset such that the cumulative probability for tokens in S surpasses p . While these methods reduce model degeneration, the inherent stochasticity can lead to semantic divergence or disconnection from the human-written prompt.

To tackle the imbalance between coherence and diversity, methods such as typical sampling (Meister et al., 2023) and CD have been developed to

produce more diverse and interesting text in open-ended settings. Typical sampling aims at generating based on the information content, which should be close to the expected information content, i.e., the conditional entropy of the model. CD, on the other hand, employs an expert language model (LM) and an amateur LM in parallel and searches for text that maximizes the difference between the expert’s and the amateur’s log probabilities, subject to plausibility constraints.

Our study, however, focuses on the work of Su et al. (2022), where they introduce CS, where given the prompt text $\mathbf{x}_{<t}$, the selection of the output token x_t follows:

$$x_t = \arg \max_{v \in V^{(k)}} \left\{ (1 - \alpha) \times \underbrace{p_\theta(v | \mathbf{x}_{<t})}_{\text{model confidence}} - \alpha \times \underbrace{\left(\max\{s(h_v, h_{x_j}) : 1 \leq j \leq t-1\}\right)}_{\text{degeneration penalty}} \right\} \quad (1)$$

where $V^{(k)}$ is the set of top- k predictions from the LM’s probability distribution $p_\theta(\cdot | \mathbf{x}_{<t})$. In Eq. (1), the first term, model confidence, is the probability of the candidate v predicted by the LM. The second term, degeneration penalty, measures how discriminative is the candidate v with respect to the previous context $\mathbf{x}_{<t}$ and $s(\cdot, \cdot)$ computes the cosine similarity between token representations. Intuitively, a larger degeneration penalty of v means it is more similar to the context, therefore more likely leading to undesirable repetitions in the generated output. The hyperparameter $k \in \mathbb{N}_{>0}$ determines the number of candidate tokens to be considered, while $\alpha \in [0, 1]$ regulates the importance of these two components.

Empirical results suggest different values for α and k , depending on the task, the datasets, and the language of interest, respectively (Su et al., 2022; Su and Xu, 2022; Su and Collier, 2023).

An empirical study comparing CS and CD (Su and Collier, 2023) highlights the strengths and weaknesses of both approaches. The automatic evaluation results suggest that CD performs better on MAUVE Pillutla et al. (2021), while CS excels in diversity and coherence. Additionally, through extensive human evaluations, they demonstrate that human annotators universally prefer CS over CD by substantial margins. Given the contradictory results between MAUVE and human evaluations, their analysis reveals that balancing diversity and coherence metrics better correlates with human

judgments.

Further studies have extended the concept of CS to incorporate additional criteria in scoring candidates for the next token. [Chen et al. \(2023\)](#) investigate the effect of adding a third criterion, fidelity, beyond model confidence and degeneration penalty to enhance the coherence of the generated text. This third criterion is again weighed by a hyperparameter β that is determined from empirical results. To the best of our knowledge, adaptive approaches based on the concept of CS have not been thoroughly explored.

3 Methodology

3.1 Incorporating Model Uncertainty

In this work, we propose an adaptive method that considers the estimated uncertainty of the model at time step t to automatically control k and α . In other words, our adaptive approach consists in modifying Eq. (1) as follows:

$$x_t = \arg \max_{v \in V^{(k_t)}} \left\{ (1 - \alpha_t) \times \underbrace{p_\theta(v | \mathbf{x}_{<t})}_{\text{model confidence}} - \underbrace{\alpha_t \times (\max\{s(h_v, h_{x_j}) : 1 \leq j \leq t-1\})}_{\text{degeneration penalty}} \right\} \quad (2)$$

where

$$k_t = 10 * \frac{\exp(\delta_t)}{\exp(\delta_t) + 1} + 5 \quad (3)$$

with

$$\delta_t = q * \operatorname{arctanh} \left(\frac{H(X)^{(t)} - \operatorname{median}(H(X)^{(<t)})}{\text{maximum entropy}} \right) \quad (4)$$

and

$$H(X)^{(t)} = - \sum_{x \in \mathcal{V}} p(x | \mathbf{x}_{<t}) \ln p(x | \mathbf{x}_{<t}). \quad (5)$$

Once k is selected, a similar procedure is followed to determine α_t :

$$\alpha_t = \frac{\exp(\delta_{t,k})}{\exp(\delta_{t,k}) + 1} \quad (6)$$

$$\delta_{t,k} = q * \operatorname{arctanh} \left(\frac{H(X)^{(t,k)} - \operatorname{median}(H(X)^{(<t,k)})}{\text{maximum entropy}^{(k)}} \right) \quad (7)$$

In other words, we follow a sequential procedure for k_t and α_t that involves these steps:

- i) **Measuring uncertainty:** Compute the entropy of the output distribution denoted as $H(X)^{(t)}$.
- ii) **Centering:** Subtract the median entropy of the previous prediction steps.
- iii) **Scaling:** Divide by the maximum entropy. This step aims to obtain a relative measure, ensuring comparability across different vocabulary sizes.
- iv) **Computation:** Pass the centered and rescaled entropy term through a sigmoid function, yielding the value of $\alpha_t \in (0, 1)$ - or for the case of k - through a rescaled sigmoid function that yields positive integer values.

The scaling term *maximum entropy* refers to the entropy of a uniform distribution over a finite set $x_1, \dots, x_{|\mathcal{V}|}$, where each token has an equal probability of $\frac{1}{|\mathcal{V}|}$. Consequently, this entropy remains constant over time. For a vocabulary of size $|\mathcal{V}|$, the maximum entropy is given by $\ln(|\mathcal{V}|)$, analogously, the maximum entropy for the distribution of the top- k tokens is given by $\ln(k)$.

Additionally, the parameter q serves as a temperature factor, influencing the range of k and α values at each time step. Adjusting q can either broaden or narrow this range: a lower temperature reduces variability, while a higher value allows for larger changes. This impact is demonstrated in Appendix A, Figures 3, 4, 5, 6, 7 and 8. However, it is important to note that our evaluation is based on a setup with no temperature (i.e., $q = 1$).

3.2 Theoretical Motivation

The general question that might arise is to why k_t and α_t should be chosen adaptively, i.e., why there is no global α nor a global k that is optimal at all time steps. Taking on a more statistical perspective on the problem offers an explanation: The degeneration penalty in contrastive search can be understood as a regularization term, see also ([Chen et al., 2023](#)). More precisely, we have:

Proposition 1 *The degeneration penalty $\max_j \{s(h_v, h_{x_j})\}$ is a function of the penalty $\|h_v - h_{x_j}\|_2$ in statistical Tikhonov-regularization, if the representations h are normalized.*

The proof can be found in Appendix B. Classical statistical regularization aims at preventing overfitting by smoothing out the effect of the training data on the model fit. In CS, the degeneration penalty plays a similar role: It attenuates the effect of the model on the chosen output token. Recall that we do not want to select tokens solely based on the model to prevent repetitive text generation. It is a well-known fact that optimal regularization parameters (corresponding to k_t and α_t here) for many statistical models correspond to the signal-to-noise ratio in the data, see e.g. the work by Kimeldorf and Wahba (1970); Rao et al. (2008); Hastie et al. (2009); Fahrmeir et al. (2022). The intuition is straightforward: For a given signal, the more noise in the data, the higher the optimal regularization parameter should be chosen to prevent overfitting to the latter. This motivates our adaptive approach to CS. Instead of choosing fixed k and α in the beginning, we choose it based on the observed variation of the object on which we want to prevent overfitting. In contrast to statistical modeling, however, this object is the model output, not the training data. We thus choose the optimal k_t and α_t based on the variation of the model output, i.e., its estimated uncertainty measured by δ_t and $\delta_{(t,k)}$, the standardized Shannon entropy. While several approaches to quantifying uncertainty exist, see Abdar et al. (2021) for an overview, we rely on the classical Shannon entropy since it is computationally efficient and tailored to measuring epistemic (reducible) *predictive* uncertainty, see (Hüllermeier and Waegeman, 2021, section 3.3), as required here.

4 Experimental Setup

In this section, we describe the metrics, datasets, baseline models, and human evaluation settings.

4.1 Evaluation Metrics

We follow Su and Xu (2022) and use three metrics to automatically measure the quality the generations: Diversity, MAUVE, and Coherence.

Diversity. This metric aggregates n-gram repetition rates:

$$\text{DIV} = \prod_{n=2}^4 \frac{|\text{unique n-grams } (x_{\text{cont}})|}{|\text{total n-grams } (x_{\text{cont}})|}.$$

A low diversity score suggests the model suffers from repetition, and a high diversity score means the model-generated text is lexically diverse.

MAUVE. MAUVE (Pillutla et al., 2021) score measures the distribution similarity between the set of generated text and the set of gold references.

Coherence. Proposed by Su et al. (2022), coherence is estimated by the cosine similarity between the sentence embeddings of prompt x_{prompt} and generated continuation x_{cont} :

$$\text{COH}(x_{\text{cont}}, x_{\text{prompt}}) = \frac{\text{EMB}(x_{\text{prompt}}) \cdot \text{EMB}(x_{\text{cont}})}{\|\text{EMB}(x_{\text{prompt}})\| \cdot \|\text{EMB}(x_{\text{cont}})\|},$$

where $\text{Emb}(x)$ is the pre-trained SimCSE sentence embedding (Gao et al., 2022).

Human Eval. In order to evaluate the quality of the generated text, we consider two critical aspects: fluency and coherence. A fluent piece of text is written in grammatical English and has a natural flow (e.g. excluding unnatural repetition or web formatting). A coherent piece of text should stay on topic with the prompt and avoid unnatural topic drift. We provide five native English speakers with 240 competing continuations (A and B) of the same prompt and ask them to rate their coherence and fluency. Definitions and instructions for the rating process are shown in Appendix C, Figure 9.

4.2 Datasets

Following previous studies, we evaluate our proposed method on three domains for open-ended text generation: news, Wikipedia, and stories. For the news domain, we use articles from Wikinews (2000 examples); for the Wikipedia domain, we use the WikiText-103 dataset (1314 examples; Merity et al., 2016); and for the story domain, we use the BookCorpus (Project Gutenberg split, 1947 examples; Zhu et al., 2015). Each of the examples contains a prompt and a gold reference i.e. human-generated continuation for evaluation purposes.

We extract the prompts and decode 256 tokens for the continuations. Finally, we evaluate the generated text based on both the set of metrics (as described in Sec. 4.1) and via human evaluation.

4.3 Baselines

We compare ACS to widely used decoding methods (including deterministic and stochastic approaches): greedy search, beam search, top- k sampling, nucleus sampling, typical decoding, CD, and CS with constant $\alpha = 0.6$ and two versions of k : 5 and 10. We include the latter for a fair comparison: The CS generations with $k = 10$ achieve better automatic evaluation scores than those generated with

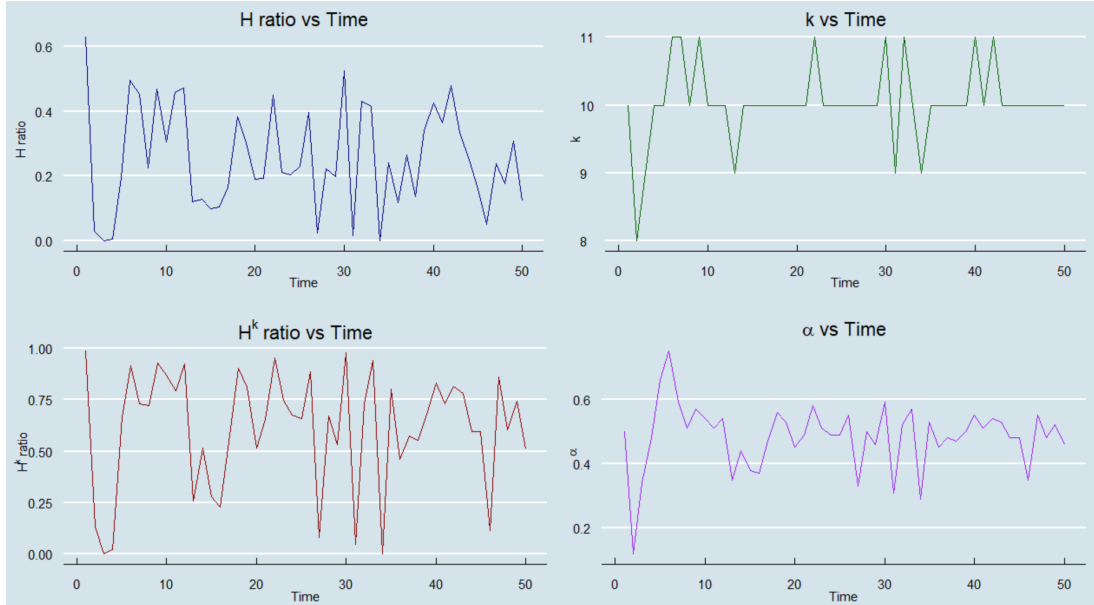


Figure 2: Visualization of uncertainty over time, measured by the Shannon entropy of the output distribution (first row, left). It is used to determine the value of k over time (right). The second row illustrates the entropy of the top- k tokens distribution, which is used to compute the value of α (right).

Prompt: *Knowing that she would be staying in, she started by choosing a pair of fitted, soft, black slippers, the type that barely covered her feet but gave*

Generated story: *her a sense of comfort. As she walked to the dining room, she took a moment to admire the decor and thought about what she would do for dinner. Her family was going to be here for a few days, and she wanted to make the most of the time they had before they left.*

Method	Wikinews			Wikitext			Story		
	div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow	div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow	div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow
Greedy Search*	3.55	13.96	-0.47	1.77	4.91	-0.41	0.86	2.65	-0.34
Top- k Sampling*	91.56	89.86	-2.22	87.49	81.00	-2.37	91.22	87.49	-2.45
Nucleus Sampling*	93.54	89.45	-2.61	92.16	86.54	-3.03	94.50	91.47	-3.02
Typical Sampling*	95.37	90.97	-3.26	94.82	86.07	-3.71	96.29	88.58	-3.68
CD*	91.57	92.20	-2.16	88.02	91.46	-2.19	86.41	93.17	-2.09
CS ($k = 5, \alpha = 0.6$)	93.72	84.14	-1.39	89.35	77.97	-1.56	93.06	84.74	-1.61
CS ($k = 10, \alpha = 0.6$)	96.30	87.53	-1.73	94.09	77.97	-1.93	95.46	84.96	-1.91
ACS (Ours, $q = 1$)	95.22	79.45	-1.60	92.72	78.67	-1.74	93.89	80.72	-1.71
Bonus: DoubleExp	97.39	90.65	-2.12	96.58	84.07	-2.18	97.37	85.66	-2.16

Table 1: Automatic evaluation results: Numbers marked with * are obtained using the generated texts originally released by Li et al. (2023), CS results are taken from Su and Xu (2022). The best results are highlighted in bold.

$k = 5$. Furthermore, they are more comparable to our method, centered around $k = 10$. Further, we include an additional adaptive method: *DoubleExp*, which consists on an exponentiation of the argument of the sigmoid function, with the purpose of reaching values of α closer to 0 or 1. Our goal with this method is to exemplify discrepancies between human judgment and MAUVE. The respective human evaluation results are visualized in Table 2.

4.4 Models

We explore the relationship between model size and the effect of ACS. For this purpose, we use three open-source autoregressive models: gpt2-xl, gpt2-

large, and gpt2-medium (Radford et al., 2019).

5 Results

5.1 Automatic evaluation results

The automatic evaluation of generated stories, based on diversity, MAUVE, and coherence are presented in Table 1. We observe that CS-based approaches tend to foster diversity, while having a slighter loss of coherence, compared to other decoding methods, such as CD and Typical sampling. An additional common trait is that CS-based approaches exhibit lower MAUVE scores, where CD excels across all three datasets. We observe that

Dataset	Coherence			Fluency		
	CS is better	CS and DoubleExp are similar	DoubleExp is better	CS is better	CS and DoubleExp are similar	DoubleExp is better
Wikinews	56%	34%	10%	32%	58%	10%
Wikitext	34%	46%	20%	29%	63%	8%
Story	49%	31%	20%	32%	58%	10%
All	48%	36%	16%	28%	62%	10%

Dataset	Coherence			Fluency		
	CS is better	CS and ACS are similar	ACS is better	CS is better	CS and ACS are similar	ACS is better
Wikinews	24%	45%	31%	16%	67%	18%
Wikitext	37%	28%	35%	9%	74%	18%
Story	41%	27%	32%	21%	59%	21%
All	31%	32%	37%	17%	62%	21%

Table 2: Human evaluation results for CS vs. *DoubleExp* (top) and CS vs. ACS (bottom) across different datasets.

Prompt	Butt criticized Donald’s controls in certain situations in the game, as well as the difficulty of some levels and puzzles. Buchanan also criticized the controls, calling	div.	coh.
Beam	them " too easy " and " too difficult ". He also criticized the game’s graphics, stating that the game’s graphics were " too simplistic " and "too simplistic ". He also criticized the game’s graphics, stating that the game’s graphics were " too simplistic " and " too simplistic ". He also criticized the graphics, stating that the game’s graphics were " too simplistic " and " too simplistic ". He also criticized the graphics, stating that the game’s graphics were " too simplistic " and " too simplistic ". He also criticized the graphics, stating that the game’s graphics were"...	0.02	0.605
Nucleus	them " offensively rudimentary ". After the game was released, Buchanan wrote a number of game reviews about his review of the game, primarily summarizing what he thought the reviewers had enjoyed about it. Buchanan was pleased with how consistently these reviews awarded the game. For one, he praised the puzzles, compared them to Nos. 1 and 2 and enjoyed the construction of the artificial intelligence in the game’s forms. He found no fault with the puzzles, even in those situations where they seemed repetitive. According to an Xbox Magazine review, " every time...	0.98	0.597
CD	them " unimpressive " and a " nightmare " of an experience to play with players unfamiliar with Tetris. On the other hand, his opinion was shared by other reviewers, and some were critical of the game’s technical design for the Wii version of Tetris. In addition, Tintin’s review included a quote from Roger Ebert, who said that Tetris was better than the original game due to its simplicity and ease of play. Ebert’s comments were included in the game’s DVD commentary, released on March 22,2010 . It is unclear if any of the video commentary was taken from ...	0.98	0.626
CS	them " unimpressive " and a " nightmare " of an experience to play with players unfamiliar with Tetris. On the other hand, his opinion was shared by other reviewers, and some were critical of the game’s technical design for the Wii version of Tetris. In addition, Tintin’s review included a quote from Roger Ebert, who said that Tetris was better than the original game due to its simplicity and ease of play. Ebert’s comments were included in the game’s DVD commentary, released on March 22,2010 . It is unclear if any of the video commentary was taken from ...	0.98	0.626
ACS	them " a pain in the ass to get used to." On the other hand, his opinion was shared by other reviewers, and some were critical of the game’s technical design for the Wii version of Tetris. In addition, Tintin’s review included a quote from Roger Ebert, who said that Tetris was better than the original game due to its simplicity and ease of play. Ebert’s comments were included in the game’s DVD commentary, released on March 22,2010 . It is unclear if any of the video commentary was taken from ...	0.98	0.629

Table 3: Case Study: Beam search produces degenerative repetitions while nucleus sampling produces text with incoherent semantics w.r.t. the prefix. Contrastive methods produce reasonable repetitions and generate fluent text.

the method *DoubleExp*, which consists on an exponentiation of the sigmoid arguments, provides a good balance of high diversity and MAUVE, maintaining coherence values that are lower than non-contrastive methods.

5.2 Human evaluation

The human evaluation scores for the CS and ACS methods, as well as for CS and *DoubleExp*, are displayed in Table 2. It is worth mentioning that high MAUVE scores and balanced coherence and diver-

sity do not always align with human judgments. For example, evaluators consistently show a preference for CS over *DoubleExp* across all datasets. Conversely, ACS is favored in terms of fluency, and AC is preferred for coherence. Nonetheless, when considering all datasets together, there is a slight overall preference for ACS compared to its non-adaptive version.

Method	Wikinews			Wikitext			Story		
	div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow	div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow	div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow
ACS, $q = 1$	95.22	79.45	-1.6	92.72	78.67	-1.74	93.89	80.72	-1.71
ACS, $q = 2$	95.03	81.66	-1.57	92.69	77.48	-1.71	93.38	80.85	-1.67
ACS, $q = 4$	95.75	83.41	-1.76	94.02	81.56	-1.87	94.97	80.14	-1.82
ACS, $q = 8$	96.92	83.10	-2.02	95.23	77.79	-2.08	96.02	82.71	-2.04
ACS, $q = 15$	97.46	83.03	-2.24	96.39	81.66	-2.25	96.66	81.44	-2.23
ACS, $q = 20$	97.78	85.01	-2.32	96.55	81.61	-2.33	96.66	80.37	-2.26

Table 4: Ablation results for diversity, MAUVE, and coherence w.r.t. to the adaptiveness enforced by temperature q .

Method	sec / story \downarrow	# Tokens / sec \uparrow
CS ($\alpha = 0.6, k = 10$)	11.6	21.98
ACS ($q = 1$)	15.7	16.29
ACS ($q = 2$)	15.9	16.14
ACS ($q = 8$)	16.3	15.35

Table 5: Comparison of generation speed for CS and ACS with different temperatures $q \in \{1, 2, 8\}$. Experiments were conducted with a GPU NVIDIA RTX 3090.

5.3 Qualitative examples

We include qualitative examples to highlight the qualitative traits observed for different decoding strategies, exemplified by the generations displayed in Table 3 and the visualizations of the entropy, k , and α in Figure 2.

5.4 Ablation studies

To estimate the effect of different levels of adaptiveness, guided by temperature, on the automatic evaluation we conduct experiments for $q \in \{1, 2, 4, 8, 15, 20\}$. The results are presented in Table 4, indicating some sensitivity of ACS concerning the choice of q , albeit of differing strengths for the different datasets.

5.5 Generation speed

We have measured the average generation speed across all three datasets by varying the temperature $q \in \{1, 2, 8\}$ with respect to our baseline (CS with $k = 10$ and $\alpha = 0.6$). A summary is presented in Table 5, showing a mild decrease in the speed for ACS compared to CS with fixed α .

5.6 Application to other languages

We explore the quality of our approach in eight other languages: Arabic, Bengali, German, French, Hindi, Japanese, Dutch, and Chinese, using pre-trained GPT-2-based architectures of different sizes, comparing the performance of ACS to CS. The results are presented in Table 6.

5.7 Effect to varying model sizes

We assess the impact of different model sizes on the quality of text generation, focusing on three model sizes: gpt2-xl, gpt2-large, and gpt2-medium. The generated stories are evaluated across three datasets: Wikinews, Wikitext, and Story. The results, detailed in Table 7, reveal significant discrepancies, particularly with gpt2-medium, where the diversity of CS is notably compromised across all datasets. We suspect this is due to the isotropy of the model, where only high values of α might enable diverse generations. Visual inspection confirms that the outputs are repetitive and degenerate, akin to those produced by greedy search.

5.8 Findings about MAUVE

Our human evaluation results, as detailed in Table 2, corroborate the findings of Su and Xu (2022). The discrepancies observed between MAUVE scores and human evaluation scores indicate that MAUVE does not consistently align with human preferences. Specifically, the *DoubleExp* method yields higher MAUVE values compared to CS and ACS. However, human evaluators consistently rate *DoubleExp* as less coherent and fluent than the CS approach with $k = 10$ and $\alpha = 0.6$. Moreover, we identified two significant issues related to varying the truncation length in pairwise sentence comparisons: (1) Inconsistent results that lead to different conclusions regarding the optimal decoding method, and (2) substantial differences in sample sizes, as illustrated in Appendix D, Table 8.

6 Discussion and Future Work

In this study, we introduce a novel approach grounded in a CS framework. It is important to note, however, that the quality of generated text extends beyond just probability and diversity. Other factors, like informativeness, trustworthiness, coherence, and cohesion (as discussed by De Beau-

Language	Contrastive Search			Adaptive Contrastive Search			Δ		
	div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow	div.(%) \uparrow	MAUVE(%) \uparrow	coh.	div.(%)	MAUVE(%)	coh.
Arabic	89.55	70.53	-1.51	60.71	89.94	-1.23	-28.84	19.41	0.28
Bengali	72.48	89.87	-1.24	85.17	96.31	-1.34	12.69	6.44	-0.10
German	97.95	72.80	-2.16	93.04	42.82	-1.07	-4.91	-29.98	1.09
French	95.74	93.21	-2.27	92.49	96.41	-2.08	-3.25	3.20	0.19
Hindi	98.99	95.95	-1.00	98.90	92.99	-1.00	-0.09	-2.96	0.00
Japanese	50.47	72.69	-0.92	39.47	83.30	-1.80	-11.00	10.61	-0.88
Dutch	95.47	33.57	-2.96	98.03	72.32	-1.30	2.56	38.75	1.66
Chinese	91.42	93.28	-2.39	82.55	92.76	-2.26	-8.87	-0.52	0.13

Table 6: Comparison across different languages. Positive Δ -values indicate better performance of ACS vs CS.

Dataset	Model	Contrastive Search			Adaptive Contrastive Search			Δ		
		div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow	div.(%) \uparrow	MAUVE(%) \uparrow	coh. \uparrow	div.(%)	MAUVE(%)	coh.
Wikinews	gpt2-xl	93.72	88.14	-1.39	96.92	83.10	-2.02	3.20	-5.04	-0.63
	gpt2-large	93.80	78.55	-1.44	96.55	78.84	-2.06	2.75	0.29	-0.62
	gpt2-medium	3.66	12.86	-0.56	49.88	20.25	-6.22	46.22	7.39	-5.66
Wikitext	gpt2-xl	89.35	77.97	-1.56	95.23	77.79	-2.08	5.88	-0.18	-0.52
	gpt2-large	89.04	73.91	-1.59	95.67	80.00	-2.11	6.63	6.09	-0.52
	gpt2-medium	2.25	4.75	-0.47	64.13	10.91	-5.94	61.88	6.16	-5.47
Story	gpt2-xl	93.06	84.74	-1.61	96.02	82.71	-2.04	2.96	-2.03	-0.43
	gpt2-large	90.63	81.16	-1.56	95.82	80.42	-2.05	5.19	-0.74	-0.49
	gpt2-medium	1.22	3.08	-0.40	11.86	17.19	-6.13	10.64	14.11	-5.73

Table 7: Comparison of CS ($k = 10, \alpha = 0.6$) and ACS across different datasets and models of varying size.

grande and Dressler (1981)), contribute to the overall quality of the text. While some metrics have been proposed previously to measure these attributes (referenced as Work on metrics et al.), there remains potential to integrate them into either the training process or the decoding strategy. Moving forward, our aim is to expand our adaptable method to encompass these traits, thereby improving the evaluation of text quality through a more holistic approach. Furthermore, we would like to explore other criteria for the automatic selection of k and α . A path worth exploring could be related to the ratio between generation perplexity and model perplexity, where the algorithm would penalize deviations from the model perplexity through automatic adaptation. Finally, our study has centered on a specific task: Open-ended Text Generation. However, the potential influence of this adaptive decoding strategy on various tasks and contexts warrants further investigation. We aim to broaden our research to evaluate its efficacy in Machine Translation, Summarization, and Handwritten Text Recognition, particularly within the scope of low-resource languages, where our approach may prove beneficial in scenarios where training examples are scarce.

7 Conclusion

We introduced an uncertainty-guided adaptive method aimed at enhancing the quality of open-ended text generation output. Our approach entails calculating the estimated uncertainty at each time step, assessed through Shannon entropy, and leveraging it to regulate the weighting assigned to model confidence and degeneration penalty, as proposed by Su et al. (2022) and Su and Xu (2022). Our experiments have demonstrated that this method performs well in terms of coherence and diversity, with MAUVE results comparable to existing methods. It receives high ratings from human evaluators, especially for the fluency of its outputs. This method does not require hyperparameter tuning and uses resources similar to the non-adaptive CS. Notably, unlike CD, it does not rely on two separate models, making it more versatile and suitable for various tasks. Furthermore, our comprehensive studies comparing this approach to CS highlight its robustness in multilingualism, speed, and model sizes, albeit with some latency. We hope to see further research in adaptive methods for open-ended text generation and the development of new metrics that better align with human judgments to improve the evaluation of decoding strategies.

Limitations

The proposed method of ACS could potentially be a step forward in enhancing the quality of text generation from language models. However, it is crucial to acknowledge its limitations and areas for further exploration to ensure a more comprehensive approach to text generation. One primary limitation lies in the narrow focus on only two objectives: model confidence and divergence penalty. While these are certainly critical factors in evaluating text quality, they do not encapsulate the full spectrum of desirable attributes in generated text. Informativeness, fluency, accuracy, trustworthiness, coherence, and cohesion are equally important indicators of high-quality text. Ignoring these aspects in the decoding process could result in text that lacks depth or fails to effectively convey information, particularly in specialized or nuanced contexts.

Another limitation worth considering is the trade-off between speed and quality. While ACS might generate higher-quality text, it does so at the expense of speed. This slower generation process may not be suitable for all applications, especially those requiring real-time responses or large-scale text generation tasks. Balancing the need for quality with the practical constraints of time and computational resources is an ongoing challenge in developing decoding methods for language models.

Additionally, the application of ACS has primarily been explored in the context of text generation tasks such as language modeling and natural language understanding. Its effectiveness on other tasks, such as machine translation, summarization, or multi-modal tasks like handwritten text recognition, remains largely untested. Each of these tasks poses unique challenges and requirements in terms of text diversity, context preservation, and semantic accuracy. Investigating the adaptability and performance of the approach across a broader range of tasks will be essential for its broader applicability and generalizability.

Lastly, while various measures of local uncertainty have been explored in the context of ACS, such as KL divergence, variance, perplexity, and entropy, there is still much room for exploration and refinement. Identifying the most suitable measures and functions for assessing text quality and guiding the decoding process is an ongoing research endeavor. Further experimentation and analysis are needed to determine the optimal combination of uncertainty metrics that can reliably produce high-

quality, open-ended text generation across diverse domains and languages. However, the modularity of ACS in terms of choosing the δ -functions allows for a seamless further exploration of different approaches.

Ethics Statement

We affirm that our research adheres to the [ACL Ethics Policy](#). This work involves the use of publicly available datasets and does not include any personally identifiable information. For our human evaluation, we employed third-party evaluators, ensuring a rate of over \$20 per hour. An ethical concern worth mentioning is the use of language models for text generation, which may produce harmful content, either through intentional misuse by users or unintentionally due to the training data or algorithms. We declare that there are no conflicts of interest that could potentially influence the outcomes, interpretations, or conclusions of this research. All funding sources supporting this study are acknowledged in the acknowledgments section. We have diligently documented our methodology, experiments, and results, and commit to sharing our code, data, and other relevant resources to enhance reproducibility and further advancements in the field.

Acknowledgments

We wish to express our gratitude to Daniele Pugno and Nicolò Campagnoli for their technical support and visualizations. Matthias Aßenmacher received funding from the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) as part of BERD@NFDI, under grant number 460037581. Julian Rodemann acknowledges support by the Federal Statistical Office of Germany within the co-operation project "Machine Learning in Official Statistics" as well as by the Bavarian Institute for Digital Transformation (bidt) and the Bavarian Academy of Sciences (BAS) within a graduate scholarship.

References

Moloud Abdar, Farhad Pourpanah, Sadiq Hussain, Dana Rezazadegan, Li Liu, Mohammad Ghavamzadeh, Paul Fieguth, Xiaochun Cao, Abbas Khosravi, U Rajendra Acharya, et al. 2021. A review of uncertainty quantification in deep learning: Techniques, applications and challenges. *Information fusion*, 76:243–297.

- Rie Kubota Ando and Tong Zhang. 2005. A framework for learning predictive structures from multiple tasks and unlabeled data. *Journal of Machine Learning Research*, 6:1817–1853.
- Galen Andrew and Jianfeng Gao. 2007. Scalable training of L1-regularized log-linear models. In *Proceedings of the 24th International Conference on Machine Learning*, pages 33–40.
- Wei-Lin Chen, Cheng-Kuang Wu, Hsin-Hsi Chen, and Chung-Chi Chen. 2023. Fidelity-enriched contrastive search: Reconciling the faithfulness-diversity trade-off in text generation. *arXiv preprint arXiv:2310.14981*.
- Robert-Alain De Beaugrande and Wolfgang U Dressler. 1981. *Introduction to text linguistics*, volume 1. longman London.
- Ludwig Fahrmeir, Thomas Kneib, Stefan Lang, and Brian D Marx. 2022. Regression models. In *Regression: Models, methods and applications*, pages 23–84. Springer.
- Angela Fan, Mike Lewis, and Yann Dauphin. 2018. [Hierarchical neural story generation](#). *Preprint*, arXiv:1805.04833.
- Tianyu Gao, Xingcheng Yao, and Danqi Chen. 2022. [Simcse: Simple contrastive learning of sentence embeddings](#). *Preprint*, arXiv:2104.08821.
- Trevor Hastie, Robert Tibshirani, Jerome H Friedman, and Jerome H Friedman. 2009. *The elements of statistical learning: data mining, inference, and prediction*, volume 2. Springer.
- Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. 2019. The curious case of neural text degeneration. *arXiv preprint arXiv:1904.09751*.
- Eyke Hüllermeier and Willem Waegeman. 2021. Aleatoric and epistemic uncertainty in machine learning: An introduction to concepts and methods. *Machine learning*, 110(3):457–506.
- George S Kimeldorf and Grace Wahba. 1970. A correspondence between bayesian estimation on stochastic processes and smoothing by splines. *The Annals of Mathematical Statistics*, 41(2):495–502.
- Guillaume Klein, Yoon Kim, Yuntian Deng, Jean Senellart, and Alexander M. Rush. 2017. [Opennmt: Open-source toolkit for neural machine translation](#). *Preprint*, arXiv:1701.02810.
- Xiang Lisa Li, Ari Holtzman, Daniel Fried, Percy Liang, Jason Eisner, Tatsunori Hashimoto, Luke Zettlemoyer, and Mike Lewis. 2023. [Contrastive decoding: Open-ended text generation as optimization](#). *Preprint*, arXiv:2210.15097.
- Clara Meister, Tiago Pimentel, Gian Wiher, and Ryan Cotterell. 2023. [Locally typical sampling](#). *Preprint*, arXiv:2202.00666.
- Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. 2016. [Pointer sentinel mixture models](#). *Preprint*, arXiv:1609.07843.
- Romain Paulus, Caiming Xiong, and Richard Socher. 2017. [A deep reinforced model for abstractive summarization](#). *Preprint*, arXiv:1705.04304.
- Krishna Pillutla, Swabha Swayamdipta, Rowan Zellers, John Thickstun, Sean Welleck, Yejin Choi, and Zaid Harchaoui. 2021. Mauve: Measuring the gap between neural text and human text using divergence frontiers. *Advances in Neural Information Processing Systems*, 34:4816–4828.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners.
- C Radhakrishna Rao, H Toutenburg, Shalabh, and C Heumann. 2008. *Linear models and generalizations: Least squares and alternatives*, volume 3.
- Mohammad Sadegh Rasooli and Joel R. Tetreault. 2015. [Yara parser: A fast and accurate dependency parser](#). *Computing Research Repository*, arXiv:1503.06733. Version 2.
- Louis Shao, Stephan Gouws, Denny Britz, Anna Goldie, Brian Strope, and Ray Kurzweil. 2017. [Generating high-quality and informative conversation responses with sequence-to-sequence models](#). *Preprint*, arXiv:1701.03185.
- Yixuan Su and Nigel Collier. 2023. [Contrastive search is what you need for neural text generation](#). *Preprint*, arXiv:2210.14140.
- Yixuan Su, Tian Lan, Yan Wang, Dani Yogatama, Lingpeng Kong, and Nigel Collier. 2022. [A contrastive framework for neural text generation](#). *Preprint*, arXiv:2202.06417.
- Yixuan Su and Jialu Xu. 2022. [An empirical study on contrastive search and contrastive decoding for open-ended text generation](#). *Preprint*, arXiv:2211.10797.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems*, 30.
- Ashwin K Vijayakumar, Michael Cogswell, Ramprasath R. Selvaraju, Qing Sun, Stefan Lee, David Crandall, and Dhruv Batra. 2018. [Diverse beam search: Decoding diverse solutions from neural sequence models](#). *Preprint*, arXiv:1610.02424.
- Sean Welleck, Ilya Kulikov, Jaedeok Kim, Richard Yuanzhe Pang, and Kyunghyun Cho. 2020. [Consistency of a recurrent language model with respect to incomplete decoding](#). *Preprint*, arXiv:2002.02492.

Yukun Zhu, Ryan Kiros, Richard Zemel, Ruslan Salakhutdinov, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. 2015. [Aligning books and movies: Towards story-like visual explanations by watching movies and reading books.](#) *Preprint*, arXiv:1506.06724.

Appendix

A Example Generations

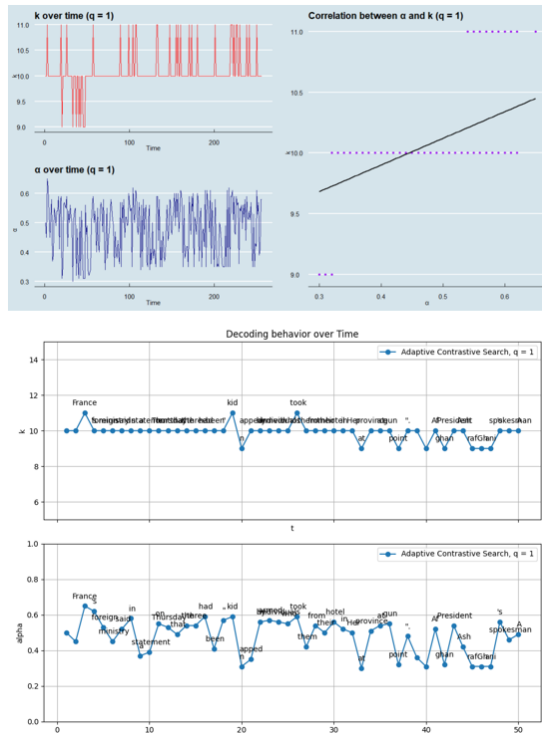


Figure 3: Decoding behavior over time from a Wikinews prompt, $q = 1$.

Prompt: Two French journalists kidnapped on Wednesday north-east of the capital Kabul are believed to be in good health, although the condition of their three Afghan assistants is unknown.

Generated story: France's foreign ministry said in a statement on Thursday that the three had been "kidnapped by armed individuals who took them from their hotel in Herat province at gunpoint". Afghan President Ashraf Ghani's spokesman Aimal Faizi said a helicopter had been sent to pick up the journalists and they were on their way to Bagram airbase in the north-centre of the country. Ghani, who took office in September, has faced criticism for failing to make progress in a war that has claimed more than 2,000 lives since US-led forces overthrew the Taliban in 2001. The United Nations Assistance Mission in Afghanistan (Unama) said this week that security in the country had deteriorated, with attacks on aid workers and foreign military convoys on the rise. Last month, Taliban fighters ambushed a convoy of UN peacekeepers in Kunduz province, killing at least 15 people and wounding more than 30. (FRANCE 24 with AFP)

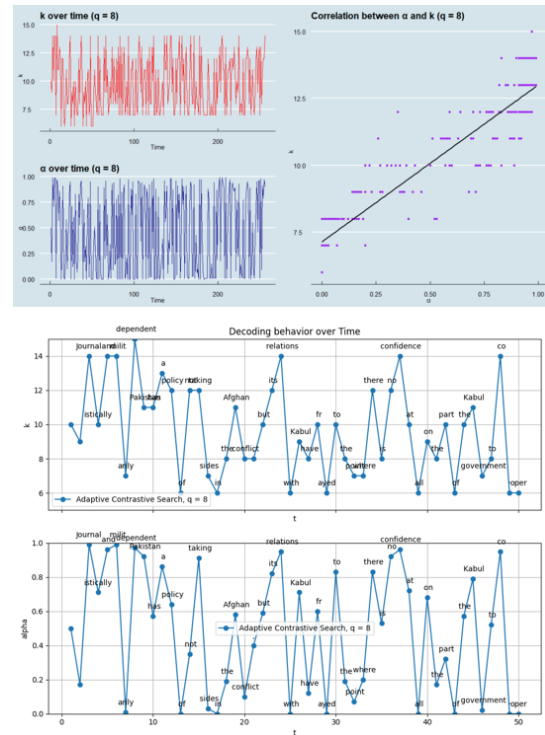


Figure 4: Decoding behavior over time from a Wikinews prompt, $q = 8$.

Prompt: Two French journalists kidnapped on Wednesday north-east of the capital Kabul are believed to be in good health, although the condition of their three Afghan assistants is unknown.

Generated story: Journalistically and militarily dependent Pakistan has a policy of not taking sides in the Afghan conflict, but its relations with Kabul have frayed to the point where there is no confidence at all on the part of the Kabul government to co-operate with Islamabad. Afghan President Hamid Karzai last week cancelled a high-level visit to the United States in protest at Washington's refusal to hand over Bin Laden on humanitarian grounds. Bin Laden escaped from Tora Bora four years ago by flying across the Hindu Kush mountains of Central Asia with help from al-Qaeda-linked guerrillas known as the Haqqani network. Since then his hideout has been under watch by U.S. Special Forces who have set up a command centre close to the Afghanistan-Pakistan border for intelligence, surveillance and counter-terrorism operations.

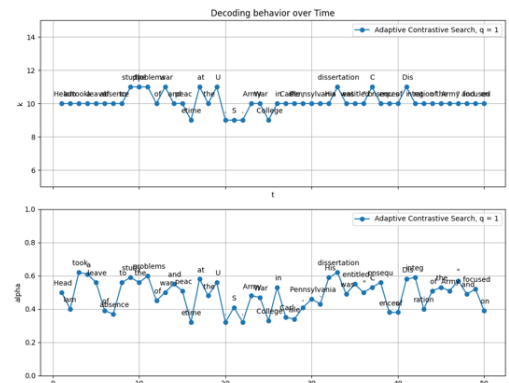
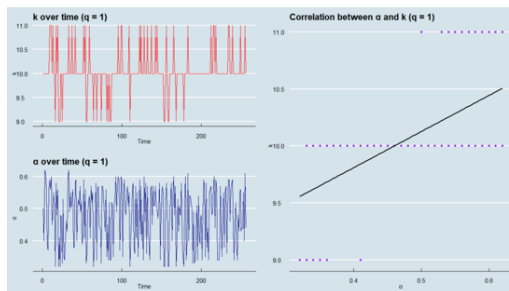


Figure 5: Decoding behavior over time from a Wikitext prompt, $q = 1$.

Prompt: Headlam served as Officer Commanding North @-@ Western Area in 1946, and as Director of Training from 1947 to 1950. In 1950 – 51,

Generated story: Headlam took a leave of absence to study the problems of war and peacetime at the U.S. Army War College in Carlisle, Pennsylvania. His dissertation was entitled "Consequences of Disintegration of the Army" and focused on the effect of demobilization on the quality of officers and NCOs. After the war, Headlam was an instructor at the United States Military Academy at West Point, New York, and served as a military attaché in the Middle East and South Asia. He received the Distinguished Service Medal with Oak Leaf Cluster for his part in the rescue of Lt. Col. (later General) Omar N. Bradley, who was under attack by Japanese at Tarawa, Oahu, in the Solomons (New Hebrides) in 1943. The award was posthumously awarded to him by President Harry S. Truman in recognition of his gallantry in the latter part of World War II. Returning to the United States in the summer of 1951, Headlam began his career as a civilian in the Civil Aeronautics Administration (CAA), where he helped set up the Air Traffic Control System at La Guardia Airport in New York City. The following year, he joined the Federal Aviation

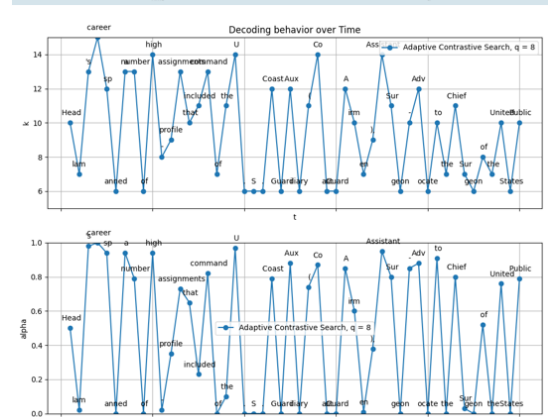
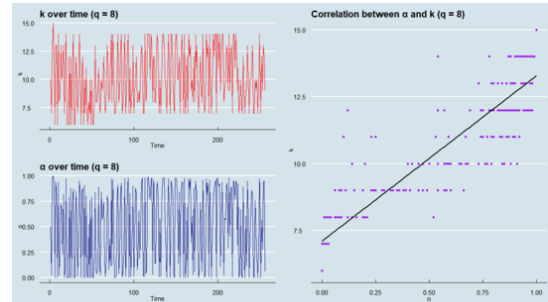


Figure 6: Decoding behavior over time from a Wikitext prompt, $q = 8$.

Prompt: Headlam served as Officer Commanding North @-@ Western Area in 1946, and as Director of Training from 1947 to 1950. In 1950 – 51,

Generated story: Headlam's career spanned a number of high-profile assignments that included command of the U.S. Coast Guard Auxiliary (Coast Guard Airmen), Assistant Surgeon-Advocate to the Chief Surgeon of the United States Public Health Service, Special Assistant to the Under Secretary of the Navy for Research and Development, Executive Vice President of the New York-Presbyterian Hospital for 30 years, a Trustee of the Ford Foundation, an Emeritus Visiting Professor at Tufts University in Medford, Mass., and, of course, one of the most prolific authors of UFOlogy to this day. This list goes on and on with every name you can think of – not to mention his work behind the scenes to bring UFOs into the limelight as science rather than superstition. So what can we learn from such a life in and out of the media spotlight? First and foremost, it is easy to lose sight of the human and his/her inner life when looking at the "big picture" of human history. There is nothing wrong with getting paid or doing what you need to do in order to make a living, but that does not mean you are off the hook as a human being.

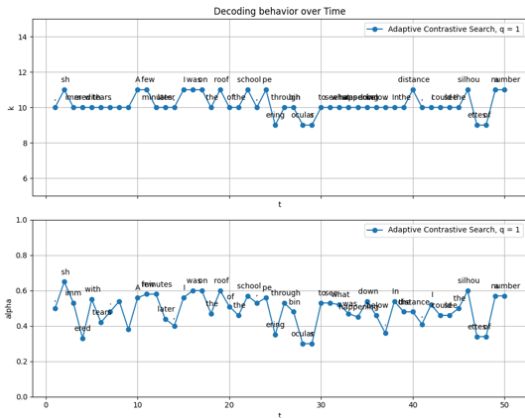
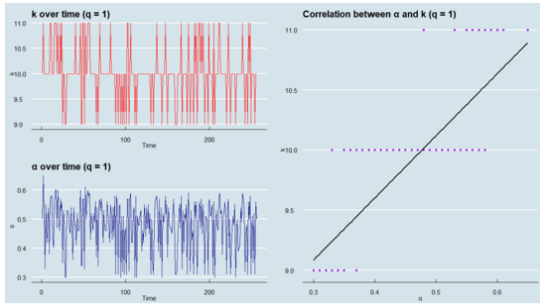


Figure 7: Decoding behavior over time from a Story prompt, $q = 1$.

Prompt: The atmosphere dripped with emotion. Even Sola, the 13-year old, caught the current. Her eyes, fixated on the mother-son scene

Generated story: , shimmered with tears. A few minutes later, I was on the roof of the school, peering through binoculars to see what was happening down below. In the distance, I could see the silhouettes of a number of school buses, their windows blackened by fire. It was hard to make out the number of casualties, but by the time I got back to the bus station, there were at least two or three bodies sprawled on the tarmac. The death toll was expected to rise as ambulances ferried the injured to hospitals across the city. Many of the dead were in their 20s and 30s, including a man in his mid-forties who had been driving a minibus when it was hit by a rocket-propelled grenade. His body was strewn across the road, next to a burnt-out car. At the morgue, an elderly man with a moustache and white turban sat in a chair surrounded by coffins. One of the most horrific scenes of the day was the sight of a little girl cradling her mother's mangled body in her arms. She was barely a year old. After the funerals, hundreds of mourners crowded into

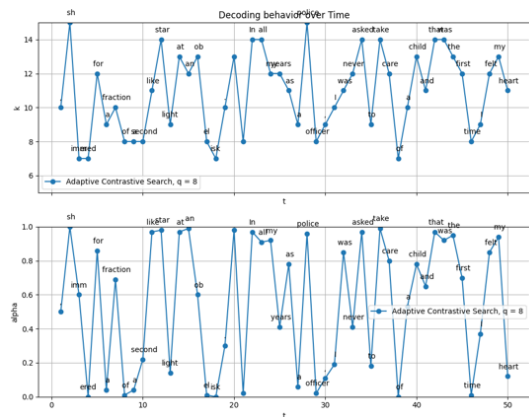
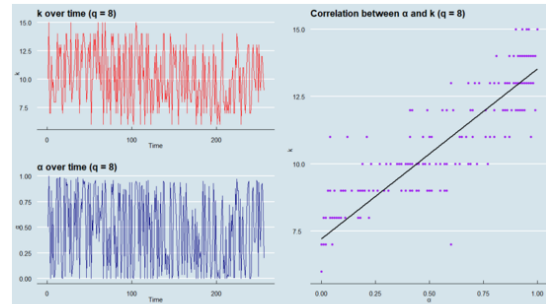


Figure 8: Decoding behavior over time from a Story prompt, $q = 8$.

Prompt: The atmosphere dripped with emotion. Even Sola, the 13-year old, caught the current. Her eyes, fixated on the mother-son scene

Generated story: , shimmered for a fraction of a second like starlight at an obelisk. In all my years as a police officer, I was never asked to take care of a child and that was the first time I felt my heart ache as I walked the beat of the district. There was no mistaking the tears running down my face. After our tour, it was time to eat a celebratory meal that consisted of chicken biryani, roti and samosas. The family seated on the terrace was well-behaved and did not make a peep in our direction. As we chatted amicably, one of the women turned to me and said, "Aunty, what's your job?" I thought it was a good question and tried to find the right answer. "I'm a constable," I said. "That's good," she said without breaking eye contact. "Why are you an constable?" "For two reasons," I told her. "First, it's one of the jobs that requires physical and mental fortitude. The second reason is that in my line of work, every life is precious. You have to make sure that everyone gets a fair

B Proofs

Proof of Proposition 1.

Proof 1 *Per normalization we have for the representations $\|h_v\|_2 = \|h_{x_j}\|_2 = 1$. Further, recall that the cosine distance is defined as*

$$s(h_v, h_{x_j}) = \frac{h_v^\top h_{x_j}}{\|h_v\|_2 \cdot \|h_{x_j}\|_2}$$

We have

$$\begin{aligned} \|h_v - h_{x_j}\|_2^2 &= (h_v - h_{x_j})^\top (h_v - h_{x_j}) \\ &= h_v^\top h_v - 2h_v^\top h_{x_j} + h_{x_j}^\top h_{x_j} \\ &= 2 - 2h_v^\top h_{x_j} \\ &= 2 - 2s(h_v, h_{x_j}) \end{aligned}$$

It follows that

$$\max_j \{s(h_v, h_{x_j})\} = \max_j \left\{ 2 - \frac{\|h_v - h_{x_j}\|_2^2}{2} \right\},$$

which was to be shown. \square

D MAUVE

Dataset	Truncation	# Examples		MAUVE(%) \uparrow			Preferred Method
		Contrastive Search	Adaptive Contrastive Search	Contrastive Search	Adaptive Contrastive Search	Δ	
Wikinews	64	1939	2000	87.42	85.79	-1.63	Contrastive Search
	96	1920	2000	81.11	88.13	7.02	Adaptive Contrastive Search
	128	1859	1977	84.14	85.39	1.25	Adaptive Contrastive Search
	160	1684	1824	84.86	85.78	0.92	Adaptive Contrastive Search
	192	1447	1617	85.23	87.10	1.87	Adaptive Contrastive Search
Wikitext	64	1296	1314	82.78	86.83	4.05	Adaptive Contrastive Search
	96	1280	1314	81.46	85.67	4.21	Adaptive Contrastive Search
	128	1250	1301	77.97	79.82	1.85	Adaptive Contrastive Search
	160	845	889	69.66	80.53	10.87	Adaptive Contrastive Search
	192	529	564	81.50	75.45	-6.05	Contrastive Search
Story	64	1907	1947	84.22	87.04	2.82	Adaptive Contrastive Search
	96	1873	1947	87.82	83.66	-4.16	Contrastive Search
	128	1657	1749	84.74	85.49	0.75	Adaptive Contrastive Search
	160	863	922	83.59	83.68	0.09	Adaptive Contrastive Search
	192	476	518	79.43	83.38	3.95	Adaptive Contrastive Search

Table 8: MAUVE scores as a function of truncation values, across three different datasets. Positive Δ - values indicate a superior performance of our method. The computations were performed with a gpt2-xl model, for CS we used the reported hyperparameters $k = 5$ and $\alpha = 0.6$.