Transfer Learning Targeting Mixed Population: A Distributional Robust Perspective

Keyao Zhan¹, Xin Xiong², Zijian Guo³, Tianxi Cai², and Molei Liu^{*4}

¹Department of Statistics, Peking University.

²Department of Biostatistics, Harvard T.H. Chan School of Public Health. ³Department of Statistics, Rutgers University.

⁴Department of Biostatistics, Columbia Mailman School of Public Health.

July 30, 2024

Abstract

Despite recent advances in transfer learning with multiple source data sets, there still lacks developments for mixture target populations that could be approximated through a composite of the sources due to certain key factors like ethnicity in practice. To address this open problem under distributional shifts of covariates and outcome models as well as the absence of accurate labels on target, we propose a novel approach for distributionally robust transfer learning targeting mixture population. It learns a set of covariate-specific weights to infer the target outcome model with multiple sources, relying on a joint source mixture assumption for the target population. Then our method incorporates a group adversarial learning step to enhance the robustness against moderate violation of the joint mixture assumption. In addition, our framework allows the use of side information like small labeled sample as a guidance to avoid over-conservative results. Statistical convergence and predictive accuracy of our method are quantified through asymptotic studies. Simulation and real-world studies demonstrate the out-performance of our method over existing multi-source and transfer learning approaches.

Keywords: Transfer learning, Multi-source data, Mixture population, Group distributional robustness.

^{*}Email: ml4890@cumc.columbia.edu

1 Introduction

1.1 Motivation

Accurate personalized risk prediction for underrepresented sub-populations is a significantly challenging task in data-driven biomedical research. This difficulty arises from the imbalanced representation and small sample sizes of minority groups in biobank data. For example, the UK biobank (UKB) contains more than 90% subjects of European descent but less than 4% African or South Asian. Such disparity in data collection results in worse prediction accuracy on the minority groups compared to the majority (West et al., 2017). Knowledge transfer approaches like Li et al. (2022) and others address this challenge by leveraging information learned from the majority data to guide analyses with the underrepresented sample. Recent scientific studies (Verma et al., 2023, e.g.) provided evidences for that phenotype-genotype relationships are largely homogeneous between two ancestry subgroups like European and African, which supports the effectiveness of such transfer learning strategies.

Nevertheless, an as important problem, transfer learning from monoethnic sub-populations like European and African to some mixed sub-population like European-African has been overlooked. Moreover, learning on such mixture targets can be even more challenging due to their much lower proportions in general population. For instance, both European-Asian and European-African groups only take up around 0.1% to 0.2% in UKB, which is much smaller even compared to the monoethnic minority groups. Also, statistical learning on subjects registered as "Unknown" or "Other" ethnicity in biobank systems could encounter a similar problem, with these subjects actually coming from multiple known ethnicity groups in unknown proportions. Motivated by this, we focus our primary interest on knowledge transfer from multiple source data sets to some target sample that could be viewed as (or approximated by) a mixture of the sources in certain unknown weights. More generally, such source-mixing target can be naturally found in broader fields, e.g., image recognition with each source set containing only one type of background environment and the target images having multiple types corresponding to different sources.

1.2 Related literature

Multi-source data aggregation is an important field in modern statistical and machine learning research, covering a broad set of topics such as meta-analysis, multi-task learning, and federated learning. In the past years, an extensive set of advancements has came up in this field to address methodological and practical challenges including data heterogeneity, privacy constraint, computation and communication costs, etc (Lin and Zeng, 2010; Cai et al., 2022; Duan et al., 2022; Duan and Wang, 2023, e.g.). Among this comprehensive literature, the work on federated learning with mixture distributions is more relevant to our setup in the sense that the local sites are assumed to be the mixture of some latent subgroups with unknown probabilities. For this problem, Marfoq et al. (2021) proposed an EM algorithm to achieve effective data integration. Tian et al. (2022) and Wu et al. (2023) tackled the specific Gaussian mixture problem in a similar context. Tian et al. (2024) studied the non-asymptotic theory of the EM-based method and improved its robustness to data contamination. Nevertheless, the fundamental goal of this track is to pursue an integrative model working well for the local clients in an average sense, which is essentially different from our transfer learning task with a specific mixture target population. In addition, the distributional robustness to deviation from such mixture or latent subgroup assumptions is a crucial but understudied question in existing federated learning literature.

In the field of domain adaptation and transfer learning, we also notice a number of recent developments in knowledge transfer with multiple source data sets from distinguished cohorts or populations. For example, Li et al. (2022) and Tian and Feng (2023) leveraged information from source data through sparse shrinkage on target and introduced algorithmfree procedures to detect transferable ones from multiple sources. Cai et al. (2024) and He et al. (2024) improved this so called Trans-Lasso framework by addressing covariate shift and semi-supervised problems. Gu et al. (2022) and Lin et al. (2024) extended Trans-Lasso to angle-based or profile transfer learning approaches, in which the target model can be approximated using a linear combination of the coefficients provided by the sources. In addition, Tian et al. (2023) and Li and Zhang (2023) both considered a federated transfer learning setting with the source and target model coefficients embedded in a low-rank latent space. As mentioned in Section 1.1, although these state-of-the-art approaches demonstrate solid utility and great potential in multi-source transfer learning, none of them can effectively leverage the source-mixing target structure for efficient knowledge transfer. Moreover, all the aforementioned methods strictly rely a decent number of labeled samples (with Y) on the target to work well while in our setup to be introduced later, the labels could be scarce or even absent.

At last, our work is closely relevant to the group distributionally robust learning (DRL) that has frequently studied in recent years to boost the out-of-sample generalizability and fairness of multi-source learning. As one seminal machine learning work in this field, Sagawa et al. (2019) considered the adversarial learning task of minimizing the worst-case loss over several pre-defined groups and addressed the poor generalization issue of deep neural network through extra regularization. Ghosal and Li (2023) further studied a probabilistic group DRL problem with subject-specific probabilities assigned to each group in the adversarial learning. In addition, Zhang et al. (2024) studied the optimal sample complexity of group DRL in the on-demand sampling regime. In statistical literature, Meinshausen and Bühlmann (2015) proposed a maximin framework that aims at maximizing the minimum reduced variance of the linear model on multiple data sources. Under this framework, Guo (2023) developed a resampling approach to realize non-normal and high-dimensional inference on the maximin effects. Wang et al. (2023) extended the linear parametric regression to general machine learning with the least square loss. However, these existing group DRL methods tend to produce over-conservative integrative estimations as their pure worst-case optimization strategy tends to shrink the learner to zero (Bühlmann and Meinshausen, 2015).

To mitigate the conservativeness of group DRL methods, Xiong et al. (2023) developed a distributionally robust transfer learning approach that leverages a set of labeled samples on

target to guide the group DRL with multi-source data sets, which avoids strong shrinkage to zero and ensures the predictive performance on target. Mo et al. (2024) introduced a group minimax regret framework that uses the empirical risk minimizer to replace the baseline null model in maximin regression. They demonstrated that the minimax regret estimator could stay more close to the center of the local models instead of zero. However, Xiong et al. (2023) and Mo et al. (2024) require labeled samples on target with their size to be large enough for target-only regression. This is hard to satisfy in our setup as the mixture target typically has an unscalable or even null set of labels in EHR-linked biobank. Our interest actually lies on further alleviating such reliance on labeled data by leveraging the source-mixing structure of the target.

1.3 Our contribution

We propose a novel framework for distributionally Robust and Efficient transfer learning targeting **MIX** ture population (REMIX). REMIX first leverages general machine learning methods to approximate the covariate distribution on target with a mixture of the sources. It then performs transfer learning according to the assumption that the joint distribution of the covariates and outcome on target can be well-approximated by some mixture of the sources. In this step, a model-assisted construction is used to adjust for covariate shift between the sources and target while maintaining robustness to the machine learning errors. More importantly, REMIX incorporates group adversarial learning in order to maintain distributional robustness to moderate violation of the joint mixture assumption imposed on the target population. Our framework also allows flexible specification and tuning on the degree of uncertainty in this DRL procedure to ensure good performance on target and avoid over-conservativeness. Through theoretical analysis, REMIX is shown to achieve desirable convergence to its population value, as well as good predictive performance on target when the joint mixing assumption tends to hold. In terms of prediction and out-of-distribution generalization, REMIX outperforms existing transfer learning and group DRL strategies in our simulation and real-world studies. Regarding comprehensive literature, the novelty and main contributions of our work can be summarized as follows.

First, REMIX fills the gap of existing multi-source transfer learning tools in addressing mixture target population as introduced in Section 1.1. Compared to existing approaches like Li et al. (2022) and Xiong et al. (2023), a main advantage of leveraging the joint mixing structure in REMIX is to realize efficient and distributional robust knowledge transfer in a more challenging setup with the outcome model shift between each source and the target, as well as the scarcity or even absence of labeled sample on target. Zijian: better with a picture? These have not been readily achieved in existing methodology literature, although such challenges are frequently encountered in various application scenarios such as EHR and biobank studies.

Second, REMIX provides a flexible framework to realize better trade-off between the predictive performance on some pre-defined target distribution and the generalizability out of this distribution. Most existing DRL methods fail to predict well on testing data since their uncertainty sets of adversarial distributions are specified to be overly general and large (e.g.,

the whole simplex of the source models as used in Meinshausen and Bühlmann (2015)), which usually results in over-conservativeness. In REMIX, we address this problem by deriving a guidance for the uncertainty set based on the joint-mixing assumption for the target distribution, which is in more favor of the predictive performance on target compared to existing DRL methods. Meanwhile, our adversarial learning part ensures robustness to the possible deviation of the actual target from such assumptions. Our new construction allows one to flexibly specify and tune the degree of uncertainty leveraging side information and according to the real needs.

In addition, our work provides a robust and efficient estimation pipeline for group adversarial learning motivated by the debiased/double machine learning framework (Chernozhukov et al., 2018). This development handles common statistical issues in the context of group DRL including model misspecification, covariate shift, and presence of auxiliary features.

2 Problem Setup

For a positive integer n, denote by $[n] = \{1, \ldots, n\}$. Suppose that we have access to L source data sets $\{X^{(l)}, Y^{(l)}\}_{1 \leq l \leq L}$ collected from different sub-populations. For $1 \leq l \leq L$, assume that $\{X_i^{(l)}, Y_i^{(l)}\}_{1 \leq i \leq n_l}$ are generated following

$$X_i^{(l)} \stackrel{i.i.d}{\sim} \mathbb{P}_X^{(l)}, \quad Y_i^{(l)} \mid X_i^{(l)} \stackrel{i.i.d}{\sim} \mathbb{P}_{Y|X}^{(l)} \quad \text{for} \quad i \in [n_l],$$

where $\mathbb{P}_X^{(l)}$ denotes the distribution function of $X_i^{(l)} \in \mathbb{R}^p$ and $\mathbb{P}_{Y|X}^{(l)}$ denotes the conditional distribution of the outcome $Y_i^{(l)} \in \mathbb{R}$ given $X_i^{(l)}$. To accommodate a broader semi-supervised setup, we assume there are potentially more unlabelled sample with only covariates $X_i^{(l)}$ observed for $(n_l < i \leq N_l)$ in each source l, where N_l can be much larger than n_l . This is a common setup in EHR data sets since collection of the true disease outcomes usually require laborious chart-reviewing or long-term follow-up.

Suppose the covariates $X = (A^{\mathsf{T}}, W^{\mathsf{T}})^{\mathsf{T}}$, where $A_{q \times 1}$ denotes a vector of predictors for Y with its first element being constant 1 and $W_{(p-q)\times 1}$ denotes some auxiliary covariates that are informative to Y but not included in the outcome model of our interest. In our primarily interested setup, X can be high-dimensional and A can be either low- or high-dimensional. In summary, for each source $l \in [L]$, we observe data $\mathcal{D}_l = \left\{ (A_i^{(l)}, W_i^{(l)})_{i \in [N_l]}, (Y_i^{(l)})_{i \in [n_l]} \right\}$. For the target population, assume the covariates and outcome $\left\{ X_i^{(0)} = (A_i^{(0)}, W_i^{(0)}), Y_i^{(0)} \right\}$ to follow

 $X_i^{(0)} \stackrel{i.i.d}{\sim} \mathbb{P}_X^{(0)}, \quad Y_i^{(0)} \mid X_i^{(0)} \stackrel{i.i.d}{\sim} \mathbb{P}_{Y|X}^{(0)} \quad \text{for} \quad i \in [N_0].$

Our goal is to construct a predictive and generalizable (linear) risk model for $Y \sim A$ on the target leveraging the source data sets. In our setup, the main challenges on this goal arise from two types of distributional shifts: (i) covariate shift: $\mathbb{P}_X^{(0)}$ and $\{\mathbb{P}_X^{(l)}\}_{l\in[L]}$ can be all different; (ii) posterior drift: $\mathbb{P}_{Y|X}^{(0)}$ and $\{\mathbb{P}_{Y|X}^{(l)}\}_{l\in[L]}$ can be all different. For now, we focus on the unsupervised domain adaptation regime where we only have access to covariate observations $\{X_i^{(0)}\}_{i \in [N_0]}$ but no outcome observations $\{Y_i^{(0)}\}_{i \in [N_0]}$ on the target, which is challenging yet common in practice such as EHR and biobank studies due to the high cost in collecting outcome labels.

Remark 1. Auxiliary or surrogate features W have been frequently considered and used in the transfer learning literature (Liu et al., 2023, e.g.). Taking EHR-linked genetic risk studies as an example, Y is the primary phenotype obtained via manual chart reviewing, A is taken as relevant genetic markers, and W could include EHR proxies of Y such as relevant diagnostic codes and laboratory test results. Since the scientific goal is to use the genes to predict the disease risk, our interest is modeling $Y \sim A$ rather than $Y \sim A, W$. Nevertheless, W can still serve as nuisance features since it is not only informative to Y but also a characteristic of the distributional shift between the sources and target in transfer learning.

Importantly, we introduce the key assumption that the joint distribution $(\mathbb{P}_X^{(0)}, \mathbb{P}_{Y|X}^{(0)})$ on target is close to a mixture of the source distributions $(\mathbb{P}_X^{(l)}, \mathbb{P}_{Y|X}^{(l)})$ for $l \in [L]$. The ideal version of this joint-mixing assumption can be expressed as

$$(X^{(0)}, Y^{(0)}) \sim \mathbb{P}^{(0)} := (\mathbb{P}_X^{(0)}, \mathbb{P}_{Y|X}^{(0)}) = \sum_{l=1}^L \rho_l^* \mathbb{P}^{(l)} := \sum_{l=1}^L \rho_l^* (\mathbb{P}_X^{(l)}, \mathbb{P}_{Y|X}^{(l)}), \tag{1}$$

where $\rho^* = (\rho_1^*, \ldots, \rho_L^*)$ is the set of (prior) mixing probabilities belonging to the *L*-dimensional simplex $\Delta_L = \{\rho \in \mathbf{R}_L \mid \sum_{l=1}^L \rho_l = 1, \rho_l \ge 0, \forall l \in [L]\}$. Note that assumption (1) also implies a mixture form of the marginal distribution of X:

$$\mathbb{P}_{X}^{(0)} = \sum_{l=1}^{L} \rho_{l}^{*} \mathbb{P}_{X}^{(l)}.$$
(2)

As will be shown later, under assumption (1), $\mathbb{P}_{Y|X}^{(0)}$ is identifiable from \mathcal{D}_l 's and \mathcal{D}_0 even without any observations of $Y^{(0)}$ on the target. This will be particularly useful for the "source-joint-mixing" type of target populations introduced in Section 1.1. However, requiring (1) to strictly hold is too stringent in practice. Thus, the key spirit of our method is to leverage (1) for effective transfer learning in our introduced setup while maintaining (distributional) robustness to its violation in certain degree.

3 Method

3.1 General framework and identification

We first introduce the class of source mixtures used for approximating the target and conducting knowledge transfer. Let $d\mathbb{P}$ denote the probability density or mass function of

any distribution function \mathbb{P} . For any $\rho \in \Delta_L$, define the mixture density function as

$$\operatorname{Mix}(x;\rho) = \sum_{l=1}^{L} \rho_l d\mathbb{P}_X^{(l)}(x).$$

To sample X following $\operatorname{Mix}(x; \rho)$, one can first generate a latent variable $S \in [L]$ with $\mathbb{P}(S = l) = \rho_l$ indicating the original source, and then sample $X \mid S = l \sim \mathbb{P}_X^{(l)}$. When the ideal joint-mixing assumption (1) strictly holds, we can derive that $X_i^{(0)} \sim \operatorname{Mix}(x; \rho^*)$ and $Y_i^{(0)} \mid X_i^{(0)}$ follows the conditional mixture model using Bayes Formula:

$$\mathbb{P}_{Y|X}^{(0)} = \sum_{l=1}^{L} \eta_l(X;\rho^*) \mathbb{P}_{Y|X}^{(l)} \quad \text{where} \quad \eta_l(X;\rho) := \mathbb{P}_{\text{Mix}(\rho)}(S = l \mid X) = \frac{\rho_l d\mathbb{P}_X^{(l)}(X)}{\sum_{k=1}^{L} \rho_k d\mathbb{P}_X^{(k)}(X)}.$$
 (3)

Here $\mathbb{P}_{\text{Mix}(\rho)}$ denotes the probability measure under the distribution of (S, X) with the weights in ρ as introduced above, and we denote by $\eta(X; \rho) = (\eta_1(X; \rho), \dots, \eta_L(X; \rho))$. This motivates us to consider the least square regression

$$\bar{\beta}_{\rho}^{\mathrm{mix}} = \arg\max_{\beta} \mathbb{E}_{(X,Y)\sim(\mathbb{P}_X^{(0)},\sum_{l=1}^L \eta_l(X;\rho)\mathbb{P}_{Y|X}^{(l)})} \left[Y^2 - (Y - A^{\mathsf{T}}\beta)^2\right],\tag{4}$$

with its reward function taken as the reduced variance of Y by $A^{\mathsf{T}}\beta$, and some ρ enabling proper approximation of the target with source mixture distribution and $\mathbb{E}_{(X,Y)\sim\mathbb{P}}$ denoting the expectation taken with respect to the distribution \mathbb{P} . Without observations of Y on the target, it is natural to find such ρ through the best mixture approximation of covariates X

$$\bar{\rho} = \min_{\rho \in \Delta_L} \operatorname{KL}\left(\mathbb{P}_X^{(0)} \mid \operatorname{Mix}(x;\rho)\right) = \max_{\rho \in \Delta_L} \mathbb{E}_{\mathbb{P}_X^{(0)}} \log\{\operatorname{Mix}(X;\rho)\},\tag{5}$$

where $\operatorname{KL}(\cdot | \cdot)$ represents the Kullback–Leibler (KL) divergence. Note that (5) is a convex problem typically having unique solution regardless of assumption (1) and when (1) holds, we have $\bar{\rho} = \rho^*$ and $\operatorname{Mix}(x; \bar{\rho}) = \mathbb{P}_X^{(0)}$; see more details in Section 4. Plugging $\bar{\rho}$ in (4) and solving it, one can obtain the best linear model for $Y \sim A$ in the source-mixing regime with the coefficients denoted as $\bar{\beta}^{\min} = \bar{\beta}_{\bar{\rho}}^{\min}$. Though possibly misspecified on the actual form of $Y \sim A$, this linear model tends to work well when (1) holds according to our discussion above. Moreover, our introduced $\bar{\beta}^{\min}$ is identifiable in our setup without any observations of $Y_i^{(0)}$.

However, in real world, the source-mixing assumption (1) may fail or just approximately hold true, which will in turn affect the accuracy and generalizablity of $\bar{\beta}^{\text{mix}}$ on the target population. Since a major goal of our designed procedure is to ensure the accuracy and robustness of the transfer learning algorithm, we shall leverage the distributional robust optimization to enhance the robustness of the prediction model. To achieve this, we introduce the source-mixing uncertainty set:

$$\mathcal{M}(s_{\max}) = \left\{ \left(\mathbb{P}_X^{(0)}, \mathbb{T}_{Y|X}(y; s, \delta) \right) : \delta \in \Delta_L, \ s \in [0, s_{\max}] \right\},\tag{6}$$

where the adversarial distribution is defined as

$$\mathbb{T}_{Y|X}(y;s,\delta) = (1-s)\sum_{l=1}^{L}\eta_l(X;\bar{\rho})\mathbb{P}_{Y|X}^{(l)}(y) + s\sum_{l=1}^{L}\delta_l\mathbb{P}_{Y|X}^{(l)}(y).$$
(7)

The first term in $\mathbb{T}_{Y|X}(y; s, \delta)$ corresponds to the conditional mixture distribution of Y implied by (1) and (3) with proportion 1 - s. The second term is a marginal mixture taking the remaining proportion of s with $\delta = (\delta_1, \ldots, \delta_L)$ on the simplex encoding the adversarial weights assigned to the sources $l = 1, \ldots, L$. Here, s_{\max} is a hyper-parameter controlling the upper range of s, i.e., our trust in assumption (1), which will be discussed in more details later. Based on (6), we define the population level REMIX regression coefficients as

$$\bar{\beta}_{\mathsf{RE}}(s_{\max}) := \underset{\beta \in \mathbb{R}^q}{\arg \max} \min_{\mathbb{P} \in \mathcal{M}(s_{\max})} R_{\mathbb{P}}(\beta), \tag{8}$$

where the reward function $R_{\mathbb{P}}(\beta) := \mathbb{E}_{(X,Y)\sim\mathbb{P}} \left[Y^2 - (Y - A^{\mathsf{T}}\beta)^2\right]$ measures the explained variance of $Y \sim A^{\mathsf{T}}\beta$ compared to the null model on \mathbb{P} . In a similar spirit to group DRL, (8) aims at optimizing the worst-case predictive performance on the uncertainty set $\mathcal{M}(s_{\max})$. It can be viewed as a two-side game that one agent search over $\mathcal{M}(s_{\max})$ to find the most adverse target distribution \mathbb{P} for some β and another agent update β to maximize the reward for such an unfavorable target population. Different from Xiong et al. (2023), this construction does not rely on observations of $Y^{(0)}$ on the target.

Importantly, the hyper-parameter s_{max} in (8) encodes a trade-off on the degree of adversary. The smaller s_{max} gets, the smaller $\mathcal{M}(s_{\text{max}})$ is, and the more closer $\bar{\beta}_{\mathsf{RE}}(s_{\text{max}})$ will be to $\bar{\beta}^{\text{mix}}$ that works under the ideal case (1). When $s_{\text{max}} = 0$, we have $\bar{\beta}_{\mathsf{RE}}(s_{\text{max}}) = \bar{\beta}^{\text{mix}}$ without robustness to any adversarial distributions departing from (1). On the other hand, a larger s_{max} results in a larger uncertainty set more likely to contain the actual target $\mathbb{P}^{(0)}$ and produces a more robust model. When $s_{\text{max}} = 1$, $\bar{\beta}_{\mathsf{RE}}(s_{\text{max}})$ will approach the covariate-shift-adjusted maximin model introduced in Guo (2023) without any consideration on our source-joint-mixing regime, which may be over-conservative. We will discuss on potential tuning strategies of s_{max} in Section 3.3 and study the impact of s_{max} in both theoretical and numerical studies. For identification of $\bar{\beta}_{\mathsf{RE}}(s_{\text{max}})$, we derive its explicit form in the following theorem.

Theorem 1. The solution to (8) can be identified from:

$$\bar{\beta}_{\mathsf{RE}}(s_{\max}) = \sum_{l=1}^{L+1} \gamma_l^* \bar{\beta}_l \quad \text{with} \quad \gamma^* = \underset{\gamma \in \mathcal{S}(s_{\max})}{\arg\min \gamma^{\mathsf{T}} \Gamma \gamma}, \tag{9}$$

where $\mathcal{S}(s_{\max}) = \{ \gamma \mid \gamma \in \Delta_{L+1}, \gamma_{L+1} \in [0, s_{\max}] \}, \ \bar{\beta}_{L+1} = \bar{\beta}^{\min} \text{ is as defined in (4)},$

$$\bar{\beta}_{l} = \operatorname*{arg\,min}_{\beta \in \mathbb{R}^{q}} \mathbb{E}_{(X,Y) \sim (\mathbb{P}_{X}^{(0)}, \mathbb{P}_{Y|X}^{(l)})} \left(Y - A^{\mathsf{T}}\beta\right)^{2},\tag{10}$$

the matrix $\Gamma = (\Gamma_{l,k})_{l,k \in [L+1]}$ with $\Gamma_{l,k} = \bar{\beta}_l^{\mathsf{T}} \bar{\Sigma}^{(0)} \bar{\beta}_k$, and $\bar{\Sigma}^{(0)} = \mathbb{E}_0 A A^{\mathsf{T}}$ with $\mathbb{E}_0 := \mathbb{E}_{\mathbb{P}_X^{(0)}}$.

By Theorem 1, the REMIX model $\bar{\beta}_{\mathsf{RE}}(s_{\max})$ is a convex combination of $\bar{\beta}_l$'s $(l \in [L])$ and $\bar{\beta}^{\min}$, defined as the least square regression coefficients for $Y \sim A$ on hypothetical populations $(\mathbb{P}_X^{(0)}, \mathbb{P}_{Y|X}^{(l)})$'s and $(\mathbb{P}_X^{(0)}, \sum_{l=1}^L \eta_l(X; \bar{\rho}) \mathbb{P}_{Y|X}^{(l)})$ respectively. The corresponding weights γ^* are solved via the quadratic problem in (9). This identification theory has a similar spirit as the maximin regression problem studied in Meinshausen and Bühlmann (2015) and Guo (2023). Different from them, our framework accommodates potential misspecification of the linear model of $Y \sim A$, which is addressed by our semiparametric estimation method to be introduced in Section 3.2. Another main distinguishment of our proposal is that the source-mixing model $\bar{\beta}^{\min}$ is included with its weight ensured to be larger than or equal to $1 - s_{\max} > 0$.

3.2 Estimation procedures

3.2.1 Doubly robust construction

Let $\bar{\eta}_l(x) = \eta_l(x;\bar{\rho}), \ \hat{\mathcal{P}}_0 = N_0^{-1} \sum_{i=1}^{N_0}$ be the empirical mean operator on the target data \mathcal{D}_0 and $\hat{\mathcal{P}}_l = n_l^{-1} \sum_{i=1}^{n_l}$ denote the mean on the labeled sample from source l. For $u = (u_1, \ldots, u_d)^{\mathsf{T}} \in \mathbb{R}^d$, we define its ℓ_r norm as $||u||_r = \left(\sum_{j=1}^d |u_j|^r\right)^{1/r}$ for any r > 0. Following Theorem 1, the key step in finite sample implementation is to estimate coefficients $\bar{\beta}_l$ for $l \in [L+1]$ where $\bar{\beta}_{L+1} = \bar{\beta}^{\mathrm{mix}}$. Here we use L+1 for mathematical convenience in expressing vectors and matrices. According to their definition, we have

$$\bar{\beta}_l = (\bar{\Sigma}^{(0)})^{-1} \mathbb{E}_0 \bar{m}_l(X) A, \ l \in [L]; \quad \bar{\beta}_{L+1} = (\bar{\Sigma}^{(0)})^{-1} \sum_{l=1}^L \mathbb{E}_0 \bar{\eta}_l(X) \bar{m}_l(X) A,$$

where $\bar{m}_l(x) = \mathbb{E}_{\mathbb{P}_{Y|X}^{(l)}}(Y \mid X = x)$ is the conditional mean of $Y \mid X$ on source l. Suppose that we already obtain the estimators \hat{m}_l and $\hat{\eta}_l$ for the nuisance functions \bar{m}_l and $\bar{\eta}_l$ using general learning methods like parametric regression and modern machine learning tools, the specific procedure of which will be introduced in Section 3.2.2. Then for low-dimensional regression of $Y \sim A$, we can derive the plug-in estimators as:

$$\widetilde{\beta}_{l} = (\widehat{\Sigma}^{(0)})^{-1} \widehat{\mathcal{P}}_{0} \widehat{m}_{l}(X_{i}^{(0)}) A_{i}^{(0)}, \ l \in [L]; \quad \widetilde{\beta}_{L+1} = (\widehat{\Sigma}^{(0)})^{-1} \sum_{l=1}^{L} \widehat{\mathcal{P}}_{0} \widehat{\eta}_{l}(X_{i}^{(0)}) \widehat{m}_{l}(X_{i}^{(0)}) A_{i}^{(0)}, \quad (11)$$

where $\widehat{\Sigma}^{(0)} = \widehat{\mathcal{P}}_0 A_i^{(0)} (A_i^{(0)})^{\intercal}$. Nevertheless, such $\widetilde{\beta}_l$'s may suffer from large bias due to the potential misspecification or excessive estimation errors in \widehat{m}_l , especially when it is obtained with a relatively small labeled sample with the size n_l . Inspired by the doubly robust (Bang and Robins, 2005, e.g.) or double machine learning (DML) framework (Chernozhukov et al.,

2018), we propose to correct the bias incurred by $\hat{m}_l - \bar{m}_l$ through the augmented estimation

$$\widehat{\beta}_{l} = \widetilde{\beta}_{l} + \widehat{\mathcal{P}}_{l}\widehat{w}_{l}(X_{i}^{(l)})[Y_{i}^{(l)} - \widehat{m}_{l}(X_{i}^{(l)})](\widehat{\Sigma}^{(0)})^{-1}A_{i}^{(l)}, \quad \forall \ l \in [L],$$
(12)

$$\widehat{\beta}_{L+1} = \widetilde{\beta}_{L+1} + \sum_{l=1}^{L} \widehat{\mathcal{P}}_{l} \widehat{\eta}_{l}(X_{i}^{(l)}) \widehat{w}_{l}(X_{i}^{(l)}) [Y_{i}^{(l)} - \widehat{m}_{l}(X_{i}^{(l)})] (\widehat{\Sigma}^{(0)})^{-1} A_{i}^{(l)},$$
(13)

where $\widehat{w}_l(x)$ is an estimator of the density ratio between the target and source l: $\overline{w}_l(x) = dP_X^{(0)}(x)/dP_X^{(l)}(x)$ obtained using general learning methods. For high-dimensional A, we can naturally extend this doubly robust construction to a regularized regression version with penalties like ridge or Lasso. See the detailed forms in Appendix.

Essentially, β_l 's are parameters defined on some hypothetical (counterfactual) populations without actual samples due to covariate shift. Thus, our case falls into the semiparametric estimation problem frequently studied in the contexts of missing data and causal inference. Inspired by existing semiparametric literature (Robins et al., 1994, e.g.), we establish in Proposition 1 the doubly robust property of $\hat{\beta}_l$ with respect to the two sets of nuisance models w_l and m_l for $l \in [L + 1]$.

Proposition 1. Denote by $\widehat{\beta}_l = \widehat{\beta}_l(\widehat{w}_l, \widehat{m}_l), l \in [L]$ and $\widehat{\beta}_{L+1} = \widehat{\beta}_{L+1}(\widehat{\eta}_l, \widehat{w}_l, \widehat{m}_l)$ in (12) and (13). We have that $\mathbb{E}\widehat{\beta}_l(w_l, m_l) = \overline{\beta}_l$ and $\mathbb{E}\widehat{\beta}_{L+1}(\overline{\eta}_l, w_l, m_l) = \overline{\beta}_{L+1}$ when either $w_l = \overline{w}_l$ or $m_l = \overline{m}_l$ holds for every $l \in [L]$.

Proposition 1 implies that our constructions in (12) and (13) are less sensitive and doubly robust to the misspecification or excessive errors in the source-target density ratio model w_l and the conditional mean model m_l . More detailed and rigorous quantification on this fact will be given in Theorem 2. In our primary setup with the semi-supervised structure $N_l \gg n_l$ and larger source samples $N_l \gg N_0$ for $l \in [L]$, our estimation procedure of η_l to be introduced in Section 3.2.2 can include larger samples for machine learning and, thus, produce an $\hat{\eta}_l$ converging substantially faster than \hat{w}_l and \hat{m}_l when these models are of similar complexity. One can find more details in Section 4.

After obtaining $\widehat{\beta}_l$ for $l \in [L + 1]$, we can directly use Theorem 1 to derive the REMIX estimator with some pre-specified s_{\max} . In specific, we compute $\widehat{\Gamma} = (\widehat{\Gamma}_{l,k})_{l,k\in[L+1]}$ with $\widehat{\Gamma}_{l,k} = \widehat{\beta}_l^{\mathsf{T}} \widehat{\Sigma}^{(0)} \widehat{\beta}_k$ and $\widehat{\Sigma}^{(0)} = \widehat{\mathcal{P}}_0 A^{(0)} (A^{(0)})^{\mathsf{T}}$, then solve the quadratic programming problem for the adversarial weights $\widehat{\gamma} = \arg \min_{\gamma \in \mathcal{S}(s_{\max})} \gamma^{\mathsf{T}} \widehat{\Gamma} \gamma$ and obtain $\widehat{\beta}_{\mathsf{RE}}(s_{\max}) = \sum_{l=1}^{L+1} \widehat{\gamma}_l \widehat{\beta}_l$. In our setup, estimating the nuisance functions in (11), (12) and (13) is not a trivial application of machine learning considering the source-mixture structure and the relatively small size of the target data compared to the sources. Next, we shall propose a novel pipeline for efficient estimation of $\overline{\eta}_l$, \overline{w}_l and \overline{m}_l allowing the use of general machine learning methods.

3.2.2 Estimation of nuisance models

The conditional mean model estimator \widehat{m}_l can be obtained in a straightforward way, regressing $Y^{(l)} \sim X^{(l)}$ on the n_l labeled sample in source l, using arbitrary learning methods such as Lasso, random forest, and neural networks. To estimate $\overline{\eta}_l$ in (3) with unknown $\overline{\rho}_l$ defined by (5), one may consider first estimating each $d\mathbb{P}_X^{(l)}$ for $l \in [L]$, then plugging them into the empirical version of (5) on the target sample to estimate $\bar{\rho}_l$, and using the estimators of $d\mathbb{P}_X^{(l)}$ and $\bar{\rho}_l$ for construction. However, this procedure may result in poor accuracy due to the common difficulty in estimating potentially high-dimensional density functions like $\mathbb{P}_X^{(l)}$ (Gretton et al., 2009).

To avoid this issue, our idea is to leverage the fact that

$$\bar{\eta}_l(x) = \frac{\bar{\rho}_l \bar{r}_l(x)}{\sum_{k=1}^L \bar{\rho}_k \bar{r}_k(x)}; \quad \bar{\rho} = \max_{\rho \in \Delta_L} \mathbb{E}_{\mathbb{P}_X^{(0)}} \log\Big(\sum_{l=1}^L \bar{\rho}_l \bar{r}_l(x)\Big), \tag{14}$$

where $\bar{r}_l(x)$ is some density ratio function

$$\bar{r}_l(x) := \frac{d\mathbb{P}_X^{(l)}(x)}{d\mathbb{P}_X^{(\text{ref})}(x)} = \frac{d\mathbb{P}_X^{(0)}(x)}{\bar{w}_l(x)d\mathbb{P}_X^{(\text{ref})}(x)}, \quad l \in [L]$$

and $\mathbb{P}_X^{(\text{ref})}$ is an arbitrary reference distribution with its domain covering each source l and will be specified later. Based on (14), we can replace the need in estimating $d\mathbb{P}_X^{(l)}$ with $\bar{r}_l(x)$, which can be converted to a classification problem. In specific, for each $l \in [L]$, we merge $\{X_i^{(l)}\}_{i \in [N_l]}$ with samples from the reference distribution $\{X_i^{(\text{ref})}\}$ and denote an observation randomly drawn from this pooled data set as $\tilde{X}_i^{(l)}$. Then define a response $G_i^{(l)} \in \{0, 1\}$ such that $G_i^{(l)} = 1$ if $\tilde{X}_i^{(l)}$ is actually from source l and $G_i^{(l)} = 0$ if $\tilde{X}_i^{(l)}$ is from the reference data set. Then we have $d\mathbb{P}_X^{(l)}(x) = d\mathbb{P}(x \mid G_i^{(l)} = 1)$ and $d\mathbb{P}_X^{(\text{ref})}(x) = d\mathbb{P}(x \mid G_i^{(l)} = 0)$ and that

$$\bar{r}_l(x) = \frac{\mathbb{P}(G_i^{(l)} = 0)}{\mathbb{P}(G_i^{(l)} = 1)} \frac{\mathbb{P}(G_i^{(l)} = 1 \mid \tilde{X}_i^{(l)} = x)}{\mathbb{P}(G_i^{(l)} = 0 \mid \tilde{X}_i^{(l)} = x)}.$$
(15)

In (15), $\mathbb{P}(G_i^{(l)} = 0)/\mathbb{P}(G_i^{(l)} = 1)$ can be approximated by the sample size ratio between the reference data and source l, and $\mathbb{P}(G_i^{(l)} = 1 | \tilde{X}_i^{(l)} = x)$ can be estimated using general machine learning methods such as logistic Lasso and random forest classifier on the full source samples with sizes N_l 's. When $\mathbb{P}_X^{(\text{ref})}$ is properly specified, such a classification task is typically much easier to implement and have more accuracy compared to the direct estimation of $d\mathbb{P}_X^{(l)}(x)$. Alternatively, one could also estimate \bar{r}_l using covariate balancing approaches such as Gretton et al. (2009) and Imai and Ratkovic (2014).

Remark 2. For the sake of estimation efficiency, the reference sample $\{X_i^{(\text{ref})}\}\$ can be taken as either (i) the source site with the largest sample size or (ii) the pool of all source samples, to maixmize the size of training data. Choice (ii) also ensures sufficient overlap between $\mathbb{P}_X^{(\text{ref})}$ and every $\mathbb{P}_X^{(l)}$ and, consequently, more stable training with general machine learning. Empirical estimation under choice (ii) can be realized by randomly splitting each \mathcal{D}_l into two sets with certain proportions, pooling one of them together for $l \in [L]$ to form the reference data, and learning $\overline{r}_l(x)$ by classifying the other set versus the pooled reference data. With the estimator $\hat{r}_l(x)$, we can then estimate ρ through

$$\widehat{\rho} = \underset{\rho \in \Delta_L}{\operatorname{arg\,max}} \ \widehat{\mathcal{P}}_0 \log \left(\sum_{l=1}^L \rho_l \widehat{r}_l(x) \right) + \lambda \|\rho\|_2^2, \tag{16}$$

and obtain the posterior weights as

$$\widehat{\eta}_l(x) = \widehat{\rho}_l \widehat{r}_l(x) / \sum_{k=1}^L \widehat{\rho}_k \widehat{r}_k(x).$$
(17)

In (16), the ridge penalty on ρ is introduced with a small λ to secure a unique and stable solution when some sources l and k have extremely close density functions of X and highly correlated $\hat{r}_l(X)$ and $\hat{r}_k(X)$ on the target sample. For the density ratio between source l and target \bar{w}_l , we provide two options on its estimation. The first one is to use a similar procedure as introduced above to obtain a general machine learning estimate $\hat{r}_0(x)$ of $d\mathbb{P}_X^{(0)}(x)/d\mathbb{P}_X^{(ref)}(x)$ with the target and reference sample, and take each $\hat{w}_l(x) = \hat{r}_0(x)/\hat{r}_l(x)$. When the target has a relatively small sample size N_0 compare to the sources, the error of \hat{w}_l tends to be dominated by $\hat{r}_0(x)$ and the small N_0 .

This motivates us to propose an alternative option by trusting the mixture form of $\mathbb{P}_X^{(0)}$ in (2) and taking advantage of the mediating results in estimating $\hat{\eta}_l$. In specific, one could use the mixture of density ratio $\sum_{l=1}^{L} \hat{\rho}_l \hat{r}_l(x)$ fitted from (16) to approximate $\hat{r}_0(x)$ and again take $\hat{w}_l(x) = \hat{r}_0(x)/\hat{r}_l(x)$. This strategy can alleviate the small \mathcal{D}_0 issue because given $\hat{r}_l(x)$ estimated using the relative large source data sets, (16) is an *M*-estimation problem only involving *L* parameters in ρ rather than the complex models for *X*, which typically attains a parametric convergence rate with respect to the sample size N_0 ; see Lemma 1 for more details. However, this approach is subject to potential bias caused by the misspecification of (2), which is not an issue of our first option.

Inspired by Chernozhukov et al. (2018), we also use cross-fitting in our framework to remove excessive bias caused by the complicated machine learning estimation of the nuisance models. For simplicity, notations related to this procedure is omitted in the main paper. We shall shortly introduce it here with the complete details presented in Appendix. For all the sources $l \in [L]$, we randomly partition \mathcal{D}_l into two disjoint subsets \mathcal{A}_l and \mathcal{B}_l with an equal size, and construct two sets of estimators $\{\widehat{w}_l^A, \widehat{\eta}_l^A, \widehat{m}_l^A : l \in [L]\}$ and $\{\widehat{w}_l^B, \widehat{\eta}_l^B, \widehat{m}_l^B :$ $l \in [L]\}$ separately using $\mathcal{A} = \bigcup_{l=1}^L \mathcal{A}_l$ and $\mathcal{B} = \bigcup_{l=1}^L \mathcal{B}_l$, with the whole target sample \mathcal{D}_0 used for both sets. Denote the sub-sample empirical operators on each $l \in [L]$ as $\widehat{\mathcal{P}}_l^A =$ $|\mathcal{A}_l|^{-1} \sum_{i \in \mathcal{A}_l}$ and $\widehat{\mathcal{P}}_l^B = |\mathcal{B}_l|^{-1} \sum_{i \in \mathcal{B}_l}$. Then we construct $\widehat{\beta}_l^A$ for $l \in [L+1]$ by plugging $\widehat{\mathcal{P}}_l^A$ and $\{\widehat{w}_l^B, \widehat{\eta}_l^B, \widehat{m}_l^B\}$ into (11), (12), and (13), and $\widehat{\beta}_l^B$ plugging in $\widehat{\mathcal{P}}_l^B$ and $\{\widehat{w}_l^A, \widehat{\eta}_l^A, \widehat{m}_l^A\}$. At last, we separately combine the two sets of estimators $\widehat{\beta}_l^A$'s and $\widehat{\beta}_l^B$'s with the full sample $\widehat{\Sigma}^{(0)}$ to derive the corresponding adversarial weights $\widehat{\gamma}_l^A$'s and $\widehat{\gamma}_l^B$'s following Theorem 1, and output $\widehat{\beta}_{\mathsf{RE}}(s_{\max}) = \sum_{l=1}^{L+1} (\widehat{\gamma}_l^A \widehat{\beta}_l^A + \widehat{\gamma}_l^B \widehat{\beta}_l^B)/2$ as the final REMIX estimator.

3.3 Tuning with side information

The only hyper-parameter s_{max} plays an important role in our method as it controls the size of the uncertainty set $\mathcal{M}(s_{\text{max}})$ and the degree of adversary. Usually, choosing a relatively small s_{max} (says 0.1) to ensure enough weights on the source-mixing estimator $\hat{\beta}_{L+1}$ is highly recommended when the key assumption (1) is reasonable, e.g., our real-world application targeting mixed ethnicity subgroups. Moreover, when there is some side information about $Y^{(0)}$ on the target, we can potentially use them to find a good choice on s_{max} . We shall make some discussion and proposal about this point here and further justify them in both theoretical and numerical studies.

Suppose there is a small set of labeled subjects on target $(X_i^{(0)}, Y_i^{(0)})$ for $i \in [n_0]$ where n_0 could be much smaller than both N_0 and n_i 's. With such a limited sample size frequently encountered in practice, a potentially high-dimensional regression for $Y_i^{(0)} \sim A_i^{(0)}$ may not be tractable. Nevertheless, we can use the labeled sample for tuning of s_{\max} , which tends to have much lower complexity than the regression. In specific, with a series of fitted $\hat{\beta}_{\mathsf{RE}}(s_{\max})$ for s_{\max} from some candidate set \mathcal{C} (e.g., an uniform grid on [0, 0.5]), we choose the one with the smallest mean prediction error on the labeled data, i.e., $\hat{\beta}_{\mathsf{RE}}(s_{\max})$ with

$$\widehat{s_{\max}} = \underset{s_{\max} \in \mathcal{C}}{\arg\min} \ \frac{1}{n_0} \sum_{i=1}^{n_0} \left\{ Y_i^{(0)} - \widehat{\beta}_{\mathsf{RE}}(s_{\max})^{\mathsf{T}} A_i^{(0)} \right\}^2.$$
(18)

Remark 3. $1 - \widehat{s_{\max}}$ obtained by (18) can be viewed as an estimate of the optimal weight assigned to the source-mixing model coefficient $\overline{\beta}_{L+1} = \overline{\beta}^{\min}$, with the purpose of optimizing the prediction performance on the target among all REMIX estimators with $s_{\max} \in C$. As will be justified in Theorem 3, when the source-mixing assumption (1) approximately hold (with small contamination), this tuning procedure is ensured to result in no worse prediction performance compared to $\overline{\beta}^{\min}$ derived as the optimal choice under (1).

When there is strictly no true outcome $Y_i^{(0)}$ observed on the target, one could also use some surrogate outcome $S_i^{(0)}$ as an noisy approximation of $Y_i^{(0)}$ for tuning. In EHR application, $S_i^{(0)}$ could be taken as counts of the main diagnostic codes for the disease outcome $Y_i^{(0)}$; and in clinical studies, $S_i^{(0)}$ could be some early endpoint of the long-term outcome $Y_i^{(0)}$ of our primary interest. In both examples, the surrogate outcome is much easier to collect than the true outcome. As shown in previous work like Li and Liu (2023), the linear model for $S_i^{(0)} \sim A_i^{(0)}$ tends to have the same direction as that of $Y_i^{(0)} \sim A_i^{(0)}$ under conditional independence condition $S_i^{(0)} \perp A_i^{(0)} \mid Y_i^{(0)}$ or $Y_i^{(0)} \perp A_i^{(0)} \mid S_i^{(0)}$ that is likely to hold in practice. In this case, a predictive β actually corresponds to a large $\widehat{\operatorname{Cor}}(S^{(0)}, \beta^{\mathsf{T}}A^{(0)})$ where $\widehat{\operatorname{Cor}}$ denotes the empirical correlation on target sample. Thus, we propose to choose

$$\widehat{s_{\max}} = \underset{s_{\max} \in \mathcal{C}}{\operatorname{arg\,min}} \ \widehat{\mathsf{Cor}}(S^{(0)}, \widehat{\beta}_{\mathsf{RE}}(s_{\max})^{\mathsf{T}} A^{(0)}).$$

4 Theoretical Justification

In this section, we investigate the convergence property of $\widehat{\beta}_{\mathsf{RE}}(s_{\max})$ and the effectiveness of the tuning procedure in Section 3.3. For two real numbers a, b, we denote by $a \wedge b :=$ $\min\{a, b\}$. For two sequences a(n) and b(n), we use $a(n) \leq b(n)$ or a(n) = O(b(n)) to represent that there exists some universal constant C > 0 such that $a(n) \leq Cb(n)$ for all $n \geq 1$, and use $a(n) \leq_{\mathsf{P}} b(n)$ or $a(n) = O_{\mathsf{P}}(b(n))$ for $a(n) \leq b(n)$ or a(n) = O(b(n))with a probability approaching 1. For some matrix B, we use $\lambda_{\min}(B)$ and $\lambda_{\max}(B)$ to denote its smallest and largest eigenvalues respectively. On the target and sources we denote expectation operators by $\mathbb{E}_0 = \mathbb{E}_{\mathbb{P}_X^{(0)}}$ and $\mathbb{E}_l = \mathbb{E}_{(\mathbb{P}_X^{(l)}, \mathbb{P}_{Y|X}^{(l)})}$. For some function f, we define its norm over the target and source covariate distribution as

$$||f||_{A,l} := \left(\mathbb{E}_l ||f(X)A||_2^2\right)^{1/2}, \quad l = 0, 1, \cdots, L$$

In addition, denote the Hessian matrix of $\bar{\rho}$ in (14) by

$$\bar{\Omega}(\rho) = \left(\bar{\Omega}_{lk}(\rho)\right)_{l,k\in[L]}, \quad \text{with} \quad \bar{\Omega}_{lk}(\rho) = \mathbb{E}_0 \frac{\bar{r}_l(X)\bar{r}_k(X)}{\left(\sum_{i=1}^L \rho_i \bar{r}_i(X)\right)^2}.$$

Set a small penalty coefficient $\lambda = O(N_0^{-1/2})$ in (17). We now introduce and comment on our main assumptions as follows.

Assumption 1. There exists some absolute constant $C_1 > 0$ such that $\mathbb{E}_l Y^2 < C_1$, $C_1^{-1} \leq \lambda_{\min}(\bar{\Sigma}^{(0)}) \leq \lambda_{\max}(\bar{\Sigma}^{(0)}) \leq C_1$, and $C_1^{-1} \leq \lambda_{\min}(\bar{\Omega}(\bar{\rho})) \leq \lambda_{\max}(\bar{\Omega}(\bar{\rho})) \leq C_1$.

Assumption 2. There exists some absolute constant $C_2 > 0$ such that

$$\max_{l \in [L], k \in \{0,l\}} \|\bar{m}_l\|_{A,k} + \|\bar{w}_l\|_{A,k} + \|\bar{r}_l\|_{A,k} \leqslant C_2, \quad \max_{l \in [L+1]} \|\bar{\beta}_l\|_2 \leqslant C_2.$$
(19)

Assumption 3. There exists sequences $\Delta^{r}(n)$, $\Delta^{w}(n)$ and $\Delta^{m}(n)$ of (some sample size) $n \in \mathbb{N}$ that converge to 0 as $n \to \infty$, and satisfy

$$\max_{k \in \{0,l\}} \|\widehat{r}_l - \bar{r}_l\|_{A,k} \lesssim_{\mathsf{P}} \Delta^r(N_l);$$
$$\max_{k \in \{0,l\}} \|\widehat{m}_l - \bar{m}_l\|_{A,k} \lesssim_{\mathsf{P}} \Delta^m(n_l);$$
$$\max_{k \in \{0,l\}} \|\widehat{w}_l - \bar{w}_l\|_{A,k} \lesssim_{\mathsf{P}} \Delta^w(N_0 \wedge N_l).$$

Remark 4. Assumptions 1 and 2 are mild and common regularity and boundedness assumptions on the data distributions and models. The condition on $\overline{\Omega}(\overline{\rho})$ is imposed to ensure proper convergence of $\widehat{\rho}_l$ in (17). The upper bound for $\|\overline{w}_l\|_{A,k}$ and $\|\overline{r}_l\|_{A,k}$ could be understood as requiring \mathbb{P}_X 's overlap between the sources and target are not too weak. Similar assumptions have been frequently used in existing literature (Sugiyama et al., 2012; Liu et al., 2023).

Remark 5. Assumption 3 imposes requirements on the error rates of the general machine

learning estimators for the nuisance models, in a similar spirit as the DML framework (Chernozhukov et al., 2018; Kennedy, 2023, e.g.). To highlight the sample sizes' impact on the quality of machine learning, we consider a slightly less general regime that the error rate functions hold to be the same across all the source and target sites and only take the training sample size into consideration. For instance, we use $\Delta^m(n_l)$ because \hat{m}_l is fitted using the labeled sample on source l of the size n_l .

Remark 6. Each Δ function in Assumption 3 is supposed to converge faster to 0 with a increased sample size under proper learning models. Such convergence properties have been well established for various methods such as Lasso (Negahban et al., 2009, e.g), random forest (Athey et al., 2019, e.g.), and deep neural network (Farrell et al., 2021, e.g.). In all these examples, Δ has been shown to converge with a polynomial rate of the training sample size. Considering that the effective sample size of a classification problem is typically determined by its smaller class, we write $\Delta^w(N_0 \wedge N_l)$ and $\Delta^r(N_l)$ in Assumption 3, as the reference sample in r_l is always set to be larger than \mathcal{D}_l .

In Lemma 1, we analyze our construction procedures in (16) and (17) to derive $\hat{\eta}_l$'s convergence rate based on the error rate of \hat{r}_l . Based on this lemma, we further establish the convergence properties of our doubly robust (or DML) estimators $\hat{\beta}_l$ in Lemma 2, which is a key intermediate results for our main theorem about the convergence rate of $\hat{\beta}_{\mathsf{RE}}(s_{\max})$.

Lemma 1. Under Assumptions 1-3, we have that for $l \in [L]$,

$$\max_{l \in [L], k \in \{0, l\}} \|\widehat{\eta}_l - \bar{\eta}_l\|_{A, k} \lesssim_{\mathsf{P}} \Delta^{\eta}(N_0, N_l) := \sqrt{\frac{L}{N_0}} + \max_{l \in [L]} \Delta^r(N_l).$$
(20)

The first term on the right hand side of (20) corresponds to the learning error of the optimal weights $\bar{\rho}$ on the target sample by (16) and the second error term arises from the machine learning estimation of \bar{r}_l 's with the full source sample. In the setup of our primary interests, we have $N_0 < N_l$ or $N_0 \ll N_l$. Due to the high complexity of machine learning models with X, $\Delta^r(N_l)$ is usually slower than the parametric rate of N_l while the target sample only contributes a parametric error rate in N_0 thanks to the low-dimensionality of ρ . As a result, there is not a term always dominating the other one in $\Delta^{\eta}(N_0, N_l)$.

Lemma 2. Under Assumptions 1–3, we have

$$\begin{split} \|\widehat{\beta}_{l} - \bar{\beta}_{l}\|_{2} \lesssim_{\mathsf{P}} \mathsf{Err}_{l} &:= \sqrt{\frac{q}{N_{0} \wedge n_{l}}} + \Delta^{m}(n_{l})\Delta^{w}(N_{0} \wedge N_{l}), \quad l \in [L]; \\ |\widehat{\beta}_{L+1} - \bar{\beta}_{L+1}\|_{2} \lesssim_{\mathsf{P}} \mathsf{Err}_{L+1} &:= \sum_{l=1}^{L} \bar{\rho}_{l} \Big(\sqrt{\frac{q}{N_{0} \wedge n_{l}}} + \Delta^{\eta}(N_{0}, N_{l}) + \Delta^{m}(n_{l})\Delta^{w}(N_{0} \wedge N_{l}) \Big). \end{split}$$

The term $\sqrt{q/(N_0 \wedge n_l)}$ in each Err_l can be viewed as the oracle error one would get when plugging the true (population) nuisance models in $\hat{\beta}_l(w_l, m_l)$ and $\hat{\beta}_{L+1}(\eta_l, w_l, m_l)$. The machine learning errors in w_l and m_l show up in Err_l in a form of their production, which has a similar spirit as the general DML theory (Chernozhukov et al., 2018, e.g.). Though $\Delta^{\eta}(N_0, N_l)$ still appears as a first-order error without the DML correction, it tends to converge faster than $\Delta^m(n_l)$ and $\Delta^w(N_0 \wedge N_l)$ in our setup with N_l larger than both N_0 and n_l . Thus, our doubly robust construction can effectively improve the convergence performance by addressing the possibly slowest terms $\Delta^m(n_l)$ and $\Delta^w(N_0 \wedge N_l)$.

Theorem 2. Under Assumptions 1–3, we have that for any $s_{\max} \in [0, 1]$,

$$\|\widehat{\beta}_{\mathsf{RE}}(s_{\max}) - \bar{\beta}_{\mathsf{RE}}(s_{\max})\|_{2} \lesssim_{\mathsf{P}} \max_{l \in [L+1]} \mathsf{Err}_{l} + \frac{L^{3/2} \max_{l \in [L+1]} \mathsf{Err}_{l}}{\lambda_{\min}(\Gamma)} \wedge d(\mathcal{S}(s_{\max})), \qquad (21)$$

with Γ and $\mathcal{S}(s_{\max})$ defined in Theorem 1, and the diameter of $\mathcal{S}(s_{\max})$ defined as $d(\mathcal{S}(s_{\max})) = \max_{\gamma,\gamma'\in\mathcal{S}(s_{\max})} \|\gamma-\gamma'\|_2$.

Theorem 2 characterizes the empirical estimation error of $\widehat{\beta}_{\mathsf{RE}}(s_{\max})$. The term Err_l derived in Lemma 2 encodes the impact of $\widehat{\beta}_l$'s error. The second term in (21) is due to the group adversarial learning. When there are some highly correlated $\overline{\beta}_l$ and $\overline{\beta}_k$, $\Gamma = (\overline{\beta}_l^{\mathsf{T}} \overline{\Sigma}^{(0)} \overline{\beta}_k)_{l,k \in [L+1]}$ could be nearly singular and the consequently large $1/\lambda_{\min}(\Gamma)$ will in turn inflate the error of $\widehat{\beta}_{\mathsf{RE}}(s_{\max})$. Also note that $d(\mathcal{S}(s_{\max})) = 0$ as $s_{\max} = 0$. When s_{\max} vanishes fast to 0, the error due to the adversarial learning on \mathcal{D}_0 may have lower impact on $\widehat{\beta}_{\mathsf{RE}}(s_{\max})$.

Furthermore, we investigate the tuning procedure defined in (18) that relies on n_0 labeled sample on the target to find $\widehat{s_{\text{max}}}$. To this end, we introduce

$$\mathbb{P}^{\dagger} = \mathbb{P}^{\dagger}(\cdot, s^*, \rho^*) := (1 - s^*) \sum_{l=1}^{L} \rho_l^* (\mathbb{P}_{Y|X}^{(l)}, \mathbb{P}_X^{(l)}) + s^* \mathbb{P}^{(\epsilon)}, \quad s^* \in [0, 1], \ \rho^* \in \Delta^L,$$

as a class of the actual target distribution of our interest. The first source-mixing part in \mathbb{P}^{\dagger} corresponds to our ideal assumption (1) but is down-weighted by the probability $1 - s^*$. $\mathbb{P}^{(\epsilon)}$ is a contamination distribution with weight s^* . Without further specifying the form of $\mathbb{P}^{(\epsilon)}$, we only requires a mild regularity condition that $\mathbb{E}_{\mathbb{P}^{(\epsilon)}}Y^2 + \lambda_{\max}(\mathbb{E}_{\mathbb{P}^{(\epsilon)}}AA^{\mathsf{T}}) < C_3$ for some constant $C_3 > 0$. Consider the scenario with $s^* \to 0$, i.e., the source-mixing assumption (1) approximately holds for the target, we show in Theorem 3 that the selected predictor $\widehat{\beta}_{\mathsf{RE}}(\widehat{s_{\max}})$ will approach the best linear approximation model for $Y \sim A$ on the actual target distribution.

Theorem 3. Suppose that Assumption 1–3 holds and the target population distribution $\mathbb{P}^{(0)} = \mathbb{P}^{\dagger}(\cdot, s^*, \rho^*)$ with $s^* \to 0$ and arbitrary $\rho^* \in \Delta^L$. We then have

$$\|\widehat{\beta}_{\mathsf{RE}}(\widehat{s_{\max}}) - \beta^*\|_2 \lesssim_{\mathsf{P}} s^* + \frac{1}{\sqrt{n_0}} + \sum_{l=1}^L \bar{\rho}_l \left(\sqrt{\frac{q}{N_0 \wedge n_l}} + \Delta^\eta (N_0, N_l) + \Delta^m (n_l) \Delta^w (N_0 \wedge N_l)\right)$$

where $\beta^* = \underset{\beta \in \mathbb{R}^q}{\operatorname{arg\,min}} \mathbb{E}_{\mathbb{P}^{(0)}} (Y - A^{\mathsf{T}}\beta)^2$ is the best linear model for $Y \sim A$ on $\mathbb{P}^{(0)}$.

5 Simulation Study

We conduct comprehensive simulation studies to evaluate our proposed REMIX under various settings and compare it with existing methods. In Section 5.2, we focus on lowdimensional A settings and will compare REMIX with benchmarks under various circumstances. In Section 5.3 we will show the effectiveness of parameter tuning of s_{max} and insensitivity of REMIX to moderate change of s_{max} . In Section 5.4 we will highlight the improved performance of REMIX throug comparison with several recently developed multisource transfer learning methods with high-dimensional A.

5.1 Data generation and benchmarks

We set $L = 5, N_l = 2000, n_l = 300, N_0 = 2000$ by default if not specified purposely. The dimension of X is p = 200, and for low dimensional settings we set $q = \dim A = 5$. The simulation data are generated in the following way. First, on each source site $l \in [L]$, we generate $A_i^{(l)}(i \in [N_l])$ i.i.d. from a Gaussian distribution $N(\mu_l, \sigma_A^2 I_q)$ and set the first element 1. For each W, the first five elements are calculated by $W_1 = k(A_1 - A_3), W_2 = k(A_2 - A_4), W_3 = kA_3, W_4 = W_5 = kA_4$, and we keep k = 0.3 creating a moderate correlation between A and W. The rest elements of W are 0, and we add a small noise $N(0, 0.1^2)$ to each element of W. For each source site we generate the outcome Y using a linear model

$$Y_i^{(l)} = \alpha_l^{\mathsf{T}} A_i^{(l)} + \gamma_l^{\mathsf{T}} W_i^{(l)} + \varepsilon_i^{(l)}$$

where $i \in [n_l]$ and $\varepsilon_i^{(l)}$ is i.i.d Gaussian $N(0, 0.5^2)$. It is note worthy that on each source site, model $\mathbb{P}_X^{(l)}$ depends on μ_l ; model $\mathbb{P}_{Y|X}^{(l)}$ is largely determined by α_l and γ_l . To model both covariate shift and posterior drift, we design that μ_l, α_l and γ_l are different across all the source sites. The detailed choice of μ_l, α_l and γ_l can be found in Appendix.

For the target, we model $\mathbb{P}_{Y|X}^{(0)}$ using an approximate version of joint-mixing assumption (1). For each subject *i* on the target site $(i \in [N_0])$, we always generate $X_i^{(0)}(i \in [N_0]) \sim \mathbb{P}_X^{(0)} = \sum_{l=1}^L \rho_l^* \mathbb{P}_X^{(l)}$ according to a given prior probability $\rho^* \in \Delta_L$, which will be detailed in the following experiments. For the Y|X model on the target, we determine the probability that the ideal joint-mixing assumption (1) fails as $s^* \in [0, 1]$, and we generate unobserved $Y_i^{(0)}$ following the conditional distribution in (7)

$$Y_i^{(0)}|X_i^{(0)} \sim \mathbb{P}_{Y|X}^{(0)} = (1 - s^*) \sum_{l=1}^L \eta_l(X; \rho^*) \mathbb{P}_{Y|X}^{(l)} + s^* \sum_{l=1}^L \delta_l^* \mathbb{P}_{Y|X}^{(l)},$$

where $\delta^* \in \Delta^L$ is an arbitrary probability vector. Here the parameter s^* shows the violation of the generated data from the ideal joint distribution mixing assumption. The closer s^* is to 1, the farther the synthetic data is from the ideal mixed joint distribution.

We evaluate a coefficient β by the prediction performance on the target site using unobserved $Y_i^{(0)}$. We will mostly use MSE: $L(\beta) = 1/N_0 \sum_{i=1}^{N_0} (Y_i^{(0)} - \beta^{\mathsf{T}} A_i^{(0)})^2$ and standardize the MSE by the empirical variance of $Y_i^{(0)}$ on the target with moderate violation of joint-mixing

assupption. In the most parts of following simulations, we will generate 100 different δ^* on the simplex Δ_L and report the worst case performance (highest standardized MSE) for these trials with different δ^* . By default, we generate $n_0 = 20$ labeled sample with $Y_i^{(0)}$ to obtain $\widehat{s_{\text{max}}}$ using tuning method in Section 3.3. We conduct 500 rounds of simulations to summarize the numerical performance. Our benchmarks include different aggregation strategies of the estimator $\widehat{\beta}_l$ in (12) and several recently developed high-dimensional transfer learning approaches that will be mainly compared in Section 5.4. We summarize the methods under comparison as follows.

- 1. SimpleAve: the simple average of each $\hat{\beta}_l$, $\hat{\beta}_{\mathsf{SA}} = 1/L \sum_{l=1}^L \hat{\beta}_l$.
- 2. **RhoAve**: the average of $\widehat{\beta}_l$ weighted by $\widehat{\rho}$ obtained in (16), $\widehat{\beta}_{\mathsf{RA}} = \sum_{l=1}^{L} \widehat{\rho}_l \widehat{\beta}_l$.
- 3. Maximin: the pure maximin regression by setting $s_{\text{max}} = 1$ in our method, which can be viewed as a simple adaptation of the covariate shift adjusted maximin regression proposed in Guo (2023) to our setup.
- 4. TransLasso: Transfer Lasso approach proposed by Li et al. (2022).
- 5. **TransGLM**: Transfer Lasso for generalized linear models proposed by Tian and Feng (2023), with a different multi-source aggregation strategy from TransLasso.
- 6. **PTL**: Profile Transfer Learning proposed by Lin et al. (2024).

5.2 Performance of different *L* and mixture

In this subsection, we focus on low-dimensional A setting $(q = \dim A = 5)$ and change the prior mixture weights ρ^* and the number of source sites L to give a comprehensive result of our REMIX method under different circumstances.

In Figure 1 we have L = 5 source sites and change the prior probability ρ to different settings. We report the worst case performance under different violation levels $s^* \in [0, 0.5]$. In the first scenario 1a, the prior mixture is $\rho^* = (0.5, 0, 0.5, 0, 0)$, which means we will choose the target from source site 1 or 3 with equal probability. We can observe that under most of violation levels, REMIX consistently outperforms all the benchmarks. When s^* is very small $(s^* \in [0.05, 0.20])$, our method is very close to RhoAve, which is reasonable because our method is designed to handle robustness against the violation of ideal mixture. In the meantime REMIX performs much better than SimpleAve and Maximin. When there is moderate violation, for example $s^* = 0.35$, standardized MSE of REMIX is 0.9412, which is 10.77% better than SimpleAve, 17.34% better than Maximin and 30.49% better than RhoAve. RhoAve gives a poor performance when s^* is large because the mixing weights ρ^* determined by X have been violated. In the second scenario 1b, the prior is more unbalanced, with more weight on the first site and less weight on the third site. We can see that our method still outperforms most benchmarks at a moderate s^* . We notice that Maximin is almost as good as our method in this unbalanced scenario, which means a moderate uncertainty set has already arrived at the same optimal coefficient as the maximum uncertainty

set. In the third scenario 1c, we have a balanced mixture among the first three sites. In this plot the phenomenon is almost the same as Figure 1a, showing that equal mixture of two sites and three sites are similar.

In the fourth scenario 1d, we assigned equal weights to all five source sites. This is not common in the real-world study, especially when the number of sites L is large. For instance we do not expect a mixed blood subject is a mixture of all the potential races (with nonnegligible positive weights); instead we expect that it is a mixture of only a few possible races. In our simulation setting, an equal average of all source sites will lead to a regression coefficient near zero, and more violation of ideal mixture actually will bring the coefficient closer to the origin point. Therefore, both adversarial regression methods will give better performance when s^* gets larger. When $s^* = 0.50$, standardized MSE of REMIX is 0.9377, which is about 23% better than RhoAve and SimpleAve. If we shift all source sites to the same direction, the worst case loss of our method or Maximin will increase. We conducted this center shift simulation in the Appendix.

In Figure 2, we conducted the simulation with L = 10 different source sites, where the last five sites are similar to the first five sites only with slight difference. As a consequence, the performance is much similar as in the Figure 1a. It is worth mentioning that our method performs well when the distributions of X on the source sites hardly overlap, and the key point is non-overlapping is helpful to the learning of the posterior. When the distributions $\mathbb{P}_X^{(l)}$ hardly overlap, the density ratio model $w_l(x)$ will be extreme and thus inexact for transfer learning. However our method learns a posterior probability η , giving smaller weight to those "remote" and unused source sites, which helps to avoid negative transfer (Torrey and Shavlik, 2010). We implement REMIX with different overlap in Appendix.

5.3 Tuning of s_{max} and its insensitivity

It is important to choose an appropriate parameter s_{max} when implementing REMIX method to obtain a robust and reasonably accurate estimation $\hat{\beta}_{\text{RE}}(s_{\text{max}})$. In this subsection we will demonstrate the effectiveness of parameter tuning of s_{max} and the insensitivity of MSE to the selection of s_{max} .

In our data generation, s^* controls the perturbation of the target distribution from exact joint mixing distribution. Figure 3a shows tuning of s_{\max} under different true perturbation level s^* using a small amount of Y as in Section 3.3. We only use a small number $n_0 = 20$ of $Y_i^{(0)}$ on the target site for tuning. We can observed that under different values of s^* , tuning procedure always gives us $\widehat{s_{\max}}$ relatively close to s^* , demonstrating the validity and effectiveness of tuning. For example when true $s^* = 0.2$, over 80% of tuned $\widehat{s_{\max}}$ fall into [0.1, 0.3], the interval of ± 0.1 around the true value 0.2.

In Figure 3b, we plot the worst case standardized MSE of REMIX with different version of s_{max} as well as the benchmarks. Line REMIX means we use tuned $\widehat{s_{\text{max}}}$; Line REMIX_true means we set $s_{\text{max}} = s^*$ on the x-axis; Line REMIX_P0.05 represents the **maximum** loss with s_{max} in a range ± 0.05 of the true s^* , and line REMIX_P0.1 represents the **maximum** loss with s_{max} in a range ± 0.1 of true s^* value. We observe the difference between the four solid lines is very small, with discrepancy less than 8%. Line REMIX is almost identical to

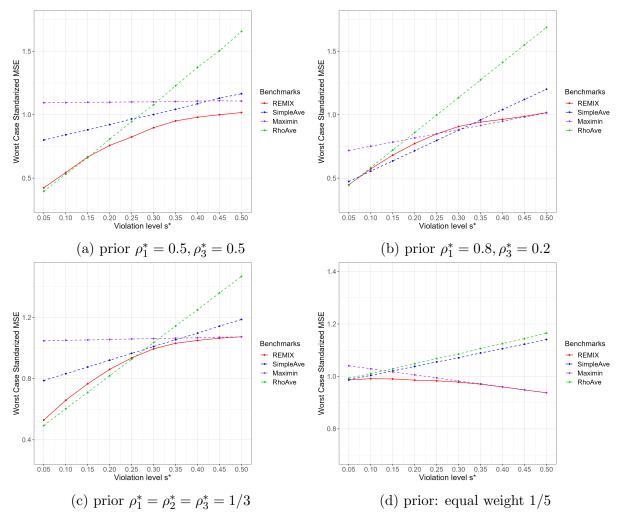


Figure 1: The worst case performance with different mixture structures. In the first panel the prior mixture of X is set to be $\rho^* = (0.5, 0, 0.5, 0, 0)$. In the second panel, the prior mixture is $\rho^* = (0.8, 0, 0.2, 0, 0)$; in the third panel, the prior mixture is $\rho^* = (1/3, 1/3, 1/3, 0, 0)$; in the last panel, the prior mixture is $\rho^* = (0.2, 0.2, 0.2, 0.2, 0.2)$. In all plots, the red solid line is our method REMIX with tuned $\widehat{s_{\text{max}}}$, and four dashed lines are benchmarks.




Figure 2: The worst case performance with numbers of sites L = 10. The prior probability is $\rho^* = (1/4, 0, 1/4, 0, 0, 1/4, 0, 0, 1/4, 0, 0)$. The red solid line is REMIX with tuned $\widehat{s_{\text{max}}}$, and four dashed lines are benchmarks.

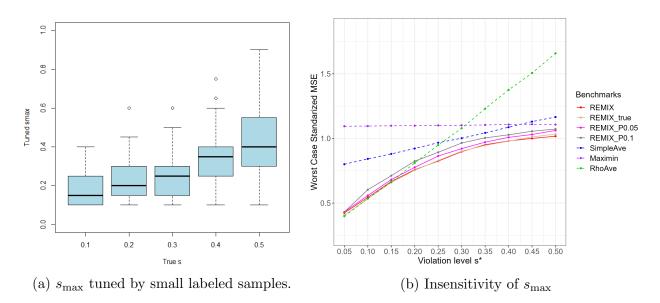


Figure 3: (a) shows the boxplot of tuned s_{max} using $n_0 = 20$ labeled target samples over different true violation levels s^* . (b) shows the worst case performance for different methods. Here L = 5, $\rho^* = (0.5, 0, 0.5, 0, 0)$, which is the same setting as Figure 1a. Four solid lines are our methods with different choice of parameter s_{max} , and four dashed lines are the benchmarks.

the line REMIX_true, which demonstrates the optimality of parameter tuning. REMIX_P0.05 and REMIX_P0.1 indicate that a small deviation from s^* will not affect the performance of REMIX, which means that our method is not sensitive to the selection of parameter s_{max} .

5.4 High-dimensional transfer learning

In this subsection we will compare our method REMIX with state-of-the-art transfer learning algorithms: TransLasso (Li et al., 2022), TransGLM (Tian and Feng, 2023) and Profile Transfer Learning (Lin et al., 2024) as indicated in Section 5.1. It is very important to note that in REMIX we essentially do not need any labels on the target site if we just choose a small s_{max} , while these transfer learning methods all require target labels to evaluate the informative samples or perform regression. Here we will set different target sample sizes, providing different quantities of $Y_i^{(0)}$ to these transfer learning methods, and we will compare the effectiveness of our method with these benchmarks under these different target sample sizes. In REMIX we use different sizes of target samples $Y_i^{(0)}$ for tuning of s_{max} .

Here we focus on high-dimensional setting and set A = X so the dimension of A is q = 200. In Figure 4 we present standardized MSE evaluated on the target data and worst case standardized MSE over different δ^* , and in both settings REMIX performs better than all other methods. For example, even with largest sample size $n_0 = 200$, REMIX achieves a standardized MSE of 0.9260 evaluated on the target, while TransLasso is 122.67%higher than REMIX, TransGLM is 42.58% higher and PTL is 15.30% higher. Worst case performance gives a similar result, indicating the effectiveness and robustness of REMIX. In both figures, the MSE of methods TransLasso, TransGLM, and PTL all decrease as the sample size increases, while the performance of REMIX hardly changes with the sample size. This is because we only use different target sample sizes for tuning of s_{max} in REMIX. As we have already seen in Section 5.3, a small number of samples can select a relatively good s_{max} , and different s_{max} values do not significantly affect the performance of our method. For SimpleAve, $\hat{\beta}_l$ is not influenced by $Y_i^{(0)}$, so its simple aggregation is also constant over different target samples. In this setup PTL performs a lot better than other two existing transfer learning methods, because TransLasso and TransGLM are based on the vanishing difference of regression coefficiences to select informative samples, overlooking the mixture structure of target data. PTL regress the target response on the transferred feature, leading to the profiled responses and calculate the residual. However PTL is still misspecified in our joint-mixing assumption, thus leading to a worse performance than our REMIX.

6 Real Data Analysis

6.1 Background

We validate our proposed REMIX approach using the high-density lipoprotein (HDL) lab test data from Mass General Brigham (MGB) and UK Biobank (UKB) along with the genetic information. It is believed that the genetic underpinnings of mean lipoprotein diameter differ

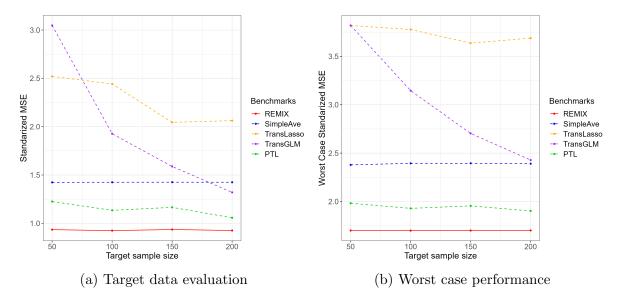


Figure 4: Performance of REMIX and other high-dimensional transfer learning methods on the target data. x-axis is the number of samples on the target site. For (a), y-axis is the standardized MSE evaluated on the target data. For (b), y-axis is the worst case standardized MSE on the generated test data over 100 independent trials.

by race/ethnicity. Frazier-Wood et al. (2013) found that variation across the intronic region of the LIPC gene was suggestively associated with mean HDL diameters only in Caucasians. In our analysis, among the 195 SNPs reported to be associated with mean HDL diameter in Frazier-Wood et al. (2013), we focus on those with minor allele frequency larger than 0.1 in the UKB and MGB cohorts, which ends up with 27 SNPs. We then build a linear model on fasting mean HDL diameters for each race-gender subgroup, adjusted for age. In the UKB dataset, other than the main racial group serving as the source sites (European female: 215905; European male: 184841; African female: 3753; African male: 2872; Asian female: 4491; Asian male: 4949), there are a small number of mixed-race groups (Other female: 2132; Other male: 1670; Unknown female: 655; Unknown male: 866; Mix female: 570; Mix male: 351). Considering two 'Other' cohorts as the target populations, it is reasonable to assume that the target model is equal/close to the mixture of source models built on the main racial groups. For each target, we randomly sample 50 data points to form the training target label and treat the rest as the validation data set.

To illustrate our model generalizability, we also choose other mixed-type race groups in MGB (Other female: 1026; Other male: 494; Unknown female: 869; Unknown male: 611) and UKB as the validation data set. Ideally, we would expect a distributional-robust model to pertain consistently good performance even if future data come from a shifted population mildly away from the training target. In the following analysis, we only present results from REMIX, SimpleAve, RhoAve, Maximin, TransLasso and TransGLM. Relative efficiency R^2 is used as the evaluation metric.

6.2 Results

In Figure 5, we present R^2 of REMIX and other methods when both the training target and the validation data come from the same population. REMIX outperforms other benchmarks with the highest R^2 for both genders (female: 2.55%; male: 2.92%), while SimpleAve and RhoAve suffer from a large negative R^2 . Maximin over-shrinks the coefficient to zero, which leads to a small R^2 close to zero (female: 0.35%; male: 0.01%). The two transfer learning methods, TransLasso (female: -6.58%; male: -19.94%) and TransGLM (female: -0.38%; male: -2.66%), fail to train an efficient model due to the limited number of target labels and site heterogeneity, ending up with poor transferability.

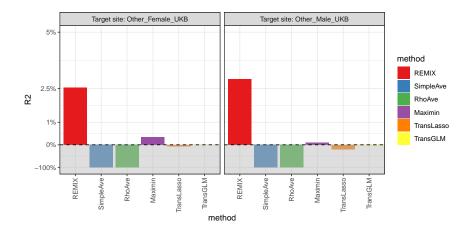


Figure 5: R^2 of different methods when both the training target data and the validation data come from 'Other female' (left panel) or 'Other male' (right panel) in the UKB cohort. Source sites include 6 major race-gender groups in UKB (European female/male, African female/male, Asian female/male). R^2 less than -100% has been truncated to -100%.

Figure 6 further illustrates the robustness of different models. The left panel shows the R^2 when training with 'Other female' from the UKB cohort while validating on females from 'UKB Unknown', 'UKB Mix', 'MGB Unknown', and 'MGB Other'. Similarly, the right panel presents results among males. On average, great performance persists in REMIX even when the validation population shifts away from the target population (females: 1.81%; males: 2.37%). Maximin (females: 0.51%; males: 0.26%) exhibits the second highest R^2 among males and similar performance for females, which validates its certain extent of model generalizability. TransGLM (females: 0.87%; males: -0.69%) generates the second highest R^2 among females but with high variation and poor performance among males. The rest of the three benchmark methods suffer from negative R^2 in both genders, indicating a lack of model generalizability.

7 Discussion

We develop REMIX, a novel framework for multi-source transfer learning targeting source-mixture sub-populations such as mixed ethnicity subgroup in our biobank application.

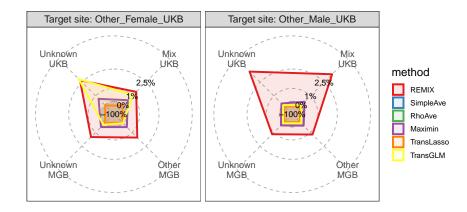


Figure 6: R^2 of different methods when the training target data come from 'Other female' (left panel) or 'Other male' (right panel) in the UKB cohort, while the validation data contains females (left panel) and males (right panel) in 'UKB Unknown', 'UKB Mix', 'MGB Unknown' and 'MGB Other'. Source sites include 6 major race-gender groups in UKB (European female/male, African female/male, Asian female/male). R^2 less than -100% has been truncated to -100%.

REMIX takes advantage of the source-mixing structure for effective knowledge transfer under the scarcity or even absence of observations of Y in the target sample. It also incorporates group adversarial learning in order to achieve distributional robustness to the violation of such source-mixing assumptions and improve out-of-distribution generalizability. Meanwhile, our DML approach serves as novel tool for nuisance-error-robust and efficient estimation in the presence of covariate shift and mixture structure. Importantly, in both the simulation and real-world studies, REMIX shows improvement over state-of-the-art multi-source transfer learning methods in terms of predictive performance and generalizability.

At last, we discuss on several potential future directions of our work. First, it would be useful to accommodate in REMIX generalized linear models (GLMs) and general machine learning models for $Y \sim A$. This could be naturally realized by replacing the linear and least square reward function $R_{\mathbb{P}}(\beta)$ with those of GLMs and nonparametric prediction models. Nevertheless, there may arise new challenges in optimization as well as the statistical interpretation. Second, for the interval estimation and testing of the model coefficients $\hat{\beta}_{\mathsf{RE}}$, one could potentially leverage the resampling inference approach of Guo (2023) to address the non-regularity issue of the maximin estimation. Third, our construction strategy of $\eta_l(x)$ may produce inaccurate approximation of $\mathbb{P}_X^{(0)}$ on target under severe misspecification of the covariate mixing structure (2). This issue could not be examined or identified with data in our current framework, either. Fixing this problem may require more advanced techniques for robust learning of mixture distributions, which warrants future research.

References

- Athey, S., Tibshirani, J., and Wager, S. (2019). Generalized random forests. The Annals of Statistics, 47(2):1148–1178.
- Bang, H. and Robins, J. M. (2005). Doubly robust estimation in missing data and causal inference models. *Biometrics*, 61(4):962–973.
- Bühlmann, P. and Meinshausen, N. (2015). Magging: maximin aggregation for inhomogeneous large-scale data. Proceedings of the IEEE, 104(1):126–135.
- Cai, T., Li, M., and Liu, M. (2024). Semi-supervised triply robust inductive transfer learning. Journal of the American Statistical Association, pages 1–14.
- Cai, T., Liu, M., and Xia, Y. (2022). Individual data protected integrative regression analysis of high-dimensional heterogeneous data. *Journal of the American Statistical Association*, 117(540):2105–2119.
- Chernozhukov, V., Chetverikov, D., Demirer, M., Duflo, E., Hansen, C., Newey, W., and Robins, J. (2018). Double/debiased machine learning for treatment and structural parameters. *The Econometrics Journal*, 21(1):C1–C68.
- Duan, R., Ning, Y., and Chen, Y. (2022). Heterogeneity-aware and communication-efficient distributed statistical inference. *Biometrika*, 109(1):67–83.
- Duan, Y. and Wang, K. (2023). Adaptive and robust multi-task learning. The Annals of Statistics, 51(5):2015–2039.
- Farrell, M. H., Liang, T., and Misra, S. (2021). Deep neural networks for estimation and inference. *Econometrica*, 89(1):181–213.
- Frazier-Wood, A. C., Manichaikul, A., Aslibekyan, S., Borecki, I. B., Goff, D. C., Hopkins, P. N., Lai, C.-Q., Ordovas, J. M., Post, W. S., Rich, S. S., et al. (2013). Genetic variants associated with vldl, ldl and hdl particle size differ with race/ethnicity. *Human genetics*, 132:405–413.
- Ghosal, S. S. and Li, Y. (2023). Distributionally robust optimization with probabilistic group. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 11809–11817.
- Gretton, A., Smola, A., Huang, J., Schmittfull, M., Borgwardt, K., and Schölkopf, B. (2009). Covariate shift by kernel mean matching. *Dataset shift in machine learning*, 3(4):5.
- Gu, T., Han, Y., and Duan, R. (2022). Robust angle-based transfer learning in high dimensions. arXiv preprint arXiv:2210.12759.
- Guo, Z. (2023). Statistical inference for maximin effects: Identifying stable associations across multiple studies. *Journal of the American Statistical Association*, pages 1–17.

- He, Z., Sun, Y., and Li, R. (2024). Transfusion: Covariate-shift robust transfer learning for high-dimensional regression. In *International Conference on Artificial Intelligence and Statistics*, pages 703–711. PMLR.
- Imai, K. and Ratkovic, M. (2014). Covariate balancing propensity score. Journal of the Royal Statistical Society: Series B (Statistical Methodology), 76(1):243–263.
- Kennedy, E. H. (2023). Towards optimal doubly robust estimation of heterogeneous causal effects. *Electronic Journal of Statistics*, 17(2):3008–3049.
- Li, S., Cai, T. T., and Li, H. (2022). Transfer learning for high-dimensional linear regression: Prediction, estimation and minimax optimality. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 84(1):149–173.
- Li, S. and Liu, M. (2023). Maxway crt: improving the robustness of the model-x inference. Journal of the Royal Statistical Society Series B: Statistical Methodology, 85(5):1441–1470.
- Li, S. and Zhang, L. (2023). Multi-dimensional domain generalization with low-rank structures. arXiv preprint arXiv:2309.09555.
- Lin, D. and Zeng, D. (2010). On the relative efficiency of using summary statistics versus individual-level data in meta-analysis. *Biometrika*, 97(2):321–332.
- Lin, Z., Zhao, J., Wang, F., and Wang, H. (2024). Profiled transfer learning for high dimensional linear model. arXiv preprint arXiv:2406.00701.
- Liu, M., Zhang, Y., Liao, K. P., and Cai, T. (2023). Augmented transfer regression learning with semi-non-parametric nuisance models. *Journal of Machine Learning Research*, 24(293):1–50.
- Marfoq, O., Neglia, G., Bellet, A., Kameni, L., and Vidal, R. (2021). Federated multi-task learning under a mixture of distributions. Advances in Neural Information Processing Systems, 34:15434–15447.
- Meinshausen, N. and Bühlmann, P. (2015). Maximin effects in inhomogeneous large-scale data. The Annals of Statistics, 43(4):1801–1830.
- Mo, W., Tang, W., Xue, S., Liu, Y., and Zhu, J. (2024). Minimax regret learning for data with heterogeneous subgroups. arXiv preprint arXiv:2405.01709.
- Negahban, S., Yu, B., Wainwright, M. J., and Ravikumar, P. (2009). A unified framework for high-dimensional analysis of *m*-estimators with decomposable regularizers. *Advances* in neural information processing systems, 22.
- Robins, J. M., Rotnitzky, A., and Zhao, L. P. (1994). Estimation of regression coefficients when some regressors are not always observed. *Journal of the American statistical Association*, 89(427):846–866.

- Sagawa, S., Koh, P. W., Hashimoto, T. B., and Liang, P. (2019). Distributionally robust neural networks for group shifts: On the importance of regularization for worst-case generalization. arXiv preprint arXiv:1911.08731.
- Sugiyama, M., Suzuki, T., and Kanamori, T. (2012). Density ratio estimation in machine learning. Cambridge University Press.
- Tian, Y. and Feng, Y. (2023). Transfer learning under high-dimensional generalized linear models. Journal of the American Statistical Association, 118(544):2684–2697.
- Tian, Y., Gu, Y., and Feng, Y. (2023). Learning from similar linear representations: Adaptivity, minimaxity, and robustness. arXiv preprint arXiv:2303.17765.
- Tian, Y., Weng, H., and Feng, Y. (2022). Unsupervised multi-task and transfer learning on gaussian mixture models. *arXiv preprint arXiv:2209.15224*.
- Tian, Y., Weng, H., and Feng, Y. (2024). Towards the theory of unsupervised federated learning: Non-asymptotic analysis of federated em algorithms. In *Forty-first International Conference on Machine Learning*.
- Torrey, L. and Shavlik, J. (2010). Transfer learning. In Handbook of research on machine learning applications and trends: algorithms, methods, and techniques, pages 242–264. IGI global.
- Verma, A., Huffman, J. E., Rodriguez, A., Conery, M., Liu, M., Ho, Y.-L., Kim, Y., Heise, D. A., Guare, L., Panickan, V. A., et al. (2023). Diversity and scale: genetic architecture of 2,068 traits in the va million veteran program. *medRxiv*.
- Wang, Z., Bühlmann, P., and Guo, Z. (2023). Distributionally robust machine learning with multi-source data.
- West, K. M., Blacksher, E., and Burke, W. (2017). Genomics, health disparities, and missed opportunities for the nation's research agenda. *Jama*, 317(18):1831–1832.
- Wu, Y., Zhang, S., Yu, W., Liu, Y., Gu, Q., Zhou, D., Chen, H., and Cheng, W. (2023). Personalized federated learning under mixture of distributions. In *International Conference* on *Machine Learning*, pages 37860–37879. PMLR.
- Xiong, X., Guo, Z., and Cai, T. (2023). Distributionally robust transfer learning.
- Zhang, Z., Zhan, W., Chen, Y., Du, S. S., and Lee, J. D. (2024). Optimal multi-distribution learning. In *The Thirty Seventh Annual Conference on Learning Theory*, pages 5220–5223. PMLR.