

Blockchain for Large Language Model Security and Safety: A Holistic Survey

Caleb Geren*
Lehigh University
cdg225@lehigh.edu

Amanda Board*
University of Idaho
boar9227@
vandals.uidaho.edu

Gaby G. Dagher
Boise State University
gabydagher@boisestate.edu

Tim Andersen
Boise State University
tandersen@boisestate.edu

Jun Zhuang
Boise State University
junzhuang@boisestate.edu

ABSTRACT

With the advent of accessible interfaces for interacting with large language models, there has been an associated explosion in both their commercial and academic interest. Consequently, there has also been a sudden burst of novel attacks associated with large language models, jeopardizing user data on a massive scale. Situated at a comparable crossroads in its development, and equally prolific to LLMs in its rampant growth, blockchain has emerged in recent years as a disruptive technology with the potential to redefine how we approach data handling. In particular, and due to its strong guarantees about data immutability and irrefutability as well as inherent data provenance assurances, blockchain has attracted significant attention as a means to better defend against the array of attacks affecting LLMs and further improve the quality of their responses. In this survey, we holistically evaluate current research on how blockchains are being used to help protect against LLM vulnerabilities, as well as analyze how they may further be used in novel applications. To better serve these ends, we introduce a taxonomy of blockchain for large language models (BC4LLM) and also develop various definitions to precisely capture the nature of different bodies of research in these areas. Moreover, throughout the paper, we present frameworks to contextualize broader research efforts, and in order to motivate the field further, we identify future research goals as well as challenges present in the blockchain for large language model (BC4LLM) space.

1. INTRODUCTION

From disparate areas such as software development, the solicitation of political advice, and assistance in creative writing tasks, the introduction of large language models into everyday life has occurred at unprecedented pace and scale [106]. Consequently, many of the vulnerabilities that large language models contend with are well known and understood in the current literature, such as prompt injection [74][98],

hallucinations [52][130][83][12], and data poisoning [37][54]. Despite this, relatively little in terms of mitigation has been introduced to combat such weak points [124][2]. The ramifications of this fact are far-reaching in regards to user experience and mounting data integrity concerns surrounding AI systems at large [118][40][68].

For example, and representative of the variety of threats that LLMs face, is the concerning fact that LLMs are easily coaxed into revealing personally identifiable information (PII), as in the case when an LLM was persuaded into divulging undisclosed names, physical addresses, emails, phone numbers, and twitter handles associated with specific individuals to an unauthorized user [20]. Similarly, attacks such as prompt injection can be compounded with a model's tendency to divulge information, resulting in massive data leakage [118]. Typically, defensive responses to these threats manifest themselves in the application of established machine learning techniques, such as differential privacy strategies applied to entire corpus' to improve privacy guarantees [1][122]. While this is an important application, it is often the case that DP guarantees are not enough to fully ensure data privacy in a large language model [68] due to DP's ability to protect primarily "by whom" data is contributed, rather than "about whom" the data is focused on. Additionally, another common attempt to tackle the data privacy problem in LLMs is the use of federated learning (FL) in the training process. This technique distributes training across multiple nodes to create a decentralized environment for model data to exist within [75]. Naturally, this lends itself to further obscuring sensitive information in a model's corpus. However, it has been shown that by taking model weights or gradients, original data from the model can still be reconstructed [63]. Additionally, federated learning solutions are susceptible to many of the same types of attacks as large language models, such as single-point-of-failure attacks or man-in-the-middle attacks [86]. This trend of typical machine learning solutions failing to exhaustively defend against the range of attacks now affecting LLMs continues across multiple traditional threat/defense models [96, 132, 122].

It is clear that to counter new threats arising from large language models there is a simultaneous need for new technologies to be introduced into the space. Situated in a similar

*These authors contributed equally to this work.

position to LLMs in their rapid emergence and adoption are blockchain systems. They have the ability to ensure data integrity via various tamper-evident mechanisms, introduce a high degree of confidentiality into otherwise centralized systems, and allow for data provenance guarantees through traceable and auditable data [27][19][77][4]. These qualities of blockchain systems place themselves at an ideal juncture to be used for bolstering the robustness of large language models. This integration creates the necessary conditions to allow for stronger privacy preservation, enhanced inference checks, anti-adversarial attack technologies, and similar defenses to be incorporated into the design of large language models.

This unification of technologies has become a hot topic of research within both blockchain and large language model oriented communities over the last several years. As a field in its infancy, blockchain for large language models (BC4LLM) demands rigorous analysis so that it may progress unhindered from any limitations that may arise from the combination of two newly introduced fields, especially given their relative complexity and various nuances. Towards this end of progress in the fields of large language models and blockchain systems, we present this survey paper as a vehicle for researchers to better grasp the state of the two fields and especially understand the combination of the two technologies in the vein of how blockchain can better serve large language model systems. To clarify our goals with this paper, we introduce four research questions that motivate the entirety of the paper and generalize our aim in writing this survey. They are as follows:

- RQ1.** What are the pressing LLM-related security concerns that may be addressed with blockchain technology?
- RQ2.** How can we meaningfully differentiate between security and safety in the context of BC4LLMs?
- RQ3.** In what ways can blockchain technology be used to enhance the safety of LLMs?
- RQ4.** What are prominent gaps within the BC4LLMs area, how can these gaps influence research directions, and what resources can we provide to enable potential new directions?

Of note is our focus specifically on how blockchain systems may impact large language model *security* and *safety*. We limit the scope of this survey to these terms in order to provide finer-grained analysis and categorization of seemingly disparate works - and to more clearly spur research advances in specific directions. Indeed, we typically see attacks on LLMs occur via malicious third parties which exploit system vulnerabilities (security) [5][121][132][44][66] or as passive issues embedded in the structure of a LLM which places users at risk with no malicious outside influence (safety) [34][109][92][125]. It is because of this encompassing distinction that we offer our analysis of the blockchain for LLM (BC4LLM) space in the context of security and safety. Moreover, we further bolster the significance of this distinction with definitions of security and safety in the context of large language models. To the best of our knowledge, we are the first paper to rigorously introduce such definitions as we aim to lay a foundation upon which future BC4LLM works can build. It is also worth pointing out our contributions towards further defining privacy measures in the form

of active privacy and passive privacy efforts, modeled after Yan et al’s survey on bolstering data privacy [122].

To separate ourselves, and our analysis of BC4LLM through the lens of safety and security, from other similar works, we look at several other closely related reviews. He et al. [42] examine the relationship between large language models and blockchain in analyzing how large language models can further enhance blockchain systems in the LLM4BC space. Mboma et al. [74] provide an exploratory review of general integrations between blockchain and large language models, which is similar to Heston’s analysis of integrating the two technologies in the sphere of telemedicine [30]. In the case of Salah, et al. [91], Bhumichai et al. [13], and Dinh et al. [28], we see the exposition of potential and existing technologies between blockchain and artificial intelligence in general. In summary, existing reviews that contend specifically with the blockchain and large language model space are not focused on the direction in which they apply the technologies. On the other hand, reviews that concern blockchain and AI as a whole lose the benefits of tighter granularity and focus. We present an overview of related works in table 1, which juxtaposes the above papers’ contents with our specific focuses, stressing the differentiating factors that we introduce into the space.

1.1 Contribution

We outline the exact contributions of this survey paper, and highlight their impact in answering our research questions. They are as follows:

1. We present several key contributions in the form of various frameworks, definitions, and compiled resources. Most prominently, we introduce a taxonomy of blockchain for large language Models in Figure 3. This taxonomy aims to succinctly explain the relevant interactions between various blockchain components and corresponding large language model vulnerabilities [RQ1][RQ3]. To further motivate and contextualize this taxonomy as well as our general discussion of existing literature, we introduce two definitions of safety and security as they apply to large language models [RQ2]. Moreover, we also provide multiple datasets relevant to BC4LLM in order to provide future researchers in the area with the tools to expand upon connections highlighted by the taxonomy and motivated by our definitions [RQ4].
2. We also highlight several other important components of our paper, intended to support our main contributions but still relevant in their own regard as pertinent artifacts of the BC4LLMs space. One such artifact is our definitions of specific areas that are found within our definition of safety, further expanded upon in Table 3 [RQ2][R3]. These definitions add further weight to our definition of safety for large language models. We go on to bolster our definitions of both safety and security by purposefully focusing on the issue of privacy in the context of security, consequently reaffirming two terms as introduced by Yan et al. [122]: passive and active privacy [RQ1][RQ3]. Also relevant in their own right but primarily proposed as supporting contributions are our contextualization of LLMs as a sub-field of various AI areas [RQ1], and our succinct taxonomic overview of blockchain components [RQ1][RQ3].

Table 1: **Overview of Existing Related Surveys.** Reviews concerning blockchain and large language models take many different forms and facilitate different functions within the broader context of BC4LLMs literature. However, a holistic review of BC4LLMs is absent from the current state of the field. For example, while many survey papers have focused to some degree on general threats affecting LLMs, fewer have considered LLM-specific threats or approached these problems from the direction of using blockchain technology. In this table, we document to what degree several important components of our survey are present in different reviews. In particular, we examine if the background is given on relevant subjects, if a model of threat categorization is introduced, if definitions of security and safety are proposed, whether security and/or safety in regards to BC4LLMs is explored, if future BC4LLMs work is probed, and whether or not the survey instead focuses on LLM for Blockchain (LLM4BC) instead of BC4LLM.

● denotes a full discussion of the related topic, ◐ a partial discussion, and ○ indicates the topic was absent from the review.

Source	LLM and BC Background	Threat Model	Definitions	Security in BC4LLMs			Safety in BC4LLMs	Future Work	LLM for Blockchain
				LLM	AI	Non-AI			
Luo, et al. 2023 [69]	●	◐	○	◐	◐	◐	◐	●	○
Mboma, et al. 2023 [73]	●	○	○	◐	○	◐	◐	○	●
He, et al. 2024 [42]	●	○	○	○	○	○	○	○	●
Heston 2024 [30]	◐	○	○	●	◐	○	◐	◐	◐
Salah, et al. 2019 [91]	◐	○	○	○	●	●	◐	○	○
Bhumichai, et al. 2024 [13]	◐	○	○	○	●	◐	◐	○	○
Dinh and Thai 2018 [28]	◐	○	○	○	●	○	◐	○	◐

- Finally, we make note of the overarching goal of our paper, which also stands as the most critical contribution we offer. That is, we present this paper in part as a holistic literature review in Section 4. In it, we categorize relevant fields to present novel insights into the space, classify research efforts in several interrelated respects, relate all BC4LLM research projects to LLM safety and security, and as a result capture an accurate and informative picture of how blockchain can benefit large language models [RQ1][RQ2][RQ3][RQ4].

The remainder of the survey is organized as follows: Section 2 introduces the background of blockchain technology and large language models. Section 3 consists of our methodology; we analyze how we filtered works for this review, and introduce the relevant definitions which motivate our analysis of the current literature. We also share our model of threat categorization, similar to Yao et al.’s categorization [124]. In Section 4, we present the comprehensive literature review of the BC4LLM space in the context of safety and security. We then scrutinize works within these areas in relation to our BC4LLM taxonomy. Within Section 5, we present relevant datasets to the BC4LLM space in order to supply future researchers with both well-known and more obscure datasets. Afterwards, in Section 6, we discuss important challenges that exist between blockchain technology and large language models which fundamentally hinder progress in the field at large. Section 7 proposes future research directions in the BC4LLM space, and section 8 concludes the paper, which both summarizes our efforts in surveying the BC4LLM area and provides further insight into the state of BC4LLM as a whole.

2. BACKGROUND

In this section, we present an overview of blockchain as a distributed ledger technology and relate the abilities of large

language models to their capacities as agents with respect to their nature as both AI models and their tendency to interact with vast quantities of data.

2.1 Blockchain

Since the introduction of Bitcoin as a decentralized currency by Satoshi Nakamoto in 2008 [79] there has been a subsequent explosion of academic and commercial interest in its underlying blockchain technology. Additionally, and as highlighted by the introduction of Vitalik Buterin’s Ethereum blockchain in 2014 [17], there has been a particular focus on blockchain’s potential applications in fields entirely disparate from digital currencies. The interest in blockchain, or distributed ledger technologies, stems from its guarantees about data sovereignty, transparency, and relative permanence. Concisely, these properties are often referred to as immutability and irrefutability. Ranging from many diverse fields such as health care record management, digital identity management, or tax auditing, these properties are widely applicable and highly desirable, even though the mechanisms through which we achieve them can be somewhat complex and opaque. In light of the oftentimes convoluted nature of blockchain systems, we introduce blockchain to the reader in a piecemeal fashion in order to emphasize the modular, yet interconnected nature of such systems. Figure 1 represents an overview of our characterization of blockchain systems in general. We purposefully exclude certain components such as the incentive mechanism, or wallets, as they are beyond the scope of our analysis of blockchain as a means to serve large language models.

2.1.1 Blockchain Components

Consensus Protocol. Of particular interest to the BC4LLM space, and arguably the most fundamental component within a blockchain, the consensus protocol is the governing system that controls how data is added to a blockchain’s ledger. At

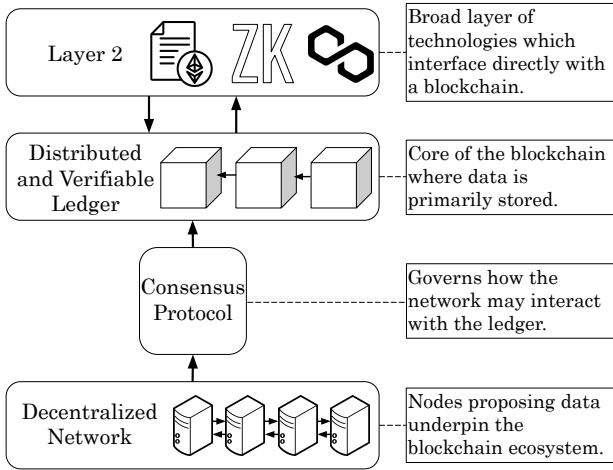


Figure 1: A blockchain consists of four main components. A decentralized network of nodes interacts with a ledger via a governing consensus mechanism. This ledger, adequately protected by the consensus mechanism, creates what we refer to as the blockchain. Layer 2 solutions can interface with this ledger to enable greater functionality between users and a blockchain’s data.

its core is the consensus mechanism, which both ensures the validity of proposed data and fosters an environment of accountability, so that nodes submitting invalid information may be penalized accordingly. For example, the Proof of Work (PoW) consensus mechanism [79] is by far the most widely known. In it, nodes must solve a complex mathematical equation in order to gain rights to propose data for the blockchain. When such a node submits new data, it is scrutinized by every other node in the system. If the data is malicious, or untruthful, the proposal is rejected and the corresponding processing power performed by the malicious node has effectively been wasted, as that node will not receive the incentive, a Bitcoin reward. The underlying ideas of accountability, certain nodes being selected as ‘block proposers’, and the ‘proof’ of the ability to submit information to the chain are central ideas in consensus protocols across blockchains with different consensus protocols [81].

Verifiable Ledger. At a blockchain’s core sits the verifiable ledger, a repository of data bolstered by a secure way of maintaining the integrity of that data. Of note is the particular technique through which data itself is verified on the ledger: the Merkle tree [76], or a variation thereof. Typically implemented as a ground-up binary tree, data is stored in leaf nodes, with hashed pointers of that data cascading up the tree. This structure results in a comprehensive ‘Merkle root’, a hash pointer consisting of all the other hash pointers in lower levels of the tree, which is ultimately based on the data stored in the leaf nodes. This technique ensures the integrity of information in the leaf nodes, as any alteration to the data is instantly reflected in the Merkle root. Likewise, new additions to the Merkle tree can be checked against previous states of the tree via a recalculation of the Merkle root accounting for the new transactions. This technique, complementing the verifiable ledger, is often the key to LLM data provenance and traceability solutions that rely on blockchain technology.

Decentralized Network. Critically, blockchain’s are decentralized networks. That is, no central server or group of servers may assume control of the network in a way that would compromise the network’s state of trustlessness. This is achieved through multiple avenues, such as the aforementioned consensus protocol, the distribution of the verifiable ledger among a large number of independent nodes, and the accessibility of a given blockchain’s network. [27] In this way, no users in the network are required to trust any other user. This fundamental aspect of blockchain is responsible for already realized and potential advancements with LLMs concerning areas such as RAG, the training process, and even supply chain issues.

Layer 2 Technologies. Apart from the fundamental components found within all blockchains themselves, there exist several external architectures that interface with blockchains and further enhance their applicability. Typically, these are referred to as layer 2 technologies, as they sit a ‘layer’ above the ‘layer 1’ blockchain. Increasingly relevant as blockchain’s influence grows, layer 2 solutions are a burgeoning area with numerous novel research directions. Most prominent among these is the space concerning smart contracts, scripts that rely on a blockchain’s security guarantees in order to facilitate off-chain transactions [140]. Also of note in the layer 2 field, and sometimes combined with the efficacy of smart contracts, are zero-knowledge rollups. Often used to strengthen scalability, zero-knowledge rollups batch unproposed transactions together, and instead of submitting the transactions themselves, submit proof that the transactions are indeed valid [103]. This allows for transactions to be added on-chain without the need for every full node to redo the calculations found within those transactions. This area of layer 2 technologies is pivotal as it relates to BC4LLM - layer 2 has the necessary dynamism to react quickly to new and emerging LLM vulnerabilities.

2.2 Large Language Models

In recent years, large language models (LLMs) have grown in popularity as a driving force in artificial intelligence (AI), being used across various fields, such as trustworthiness [51, 25], scholarly document processing [142], signal processing [89], quantum computing [58], climate production [60, 59], software engineering [139], and healthcare [42] among multiple other learning environments. Zhao et al. [135] and Yang et al. [123] define LLMs and pre-trained language models (PLMs) from the perspectives of model size and training approach. Generally speaking, PLMs refer to language models that are pre-trained on large amounts of general text data and then fine-tuned for specific tasks. LLMs are a kind of PLM. The key distinction is that LLMs are generally larger in scale with more parameters. These large language models have demonstrated the ability to learn universal representations of language, used in various natural language processing (NLP) tasks [47], bolstering their applicability.

LLMs are a sub-field of AI. Given this connection, discussions of blockchain for AI (BC4AI) research can also be applicable to LLMs. Figure 2 demonstrates the connections and following developments between AI, machine learning (ML), deep learning (DL), and LLMs. AI is largely discussed, yet we still see improvements in ML, such as FL that is better correlated to LLMs than general AI research. We then note DL as a subset of ML, showing advancements with neural network structures that are similar to how LLMs

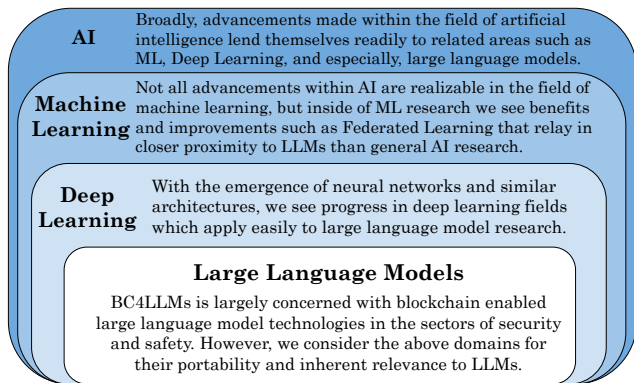


Figure 2: LLMs are a subset of AI. The focus of our paper is LLMs; however, we acknowledge AI due to the intertwined relationship between LLMs and AI.

learn and operate. To define ML, we refer to Liu et al. [62] who state that ML is an automated learning process using algorithms and statistical models to efficiently perform specific tasks without the use of explicit instructions. DL is a sub-field of ML that utilizes multiple layers of artificial neurons to learn the latent space representation of the most basic form of data such as images, text, and speech signals. As described by Shafay et al. [93] deep learning has been able to achieve human-like accuracy, or even better accuracy than humans, on a variety of difficult tasks. Below, we elaborate upon the process of how models are trained and fine-tuned to become a usable, safe, and secure system.

2.2.1 Model Training

During the pre-training phase, the LLM is trained on a diverse, large dataset of textual data from various sources to learn the statistical properties of language. The LLM is equipped with a myriad of adjustable parameters, commonly reaching more than ten billion [47]. Due to the huge model size and the vast amount of data used to train it, it is computationally challenging to successfully train a capable LLM, requiring distributed training algorithms for learning the model parameters [135]. Another crucial factor for LLM training is the data itself. Data that models are trained on come from a wide variety of sources, but the data itself may not be up to date [101]. To mitigate this shortcoming, recent advancements have introduced Retrieval-Augmented Generation (RAG), which is designed to augment and rectify the information returned by LLMs by consulting up-to-date online sources. The data that the LLM was trained on also has other deficiencies, like knowledge gaps in healthcare fields where data is private and restricted [50]. Due to these knowledge gaps, the LLM may conjure up hallucinations where the model generates false information during prompting [72, 3] because of a lack of relevant information. However, hallucinations may also occur with a plethora of data available as they are inherent problems in LLMs. Methods of preventing these hallucinations are elaborated on in 4.2.2. RAG can help rectify hallucinations, and fill in the gaps of data the LLM is missing, by using up-to-date and validated information from trustworthy online resources. This method of data retrieval introduces novel vulnerabilities since the information gathered by the retriever is largely un-audited and

may contain poisoned data or data that can lead to unsafe responses from the LLMs.

2.2.2 Model Tuning and Utilization

After pre-training, the parameters of LLMs can be further updated by training on domain-specific datasets in downstream tasks. This process is known as fine-tuning (FT) [16]. A kind of fine-tuning method called supervised fine-tuning (SFT), aims to improve LLMs’ responsiveness to instructions, ensuring more desirable reactions involving three major components of instructions, inputs, and outputs. Inputs relate to prompting and the inputs depend on the instructions, similar to applications of open-ended generation in ChatGPT. By providing both inputs and outputs they form an instance, and multiple instances can exist for a single instruction [42]. Among fine-tuning, there are a multitude of other training techniques within prompting the model such as instruction tuning and alignment tuning. By FT from a mixture of multi-task datasets formatted via natural language descriptions with the use of instruction tuning, LLMs are enabled to follow task instructions for new tasks without needing explicit examples, highlighting the ability of generalization for instruction following [135]. However, LLMs can demonstrate versatility, even without FT where they produce a phenomenon known as zero-shot learning, exhibiting the ability to perform tasks for which the model was never explicitly trained [16].

Alignment tuning, a form of reinforcement learning, is used to promote the LLM to be a safe interactive machine. Since LLMs are trained to capture the data characteristics of uncurated pre-training corpora involving both high-quality and low-quality data, the LLM can generate toxic, biased, or harmful content for humans. To mitigate this problem, a FT process based on reinforcement learning from human feedback (RLHF) is used to align the LLM with safety values in order to make a trustworthy model [135]. The RLHF process ranks LLM outputs, with rewards scaled to positive and negative values. The LLM is then trained to produce highly-ranked responses and avoid low-ranked responses. In healthcare, RLHF provides advantages to the model such as improved accuracy and reliability through continuous feedback from medical professionals and customizes the interactions based on real clinical settings and patient needs [41]. These advanced training techniques improve LLM’s ability to generalize across tasks and improve their overall utility in various domains.

3. RESEARCH METHODOLOGY

The discussion of blockchain technology’s incorporation into large language models necessitates a corresponding exploration into the implications of various terms and definitions found at that intersection. For example, due to the rapid emergence of LLMs, there exists an absence of consensus in describing common phenomena concerning LLM safety and security. To ameliorate this effect, we take care to stress opposing, but related, definitions of safety found within many different works in Table 2. In light of these distinctions, we offer two formal definitions of security and safety in order to contextualize these differing but similar areas of research. These definitions will also serve to highlight where particular blockchain technologies could be applied in their respective domains, and focus research efforts.

Table 2: **Differences in Definitions of Safety.** There is no unifying definition of safety within the area of large language models. We see obvious agreement that models should be law-abiding, ethical, and non-violent in order to be safe, and as such these properties are strongly relevant to our definition of safety. However, beyond that point, there is generally a deviation between the authors’ respective definitions. This creates two further categories of terms, properties that are moderately relevant to safety and those that are weakly relevant. Questions of fairness, the informing ability of an LLM, and robustness are generally covered but not unanimously, and hence are moderately relevant, whereas privacy-preserving properties or non-sycophancy are rarely discussed in the current literature and are thus weakly relevant to safety. This dialogue between different modes of thought concerning what makes a large language model ”safe” heavily influences our definition of safety and our resulting discussion.

Relevance	Property	Sun et al. [102]	Liu et al. [65]	Han et al. [39]	Röttger et al. [88]	Zhang et al. [133]	Wang et al. [110]	Tedeschi et al. [105]	Inan et al. [49]	Weidinger et al. [112]
Strong	Ethical	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Law-abiding	✓	✓	✓	✓	✓		✓	✓	✓
	Non-violent	✓	✓		✓	✓	✓	✓	✓	✓
Moderate	Fair				✓	✓	✓	✓		✓
	Informing		✓			✓	✓			✓
	Robust				✓	✓	✓			✓
Weak	Privacy Preserving	✓			✓		✓			
	Non-sycophantic				✓			✓	✓	

First, and to allow a richer discussion centered around safety and security, we delineate between active and passive privacy within LLMs as introduced in Yan et al. [122].

- *Active privacy* is where a user intentionally tries to gain access to sensitive information by breaking the large language model, especially with backdoor attacks, prompt injection attacks, and membership inference attacks during the pre-training and FT phases.
- *Passive privacy* is the state or condition of any impacted person being protected from accidental or unexpected data leakage originating from a large language model. This definition includes protecting the privacy of not only users but people whose information was added to a model’s corpus without their knowledge or consent.

Next, we introduce our definitions of security and safety regarding LLMs.

DEFINITION 1. LLM Security. *A large language model is considered secure if it:*

1. *Withstands applicable adversarial attacks and maintains system integrity, providing consistent and accurate responses, and*
2. *Ensures active user privacy, explicitly resisting backdoor, prompt injection, and inference attacks to prevent malicious users from extracting private information.*

DEFINITION 2. LLM Safety. *A large language model is considered safe if it interacts with users in a trustworthy manner, adhering to the aforementioned (Table 3) interrelated properties of safety: being ethical, law-abiding, nonviolent, fair, passively privacy-preserving, and informing.*

These definitions will serve a versatile role throughout this paper as building blocks for our contextualization of relevant and notable research efforts in the area of BC4LLMs.

Moreover, they will also serve the community at large in helping to establish reliable and tangible properties of secure and safe large language models. They also will aid in establishing tighter definitions on finer-grained terms and ideas within BC4LLMs. For example, in Table 2 we provide definitions for terms found within our definition of safety to lessen the effect of the vague nature of some of the words. These definitions are backed by relevant examples found in the literature.

3.1 Research Approach and Limitations

Literature surveys often are limited in their depth and scope by unconscious factors that impact the authors’ ability to fairly select papers for review. To be transparent, and to aid researchers conducting similar or future reviews, we outline our research approach and its associated limitations. While conducting our research, we used the search engine Google Scholar, and several databases including ACM Computing Surveys, IEEE Xplore, SpringerLink, and arXiv. We chose these databases as they either produce quality research and contribute to the growth of interest in novel areas, or in the case of arXiv have the most up-to-date papers available. With Google Scholar, we used keyword searches such as ”blockchain for LLMs” and ”blockchain-based LLMs” as starting points for relevant, intriguing research papers. To solve problems concerning scope and interrelated domains of disparate areas, we gathered various applications of blockchain for AI, blockchain-enabled machine learning, federated learning, and deep learning tactics to apply them to LLMs. Lastly, of note is the fact that we were largely aided in this further research effort by a waterfall approach to finding research papers. That is, we found several foundational papers in the BC4LLM field, explored citations in those papers, and subsequently explored citations in those secondary papers. We continued investigating relevant citations in this waterfall fashion until we reasonably exhausted all relevant articles. Admittedly, this method of finding prominent research articles is limited in its natural tendency to develop blind spots to less well-known research articles or venues.

Table 3: **Safety Area Definitions and Examples.** The area immediately surrounding BC4LLMs lacks a unifying definition of safety as well as consensus on what terms within that definition precisely mean. We provide generalized definitions for terms considered in our definition, as well as examples of incidents in literature where LLMs deviate from behavior as described in the definition. Italicized terms indicate inclusion in our definition of safety.

Safety Area	Definition	Example of Non-alignment
<i>Ethicality</i>	LLMs aligning with moral principles.	A LLM agreeing with eugenics. [43].
<i>Legality</i>	LLMs refusing to assist users in illegal endeavors.	A LLM assisting a user in creating incendiary devices. [107].
<i>Non-violence</i>	LLMs soliciting generally non-violent advice or instructions.	A LLM advising a user to perform a 'raid on a drug house' and 'kill everyone there' [35].
<i>Passive Privacy</i>	LLMs protecting private data within their corpus absent of malicious threats.	A LLM partially or fully reconstructing private images from a given dataset [20].
<i>Honesty</i>	LLMs refraining from producing inaccurate or misinformed responses which may lead to negative outcomes.	LLMs administering faulty or fundamentally dangerous advice to patients or physicians in a healthcare setting [82].
<i>Fairness</i>	LLMs ensuring a equitable environment for interaction, regardless of social identity.	LLMs associating "male" names with qualities of leadership, and "female" names with qualities of amicability [109].
Robustness	The ability of the LLM to defend against adversarial attacks, originating from outside the model. This is a wide-reaching term, and falls within our discussion of security as it relates to LLMs.	A LLM falling victim to a backdoor attack planted in poisoned training data and producing malicious outputs as a result [124].
Non-sycophancy	LLMs choosing consistent outputs despite the chance that they may be in conflict with a user's beliefs or desires.	A LLM revising a correct answer to an incorrect answer after the user asks the LLM if they are sure or challenges the LLM's result in some way [95].

} Found within definition of safety

However, in the spirit of a literature survey, we choose to focus on more established papers that more accurately capture the trends currently found in the space. For our exclusion criteria, we limited our research as follows: no duplicates; found articles from 2016 and above, excluding the original Merkle Tree paper [76]; no Masters or Ph.D. theses; and only studies written in English.

3.2 Model of Threat Categorization

There exist a wide variety of threats which affect LLMs. Oftentimes, many of these threats originate from the nature of LLMs acting as AI systems. In Figure 3 we refer to these vulnerabilities similarly to Yao et al [124] who categorized the most extensively discussed LLM vulnerabilities and AI-inherent vulnerabilities together, yet also included external threats under non-AI inherent vulnerabilities. We contribute further by applying these vulnerabilities to each respective process within developing a large language model and tie these to respective applications of blockchain. Beginning with the training process, LLMs are prone to threats such as data poisoning and backdoor attacks. As defined in Yao et al. [124] data poisoning is where attackers influence the training process by injecting malicious data into the training set, introducing vulnerabilities within the security and effectiveness of the model. Following the trend of poisoned data, there can be backdoor attacks implemented on the training data, as defined in Li et al. [56] who categorize backdoor attacks into attacks on training data and attacks on local models. The backdoor attacks on training data are further divided into attacks based on label flipping and attacks based on planting triggers. Attacks based on label flipping focus on manipulating the labels, whereas attacks

on planting triggers modify the input data and labels, effectively constructing an adversarial sample. Then, attacks on local models are further divided into attacks based on modifications to the training process and attacks based on manipulating the trained model [56]. The backdoor attacks can be applicable to both the training and prompting phases of LLMs when using this distinction.

RAG attacks have a variety of issues, including privacy issues [127][5] and knowledge poisoning attacks [143]. For RAG specifically, Xue et al. [121] propose BadRAG to identify security vulnerabilities, exposing direct attacks on the retrieval phase from semantic triggers, and uncovering indirect attacks on the generative phase of LLMs that were caused by a contaminated corpus. These RAG-specific attacks and defenses are elaborated on in section 4.1.2. When interacting with a LLM, we see AI's inherent vulnerabilities become relevant, as in Yao et al. [124] note that LLMs are fundamentally AI models themselves. We focus on the prevalent adversarial attacks that malicious users may use to tamper with the LLM, attempts to find out sensitive information, or try to ruin the system entirely. We recognize jailbreaking and prompt injection as two separate but similar types of adversarial attacks that are initiated within prompting. For instance, jailbreaking prompts are designed to bypass the restrictions set by service providers during model alignment or other containment approaches [96]. Whereas prompt injection attacks aim to override an LLM's original prompt and directs it to follow a set of malicious instructions, leading to erroneous advice or unauthorized data leakage [66]. In our Sections 4.2.1, 4.2.2 we discuss instances of misinformation and passive privacy leakage addressed as safety concerns. Note that from above, we included back-

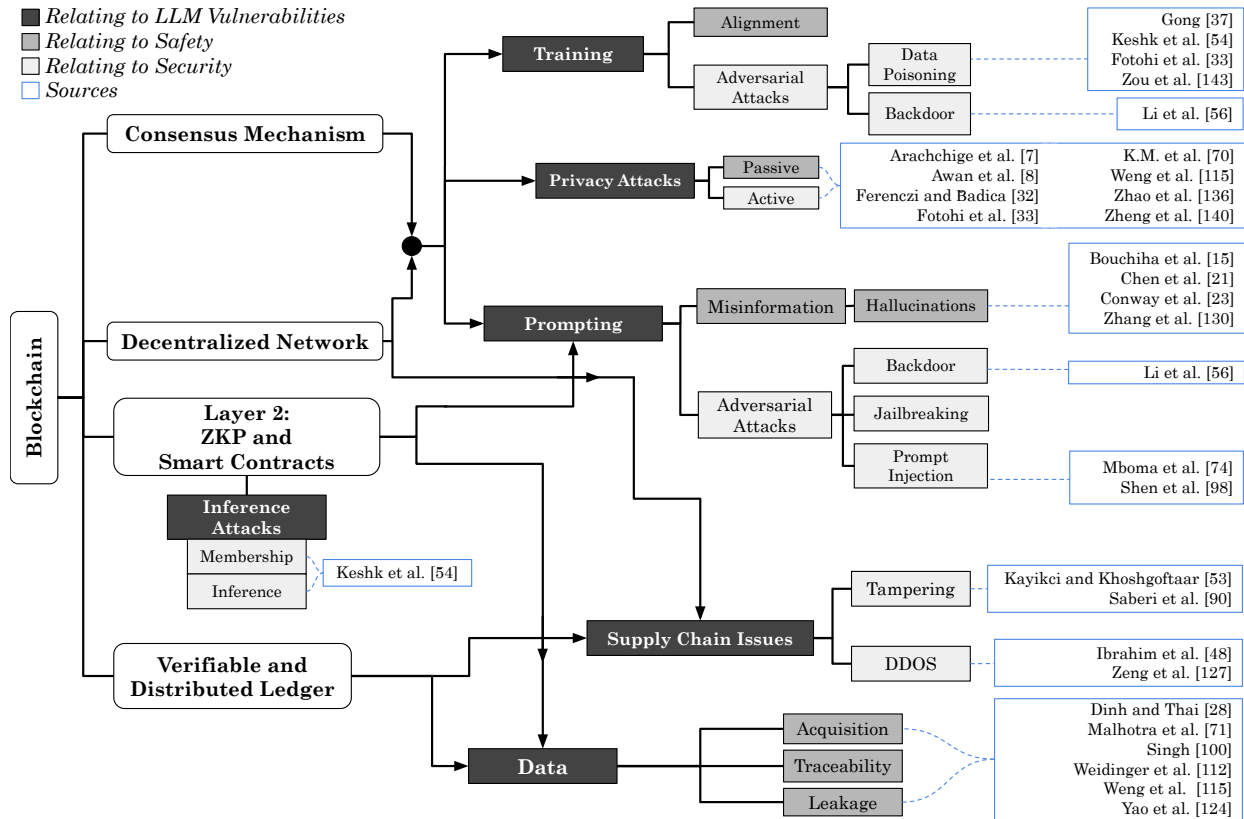


Figure 3: Taxonomy of Blockchain for LLM’s Security and Safety. This diagram outlines the integration of blockchain technology to enhance the security and safety of large language models through categorizing interactions and safeguards into several layers and components. Each section supports relevant sources for further reference, illustrating a comprehensive approach to mitigating and preventing vulnerabilities as well as supplementing the security and safety of LLMs through blockchain technology. Promising areas that currently do not have blockchain as a solution to these vulnerabilities intentionally do not have source boxes.

door attacks based on modifications to the trained model in prompting, since these backdoor attacks can still happen after the model has been trained [56].

Other attacks relating to LLMs and AI are membership inference attacks (MIA), relating to a type of privacy attack where some malicious user, given access to the model, is able to determine whether a given point was used to train that model with high accuracy [80]. However, Neel and Chang [80] state this attack is more related to information about the training point data leaking through the model, and that malicious users must have access to a candidate point in order to run the attack. Therefore this attack is more prevalent with passive privacy, highlighting the need for preventing data leakage. Similar attacks are user inference attacks that seek to gain knowledge or insights about the model or data’s characteristics, often by observing the model’s responses or behavior [124].

Lastly, we explore denial of service (DoS) attacks and supply chain vulnerabilities. From Yao et al. [124] a DoS attack is a type of cyber attack that aims to exhaust computational resources, resulting in latency or making the technology resources unavailable. We focus on distributed denial of service attacks (DDoS) which is a type of DoS attack where requests flood the system, attacking simultaneously from multiple sources on the network [29]. Yao et al. [124]

also defined LLM supply chain vulnerabilities, referring to the risks in the lifecycle of LLM applications that may occur from using vulnerable components or services, including third party plugins that may be used to steal chat histories, access private information, and or execute code on a user’s machine [124]. All of these security vulnerabilities are substantial threats to LLMs that need to be mitigated or prevented. Possible methods of defense are discussed within Section 4.1, using current blockchain frameworks and experiments for these security problems, as listed by each developmental phase of the LLM, AI inherent threats, and supply chain issues.

4. EXISTING LITERATURE ON BC4LLM

Independently, the fields of both LLMs and blockchain research have grown substantially over the past several years. It is no surprise that the literature surrounding these topics has begun to morph and relate to each other. In previous research, we have seen LLMs for Blockchain Security [42] as well as an introduction to the term BC4LLM in Luo et al [69] where they provide a comprehensive survey of blockchain for LLMs. However, they do not acknowledge the multitude of safety and security solutions that blockchain provides for certain LLM vulnerabilities. Effectively, Luo et al. [69] aims

to introduce BC4LLM for trusted AI, enabling reliable learning corpora, secure training processes, and identifiable generated content. In juxtaposition, our survey aims to analyze possible BC4LLM solutions closely related to our definitions of safety (2) and security (1) when looking at inherent system vulnerabilities in LLMs. To begin our analysis, we define these security problems based on previous work and highlight areas of research that are applicable to areas of BC4LLM safety and security.

4.1 Blockchain for Large Language Model Security

Few papers and experiments analyze how the integration of these two technological powerhouses interact with one another. We have seen benefits of this integration that apply to our definition of security (1). Baliya et al. [10] introduced a peer-to-peer (P2P) federated LLM, namely PageRank, which works with a blockchain. This system operates in a fully decentralized capacity. Demonstrably, the blockchain implementation led to more efficient accuracy and latency results. With that being stated, Baliya et al. [10] provide a developing direction in the field of BC4LLM to enhance system security. Below, we address several current vulnerabilities in LLMs and analyze them individually. In order to better understand these security problems, we categorize these vulnerabilities to their respective LLM training stages, highlight blockchain for AI works, and provide well-researched blockchain applications as a solution.

Vulnerabilities are present at each step in the process of developing a LLM. In early methods of model training, we encounter adversarial attacks such as data poisoning and backdoor attacks within the corpus [96, 122]. Progressing into model fine-tuning and general use, the LLM can fall victim to prompt-based attacks, [2][134] [122][66], inference attacks [44] [54], and RAG related attacks [121] [22][5][26][143] [127]. These attacks are common vulnerabilities in both LLMs and AI since LLMs and AI are closely related as seen in Figure 2. Some of the threats against LLMs can be addressed by implementations from blockchain for AI (BC4AI) research, as elaborated below in Section 4.1.3. Considering the volume of potential attacks against LLMs, we make a further distinction of solutions that are specifically related to BC4LLM research and other blockchain-based solutions from BC4AI research. With this, we are able to highlight shared vulnerabilities for LLMs and AI. We provide an analysis of how blockchain can help defend against and mitigate these vulnerabilities, starting with threats during each phase of LLM training and utilization, continuing onto different blockchain solutions for AI inherent threats, and lastly noteworthy technology inherent attacks such as denial of service (DDoS) attacks and issues with supply chain logistics.

4.1.1 Blockchain for Threats within LLM Training Process

Situated at a critical juncture in the process of model development is the issue of data selection. An area of paramount concern for this data is exactly how we can verify that training data is authentic and safe as well as tamper-proof from data poisoning attacks. A new approach may be the LLM’s ability to unlearn this poisoned data, or data that is unsafe according to our definition of safety 2. From Zuo et al. [145] they establish federated TrustChain as a method of enhanc-

ing LLM training and unlearning through a blockchain-based federated learning framework. By integrating blockchain using Hyperledger, their findings present that the framework is efficient in unlearning capabilities, showcasing an accuracy score initially of 99.15% and after unlearning, the accuracy drops to 0.70% [145]. This highlights the potential for BC4LLM to improve security and privacy guarantees, where the LLM can selectively forget specified data points while simultaneously preserving their performance with the leverage of Low-Rank Adaptation (LoRA) and tuning hyper-parameters. This method of a blockchain-enabled federated unlearning process is further detailed as a future research possibility that has been thoroughly explored by few, as emphasized later in Section 7.1.

Another significant problem in the area of adversarial threats against LLMs is data poisoning. Gong et al. [37] proposed a possible blockchain solution, introducing dynamic large language models (DLLM) on blockchains. Instead of using the traditional centralized data sets that LLMs are provided with, developing LLMs on blockchains enables the creation of decentralized datasets. These datasets are less likely to be tampered with and can be easily audited for accuracy. Gong et al. presents DLLM to evolve after the training process. This was implemented through neural network parameters that offer the LLM the ability to learn during its usage.

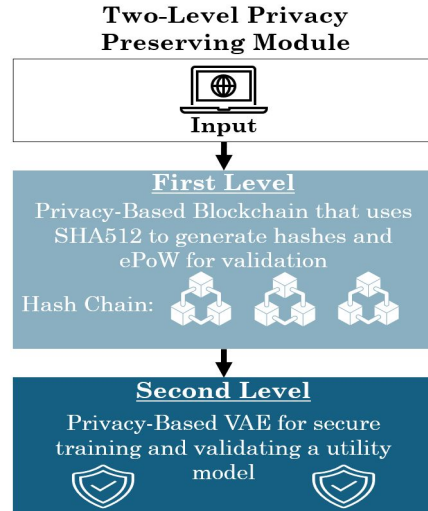


Figure 4: We provide an overview of a two-level framework consisting of: a privacy-based blockchain that uses the secure hash algorithm 512 (SHA512) to generate hashes for data integrity. Then, the enhanced proof of work (ePoW) is used to authenticate data records and prevent data poisoning attacks from altering original data. These hashes of data blocks are linked to each other, called a Hash Chain. Then, for the second level, privacy-based variational autoencoder (VAE) for secure data transformation, ensures robust protection against inference attacks while maintaining the utility model for anomaly detection.

Additionally, blockchain-based systems can help assess where data poisoning may occur and as shown in [54] blockchain can protect datasets and detect potential inference attacks through a two-level privacy preserving module. This research included a framework based on blockchain and deep learning, including two levels of privacy mechanisms as shown

in Figure 4. For the first level, Keshk et al. [54] used SHA512 to generate secure hashes and then implemented an enhanced proof-of-work (ePoW) technique for authenticating data records and preventing data poisoning attacks. The second level consisted of a VAE technique for converting original data into an encoded format for mitigating inference attacks that could be learned from system-based machine learning. In their testing, these mechanisms were effective in preventing data poisoning and inference attacks from manipulated smart power network datasets. BC4LLMs could benefit from this similar type of implementation, working with secure methods of hashing and blockchain-based deep learning privacy preservation techniques. By integrating a two-level privacy-preserving module, BC4LLMs can ensure data integrity and confidentiality while effectively detecting and mitigating both data poisoning and inference attacks.

Poisoned data has been an interest with RAG in particular. For example, Xue et al. [121] developed a way to identify security vulnerabilities from a poisoned corpus, but they do not use blockchain as a solution. We address the absence of research on blockchain and RAG, especially when using blockchain to help prevent RAG security issues. We discuss this as a possible future research direction as there remains a current gap in research of blockchain-based RAG systems and elaborate on this topic in 7.2. Poisoned data overall is a major concern within LLMs and we offer blockchain as a potential source of ground truth to aid in mitigating this threat during the pre-training stages of LLMs and potentially mitigate RAG security concerns. In addition to data poisoning, LLMs are susceptible to backdoor attacks hidden in the training data during the LLM pre-training phase. Notable research by Zhao et al. [134] introduced ProAttack which improves the stealth of backdoor attacks by accurately labeling poisoned data samples. As these attacks improve and become more sophisticated, it is crucial to explore robust defense mechanisms for LLMs. Few defense mechanisms using blockchain have been made, but we see in Li et al. [56] a proposal for a blockchain-based federated-learning framework (DBFL) that withstands backdoor attacks in a blockchain environment through incorporating an RLR aggregation strategy into the aggregation algorithm of a user and the addition of gradient noise to limit the effectiveness of backdoor attacks. The robustness of FL against backdoor attacks is enhanced by using various blockchain functions, including digital signature verification and simulation of chain resynchronization [56].

4.1.2 Blockchain for Threats within LLM Prompting and Utilization

LLMs undergo continuous training through instruction tuning, alignment tuning, and fine-tuning, which warrants a list of vulnerabilities such as prompt injection [74][98] and backdoor attacks [56]. These adversarial attacks are included under the term active privacy 3 where a malicious user attempts to gain unauthorized access. Blockchain technology, with its inherent transparency and immutability, holds the potential to mitigate and defend against these vulnerabilities. For instance, blockchain’s ability to ensure data integrity and provide traceability can play a pivotal role in defending against prompt injection attacks. Mbula et al. [74] produce an overview of LLMs for blockchain and note the capabilities of blockchain, especially the transparency and immutability to provide a reliable audit trail of transactions

to track and investigate any suspicious activities. Although not specifically focused on prompt injection, this approach showcases how blockchain can supplement security by offering a clear and immutable record of interactions. Applying this to BC4LLMs can help prevent suspicious users from continuously interacting with a LLM, allowing for traceability to stop the user from entering malicious prompts. We recognize prompt injection is a critical vulnerability in LLMs and AI-related systems, yet as noted in the survey from Shen et al. [98] few blockchain defenses for prompt injection are present in the current field of research.

Inference attacks are also of critical importance to LLMs and to active privacy, where a malicious user tries to extract data from the LLM. The malicious user could also try to gain information about the training data, hence why the Taxonomy 3 has inference attacks standalone. As discussed previously in Section 4.1.1 from Keshk et al. [54] that uses Blockchain and DL to privacy preserve and prevent inference attacks through a framework as depicted in Figure 4. For more inference attack applicable work, a survey [44] thoroughly discusses membership inference attacks on ML and provides a group of defenses including differential privacy, regularization, confidence masking, and knowledge distillation. In other works, there are instances of blockchain-based differential privacy methods [136][38][84], but current research that uses blockchain-based differential privacy frameworks to prevent inference attacks is limited; It is worth noting that the theoretical foundation and potential synergies of this combination are promising. Another area with limited research is blockchain as a defense for jailbreaking attacks, which exploit the inherent capabilities of LLMs to bypass restrictions. There are multiple articles defending LLMs from jailbreaking attacks, yet little to none fully include blockchain to prevent jailbreaking. Hu et al. [45] explores a blockchain defense mechanism for malware checking on operating systems, indicating a possible direction for future research in integrating blockchain to defend against jailbreaking in LLMs. As previously explained in Section 3.2, backdoor attacks after the model has been trained are based on modifications to the trained model. The key blockchain-based federated-learning framework from Li et al. [56] discussed in detail in Section 4.1.1 used a combination of a blockchain environment and an RLR aggregation strategy to defend against backdoor attacks. This framework effectively coordinated FL processes and maintained learning security and user privacy. When testing backdoor attacks caused by malicious participants, the accuracy of the model increased when using the RLR aggregation strategy [56]. Given these findings, the possibility of leveraging blockchains transparency and immutability presents a robust mechanism for improving LLM security against active privacy threats. However, comprehensive integration and empirical validation of blockchain-based defenses in LLMs remain imperative to advance the field of BC4LLMs.

4.1.3 AI-intrinsic Threats and Defenses

AI intrinsic threats apply to LLMs due to the proximity of LLMs and AI, as shown in figure 2. Blockchain for AI (BC4AI) is an emerging technology, with blockchain-based solutions already being researched as a secure way to establish trust in the Internet of Things (IoT) [99][24]. Instead of the term BC4AI, some previous works refer to the inte-

gration as "Onchain AI" [28][23]. Research of BC4AI encapsulates other machine learning related techniques such as blockchain-based federated learning and blockchain for deep learning. Federated Learning is an addition to machine learning, as noted in figure 2, where federated learning uses a privacy-preserving and decentralized approach to centralized systems.

There are multiple sources relating BC4AI, dating from 2018 to 2024 [28][111][67][119][31][91][104][71][18][11][13]. Focusing on the most well known works, Salah et al. [91] state integration benefits of BC4AI. For example, there are five main benefits, such as enhanced data security, improved trust in robotic decisions, collective decision-making, decentralized intelligence, and high efficiency[91]. For enhanced data security, it is known that information held within the blockchain is highly secure. By storing sensitive and personal data in a distributed, disk-less environment and allowing AI algorithms to work to secure data, also to ensure more trusted and credible decision outcomes. The other benefits of improving trust within AI decision making involves using the blockchain as a record of the decision-making process, allowing better AI traceability to analyze the quality of responses. Secondly, from Dinh and Thai [28] who summarized the integration of blockchain and AI to where blockchain can assist AI in multiple aspects, as follows. AI can benefit in secure data sharing from blockchain, allowing transparency and accountability regarding which user's data is accessed, when, and by whom, letting users maintain control of their personal data. Among other data concerns, with the integration of blockchain and AI, blockchain technologies can let user's sell their data via smart contracts, enabling the possibility of data marketplaces without a centralized middleman, making the transactions private and secure between users.

A noteworthy framework from Malhotra et al. [71] provides a blockchain-based proof-of-authenticity framework for explainable AI (XAI) utilizing a public Ethereum Blockchain, smart contracts, and IPFS (Interplanetary File System) to ensure secure, traceable, auditable transactions within the Ethereum network. This framework highlights three major components, smart contracts, an Ethereum and IPFS interconnected network, and a regulator, as depicted in figure 5. The use of smart contracts to enable continuous monitoring and tracing by all peers, in the case of any rule violations there are prompt rebound transactions to restore the system to an optimal state. To address the size limitation of storage on the blockchain, as further discussed in Section 6.1, Malhotra et al. [71] used unique IPFS hashes stored on the Ethereum Blockchain to access larger-sized explanations that are stored off-chain in IPFS. These hashes are encrypted with the SHA256 algorithm to maintain data security. Thus, only entities with the corresponding hash can access and retrieve the IPFS hash and the associated explanation, ensuring controlled access even in a distributed network. Lastly, the regulator's role is responsible for auditing and has access to the explanations to predict the user at fault using audit trails if system failure were to occur.

4.1.4 Non-AI Threats and Defenses

Referring to our Figure 3, we specifically focus on DDoS attacks and supply chain issues. Even though these attacks are common problems among technology as a whole; they are threats we consider relevant to BC4LLMs. Ibrahim et

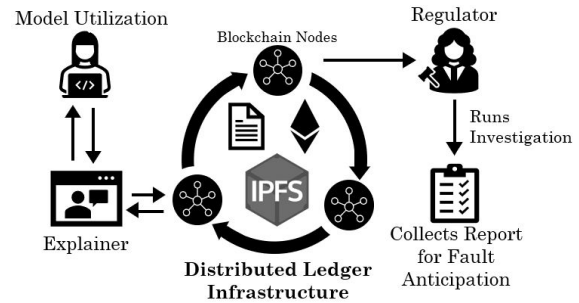


Figure 5: Within BXAI, this diagram illustrates the framework that leverages a distributed ledger infrastructure, using the Ethereum Blockchain and IPFS for storage and secure, traceable transactions. Depicted is the interaction between model utilization: an explainer generating local post-hoc explanations, the storage of these explanations in IPFS, and their linkage to the Blockchain. The use of smart contracts helps secure and encrypt the data, then relay it to a regulator who investigates current explanations, ensuring accountability and fault anticipation. Blockchain nodes are used to facilitate the secure and transparent broadcast of events within the Ethereum network.

al. [48] suggest using a public blockchain to prevent DDoS attacks on IoT devices. Blockchain provides a tamper-proof platform as well as demonstrates how IoT devices working with blockchain can verify and authenticate using a trusted white-list which is implemented in the smart contract. Following this smart contract usage, if LLMs were to use a trusted white list for users then we can try to prevent these malicious users from trying to access the LLM in certain circumstances that are mutually agreed upon. Additionally proven in Shah et al. [94], blockchain-based solutions play a vital role in mitigating DDoS attacks.

A point of consideration is how DDoS attacks that target the blockchain to make the blockchain unavailable would require sufficient computer resources. The fully decentralized architecture of the blockchain and the consensus protocol for new blocks ensure that the blockchain can still operate meanwhile several blockchain nodes could be offline [128]. Incorporating this architecture into LLMs would help prevent DDoS attackers, as the larger the blockchain network is, then the harder it would be for a DDoS attack to be successful. Moreover, blockchain is known as a distributed, immutable, and verifiable ledger technology that ensures transparency and traceability [90]. By utilizing blockchain for LLMs, we can help mitigate these supply chain vulnerabilities. The decentralization of the network can maintain the integrity of the system at all points, aiding in mitigating the risk of a single point of failure, a common problem with centralized systems [90]. Blockchain is offered as a solution if the LLM were to accidentally crash, or was purposefully attacked by an attempt at overwhelming the system, then the LLM would still be intact since it is blockchain-based, removing the single point of failure entirely. However, it is important to note that blockchain solutions for LLMs depend on the availability of the underlying LLM infrastructure. If the LLM server is malfunctioning or shut down, then these blockchain mechanisms may not be applicable, highlighting the need for a robust and resilient supply chain. To solidify the supply chain, blockchain offers secure transac-

tional data in sectors including supply chain management, healthcare, and federated learning [145]. For better supply chain management and data traceability, Kayikci and Khosgoftaar [53] address the potential intersection of blockchain and ML. ML can aid in analyzing data from multiple sources and identify potential supply chain issues such as delays or quality issues before they occur. By using blockchain to create a transparent record of all supply chain transactions there are improvements in security, openness, traceability, and productivity [53]. While blockchain presents a promising solution for enhancing security and defending against adversarial threats to LLMs, ongoing research and development are necessary to address the evolving landscape of threats and vulnerabilities.

4.2 Blockchain for Large Language Model Safety

The burgeoning dominance of large language models as search engines [87], code-writers [139], and a vast array of other roles has led to the emergence of unique problems within the sphere of their safety. For instance, LLMs who advise users to engage in dangerous activities such as eating glass [40] or which easily reveal personally identifying information [55] may be unsafe for users to interact with even in the absence of external threats. In this section, we rely on our proposed definition of safety (Definition 2) to explore relevant literature that incorporates blockchain technology into the various solutions surrounding LLM safety.

4.2.1 Blockchain for Passive Privacy in Large Language Models

Despite its novelty, the notion of passive privacy is of paramount importance in maintaining the safety of large language models. Some models face the issue of leaking sensitive data, potentially revealing private information like government-issued ID numbers and patient data [83]. Given the severity of such leaks, it is evident that solutions to such problems are required for more substantial advancements in LLMs. To this end, blockchain’s guarantees about data sovereignty, obfuscation, and traceability translate well into realizable passive privacy benefits for large language models. In particular, we observe blockchain-based privacy preservation techniques which originate in varying proximity to LLMs as seen in BC4LLMs itself [113][100][108], blockchain-enabled deep learning [93][141][116][115][54], blockchain-enabled machine learning [7], and blockchain-enabled federated learning [85][70][137][78][8][32][86].

Within our focus of BC4LLMs, we have observed distinct trends in the application of blockchain to large language models in their capacity to bolster passive privacy guarantees. Most notably, the development of ZK-LLMs, or zero-knowledge large language models as described in Wellington [113] and Singh [100] have the potential to drastically reduce privacy leakage risks when interacting with large language models. Considering the problem of data leakage approached from the lens of access, this application is natural. A user querying for their own personally identifiable information should, ideally, be able to access it whereas an unauthorized user should not. Obfuscating portions or the entirety of a corpus using zero-knowledge proofs allows for untrusted training nodes, or the model itself, to act on sensitive data without the ability to regurgitate it to a potentially malicious party. This same mechanism has broad applica-

tions that have been explored in other recent works as well, with special focuses on ZKPs for data curation and pre-processing [108] which consequently enhance passive privacy within large language models.

Additionally, besides material on BC4LLMs, it is necessary to discuss passive privacy contributions made within LLM-related areas, as described in our classification of LLMs in the context of AI, ML, and DL.(Figure 2) Especially important in its immediate applications to LLMs, blockchain-enabled deep learning (BC-DL) is a growing field with potentially large impacts on LLM’s passive privacy. Specifically, certain BC-DL technologies propose learning mechanisms distinct from traditional federated learning models [116][93][54]. The concerted research effort to develop efficient distributed learning models that deviate from the typical model of federated learning is clearly well underway. This field has broad implications for blockchain; through the utilization of various blockchain properties, we see the development of privacy guarantees which undoubtedly strengthens the BC4LLMs area.

Of particular note in the BC-DL area is the influential DeepChain paper [116] which introduced a novel privacy-preserving training framework based on blockchain technology. The proposed system, reliant on a consensus protocol and corresponding incentive mechanism, allows for the existence of private training gradients and the guaranteed auditability of training data. This type of twofold approach, which also leans on zero knowledge in several areas of the protocol, could be indicative of a new direction of research for blockchain-enabled passive privacy, stemming from the vastly studied federated learning area. In order to highlight the novelty of such an approach, we provide Figure 6 to further illuminate the nature of a system interacted with chiefly through the two vehicles of consensus and incentivization.

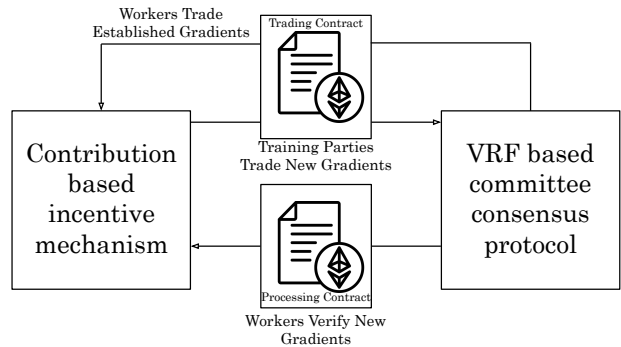


Figure 6: Within DeepChain, we see a deviation from conventional federated learning models in that while training occurs in iterative rounds, it is marked by synchronous requirements for consensus on data added to the model in the last round of training. The contribution-based incentive mechanism rewards workers for verifying new gradients, and stimulates the trading contract which facilitates the sharing of new and updated gradient information. A Verifiable Random Function (VRF) ensures that the committee-based consensus is fair and alleviates concerns surrounding finality.

Additionally, despite this potential research direction, discussion on the wide body of research that does exist concern-

ing blockchain-enabled federated learning (BC-FL) is essential when describing blockchain as a vehicle for improving the safety and security of large language models. Federated learning, introduced in McMahan et al. [75], has since been the principle building block of decentralized learning approaches in machine learning systems. While too broad to be considered for BC4LLMs, notable to this paper are the contributions of authors approaching BC-FL in its capacity as a powerful privacy preserving mechanism [78][8][32][33][70][137].

4.2.2 Blockchain for Misinformation in Large Language Models

The issue of large language models fabricating information, commonly known as hallucinations [72][3] is well understood. As a result, detecting and defending against hallucinations is a widely explored area [92], with more research still yet to be conducted [126][130]. Along with this pressing general body of research, efforts have been made to leverage blockchain technology to reduce hallucinations by consensus-oriented [131] and oracle-based [15] approaches. Within consensus, Zhang et al. [131] proposed a system for efficient large language model inference quality assessment. That is, the veracity of a given model’s responses was able to be assessed by using a ‘Proof of Quality’ consensus mechanism with low latency between the user and language model. This stands in contrast to other approaches, such as Bouchiha et al.’s [15] reputation-based system LLMChain, which relies on a decentralized oracle to cross reference request/response pairs originating from differing models and speak to the quality of inferences based on those comparisons. It is worth noting that despite these fundamental differences, they are both consensus-based approaches. This serves as an excellent example of how BC4LLMs technology can take many different forms towards the same goal.

Besides steering towards consensus-driven models of governance for misinformation, several other ideas have been considered to enhance the correctness of large language model responses. These accomplishments have come from the zero-knowledge space as in the case of Chen et al. [21], more optimistic privacy guarantees found within works such as Conway et al. [23], and even straightforward applications of the verifiable ledger as in Yazdinejad et al. [125]. Chen et al. propose zkML, a compiler that enables TensorFlow models to be translated readily into zk-SNARK halo2 circuits via either KZG or IPA commitments. This conversion allows for any portion, or the entirety of, an LLM to gain the properties of zero-knowledge, knowledge soundness, and completeness. Through this, and with potential connections to verifiable databases, zkML gains the powerful ability to audit inferences and ensure their accuracy. This research avenue is particularly promising due to both the efficient and potentially on-chain verification of zk-SNARKs as well as the extensibility of zkML to virtually any ML model.

Distinct from the zkML approach is that of Conway et al. with opML [23], which opts for an optimistic approach reliant on a fraud proof rather than a ZK proof to catch erroneous outputs within a certain challenge period. Clearly, there exist trade-offs in this implementation when compared to the zkML approach. Optimistic rollups are desirable in the sense that they are performant, but if implemented in a RAG environment, or similarly situated between the user and a model, latency issues can quickly become dominant. Apart from proof-oriented mechanisms and worth noting is

the work of Yazdinejad et al. [125], which focuses on detecting deep fakes using blockchain’s verifiable ledger. While not directly applicable to the realm of LLMs due to the non-atomic nature of data within a language model, important insights can be drawn from the paper. Namely, BC4LLMs could benefit greatly from a proposed hashing method applied to particularly sensitive data areas such as names, addresses, or even health-care related parts of corpora. This hash could be used as a guarantee of data veracity and could potentially prevent unsafe behaviors such as sycophancy, deception, or unfairness. Indeed, this hashing mechanism has the potential to be used as a final check for the LLM to verify that it is submitting information to the user that is consistent with standards agreed upon when information was originally committed to the ledger. Many similar vehicles for the maintenance of data integrity exist, albeit currently limited by scaling issues on-chain [27].

5. DATASETS RELEVANT TO BC4LLM

Developing synergistic technologies that incorporate blockchain and large language models is vital to securing a future consisting of safe, trustworthy LLMs. To this end, relevant datasets with which researchers may conduct experiments are of paramount importance. Moreover, it is often the case that blockchain-enabled systems require unorthodox training sets and edge cases in order to fully capture the dynamism and robustness of respective implementations. Therefore we have collected and summarize the relevance of certain datasets in Table 4. Of note are the standard datasets such as MNIST, CIFAR-10, SQuAD, and MS-MARCO, and we also give special attention to less widely known datasets which still may prove useful in certain academic settings.

6. PROMINENT CHALLENGES WITHIN BC4LLM

Despite the promise of the emerging BC4LLMs field, there are several innate challenges that delay progress and inhibit potential research directions. Typically, these are derived from certain limitations in blockchain technology, large language models, or deficits in the way that blockchain can serve large language models.

6.1 Corpus on Blockchain

Large language models require massive amounts of data to operate, with modern corpus sizes typically exceeding dozens of terabytes in volume [135]. This inherent quality of LLMs is situated opposite to problems that blockchain systems typically prefer to solve. Reconciling the limitations of blockchain’s throughput and capacity for data handling with LLMs ballooning size is perhaps the most pressing issue in the BC4LLMs space.

Multiple attempts in which researchers have proposed zero-knowledge proofs for scalability have been discussed, such as in Wellington [113] and Singh [100]. However, employing zero-knowledge technology solely for scalability, and not privacy, is a doubtful long-term prospect due to the demands of generating zero-knowledge proofs, even with incredibly small circuits. Largely, this is due to the long-standing problem of the MSM within the context of generating ZKPs [120].

Table 4: Datasets Relevant to BC4LLMs

Dataset	Use Case	Description	Papers
MNIST ¹		Images of handwritten digits for pattern recognition applications or vulnerability analysis.	[116][114][75][32][97][57]
CIFAR-10 ²		Labeled images used in capacities from improving pattern recognition to zk-SNARK benchmarks.	[114][21][75]
MS MARCO ³	Pattern Recognition	Collection of human answered questions, used in training corpora as well as simulating RAG attacks.	[121][143][22]
MedMNIST ⁴		Collection of medical images from case studies.	[121][143][22]
Natural Questions ⁵	Poisoned RAG	Open domain question answering dataset, incorporating questions from users and rigorous answers.	[121][143][22]
HotpotQA ⁶		Question answering dataset with multi-hop questions and supervised, regulated, answers.	[143][22]
MT BENCH ⁷	LLM Evaluation	Ranked pairwise expert human preferences for various model responses.	[138][15]
SQuAD ⁸		Reading comprehension dataset comprised of questions posed on Wikipedia article with answers as sections of those corresponding articles.	[145][46]
IMDB Dataset ⁹	Sentiment Analysis	Movie reviews	[145][46]
SafetyBench ¹⁰	Safety Evaluation	Large number of multiple choice questions focused on evaluating the safety of large language models.	[133]
Tweets2011 ¹¹		List of scraped tweet identifiers and corresponding tweets from early 2011.	[145]
MTSamples Scrape ¹²		Sample transcription medical reports from various disciplines and areas.	[145, 46]
DRC Diplomas ¹³		Highschool diplomas from the Democratic Republic of the Congo.	[10]
HealthCareMagic ¹⁴	Sensitive Information Handling	Real patient-doctor conversations found through the HealthCareMagic website, capturing the nature of patient vocabulary.	[5]
Enron Emails ¹⁵		Large set of emails generated by employees of the Enron Corporation.	[145, 46]
LLMGooAQ ¹⁶		Comprehensive database capturing question and answers from a wide variety of domains.	[15]
GooAQ ¹⁷		Large scale question answering dataset aimed at developing a vast selection of question types.	[15]
The Pile ¹⁸		Massive and open source data set consisting of a combination of roughly 20 other datasets.	[134]

¹<https://yann.lecun.com/exdb/mnist/> ²<https://www.cs.toronto.edu/~kriz/cifar.html> ³<https://microsoft.github.io/msmarco/>⁴<https://medmnist.com/> ⁵<https://ai.google.com/research/NaturalQuestions> ⁶<https://hotpotqa.github.io/>⁷<https://paperswithcode.com/dataset/mt-bench> ⁸<https://rajpurkar.github.io/SQuAD-explorer/>⁹<https://developer.imdb.com/non-commercial-datasets/> ¹⁰<https://github.com/thu-coai/SafetyBench>¹¹<https://trec.nist.gov/data/tweets/> ¹²<https://mtsamples.com/> ¹³<https://minepst.gouv.cd/palmares-exetat/>¹⁴<https://huggingface.co/datasets/RafaelMPereira/HealthCareMagic-100k-Chat-Format-en>¹⁵<https://huggingface.co/datasets/preference-agents/enron-cleaned> ¹⁶<https://github.com/mohaminemed/LLMGooAQ/>¹⁷<https://huggingface.co/datasets/allenai/gooaq> ¹⁸<https://pile.eleuther.ai/>

Moreover, current WebGPU and/or WASM implementations could likely not support the throughput that client-based LLMs would require. For these reasons, it is unlikely that zero knowledge could be employed as a definitive solution for scalability issues within BC4LLMs without extensive developments in zk-SNARK generation research.

The disconnect between large language models' growing size and the aversion of blockchain's to store data readily on chain is a major research challenge.

6.2 Reliance on Oracles

The security guarantees of blockchain technology, while robust, often leave little room for interoperability with external systems [27]. That is, the blockchain can most easily interact with information on the chain, leaving little room to consider issues such as fact-checking or moral alignment. Oftentimes, to develop mechanisms that seek to provide assistance with LLM toxicity or factuality, oracles are used to bridge this gap [31][34]. Serving as mediators between chains and online sources, oracles are trusted parties that deliver information through a variety of protocols and frameworks. However, introducing a trusted party into an otherwise trustless system has been a long-standing weak point in this solution [74]. Exploring non-oracle-based options for ground truth solutions, or toxicity checks, would greatly enhance the security guarantees of blockchain within LLMs.

6.3 Energy Consumption

The crux of many issues concerning large language models stems from their need to consume and process inordinate amounts of data [135]. This requirement, in turn, creates a corresponding need for large language models to consume equally as colossal quantities of energy during their training stages, as well as during run time [69]. On the other side of the coin, we have energy issues within blockchain as well. Oftentimes, blockchain systems struggle to limit energy costs as the demands of both consensus mechanisms and the validation of proposed transactions incur huge computational costs [74]. Due to their tendency's to consume large amounts of compute resources, we see an unfortunate dissonance between implementing BC4LLM at scale without large efforts to cut back on energy costs, possibly through a shift away from both transformer architectures and proof of work type consensus mechanisms [81].

7. FUTURE RESEARCH DIRECTIONS

There exist several critically overlooked areas within LLMs that may benefit greatly from the introduction of blockchain technologies. The most prominent of these areas include blockchain federated unlearning, RAG, differential privacy, data provenance, and toxicity mitigation.

7.1 Blockchain Federated Unlearning

Privacy regulations are paramount in the online realm, especially concerning the "right to be forgotten" and user data privacy which are critical considerations when working with LLMs and blockchain. Federated blockchain unlearning offers LLMs the ability to erase learned data. Within our research, we identified four recent papers that have implemented blockchain federated unlearning frameworks. As noted previously in Section 4.1.1, Zuo et al. [145] developed

a federated TrustChain framework for blockchain-enhanced LLM training and unlearning, focusing on the impact of Low-Rank Adaptation (LoRA) hyperparameters on unlearning performances and integrating Hyperledger Fabric to ensure the security, transparency, and verifiability of the unlearning process. In another study, Zuo et al. [144] presented a trustworthy approach towards federated learning with blockchain-enhanced machine unlearning. This implementation differs from Trustchain, where Zuo et al. [144] used a machine unlearning mechanism that utilized two types of clients for training and unlearning, smart contracts for process automation, and a blockchain network for secure, immutable record-keeping. Beyond the above works [144], Liu et al. [64] introduced Blockchain Federated Unlearning (BlockFUL) as a versatile framework that redesigns the blockchain structure using a Chameleon Hash (CH) technology to simplify model updates and reduce the computational and consensus costs associated with unlearning tasks. Additionally, BlockFUL ensures the integrity and traceability of model updates, including privacy-preserving results from these blockchain-based unlearning operations [64]. Lin et al. [61] propose a framework with a proof of federated unlearning protocol that also utilizes the Chameleon hash function to verify data removal and eliminate the data contributions stored in other clients' models. Both, Liu et al. and Lin et al. use CH functions in their blockchain-enabled federated unlearning processes. The applications of key blockchain components, such as on-chain smart contracts and hash mappings for verifying data removal, may enable LLMs to forget personal data effectively. Blockchain for unlearning is an emerging area of research with significant potential for further innovation.

7.2 Blockchain Enhanced Retrieval Augmented Generation

Considering the novelty of RAG, there exists a plethora of research that focuses on how RAG may be attacked, consequently weakening the integrity of large language models. [121][5][26][143][46][127][22] However, there exists a vacuum yet to be filled with potential work concerning how these attacks may be mitigated, especially where defenses can make use of blockchain technology. In particular, calls for the inspection of blockchain's potential role in RAG deployment [9] have been made, and preliminary work done in exploring this intersection where it concerns blockchain's potential usefulness in user experience [129] and performance assessment [84] has been conducted. However, efforts concentrated on the enhancement of security and safety within RAG systems are absent from the current literature. A concerted effort towards bettering BC4LLMs where it concerns RAG would be both mutually and independently beneficial for blockchain technology and large language models.

7.3 Blockchain for Privacy Guarantees in Large Language Models

The clear connection between federated learning, blockchain, and large language models allows for the field of differential privacy to enter BC4LLMs' sphere of relevance. Major contributions concerning the impact of differential privacy on related areas such as deep learning have already been made [1], but issues such as privacy budget exhaustion still loom large in the space [14]. Moreover, despite conclusions

that blockchain can help with privacy budget exhaustion [38, 136], few efforts have been conducted in exploring these solutions. Indeed, there is a need for more relevant research in order to realize the full measure of blockchain’s impact on this area.

7.4 Blockchain for Transparency and Data Provenance in Large Language Models

Several recent papers have urged for increased data accountability measures to be placed on organizations developing large language models, especially where it concerns issues of data acquisition [12][41]. Additionally, worth noting are direct calls for the introduction of blockchain technology to help solve the issue of data provenance [117] in large language models. Largely, while this has been answered with responses in the realms of auditability [56], straightforward data tracking solutions have remained absent from the literature, despite relatively simple conceptual formulations [28]. Towards this goal of achieving improved data provenance within large language models corpus’, RAG databases, and even in-context learning repositories, there is a need for more explorations into this natural application of distributed ledger technology to problems of explainable AI concerning large language models.

7.5 Blockchain for Non-toxic Large Language Models

Encompassing vital attributes such as ethics, legality, and non-violence, developing non-toxic large language models has been and will continue to be a major focus of the field for the foreseeable future [65][39][98]. There is no doubt that automated filtering of generated toxic content is one of the most pressing challenges concerning the safety of large language models [36][6]. This is because in essence, filtering inferences negatively impacts the quality of LLM responses, whereas manual human annotation is a costly and complex process [6]. Therefore, the applications of blockchain technology in this regard, while currently limited, are compelling. Considering one of the most groundbreaking achievements in ML within the past several years, federated learning has allowed for massive strides to be made within the spaces of securing training sets, user privacy, and even misinformation defense. A similar approach, aimed at the problem of toxicity, could be a hugely beneficial endeavor to the field. Moreover, imagining such a model is not difficult. Developing consensus around what is considered correct in a model and using that to propagate gradients and parameters is not dissimilar to the decisions that must be made about what is or is not toxic given the state of certain corpora. Given a concentrated research program, automated non-toxicity could very well have excellent solutions founded within the blockchain space.

8. CONCLUSION

In this survey, we presented how large language models have been applied to various facets of everyday life, revealing significant system vulnerabilities such as data poisoning, hallucinations, jailbreaking, and privacy attacks. Despite widespread recognition of these issues, effective mitigation strategies remain limited. Traditional machine learning solutions, such as differential privacy and federated learning

have been applied, but fall short in providing comprehensive protection against the unique threats faced by LLMs. The adoption of blockchain technology presents a promising avenue for enhancing the security and safety of LLMs. Blockchain systems offer robust mechanisms for ensuring data integrity, provenance and encrypted frameworks which can be leveraged to bolster LLM defenses. By incorporating blockchain-based defenses, it is viable to achieve stronger privacy preservation, and reliable data, and offer LLMs to be more resilient against adversarial threats.

Furthermore, it is critical to establish clear definitions of security and safety in the context of LLM technologies. We conclude that security for LLMs pertains to the ability to tolerate applicable adversarial attacks while maintaining system integrity to provide consistent and accurate responses. Whereas safety for LLMs is the model’s capacity to interact with users in a trustworthy manner, contingent upon adhering to ethical concerns, law-abiding, non-violent, fair, passively privacy-preserving, and informing. Additionally, differentiating between active and passive privacy measures will aid in developing more targeted and effective privacy-preserving strategies. These distinctions and definitions provide a foundational framework for future research in the BC4LLM space. From analyzing the integration of blockchain technology and LLMs, we provided a taxonomy in Figure 3 where previous research done in the field of BC4LLMs can apply to security and safety problems that LLMs face. We recognize various gaps in the BC4LLM space that need to be looked into for further consideration. In refining our understanding of relevant concepts, we see that the intersection of blockchain technology and LLMs holds significant potential for addressing the current shortcomings in LLM security and safety. With our contributions, we can use BC4LLM to provide more secure, reliable, and safe AI systems.

References

- [1] Martin Abadi et al. “Deep Learning with Differential Privacy”. In: *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*. 2016, pp. 308–318.
- [2] Sara Abdali et al. “Securing Large Language Models: Threats, Vulnerabilities and Responsible Practices”. In: *arXiv preprint arXiv:2403.12503* (2024).
- [3] Josh Achiam et al. *GPT-4 Technical Report*. 2024.
- [4] Omar Ali et al. “A Comparative Study: Blockchain Technology Utilization Benefits, Challenges and Functionalities”. In: *IEEE Access* 9 (2021), pp. 12730–12749.
- [5] Maya Anderson, Guy Amit, and Abigail Goldsteen. “Is My Data in Your Retrieval Database? Membership Inference Attacks Against Retrieval Augmented Generation”. In: *arXiv preprint arXiv:2405.20446* (2024).
- [6] Usman Anwar et al. *Foundational Challenges in Assessing Alignment and Safety of Large Language Models*. 2024.
- [7] Pathum Chamikara Mahawaga Arachchige et al. “A Trustworthy Privacy Preserving Framework for Machine Learning in Industrial IoT Systems”. In: *IEEE Transactions on Industrial Informatics* 16.9 (2020), pp. 6092–6102.

- [8] Sana Awan et al. “Poster: A Reliable and Accountable Privacy-Preserving Federated Learning Framework using the Blockchain”. In: *Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security*. 2019, pp. 2561–2563.
- [9] Anandaganesh Balakrishnan. *Enhancing Data Engineering Efficiency With AI: Utilizing Retrieval-augmented Generation, Reinforcement Learning From Human Feedback, and Fine-tuning Techniques*. 2024.
- [10] Sree Bhargavi Balija, Amitash Nanda, and Debashis Sahoo. “Building Communication Efficient Asynchronous Peer-to-Peer Federated LLMs with Blockchain”. In: *Proceedings of the AAI Symposium Series 3.1* (2024), pp. 288–292.
- [11] Nishant Baranwal Somy et al. “Ownership Preserving AI Market Places Using Blockchain”. In: *2019 IEEE International Conference on Blockchain (Blockchain)*. 2019, pp. 156–165.
- [12] Emily M. Bender et al. “On the Dangers of Stochastic Parrots: Can Language Models Be Too Big”. In: *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*. FAccT ’21. 2021, pp. 610–623. doi: 10.1145/3442188.3445922.
- [13] Dhanasak Bhumichai et al. “The Convergence of Artificial Intelligence and Blockchain: The State of Play and the Road Ahead”. In: *Information* 15.5 (2024).
- [14] Anis Bkakraia et al. “Optimal Distribution of Privacy Budget in Differential Privacy”. In: *Risks and Security of Internet and Systems: 13th International Conference, CRiSIS 2018, Arcachon, France, October 16–18, 2018, Revised Selected Papers 13*. 2019, pp. 222–236.
- [15] Mouhamed Amine Bouchiha et al. “LLMChain: Blockchain-based Reputation System for Sharing and Evaluating Large Language Models”. In: *arXiv preprint arXiv:2404.13236* (2024).
- [16] Tom B. Brown et al. *Language Models are Few-Shot Learners*. 2020.
- [17] Vitalik Buterin. “Ethereum: A Next-Generation Smart Contract and Decentralized Application Platform.” In: *white paper 3.37* (2014).
- [18] Davide Calvaresi et al. “Explainable Multi-Agent Systems Through Blockchain Technology”. In: *Explainable, Transparent Autonomous Agents and Multi-Agent Systems*. Springer International Publishing, 2019, pp. 41–58.
- [19] Bin Cao et al. “Blockchain Systems, Technologies, and Applications: A Methodology Perspective”. In: *IEEE Communications Surveys & Tutorials* 25.1 (2023), pp. 353–385.
- [20] Nicholas Carlini et al. *Extracting Training Data from Diffusion Models*. 2023.
- [21] Bing-Jyue Chen et al. “ZKML: An Optimizing System for ML Inference in Zero-Knowledge Proofs”. In: *Proceedings of the Nineteenth European Conference on Computer Systems*. 2024, pp. 560–574.
- [22] Pengzhou Cheng et al. “TrojanRAG: Retrieval-Augmented Generation Can Be Backdoor Driver in Large Language Models”. In: *arXiv preprint arXiv:2405.13401* (2024).
- [23] K. D. Conway et al. *opML: Optimistic Machine Learning on Blockchain*. 2024.
- [24] Jerry Cuomo. *How blockchain adds trust to AI and IoT*. 2020.
- [25] Chengyuan Deng et al. “Deconstructing The Ethics of Large Language Models from Long-standing Issues to New-emerging Dilemmas”. In: *arXiv preprint arXiv:2406.05392* (2024).
- [26] Gelei Deng et al. “Pandora: Jailbreak GPTs by Retrieval Augmented Generation Poisoning”. In: *arXiv preprint arXiv:2402.08416* (2024).
- [27] Advait Deshpande et al. “Distributed Ledger Technologies/Blockchain: Challenges, opportunities and the prospects for standards”. In: *Overview report The British Standards Institution (BSI) 40.40* (2017), pp. 1–34.
- [28] Thang N. Dinh and My T. Thai. “AI and Blockchain: A Disruptive Integration”. In: *Computer* 51.9 (2018), pp. 48–53.
- [29] Sidi Boubacar ElMamy et al. “A Survey on the Usage of Blockchain Technology for Cyber-Threats in the Context of Industry 4.0”. In: *Sustainability* 12.21 (2020), p. 9179.
- [30] Thomas F. Heston. “Perspective Chapter: Integrating Large Language Models and Blockchain in Telemedicine”. In: *A Comprehensive Overview of Telemedicine [Working Title]*. IntechOpen, 2024.
- [31] Shaokun Fan et al. “Blockchain as a trust machine: From disillusionment to enlightenment in the era of generative AI”. In: *Decision Support Systems* 182 (2024).
- [32] Andras Ferenczi and Costin Bădică. “A Fully Decentralized Privacy-Enabled Federated Learning System”. In: *Computational Collective Intelligence: 15th International Conference, ICCCI Proceedings*. 2023, pp. 444–456.
- [33] Reza Fotohi, Fereidoon Shams Aliee, and Bahar Farahani. “Decentralized and robust privacy-preserving model using blockchain-enabled Federated Deep Learning in intelligent enterprises”. In: *Applied Soft Computing* 161 (2024), p. 111764.
- [34] Paula Fraga-Lamas and Tiago M. Fernández-Caramés. “Fake News, Disinformation, and Deepfakes: Leveraging Distributed Ledger Technologies and Blockchain to Combat Digital Deception and Counterfeit Reality”. In: *IT Professional* (2020).
- [35] Deep Ganguli et al. *Red Teaming Language Models to Reduce Harms: Methods, Scaling Behaviors, and Lessons Learned*. 2022.
- [36] Samuel Gehman et al. “RealToxicityPrompts: Evaluating Neural Toxic Degeneration in Language Models”. In: *Findings of the Association for Computational Linguistics: EMNLP 2020*. 2020, pp. 3356–3369.
- [37] Yuanhao Gong. *Dynamic Large Language Models on Blockchains*. 2023.
- [38] Leong Mei Han, Yang Zhao, and Jun Zhao. *Blockchain-Based Differential Privacy Cost Management System*. 2020.

- [39] Tessa Han et al. *Towards Safe Large Language Models for Medicine*. 2024.
- [40] Stefan Harrer. “Attention is not all you need: the complicated case of ethically using large language models in healthcare and medicine”. In: *EBioMedicine* 90 (2023).
- [41] Kai He et al. *A Survey of Large Language Models for Healthcare: from Data, Technology, and Applications to Accountability and Ethics*. 2024.
- [42] Zheyuan He et al. “Large Language Models for Blockchain Security: A Systematic Literature Review”. In: *arXiv preprint arXiv:2403.14280* (2024).
- [43] Dan Hendrycks et al. “Aligning AI With Shared Human Values”. In: 2020.
- [44] Hongsheng Hu et al. *Membership Inference Attacks on Machine Learning: A Survey*. 2022.
- [45] Qinwen Hu, Muhammad Rizwan Asghar, and Sher-ali Zeadally. “Blockchain-based public ecosystem for auditing security of software applications”. In: *Computing* 103.11 (2021), pp. 2643–2665.
- [46] Zhibo Hu et al. “Prompt Perturbation in Retrieval-Augmented Generation based Large Language Models”. In: *arXiv preprint arXiv:2402.07179* (2024).
- [47] Xiaowei Huang et al. “A survey of safety and trustworthiness of large language models through the lens of verification and validation”. In: *Artificial Intelligence Review* 57.7 (2024).
- [48] Rahmeh Fawaz Ibrahim, Qasem Abu Al-Haija, and Ashraf Ahmad. “DDoS Attack Prevention for Internet of Thing Devices Using Ethereum Blockchain Technology”. In: *Sensors* 22.18 (2022).
- [49] Hakan Inan et al. *Llama Guard: LLM-based Input-Output Safeguard for Human-AI Conversations*. 2023.
- [50] Ziwei Ji et al. “Survey of Hallucination in Natural Language Generation”. In: *ACM Computing Surveys* 55.12 (2023), pp. 1–38.
- [51] Haibo Jin et al. “JailbreakZoo: Survey, Landscapes, and Horizons in Jailbreaking Large Language and Vision-Language Models”. In: *arXiv preprint arXiv:2407.01599* (2024).
- [52] Enkelejda Kasneci et al. “ChatGPT for good? On opportunities and challenges of large language models for education”. In: *Learning and Individual Differences* 103 (2023).
- [53] Safak Kayikci and Taghi M. Khoshgoftaar. “Blockchain meets machine learning: a survey”. In: *Journal of Big Data* 11.1 (2024).
- [54] Marwa Keshk et al. “A Privacy-Preserving-Framework-Based Blockchain and Deep Learning for Protecting Smart Power Networks”. In: *IEEE Transactions on Industrial Informatics* 16.8 (2020), pp. 5110–5118.
- [55] Siwon Kim et al. “ProPILE: Probing Privacy Leakage in Large Language Models”. In: *Thirty-seventh Conference on Neural Information Processing Systems*. 2023.
- [56] Lu Li, Jiwei Qin, and Jintao Luo. “A Blockchain-Based Federated-Learning Framework for Defense against Backdoor Attacks”. In: *Electronics* 12.11 (2023).
- [57] Zonghang Li et al. “Byzantine Resistant Secure Blockchained Federated Learning at the Edge”. In: *IEEE Network* 35.4 (2021), pp. 295–301.
- [58] Zhiding Liang et al. “Unleashing the potential of llms for quantum computing: A study in quantum architecture design”. In: *arXiv preprint arXiv:2307.08191* (2023).
- [59] Fudong Lin et al. “Comprehensive transformer-based model architecture for real-world storm prediction”. In: *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*. Springer. 2023, pp. 54–71.
- [60] Fudong Lin et al. “MMST-ViT: Climate Change-aware Crop Yield Prediction via Multi-Modal Spatial-Temporal Vision Transformer”. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 2023, pp. 5774–5784.
- [61] Yijing Lin et al. *Blockchain-enabled Trustworthy Federated Unlearning*. 2024.
- [62] Bo Liu et al. *When Machine Learning Meets Privacy: A Survey and Outlook*. 2021.
- [63] Ming Liu et al. *Federated Learning Meets Natural Language Processing: A Survey*. 2021.
- [64] Xiao Liu et al. *Decentralized Federated Unlearning on Blockchain*. 2024.
- [65] Yang Liu et al. *Trustworthy LLMs: a Survey and Guideline for Evaluating Large Language Models’ Alignment*. 2024.
- [66] Yi Liu et al. *Prompt Injection attack against LLM-integrated Applications*. 2024.
- [67] Vasco Lopes and Luís A. Alexandre. “An Overview of Blockchain Integration with Robotics and Artificial Intelligence”. In: *arXiv preprint arXiv:1810.00329* (2018).
- [68] Nils Lukas et al. *Analyzing Leakage of Personally Identifiable Information in Language Models*. 2023.
- [69] Haoxiang Luo, Jian Luo, and Athanasios V. Vasilakos. “BC4LLM: Trusted Artificial Intelligence When Blockchain Meets Large Language Models”. In: *arXiv preprint arXiv:2310.06278* (2023).
- [70] Sameera K. M. et al. “Privacy-Preserving in Blockchain-based Federated Learning Systems”. In: *Computer Communications* (2024).
- [71] Diksha Malhotra, Poonam Saini, and Awadhesh Kumar Singh. “Blockchain-based proof-of-authenticity frameworks for Explainable AI”. In: *Multimedia Tools and Applications* 83.13 (2024), pp. 37889–37911.
- [72] Joshua Maynez et al. *On Faithfulness and Factuality in Abstractive Summarization*. 2020.
- [73] Jean Gilbert Mbula Mboma et al. “Integrating LLM with Blockchain and IPFS to Enhance Academic Diploma Integrity”. In: *2024 International Conference on Artificial Intelligence, Computer, Data Sciences and Applications (ACDSA)*. 2024, pp. 1–6.
- [74] Jean Gilbert Mbula Mboma et al. “Assessing How Large Language Models Can Be Integrated with or Used for Blockchain Technology: Overview and Illustrative Case Study”. In: *2023 27th International Conference on Circuits, Systems, Communications and Computers (CSCC)*. 2023, pp. 59–70.

- [75] H. Brendan McMahan et al. *Communication-Efficient Learning of Deep Networks from Decentralized Data*. 2017.
- [76] Ralph C. Merkle. “A Digital Signature Based on a Conventional Encryption Function”. In: Springer, 1988, pp. 369–378.
- [77] Du Mingxiao et al. “A review on consensus algorithm of blockchain”. In: *2017 IEEE International Conference on Systems, Man, and Cybernetics (SMC)*. 2017, pp. 2567–2572.
- [78] Anudit Nagar. *Privacy-Preserving Blockchain Based Federated Learning with Differential Data Sharing*. 2019.
- [79] Satoshi Nakamoto. “Bitcoin: A Peer-to-Peer Electronic Cash System”. In: (2008).
- [80] Seth Neel and Peter Chang. *Privacy Issues in Large Language Models: A Survey*. 2024.
- [81] Cong T. Nguyen et al. “Proof-of-Stake Consensus Mechanisms for Future Blockchain Networks: Fundamentals, Applications and Opportunities”. In: *IEEE Access* (2019).
- [82] Ankit Pal, Logesh Kumar Umapathi, and Malaikanan Sankarasubbu. *Med-HALT: Medical Domain Hallucination Test for Large Language Models*. 2023.
- [83] Xudong Pan et al. “Privacy Risks of General-Purpose Language Models”. In: *2020 IEEE Symposium on Security and Privacy (SP)*. 2020, pp. 1314–1331.
- [84] Young-Hoon Park, Yejin Kim, and Junho Shim. “Blockchain-Based Privacy-Preserving System for Genomic Data Management Using Local Differential Privacy”. In: *Electronics* 10.23 (2021).
- [85] Attia Qammar et al. “Securing federated learning with blockchain: a systematic literature review”. In: *Artificial Intelligence Review* 56.5 (2023), pp. 3951–3985.
- [86] Youyang Qu et al. “Blockchain-enabled Federated Learning: A Survey”. In: *ACM Computing Surveys* 55.4 (2023), pp. 1–35.
- [87] Liz Reid. *Generative AI in Search: Let Google do the searching for you*. 2024.
- [88] Paul Röttger et al. *SafetyPrompts: a Systematic Review of Open Datasets for Evaluating and Improving Large Language Model Safety*. 2024.
- [89] Kangrui Ruan et al. “S2e: Towards an end-to-end entity resolution solution from acoustic signal”. In: *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. 2024, pp. 10441–10445.
- [90] Sara Saberi et al. “Blockchain technology and its relationships to sustainable supply chain management”. In: *International Journal of Production Research* 57.7 (2019), pp. 2117–2135.
- [91] Khaled Salah et al. “Blockchain for AI: Review and Open Research Challenges”. In: *IEEE Access* 7 (2019), pp. 10127–10149.
- [92] Oshani Seneviratne. “Blockchain for Social Good: Combating Misinformation on the Web with AI and Blockchain”. In: *Proceedings of the 14th ACM Web Science Conference 2022*. 2022, pp. 435–442.
- [93] Muhammad Shafay et al. “Blockchain for deep learning: review and open challenges”. In: *Cluster Computing* 26.1 (2023), pp. 197–221.
- [94] Zawar Shah et al. “Blockchain Based Solutions to Mitigate Distributed Denial of Service (DDoS) Attacks in the Internet of Things (IoT): A Survey”. In: *Sensors* 22 (2022).
- [95] Mrinank Sharma et al. *Towards Understanding Syco-phancy in Language Models*. 2023.
- [96] Erfan Shayegani et al. *Survey of Vulnerabilities in Large Language Models Revealed by Adversarial Attacks*. 2023.
- [97] Meng Shen et al. “Exploiting Unintended Property Leakage in Blockchain-Assisted Federated Learning for Intelligent Edge Computing”. In: *IEEE Internet of Things Journal* 8.4 (2021), pp. 2265–2275.
- [98] Tianhao Shen et al. *Large Language Model Alignment: A Survey*. 2023.
- [99] Saurabh Singh et al. “Convergence of blockchain and artificial intelligence in IoT network for the sustainable smart city”. In: *Sustainable Cities and Society* 63 (2020).
- [100] Shridhar Singh. “Enhancing Privacy and Security in Large-Language Models: A Zero-Knowledge Proof Approach”. In: *International Conference on Cyber Warfare and Security* 19.1 (2024), pp. 574–582.
- [101] Tobin South et al. “Secure Community Transformers: Private Pooled Data for LLMs”. In: (2023).
- [102] Lichao Sun et al. *TrustLLM: Trustworthiness in Large Language Models*. 2024.
- [103] Xiaoqiang Sun et al. “A Survey on Zero-Knowledge Proof in Blockchain”. In: *IEEE Network* 35.4 (2021).
- [104] Hamed Taherdoost. “Blockchain Technology and Artificial Intelligence Together: A Critical Review on Applications”. In: *Applied Sciences* 12.24 (2022), p. 12948.
- [105] Simone Tedeschi et al. *ALERT: A Comprehensive Benchmark for Assessing Large Language Models’ Safety through Red Teaming*. 2024.
- [106] Timm Teubner et al. “Welcome to the Era of ChatGPT et al.” In: *Business & Information Systems Engineering* 65 (2023).
- [107] Casey Tonkin. ‘ChatGPT, help me make a bomb’. Information Age. 2023.
- [108] Imdad Ullah et al. “Privacy Preserving Large Language Models: ChatGPT Case Study Based Vision and Framework”. In: *arXiv preprint arXiv:2310.12523* (2023).
- [109] Yixin Wan et al. “Kelly is a Warm Person, Joseph is a Role Model”: Gender Biases in LLM-Generated Reference Letters. 2023.
- [110] Boxin Wang et al. *DecodingTrust: A Comprehensive Assessment of Trustworthiness in GPT Models*. 2023.
- [111] Qianlong Wang et al. “AI at the Edge: Blockchain-Empowered Secure Multiparty Learning With Heterogeneous Models”. In: *IEEE Internet of Things Journal* 7.10 (2020), pp. 9600–9610.

- [112] Laura Weidinger et al. *Sociotechnical Safety Evaluation of Generative AI Systems*. 2023.
- [113] Sean Wellington. “BasedAI: A decentralized P2P network for Zero Knowledge Large Language Models (ZK-LLMs)”. In: *arXiv preprint arXiv:2403.01008* (2024).
- [114] Chenkai Weng et al. *Mystique: Efficient Conversions for Zero-Knowledge Proofs with Applications to Machine Learning*. 2021.
- [115] Jian Weng et al. “Auditable privacy protection deep learning platform construction method based on blockchain incentive mechanism”. US Patent 11,836,616. 2023.
- [116] Jiasi Weng et al. “DeepChain: Auditable and Privacy-Preserving Deep Learning with Blockchain-Based Incentive”. In: *IEEE Transactions on Dependable and Secure Computing* 18.5 (2021), pp. 2438–2455.
- [117] Karl Werder, Balasubramaniam Ramesh, and Rongen (Sophia) Zhang. “Establishing Data Provenance for Responsible Artificial Intelligence Systems”. In: *ACM Transactions on Management Information Systems* 2 (2022), pp. 1–23.
- [118] Amy Winograd. “Loose-Lipped Large Language Models Spill Your Secrets: The Privacy Implications of Large Language Models Notes”. In: *Harvard Journal of Law & Technology (Harvard JOLT)* 2 (2022).
- [119] Leon Witt et al. *Blockchain and Artificial Intelligence: Synergies and Conflicts*. 2024.
- [120] Charles F. Xavier. *PipeMSM: Hardware Acceleration for Multi-Scalar Multiplication*. Cryptology ePrint Archive, Paper 2022/999. 2022.
- [121] Jiaqi Xue et al. “BadRAG: Identifying Vulnerabilities in Retrieval Augmented Generation of Large Language Models”. In: *ArXiv preprint arXiv:2406.00083* (2024).
- [122] Biwei Yan et al. *On Protecting the Data Privacy of Large Language Models (LLMs): A Survey*. 2024.
- [123] Jingfeng Yang et al. *Harnessing the Power of LLMs in Practice: A Survey on ChatGPT and Beyond*. 2023.
- [124] Yifan Yao et al. “A Survey on Large Language Model (LLM) Security and Privacy: The Good, The Bad, and The Ugly”. In: *High-Confidence Computing* (2024), p. 100211.
- [125] Abbas Yazdinejad et al. “Making Sense of Blockchain for AI Deepfakes Technology”. In: *2020 IEEE Globecom Workshops (GC Wkshps)*. 2020, pp. 1–6.
- [126] Hongbin Ye et al. *Cognitive Mirage: A Review of Hallucinations in Large Language Models*. 2023.
- [127] Shenglai Zeng et al. “The Good and The Bad: Exploring Privacy Issues in Retrieval-Augmented Generation (RAG)”. In: *arXiv preprint arXiv:2402.16893* (2024).
- [128] Rui Zhang, Rui Xue, and Ling Liu. “Security and Privacy on Blockchain”. In: *ACM Computing Surveys* 52.3 (2020).
- [129] Ruichen Zhang et al. *Interactive AI with Retrieval-Augmented Generation for Next Generation Networking*. 2024.
- [130] Yue Zhang et al. *Siren’s Song in the AI Ocean: A Survey on Hallucination in Large Language Models*. 2023.
- [131] Zhenjie Zhang et al. *Proof of Quality: A Costless Paradigm for Trustless Generative AI Model Inference on Blockchains*. 2024.
- [132] Zhixin Zhang et al. *Defending Large Language Models Against Jailbreaking Attacks Through Goal Prioritization*. 2024.
- [133] Zhixin Zhang et al. *SafetyBench: Evaluating the Safety of Large Language Models with Multiple Choice Questions*. 2023.
- [134] Shuai Zhao et al. “Prompt as Triggers for Backdoor Attack: Examining the Vulnerability in Language Models”. In: 2023.
- [135] Wayne Xin Zhao et al. *A Survey of Large Language Models*. 2023.
- [136] Yang Zhao et al. “A Blockchain-Based Approach for Saving and Tracking Differential-Privacy Cost”. In: *IEEE Internet of Things Journal* 8.11 (2021), pp. 8865–8882.
- [137] Yang Zhao et al. “Privacy-Preserving Blockchain-Based Federated Learning for IoT Devices”. In: *IEEE Internet of Things Journal* 8.3 (2021), pp. 1817–1829.
- [138] Lianmin Zheng et al. *Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena*. 2024.
- [139] Zibin Zheng et al. *A Survey of Large Language Models for Code: Evolution, Benchmarking, and Future Trends*. 2024.
- [140] Zibin Zheng et al. “An overview on smart contracts: Challenges, advances and platforms”. In: *Future Generation Computer Systems* 105 (2020), pp. 475–491.
- [141] Xudong Zhu, Hui Li, and Yang Yu. “Blockchain-Based Privacy Preserving Deep Learning”. In: *Information Security and Cryptology*. 2019, pp. 370–383.
- [142] Jun Zhuang and Casey Kennington. “Understanding survey paper taxonomy about large language models via graph representation learning”. In: *arXiv preprint arXiv:2402.10409* (2024).
- [143] Wei Zou et al. “PoisonedRAG: Knowledge Poisoning Attacks to Retrieval-Augmented Generation of Large Language Models”. In: *arXiv preprint arXiv:2402.07867* (2024).
- [144] Xuhan Zuo et al. *Federated Learning with Blockchain-Enhanced Machine Unlearning: A Trustworthy Approach*. 2024.
- [145] Xuhan Zuo et al. *Federated TrustChain: Blockchain-Enhanced LLM Training and Unlearning*. 2024.