

FACING THE MUSIC: TACKLING SINGING VOICE SEPARATION IN CINEMATIC AUDIO SOURCE SEPARATION

Karn N. Watcharasupat^{1*,2}

Chih-Wei Wu¹

Iroro Orife¹

¹ Audio Algorithms, Netflix Inc., Los Gatos, CA 95032, USA (* Internship)

² Music Informatics Group, Georgia Institute of Technology, Atlanta, GA 30332, USA

kwatcharasupat@gatech.edu, {chihweiw, iorife}@netflix.com

ABSTRACT

Cinematic audio source separation (CASS), as a standalone problem of extracting individual stems from their mixture, is a fairly new subtask of audio source separation. A typical setup of CASS is a three-stem problem, with the aim of separating the mixture into the dialogue (DX), music (MX), and effects (FX) stems. Given the creative nature of cinematic sound production, however, several edge cases exist; some sound sources do not fit neatly in any of these three stems, necessitating the use of additional auxiliary stems in production. One very common edge case is the singing voice in film audio, which may belong in either the DX or MX or neither, depending heavily on the cinematic context. In this work, we demonstrate a very straightforward extension of the dedicated-decoder Bandit and query-based single-decoder Banquet models to a four-stem problem, treating non-musical dialogue, instrumental music, singing voice, and effects as separate stems. Interestingly, the query-based Banquet model outperformed the dedicated-decoder Bandit model. We hypothesized that this is due to a better feature alignment at the bottleneck as enforced by the band-agnostic FiLM layer.

1. INTRODUCTION

Applications of digital signal processing and machine learning to improve the audio experience in television or cinematic content have been attempted since at least the mid-2000s, often focusing on enhancing dialogue intelligibility with [1] or without [2, 3] source separation as a preprocessing step. However, cinematic audio source separation (CASS), as a standalone problem of extracting individual stems from their mixture, remains an emerging subtask of audio source separation. To the best of our knowledge, most standalone CASS works thus far have relied on the three-stem setup introduced in [4], with the goal of separating the mixture into the dialogue (DX), music (MX), and effects (FX) stem. Although this is already a very use-

ful setup for many downstream tasks, certain cinematic audio production workflow requires more granular controls over the distribution of sound sources into stems, with a significant number of edge cases and contextual nuances that evade putting all cinematic sound sources into three clear-cut boxes. As a result, additional auxiliary stems¹ are often needed in some content, to account for sound events such as walla and singing voice.

Adding supports for these additional stems remains an open problem in CASS and poses a significant complexity increase in a system with a dedicated decoder for each stem. In this work,² we focus on adding support for distinguishing singing voice from speech and instrumental music, as this is perhaps one of the most unaddressed open problems in CASS research, as evidenced by the discussions in the Cinematic Demixing track of the 2023 Sound Demixing Challenge [5]. To do so, we straightforwardly added an additional stem to the Bandit model [6] and the Banquet model [7] and trained the systems on a modified version of the Divide and Remaster (DnR) v3 dataset [8] with the music stem drawn from music source separation datasets to provide clean vocal and instrumental ground truths. Interestingly, the results indicated that the query-based single-decoder Banquet model consistently outperformed the dedicated-decoder Bandit model.

2. DATA

Most CASS works so far relied on the DnR v2 [4] dataset, which is a three-stem English-language dataset with the music stem drawn from the Free Music Archive (FMA) dataset [9]. The recently released multilingual rework (v3) of DnR [8] also drew the music stem from FMA. Since FMA does not provide clean isolated vocal and instrumental stems, it is not possible to cleanly obtain isolated vocal and instrumental ground truths; there is also no way of distinguishing between types of vocalization (e.g. speech vs singing) in FMA. As a result, the dataset used in this work is an adaptation of DnR v3, with the music stems drawing from the music source separation datasets MUSDB18-HQ [10] and MoisesDB [11] instead. We also removed all tracks and/or stems with bleed from these datasets. The generation process is similar to that in [8], with the vocals and instrumentals temporally aligned.

¹ See tinyurl.com/nflx-mne-guidelines. Last accessed: 2 Aug 2024.

² Dataset and model implementation will be made available at github.com/kwatcharasupat/source-separation-landing.



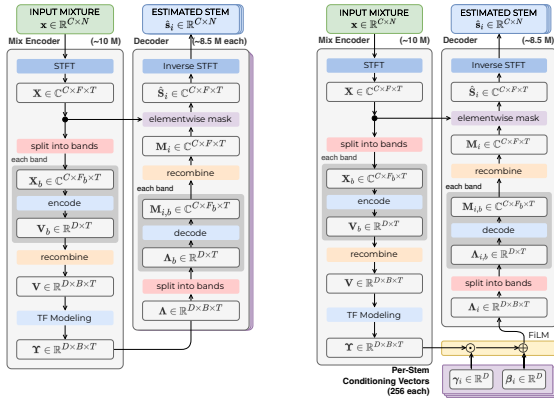


Figure 1. Model architecture for (left) Bandit and (right) Banquet. Bandit has a dedicated decoder for each stem. Banquet uses only one shared decoder.

3. SYSTEM

The systems used in this work are (1) the 64-band musical Bandit model [6] and (2) its query-based adaptation, Banquet [7]. The model architectures are shown in Fig. 1. We experimented with three training setups. In the instrumental-only setup, the mixture does not contain any singing vocals. Each system extracts three stems: DX, MX-I, and FX. In the combined MX and split MX setups, the mixture contains singing vocals. The combined setup extracts three stems, with the MX stem containing both vocals and instrumentals (MX-*). The split setup extracts four stems, with singing vocals (MX-V) and instrumentals (MX-I) separately. Unlike the query-by-audio Banquet in [7], the variant of Banquet used in this work is set up so that the conditioning vectors are directly learnable as stem-specific parameters. The training setup follows [8].

4. RESULTS

To evaluate the performance of the models, we compute the full-track signal-to-noise ratio (SNR) on each stem. The results are shown in Table 1. For the split setup, the MX-* result was evaluated using the sum of MX-I and MX-V estimates. Although the MX stem contents are different from the canonical DnR v3, the results indicated that the performance of the model is within a similar range to the benchmark reported in [8]. The model interestingly did not exhibit any overfitting behavior during training, despite MUSDB18-HQ and MoisesDB combined being significantly smaller than the subset of FMA used in [8].

Across all setups and stems, the Banquet model performed statistically significantly better ($p < 0.01$) than Bandit, although with varying effect sizes. In the instrumental-only setup, the effect sizes were all very small, with the models performing within 0.2 dB of each other, indicating that either model would work similarly in this setup. With the inclusion of vocals in the MX stem, the performance dropped by around 1 dB for DX and FX, indicating that this setup is likely harder. Between the models, the performances are still with 0.2 dB of each other, but the effect sizes are slightly higher in

Setup	Model	DX	MX-V	MX-I	MX-*	FX
Inst. only	Bandit (37.0 M)	16.0		11.6		11.2
	Banquet (19.7 M)	16.1		11.8		11.3
	Cohen's d	0.16		0.11		0.14
Combined	Bandit (37.0 M)	14.7			11.4	10.2
	Banquet (19.7 M)	14.9			11.6	10.3
	Cohen's d	0.34			0.23	0.08
Split	Bandit (37.0 M)	14.3	9.4	10.1	11.4	10.1
	Banquet (19.7 M)	14.9	9.9	10.6	11.8	10.4
	Cohen's d	0.72	0.71	0.38	0.42	0.21

Table 1. Median SNR of Bandit and Banquet in different training setups. Paired-sample Cohen's d values indicate effect sizes of Banquet performance relative to Bandit.

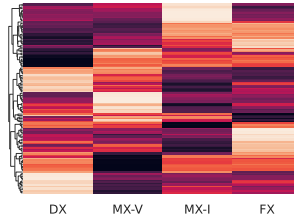


Figure 2. Normalized clustermap of Banquet's γ_i for each stem in the split MX setup. Lighter color indicates larger normalized value.

the DX and MX stems than in the instrumental MX setup while the effect size of the FX stem is very small. When treating the singing vocals and instrumentals separately, the Bandit model dropped in performance by 0.4 dB on the speech stem. Across the board, moderate-to-large effect sizes were seen in DX and all MX stems, with the Banquet model performing 0.4 dB to 0.6 dB better.

Although both models consist of a single encoder responsible for computing the mixture embedding Υ , Bandit has a dedicated decoder for each stem while Banquet has a single shared decoder. As a result, in Bandit, the "separation" happens in the band-wise decoding block that maps Λ_b to $M_{i,b}$, where i is the stem index and b is the band index. This map is nonlinear, likely allowing the representation Υ to remain entangled. In Banquet, the "separation" occurs in the band-agnostic FiLM layer. Given that FiLM is equivalent to an affine operation whose linear map is constrained to a diagonal matrix, Banquet likely encourages independence across features or groups thereof. This conjecture is partially supported by the z -normalized cluster map of γ_i , shown in Fig. 2. Although the clustering is not fully obvious, it can be seen that most features are only activated for one or two of the stems, likely indicating that each abstract feature is responsible for a semantic concept specific to only one or two stems.

5. CONCLUSION

In this work, we demonstrate a straightforward extension of the Bandit and Banquet models for a CASS setup that distinguishes between singing voice, dialogues, and instrumental music. Experimental results indicated that the query-based Banquet model performed significantly better despite only requiring half the parameters. Additional analyses are required to better understand these behaviors.

6. ACKNOWLEDGMENTS

This work was done while K. N. Watcharasupat was supported by the IEEE Signal Processing Society Scholarship Program.

The authors would like to thank Darius Pétermann; Pablo Delgado and the Netflix Machine Learning Platform team; and, William Wolcott and the Netflix Audio Algorithms team for their assistance with the project.

7. ETHICS STATEMENT

The four-stem models developed in this work utilized training data derived from MUSDB18-HQ and MoisesDB, both permitting only non-commercial research use. Therefore, these models were developed strictly for research purposes only and will not be used in production at Netflix. Model weights for these systems will be released on a strictly non-commercial license.

8. REFERENCES

- [1] J. Paulus, M. Torcoli, C. Uhle, J. Herre, S. Disch, and H. Fuchs, "Source Separation for Enabling Dialogue Enhancement in Object-based Broadcast with MPEG-H," *Journal of the Audio Engineering Society*, vol. 67, no. 7/8, pp. 510–521, Aug. 2019.
- [2] C. Uhle, O. Hellmuth, and J. Weigel, "Speech enhancement of movie sound," in *Proceedings of the 125th Audio Engineering Society Convention*. Audio Engineering Society, 2008.
- [3] J. T. Geiger, P. Grosche, and Y. L. Parodi, "Dialogue enhancement of stereo sound," in *Proceedings of the 23rd European Signal Processing Conference*. Nice: IEEE, Aug. 2015, pp. 869–873.
- [4] D. Petermann, G. Wichern, Z.-Q. Wang, and J. Le Roux, "The Cocktail Fork Problem: Three-Stem Audio Separation for Real-World Soundtracks," in *Proceedings of the 2022 IEEE International Conference on Acoustics, Speech, and Signal Processing*. Singapore, Singapore: IEEE, 2022.
- [5] S. Uhlich, G. Fabbro, M. Hirano, S. Takahashi, G. Wichern, J. Le Roux, D. Chakraborty, S. Mohanty, K. Li, Y. Luo, J. Yu, R. Gu, R. Solovyev, A. Stempkovskiy, T. Habruseva, M. Sukhovei, and Y. Mitsufuji, "The Sound Demixing Challenge 2023 – Cinematic Demixing Track," *Transactions of the International Society for Music Information Retrieval*, Aug. 2023.
- [6] K. N. Watcharasupat, C.-W. Wu, Y. Ding, I. Orife, A. J. Hipple, P. A. Williams, S. Kramer, A. Lerch, and W. Wolcott, "A Generalized Bandsplit Neural Network for Cinematic Audio Source separation," *IEEE Open Journal of Signal Processing*, vol. 5, pp. 73–81, 2023.
- [7] K. N. Watcharasupat and A. Lerch, "A Stem-Agnostic Single-Decoder System for Music Source Separation Beyond Four Stems," in *To Appear in the Proceedings of the 25th International Society for Music Information Retrieval*, San Francisco, CA, USA, Jun. 2024.
- [8] K. N. Watcharasupat, C.-W. Wu, and I. Orife, "Remastering Divide and Remaster: A Cinematic Audio Source Separation Dataset with Multilingual Support," in *To Appear in the Proceedings of the 5th IEEE International Symposium on the Internet of Sounds*. Erlangen, Germany: IEEE, Sep. 2024.
- [9] M. Defferrard, K. Benzi, P. Vandergheynst, and X. Bresson, "FMA: A Dataset for Music Analysis," in *Proceedings of the 18th International Society for Music Information Retrieval Conference*. Suzhou, China: ISMIR, 2017, pp. 316–323.
- [10] Z. Rafii, A. Liutkus, F.-R. Stöter, S. I. Mimilakis, and R. Bittner, "MUSDB18-HQ - an uncompressed version of MUSDB18," Aug. 2019.
- [11] I. Pereira, F. Araújo, F. Korzeniowski, and R. Vogl, "MoisesDB: A Dataset for Source Separation Beyond 4-Stems," in *Proceedings of the 24th International Society for Music Information Retrieval Conference*, Milan, Italy, 2023, pp. 619–626.