

Unlock the Power of Frozen LLMs in Knowledge Graph Completion

Bo Xue, Yi Xu, Yunchong Song, Yiming Pang, Yuyang Ren, Jiaxin Ding*, Luoyi Fu, Xinbing Wang
Shanghai Jiao Tong University, Shanghai, China
{sappho_x, jiaxingding, yiluofu}@sjtu.edu.cn

Abstract

Classical knowledge graph completion (KGC) methods rely solely on structural information, struggling with the inherent sparsity of knowledge graphs (KGs). Large Language Models (LLMs) learn extensive knowledge from large corpora with powerful context modeling, which is ideal for mitigating the limitations of previous methods. Directly fine-tuning LLMs offers great capability but comes at the cost of huge time and memory consumption, while utilizing frozen LLMs yields suboptimal results. In this work, we aim to leverage LLMs for KGC effectively and efficiently. We capture the context-aware hidden states of knowledge triples by employing prompts to stimulate the intermediate layers of LLMs. We then train a data-efficient classifier on these hidden states to harness the inherent capabilities of frozen LLMs in KGC. We also generate entity descriptions with sub-graph sampling on KGs, reducing the ambiguity of triplets and enriching the knowledge representation. Extensive experiments on standard benchmarks showcase the efficiency and effectiveness of our approach. We outperform classical KGC methods on most datasets and match the performance of fine-tuned LLMs. Additionally, compared to fine-tuned LLMs, we boost GPU memory efficiency by $188\times$ and speed up training+inference by $13.48\times$.

1 Introduction

Knowledge graph completion has become a crucial endeavor for the effective application of knowledge graphs (Chen et al., 2020), which aims to complete the knowledge graph and expand its scale by predicting the potential relationship between existing entities and discovering new relational facts (Shen et al., 2022b). Classical knowledge graph embedding methods only utilize structure information from the knowledge graph (Bordes et al., 2013; Trouillon et al., 2016; Sun et al., 2019), which suffer from the sparseness of KGs (Yao et al., 2019).

Leveraging the powerful contextual modeling capabilities and extensive stored world knowledge of LLMs can mitigate this challenge by utilizing the rich semantics within knowledge graphs, thereby enhancing the performance of knowledge graph completion (Wei et al., 2023).

These approaches generally fall into two types: using frozen LLMs and employing fine-tuned LLMs. The first type leverages frozen language models (e.g., LLaMA and GPT-4) with prompt techniques, such as in-context learning, which facilitate the completion of knowledge graphs directly in natural language outputs (Wei et al., 2023; Yao et al., 2023), offering an efficient solution that utilizes the pre-trained capabilities of these models without the need for further training. The second type involves fine-tuning the language models using a range of supervised techniques, including instruction tuning, to tailor the models specifically for KGC tasks. This method involves fine-tuning language models, such as LLaMA and T5, through the use of training samples (Saxena et al., 2022; Yao et al., 2023). Although this can lead to better performance (Zhang et al., 2023; Yao et al., 2023), it also requires significant increases in time and resource expenditure. A natural question is: *How can we utilize LLMs to accomplish KGC tasks with both efficacy and efficiency?*

To answer this question, we build upon the efficiency of frozen LLMs and explore the reasons behind the underperformance of frozen LLMs compared to their fine-tuned counterparts. First, while LLMs contain vast amounts of world knowledge encoded within their parameters, accessing the knowledge and decoding it into responses effectively through frozen models can be challenging (Wang et al., 2023). It is well known that LLMs suffer from hallucinations (Zhao et al., 2023), which makes them unreliable for achieving high performance in KGC tasks. Fine-tuning directly modifies the models' weights through the training samples

* Jiaxin Ding is the corresponding authors.

to improve the retrieval and application of relevant world knowledge, thus leading to better performance (Zhou et al., 2024). Second, KGs often involve complex relationships and ambiguous entity representations (Li et al., 2024), which can be difficult for a frozen LLM to handle accurately without specific tuning. Fine-tuned models can be explicitly trained to interpret and disambiguate such complexities on the basis of the training data provided, linking entities in the KG with the LLM.

To overcome the limitations of frozen LLMs in KGC tasks, we have introduced probing techniques utilizing stimulation prompts, complemented by detailed descriptions of entities, as shown in Figure 1. These methods are designed to effectively extract and leverage the latent knowledge embedded within the models’ parameters, and minimize ambiguous entity representations, thereby enhancing its application in KGC without the need for extensive retraining. Specifically, our research concentrates on the core issues of knowledge graph completion, which are triple classification and relation prediction. We stimulate the intermediate layers of LLMs to capture the context-aware hidden states of knowledge triples. Moreover, we improve the precision of knowledge representation by aligning KG entities with the LLMs, reducing the ambiguity of knowledge triples through the generation of entity descriptions via subgraph sampling from KGs. We train a data-efficient classifier on these obtained hidden states supervised by the labels, to fully harness the inherent KGC capabilities of the frozen LLMs.

Our contributions can be summarized as follows.

- We introduce a novel probing method tailored for KGC tasks, designed to stimulate language models to verify knowledge graph triples directly. We further generate knowledge graph entity descriptions through the use of subgraphs, which are then seamlessly integrated into our probing techniques.
- Our approach employs LLMs with both effectiveness and efficiency to achieve KGC. By utilizing only a subset of the dataset, our method achieves a relative performance improvement of up to 2.7% compared to fine-tuning the LLM on the entire training set. Additionally, it significantly reduces GPU memory usage by a factor of 188 during the training phase and decreases time consumption by a factor of 13.48, all while maintaining comparable performance.¹
- We conduct extensive experiments on six standard knowledge graph datasets to benchmark our method against multiple baseline approaches. We investigate the versatility of our method with various language models, assessing its efficacy and data efficiency through rigorous experimental validation.

2 Method

Our method’s design stems from an analysis of the two primary reasons for the underperformance of frozen LLMs compared to fine-tuned counterparts. First, LLM may not always trigger the depth of knowledge needed and reveal the right responses. We demonstrate in Section 2.2 how to achieve this for the frozen LLM using probing techniques. Second, KGs often involve ambiguous entity representations, which can be difficult for LLM to handle accurately. In Section 2.3 we show how to achieve this with the generation of entity descriptions.

2.1 Formulation and Notations

A knowledge graph can be represented as a set of triples $G = \{(h, r, t)\}$, where E and R denote the set of entities and relations in G , respectively, $h \in E$ is a head entity, $t \in E$ is a tail entity, we collectively refer to the head entity and tail entity as e , and $r \in R$ represents the relation between them. D is the set of descriptions for each entity and relation. We denote $D(e)$, $D(r)$ as the textual description of each entity and each relation.

We focus on triple classification and relation prediction. Triple classification involves evaluating the plausibility of a given knowledge triple, to determine whether the triple is true or not and relation prediction predicts the missing relation in a triple.

2.2 Stimulating the Intermediate Layers

Knowledge graphs consist of numerous triples, and the format of these triples is challenging for the LLM to understand, which may mislead the LLM to retrieve irrelevant knowledge and reveal the wrong responses. To minimize the influence of task-unrelated information and enhance the performance of LLMs in KGC, we leverage the internal judgment mechanisms of the language model. Our

¹For a detailed comparison of efficiency, please refer to Table 8 in the Appendix B.3.

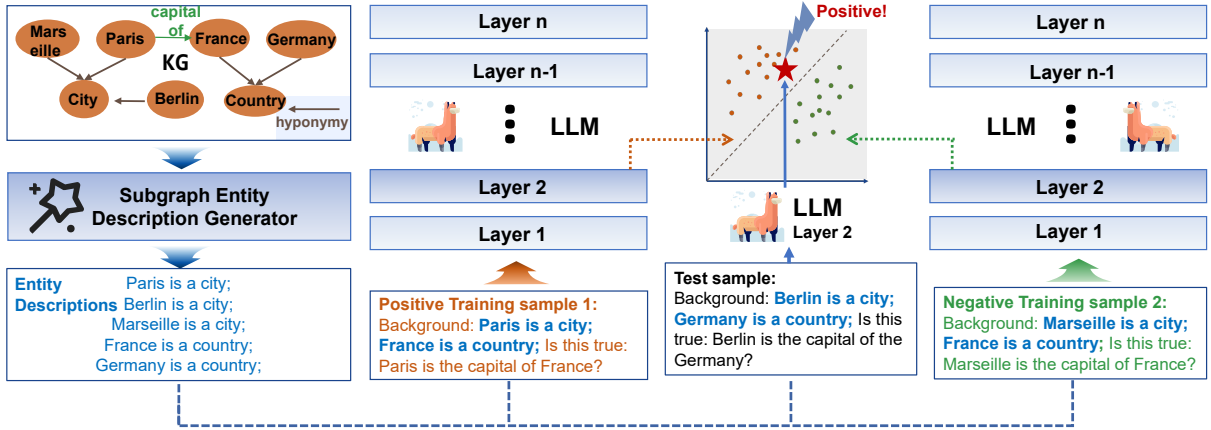


Figure 1: The overall architecture of our proposed probing method for the triple classification. Constructing positive and negative sample pairs, followed by stimulating the middle layers of the language model to obtain hidden states for completing the KGC task. Entity descriptions are generated by the subgraph entity description generator. **The only component that needs training in the entire architecture is the data-efficient classifier used to classify hidden states**, which can be MLP, logistic regression, etc.

method involves strategically triggering the necessary depth of knowledge embedded within the LLM to elicit the correct responses required for accurate KGC. By focusing on extracting classification results directly from the model’s internal processing, we ensure that the responses are both relevant and precise, thereby improving the effectiveness of the KGC task.

Since different layers of the language model have different roles (Azaria and Mitchell, 2023), we determine the most suitable layer for the task by experimenting with the validation set. First, we construct prompt templates to stimulate the model to generate the required classification information in the intermediate layers. In the triple classification, our goal is to determine whether the triples in the knowledge graph are true. Therefore, we use the following prompt template, PT_1 , to create positive and negative sample pairs, as shown in Figure 2. Notice that the prompt does not describe positive or negative information for triples.

Then, we use existing triples in the knowledge graph to construct positive samples S^+ , and employ the negative sampling technique (Lv et al., 2022) to obtain negative samples S^- . Finally, we obtain N training data samples. For each training text, we input it into the language model to obtain the representation of each text in the intermediate layers. We can obtain information about the plausibility of triples from the hidden state corresponding to the token immediately preceding the model prediction, which is the last token of the input text (Zou et al., 2023). Specifically, we cap-

ture plausibility information for positive samples $s^+ \in S^+$ by:

$$v(s^+) = \{M_{1-i}(s^+) [-1], 0 < i < L\}, \quad (1)$$

where M represents the language model, M_{1-i} represents the first i layers of the model, $[-1]$ refers to the hidden state corresponding to the last token, L denotes the number of layers in the model. The dimension of $M_{1-i}(s^+) [-1]$ is the embedding dimension of the language model. Negative samples follow the same principle.

At last, we train a classification model using $v(s^+)$ and $v(s^-)$ to capture plausibility information. The goal is to learn a boundary that can separate the hidden states of the intermediate layers of the language model corresponding to positive samples (which are true) from those corresponding to negative samples (which are false). We can use classification models such as multilayer perceptron (MLP), SVM, etc., for classification training. Taking logistic regression to determine the plausibility of samples as an example:

$$P(Y = \mathbf{1}|x) = \frac{1}{1 + e^{-(w^T x + b)}}, \quad (2)$$

where x represents $v(s)[l]$, l is the layer index, w and b are weights and bias to be learned. For relation prediction, we simply transform the binary classification into multi-class classification. By utilizing the prompt in Figure 7, we stimulate the LLM to generate hidden states that capture the

characteristics of different relation types in the KG. Details can be found in the Appendix B.1.

The task-unrelated information does not affect the classification results. The reason is that the positive samples S^+ and negative samples S^- are constructed using the same prompt template. The classifier only needs to capture the plausibility of the triples in $v(S^+)$ and $v(S^-)$, that is, whether the triple is true or not. The advantage of using this method for KGC is that it can ignore the impact of the task-unrelated information and reveal the right responses for accurate KGC.

PT_1 : Is this true: {h} {r} {t}?

PT_2 : Background: \n1.{D(h)}\n2.{D(t)}\n
Question:\nIs this true: {h} {r} {t}?

Figure 2: Prompt templates to stimulate the LLM for triple classification.

2.3 Subgraph Entity Description Generator

The semantics of entities in the knowledge graph are highly complex; it is difficult for the language model to understand the entity based solely on the entity’s name. Therefore, we inform the language model about the meaning of each entity in the input. The meaning of each entity in KG is generated by its one-hop subgraph.

Specifically, we extend the prompt template constructed in Section 2.2, aiming to assist the language model in aligning internal entities with entities in the knowledge graph. For triple classification, since we employ the probing method to extract KGC features from the samples, we need to ensure that the language model can be stimulated to produce effective hidden states that can be used by the classifier to predict the plausibility of triples. Therefore, we construct a new prompt PT_2 , as shown in Figure 2. By introducing the $D(e)$, LLMs are able to generate more precise and distinguishable hidden states, thereby improving the overall classification performance.

To address incomplete entity descriptions within certain datasets, we have devised a method to generate $D(e)$. We construct $D(e)$ in two ways. The first approach involves a straightforward method where we concatenate all the triples within the one-hop subgraph surrounding the entity e , thereby forming $D(e)$. However, this direct concatenation can sometimes lead to ineffective or misleading stim-

uli for the LLM, as the structure and content of these subgraph triples may significantly differ from the text seen during the LLM’s pre-training phase. This divergence can adversely affect the model’s response accuracy. To mitigate this issue, our second approach leverages a language model to transform these triples into a format that is more comprehensible to the LLM. By rephrasing the triples from the one-hop subgraph around the entity e into natural language text, we produce a more refined and model-friendly version of $D(e)$:

$$D(e) = \text{concat}\{\text{transform}(\{h_1\}\{r_1\}\{t_1\}), (h_1, r_1, t_1) \in \text{subgraph}(e)\}, \quad (3)$$

where $\text{subgraph}(\cdot)$ is a function that retrieves the set of all triples in the one-hop subgraph where the entity resides; $\text{transform}(\cdot)$ is a function that converts the triple into sentence; $\text{concat}(\cdot)$ is a function to process triple statements. For the first approach, $\text{concat}(\cdot)$ is simply a string concatenation function that joins each transformed triple statement with a separator. For the second approach, we need to utilize LLM with the in-context learning technique (Brown et al., 2020) to generate descriptions of entities based on the triples in their subgraph. Please refer to Appendix A.1 for details.

By generating long entity descriptions using the subgraph description generator, we align the internal understanding of entities in the LLM with the entity meanings in the KG, which is similar to the entity linking process in knowledge graphs. In this way, the LLM will better understand the semantics of the entities, and improve the KGC performance.

3 Experiments

In the experiments, our objective is to answer the following research questions (RQs):

- **RQ1:** Can frozen LLMs with the proposed probing methods effectively achieve performance on par with their fine-tuned counterparts?
- **RQ2:** How does our method perform across different language models and classification models?
- **RQ3:** How about data efficiency and compute efficiency of our proposed method?

3.1 Datasets

In our experiments, we employ five widely-used KG datasets for triple classification: FB13 (Socher

Dataset	EI	RI	# Train	# Valid	# Test
FB13	75,043	13	316,232	5,908	23,733
WN11	38,696	11	112,581	2,609	10,544
FB15K-237N	13,104	93	87,282	14,082	16,452
WN18RR	40,943	11	86,835	3,034	3,134
UMLS	135	46	5,216	1,304	1,322
YAGO3-10	123,182	37	1,079,040	5,000	5,000

Table 1: Statistical information of datasets.

et al., 2013), WN11 (Socher et al., 2013), FB15K-237N (Lv et al., 2022), WN18RR (Dettmers et al., 2018), and UMLS (Yao et al., 2019), as well as a commonly used KG dataset for relation prediction: YAGO3-10 (Dettmers et al., 2018).

For FB13, we use Wikipedia entity descriptions as input sentences. For FB15K-237N, the entity descriptions provided by (Xie et al., 2016) are used. Synset definitions from (Yao et al., 2019) served as entity descriptions for WN18RR. In the case of UMLS, entity descriptions provided by the dataset are used. In the following, we refer to the entity descriptions as non-generated entity descriptions.

3.2 Experimental Settings

To generate entity descriptions, for the first approach in Section 2.3, we concatenate all subgraph triples to generate descriptions. For the second approach, we employ GPT-3.5-turbo as the LLM. Due to cost considerations, we randomly select 4000 test examples from each dataset to generate entity descriptions. We mark the results of these methods with an asterisk (*). In the following text, we refer to these entity descriptions as generated entity descriptions(Tri)/(GPT).

We compare our method with four structure information-based methods: TransE (Bordes et al., 2013), DistMult (Yang et al., 2014), ComplEx (Trouillon et al., 2016) and RotatE (Sun et al., 2019), as well as seven additional information-based methods: KG-LLAMA (Yao et al., 2023), KG-BERT (Yao et al., 2019), KG-T5 (Saxena et al., 2022), LLaMA-7b, Alpaca-7B, LLaMA-7B-ICL and Alpaca-7B-ICL (Zhang et al., 2023). **KG-LLAMA, KG-BERT and KGT5 fine-tune the language models using all the training samples.** LLaMA-7b and Alpaca-7B using the frozen language model to predict. LLaMA-7B-ICL and Alpaca-7B-ICL using 2-shot samples with in-context learning to predict. Please refer to Section 4.1 for detailed introductions of these methods.

For structure information-based methods, we

reproduce the results with OpenKE (Han et al., 2018). For additional information-based methods, we reproduce the results with official code implementation. For KGT5, there’s no public record or code for the method on the FB15K237N, WN18RR, UMLS dataset. Please refer to Appendix A.2 for detailed experimental settings.

3.3 Main Results (For RQ1)

From Table 2, we can observe that LLAMA-DES-H and LLAMA-DES2 (GPT), when using a partial training set, exhibit comparable performance to KG-LLAMA-7B, the latter being fine-tuned with all training triples. Additionally, LLAMA-DES-H and LLAMA-DES2 (GPT) outperform LLAMA-MLP, demonstrating the effectiveness of using subgraph entity description generator to improve the LLM’s understanding of entities in the KG, as proposed in Section 2.3. Moreover, LLAMA-MLP demonstrates superior performance compared to LLAMA-7B, ALPACA-7B, LLAMA-7B-ICL and ALPACA-7B-ICL, affirming the effectiveness of stimulation method proposed in Section 2.2. However, it is noteworthy that ALPACA-DES fails to outperform ALPACA-7B, suggesting that mere incorporation of entity descriptions may not yield direct performance enhancements, considering the possibility of LLMs revealing the wrong responses and being influenced by hallucinations. Thus, the experimental results substantiate the effectiveness of our proposed methodology. Additionally, the frozen language model can also achieve similar KGC effects as fine-tuning the language model.

Notice that the performance on the UMLS dataset is special, where using generated descriptions impedes the classification accuracy of the model, and using the non-generated entity descriptions is also worse than not using any entity descriptions. It is postulated that the underlying reason may lie in the specialized nature of entity names in the UMLS dataset, resulting in minimal ambiguity. The entities in the knowledge graph have well-aligned with the internal entities of the LLM. Meanwhile, using entity descriptions may be affected by uncleaned description text, and descriptions generated by GPT-3.5-turbo may be influenced by hallucination, thereby affecting the classification effectiveness of the induced hidden states.

In addition to the triple classification, we also validate the effectiveness of the proposed probing method on the relation prediction task as shown

Method	Pred	Samples	FB13	WN11	15K237N	WN18RR	UMLS
TransE	S-F	ALL	0.815	0.759	0.697	0.884	0.845
DistMult	S-F	ALL	0.862	0.871	0.587	0.851	0.864
ComplEx	S-F	ALL	0.857	0.862	0.657	0.841	0.908
RotatE	S-F	ALL	0.819	0.847	0.685	0.882	0.921
KG-BERT	L-MLP	ALL	0.904	0.935	0.560	0.963	0.773
KGT5	N-L	ALL	0.663	0.728	-	-	-
KG-LLAMA-7B	N-L	ALL	0.892	0.955	0.748	0.921	0.858
LLAMA-7B	N-L	0	0.091	0.211	0.573	0.458	0.658
ALPACA-7B	N-L	0	0.226	0.696	0.561	0.714	0.526
LLAMA-7B-ICL	N-L	2	0.501	0.500	0.578	0.502	0.538
ALPACA-7B-ICL	N-L	2	0.675	0.706	0.607	0.691	0.605
ALPACA-DES	N-L	0	0.611	-	0.590	0.548	0.525
LLAMA-MLP	H-MLP	10,000	0.851	0.874	0.679	0.866	0.882
LLAMA-DES-H	H-MLP	10,000	0.895	-	0.736	0.935	0.862
LLAMA-DES2 (Tri)	H-MLP	10,000	0.847	0.764	0.673	0.785	0.782
LLAMA-DES2 (GPT)*	H-MLP	1,000	0.890	0.892	0.705	0.907	0.783

Table 2: The main experiment results (accuracy) of triple classification. In the 'Pred' column, S-F uses score function, L-MLP uses MLP on last layer hidden states, N-L uses natural language, and H-MLP uses MLP on intermediate layer hidden states to predict. 'Samples' indicates training sample counts. ALPACA-DES combines non-generated descriptions with PT_2 for Alpaca-7B; LLAMA-MLP uses LLaMA-7B with MLP for hidden state classification and PT_1 for stimuli generation; LLAMA-DES-H combines non-generated descriptions with PT_2 for stimulus generation; LLAMA-DES2 (Tri)/(GPT) uses first/second generated descriptions with PT_2 for stimuli generation. Top three results per dataset are bolded.

in Table 3. The experimental results similarly demonstrate that the probing method can achieve the nearly same performance as full training set fine-tuning, even when using only 0.6% of the training data. Detailed methodology and analysis are provided in Appendix B.1.

Method	Pred	Samples	YAGO3-10
KG-BERT	L-MLP	ALL	0.6816
KGT5	N-L	ALL	0.5714
ChatGLM-6B	N-L	0	0.0658
KG-ChatGLM-6B	N-L	ALL	0.5662
LLaMA-7B	N-L	0	0.0348
LLaMA-13B	N-L	0	0.0040
KG-LLaMA-7B	N-L	0	0.7028
LLAMA-MLP-7B	H-MLP	6996	0.5968
LLAMA-DES2 (GPT)*	H-MLP	6996	0.6824

Table 3: The experiment results (Hits@1) of relation prediction. LLAMA-MLP-7B refers to using LLaMA-7B as the base language model, using MLP as the hidden state classifier, and generating stimuli using PT_3 ; LLAMA-DES2 (GPT) refers to using the second generated description combined with PT_4 to generate stimuli.

Method	FB13	WN11	FB15K-237N
LLAMA-SVM	0.824	0.869	0.599
LLAMA-LR	0.840	0.863	0.665
LLAMA-MLP	0.851	0.874	0.679

Table 4: The variation in KGC prediction performance across different datasets using SVM, Logistic Regression, MLP as classification models. All these methods use LLaMA-7B as the base model, and generate stimuli using PT_1 .

3.4 Ablation Study (For RQ2)

Through the analysis depicted in the left portion of Figure 3, it is observed that with an increase in the index of the intermediate layer, the efficacy of hidden states for triple classification demonstrates an initial incline followed by a subsequent decline. Intermediate layers closer to natural language text output generally exhibit better prediction performance compared to the lowest layers. This observation corroborates the notion posited by Geva et al. (2020) that language models encode knowledge differentially across their Feed-Forward layers, with higher layers assimilating information

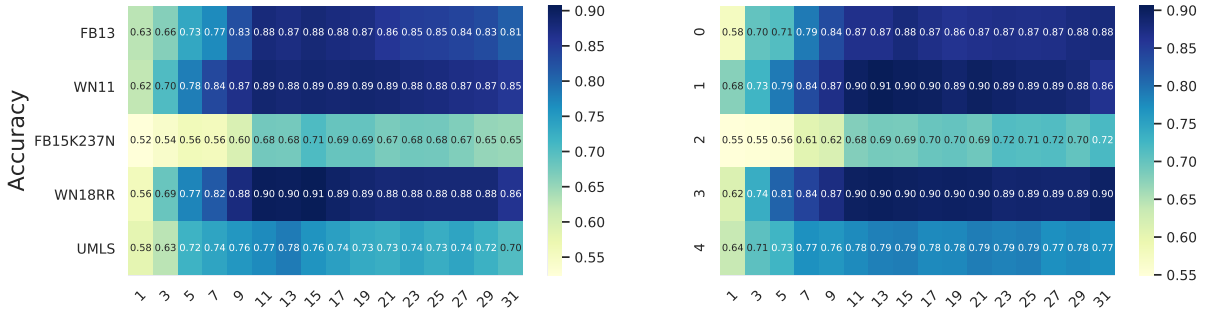


Figure 3: Differences in KGC performance across different layers of the LLAMA-DES2 (GPT) [left] and Mistral-DES2 (GPT) [right]. The horizontal axis represents the position of the intermediate layers in LLaMA or Mistral (which have different backbones), and the vertical axis represents the dataset.

Model	Method	FB13	WN11
LLaMA	KG-LLAMA-7B	0.892	0.955
	LLAMA-MLP	0.851	0.874
	LLAMA-DES-H	0.895	-
	LLAMA-DES2 (GPT)*	0.890	0.892
Mistral	KG-MISTRAL-7B	0.891	0.962
	MISTRAL-MLP	0.848	0.903
	MISTRAL-DES-H	0.884	-
	MISTRAL-DES2 (GPT)*	0.875	0.912
Gemma	KG-GEMMA-7B	0.897	0.944
	GEMMA-MLP	0.810	0.895
	GEMMA-DES-H	0.895	-
	GEMMA-DES2 (GPT)*	0.851	0.911

Table 5: The variation in KGC prediction performance across different datasets using LLaMA, Mistral (Jiang et al., 2023), and Gemma (Team et al., 2024) as base models (which have different backbones). Please refer to Table 2 for the number of training samples used by different methods.

from lower layers. During pretraining, it is possible that lower layers may not have stored certain knowledge, hence they cannot generate hidden states with effective triple classification effects. Furthermore, the prediction performance of the layers closer to the natural language text output is generally worse than those in the middle layers. This phenomenon may be attributed to the hallucination issue inherent in LLaMA, wherein higher layers could potentially either omit or alter triple information, leading to a blurred distinction between positive and negative triple hidden states induced by stimuli. However, the lower layers of LLaMA can effectively gather the stimulus information required for the completion of the knowledge graph tasks. Akin observations are discernible on the right side of Figure 3 for the Mistral model, which has a different backbone from LLaMA. Meanwhile, as observed in Table 5, our method demonstrates strong versatility across

different backbone models, achieving performance comparable to full dataset fine-tuning with only a small sample size.

Regarding classification models, a comparative analysis encompassing MLP, SVM, and Logistic Regression, as delineated in Table 4, is conducted. The result shows that MLP outperforms all three datasets compared to the other two classification models, while Logistic Regression also exhibits results close to MLP. This underscores the efficacy of our stimulus methodology, whereby hidden states of positive and negative samples within a high-dimensional space exhibit linear separability.

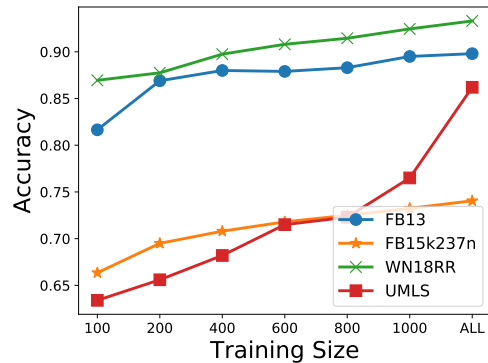


Figure 4: The LLAMA-DES-H prediction performance on KGC varies with the size of the training dataset. The horizontal axis represents the number of training samples used, with an equal number of positive and negative samples, and the vertical axis represents the accuracy on the test set.

3.5 Efficiency Study (For RQ3)

From Figure 4, we can observe the following: For the FB13 dataset, using 400 training samples, which is 0.06% of the training set, achieves 98.3% of the performance of using the entire training set; For the FB15K-237N dataset, using 0.57% of the

training set achieves 99.6% of the performance of using the entire training set; For the WN18RR dataset, using 0.46% of the training set achieves 98.8% of the performance of using the entire training set; For the UMLS dataset, using 9.58% of the dataset achieves 88.7% of the performance of using the entire training set. Our experimental results confirm that the language model is capable of generating effective hidden states through the techniques described in Sections 2.2 and 2.3, demonstrating its potential for data-efficient scenarios within the context of knowledge graph completion tasks.

Meanwhile, we also evaluate the compute efficiency of our method. Table 8 shows that our method can achieve significantly lower consumption compared to fine-tuning even in the setting of the full dataset. Compared to fine-tuned LLMs, we boost the GPU memory efficiency to $188\times$ during model training and speed up $13.48\times$ overall. Please refer to Appendix B.3 for details.

4 Related Work

4.1 Knowledge Graph Completion

Knowledge graphs are typically characterized by their inherent incompleteness, often containing substantial amounts of implicit or missing valuable knowledge (Hogan et al., 2021). The prevailing methodologies in KGC can be categorized into two main classes: structure information-based methods and additional information-based methods (Shen et al., 2022b). Structure information-based methods leverage the inherent structural data present within knowledge graphs. For example, RESCAL (Nickel et al., 2011), DistMult (Yang et al., 2014), COMPGCN (Vashishth et al., 2019), and ConvE (Dettmers et al., 2018) primarily use scoring functions to evaluate the semantic similarities of entity or relation embeddings within a latent embedding space to infer missing information. Additional information-based methods incorporate a variety of supplementary data to enrich the knowledge graphs. These methods utilize node attributes, entity-related information, or relational path data to enhance the features of knowledge embeddings critical for KGC tasks. The prominent examples are KG-BERT (Yao et al., 2019) and LASS (Shen et al., 2022a), which assess the plausibility of triples by transforming the triple and its contextual data into natural language sentences using predefined templates. These sentences are then encoded using a fine-tuned BERT model, effectively leveraging

additional information to improve the accuracy of triple classification. KG-S2S (Chen et al., 2022) and KGT5 (Saxena et al., 2022) employ encoder-decoder architecture language models to complete KGC in a generative manner. KG-LLAMA (Yao et al., 2023) utilizes triples composed of entity and relation names as sentences, fine-tuning the LLaMA model for KGC using natural language. Li et al. (2024) enhances KGC with LLM by generating entity descriptions and designing loss functions for fine-tuning.

4.2 Large Language Models

Several studies have explored the mechanisms through which Large Language Models process, interpret, and generate factual content. As highlighted by Saier et al. (2023), these models function as extensive repositories of knowledge, encapsulating a vast array of information about the world within their parameters. This insight into LLMs underscores their potential as powerful tools for a wide range of applications, including knowledge graph completion, by leveraging the rich informational content stored in their intricate network structures. Ramrakhiani et al. (2023) have conducted evaluations across multiple Large Language Models to assess their knowledge of world geography using probing techniques. Similarly, Onoe et al. (2022) developed a methodology for automatically constructing cloze prompts by masking out spans, aiming to assess the language models’ understanding of entities through factual probing. In addition, Azaria and Mitchell (2023) and Zou et al. (2023) have explored training classifiers to estimate the truthfulness of statements based on the activations of the hidden layers in LLMs.

5 Conclusion

In this paper, we introduce a novel data-efficient probing method that completes KGC by leveraging the internal knowledge of LLMs. Experiments show that using the probing method with generated entity descriptions, frozen LLMs can achieve performance comparable to that of their fine-tuned counterparts. Simultaneously, this method saves a significant amount of GPU memory and time compared to fine-tuning approaches. This work explores the potential of frozen LLMs in KGC tasks with both efficacy and efficiency. Compared to fine-tuning LLMs, we hit the core of KGC problem in a better way.

Limitations

In this study, our method was primarily tested using the UMLS domain-specific knowledge graph and was not applied to other domain-specific KGs. Our current architectural design is specifically tailored for triple classification and relation prediction within knowledge graph completion. Recognizing these limitations, future work will aim to expand our architecture to accommodate additional KGC tasks such as link prediction. This extension will potentially broaden the applicability and enhance the robustness of our method across a more diverse set of knowledge graph scenarios.

References

- Amos Azaria and Tom Mitchell. 2023. The internal state of an LLM knows when its lying. *arXiv preprint arXiv:2304.13734*.
- Antoine Bordes, Nicolas Usunier, Alberto Garcia-Duran, Jason Weston, and Oksana Yakhnenko. 2013. Translating embeddings for modeling multi-relational data. *Advances in neural information processing systems*, 26.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Chen Chen, Yufei Wang, Bing Li, and Kwok-Yan Lam. 2022. Knowledge is flat: A seq2seq generative framework for various knowledge graph completion. *arXiv preprint arXiv:2209.07299*.
- Zhe Chen, Yuehan Wang, Bin Zhao, Jing Cheng, Xin Zhao, and Zongtao Duan. 2020. Knowledge graph completion: A review. *Ieee Access*, 8:192435–192456.
- Joe Davison, Joshua Feldman, and Alexander M Rush. 2019. Commonsense knowledge mining from pre-trained models. In *Proceedings of the 2019 conference on empirical methods in natural language processing and the 9th international joint conference on natural language processing (EMNLP-IJCNLP)*, pages 1173–1178.
- Tim Dettmers, Pasquale Minervini, Pontus Stenetorp, and Sebastian Riedel. 2018. Convolutional 2d knowledge graph embeddings. In *Proceedings of the AAAI conference on artificial intelligence*, volume 32.
- Mor Geva, Roei Schuster, Jonathan Berant, and Omer Levy. 2020. Transformer feed-forward layers are key-value memories. *arXiv preprint arXiv:2012.14913*.
- Xu Han, Shulin Cao, Xin Lv, Yankai Lin, Zhiyuan Liu, Maosong Sun, and Juanzi Li. 2018. Openke: An open toolkit for knowledge embedding. In *Proceedings of the 2018 conference on empirical methods in natural language processing: system demonstrations*, pages 139–144.
- Aidan Hogan, Eva Blomqvist, Michael Cochez, Claudia d’Amato, Gerard De Melo, Claudio Gutierrez, Sabrina Kirrane, José Emilio Labra Gayo, Roberto Navigli, Sebastian Neumaier, et al. 2021. Knowledge graphs. *ACM Computing Surveys (Csur)*, 54(4):1–37.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. 2023. Mistral 7b. *arXiv preprint arXiv:2310.06825*.
- Dawei Li, Zhen Tan, Tianlong Chen, and Huan Liu. 2024. Contextualization distillation from large language model for knowledge graph completion. *arXiv preprint arXiv:2402.01729*.
- Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. 2023. Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ACM Computing Surveys*, 55(9):1–35.
- Xin Lv, Yankai Lin, Yixin Cao, Lei Hou, Juanzi Li, Zhiyuan Liu, Peng Li, and Jie Zhou. 2022. Do pre-trained models benefit knowledge graph completion? a reliable evaluation and a reasonable approach. Association for Computational Linguistics.
- Maximilian Nickel, Volker Tresp, Hans-Peter Kriegel, et al. 2011. A three-way model for collective learning on multi-relational data. In *Icml*, volume 11, pages 3104482–3104584.
- Yasumasa Onoe, Michael JQ Zhang, Eunsol Choi, and Greg Durrett. 2022. Entity cloze by date: What LMs know about unseen entities. *arXiv preprint arXiv:2205.02832*.
- Nitin Ramrakhiani, Vasudeva Varma, Girish Palshikar, and Sachin Pawar. 2023. Zero-shot probing of pre-trained language models for geography knowledge. In *Proceedings of the 4th Workshop on Evaluation and Comparison of NLP Systems*, pages 49–61.
- Tarek Saier, Johan Krause, and Michael Färber. 2023. unarXiv 2022: All arXiv publications pre-processed for nlp, including structured full-text and citation network. In *2023 ACM/IEEE Joint Conference on Digital Libraries (JCDL)*, pages 66–70. IEEE.
- Apoorv Saxena, Adrian Kochsiek, and Rainer Gemulla. 2022. Sequence-to-sequence knowledge graph completion and question answering. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2814–2828.

- Jianhao Shen, Chenguang Wang, Linyuan Gong, and Dawn Song. 2022a. Joint language semantic and structure embedding for knowledge graph completion. In *Proceedings of the 29th International Conference on Computational Linguistics*, pages 1965–1978.
- Tong Shen, Fu Zhang, and Jingwei Cheng. 2022b. A comprehensive overview of knowledge graph completion. *Knowledge-Based Systems*, 255:109597.
- Richard Socher, Danqi Chen, Christopher D Manning, and Andrew Ng. 2013. Reasoning with neural tensor networks for knowledge base completion. *Advances in neural information processing systems*, 26.
- Zhiqing Sun, Zhi-Hong Deng, Jian-Yun Nie, and Jian Tang. 2019. Rotate: Knowledge graph embedding by relational rotation in complex space. *arXiv preprint arXiv:1902.10197*.
- Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, et al. 2024. Gemma: Open models based on gemini research and technology. *arXiv preprint arXiv:2403.08295*.
- Kristina Toutanova and Danqi Chen. 2015. Observed versus latent features for knowledge base and text inference. In *Proceedings of the 3rd workshop on continuous vector space models and their compositionality*, pages 57–66.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Théo Trouillon, Johannes Welbl, Sebastian Riedel, Éric Gaussier, and Guillaume Bouchard. 2016. Complex embeddings for simple link prediction. In *International conference on machine learning*, pages 2071–2080. PMLR.
- Shikhar Vashishth, Soumya Sanyal, Vikram Nitin, and Partha Talukdar. 2019. Composition-based multi-relational graph convolutional networks. *arXiv preprint arXiv:1911.03082*.
- Cunxiang Wang, Xiaoze Liu, Yuanhao Yue, Xiangru Tang, Tianhang Zhang, Cheng Jiayang, Yunzhi Yao, Wenyang Gao, Xuming Hu, Zehan Qi, et al. 2023. Survey on factuality in large language models: Knowledge, retrieval and domain-specificity. *arXiv preprint arXiv:2310.07521*.
- Yanbin Wei, Qiushi Huang, Yu Zhang, and James Kwok. 2023. Kicgpt: Large language model with knowledge in context for knowledge graph completion. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 8667–8683.
- Ruobing Xie, Zhiyuan Liu, Jia Jia, Huanbo Luan, and Maosong Sun. 2016. Representation learning of knowledge graphs with entity descriptions. In *Proceedings of the AAAI conference on artificial intelligence*, volume 30.
- Bishan Yang, Wen-tau Yih, Xiaodong He, Jianfeng Gao, and Li Deng. 2014. Embedding entities and relations for learning and inference in knowledge bases. *arXiv preprint arXiv:1412.6575*.
- Liang Yao, Chengsheng Mao, and Yuan Luo. 2019. Kgbert: Bert for knowledge graph completion. *arXiv preprint arXiv:1909.03193*.
- Liang Yao, Jiazhen Peng, Chengsheng Mao, and Yuan Luo. 2023. Exploring large language models for knowledge graph completion. *arXiv preprint arXiv:2308.13916*.
- Yichi Zhang, Zhuo Chen, Wen Zhang, and Huajun Chen. 2023. Making large language models perform better in knowledge graph completion. *arXiv preprint arXiv:2310.06671*.
- Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, et al. 2023. A survey of large language models. *arXiv preprint arXiv:2303.18223*.
- Chunting Zhou, Pengfei Liu, Puxin Xu, Srinivasan Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat, Ping Yu, Lili Yu, et al. 2024. Lima: Less is more for alignment. *Advances in Neural Information Processing Systems*, 36.
- Andy Zou, Long Phan, Sarah Chen, James Campbell, Phillip Guo, Richard Ren, Alexander Pan, Xuwang Yin, Mantas Mazeika, Ann-Kathrin Dombrowski, et al. 2023. Representation engineering: A top-down approach to ai transparency. *arXiv preprint arXiv:2310.01405*.

A Experimental Details

A.1 Generate Entity Descriptions using GPT-3.5-turbo

In Section 2.3, we utilize LLM with the in-context learning technique to generate descriptions for entities based on the triples in their one-hop subgraph. In the experiments, we utilize the GPT-3.5 as the LLM. The prompt template used to generate entity descriptions is shown in Figure 5. Specifically, the $EN(e)$ is the entity name of entity e ; the `concat_subgraph()` is a function that first converts triples from the one-hop subgraph where the entity is located into sentences, and then concatenates these sentences using a specified delimiter. It is important to note that all the triples used in the prompt are from the training set, preventing potential data leakage from the test set in the generated entity descriptions. Table 6 shows the descriptions of entities generated using this method, thus achieving "entity alignment" between the knowledge graph and the LLM.

```
System: You are a helpful assistant.
User: The entity description is a description of the entity name.
Given the entity name: 'swob'; at the same time, 'swob' satisfies the
constraints: swob derivationally related form swob, swob
derivationally related form lactobacillus acidophilus, swob
derivationally related form style, swob derivationally related form
swob. Please generate an entity description that satisfies the
constraints for 'swob'.
Assistant: swob is cleaning implement consisting of absorbent
material fastened to a handle; for cleaning floors.
User: The entity description is a description of the entity name.
Given the entity name: '{EN(e)}'; at the same time, '{EN(e)}'
satisfies the constraints: {concat_subgraph(EN(e))}. Please generate
an entity description that satisfies the constraints for '{EN(e)}'.
Assistant:
```

Figure 5: The prompt template used to generate entity descriptions based on the one-hop subgraph where the entity is located for GPT-3.5-turbo.

A.2 Implementation Details

```
### Instruction: You are a helpful assistant.
### Input: Is this true: land reform hypernym reform?
### Response: Yes, this is true.
### Input: Is this true: land reform hypernym castle?
### Response: No, this is not true.
### Input: Is this true: {h} {r} {t}?
### Response:
```

Figure 6: The prompt template used in Alpaca-7B-ICL on the WN18RR dataset.

In our implementation, we use the grid search to find appropriate sets of hyperparameters for baselines and our proposed method.

For the MLP classifier configuration, we opt for a batch size of 64, a learning rate of $3e-5$, and utilize the AdamW optimizer, with training restricted to 30 epochs. For LLaMA-7B-ICL and Alpaca-7B-ICL, we randomly select one positive sample and one negative sample from the training set of each dataset, respectively. The prompt for KGC using Alpaca-7B-ICL on the WN18RR dataset is illustrated in Figure 6. Additionally, the hyperparameters for models trained with the LoPA technique, specifically KG-LLAMA-7B, are outlined in Table 7.

It's worth noting that for Table 2, Table 3, Table 4, Table 5 and Figure 4, we determine the most suitable layer for the task by experimenting with the validation set, and then report the results on the test set. For Figure 3, the results shown are for different layers of the language model on the test set. For the baseline results in Table 2 and Table 3, we give priority to using the results reported in the official baseline paper. For results not included in the paper, we replicate the experiments using the hyperparameters recommended by the official sources and conduct multiple attempts and optimizations on these hyperparameters as well. Each experiment is executed three times with random initializations, and the mean results are reported.

B Additional Results and Analysis

B.1 Relation Prediction

```
PT3 : What is the relationship between {h} and
{t}? Please choose your answer from:
{r1} {r2}... {rn}.
PT4 : Background:\n1.D(h)\n2.D(t)\n
Question:\nWhat is the relationship between
{h} and {t}? Please choose your answer from:
{r1} {r2}... {rn}.
```

Figure 7: Prompt templates to stimulate the LLM for relation prediction.

Given an incomplete triple $(h, ?, t)$ as query, relation prediction aims to predict the missing relation (denoted as $?$). For relation prediction, we transform the binary framework of triple classification shown in Figure 1 into a multi-class framework. The categories for classification are the relationship types within each knowledge graph. Table 3 shows our experimental results on the YAGO3-10 (Dettmers et al., 2018) dataset. We use the

Entity	Generated Description	Non-Generated Description
Gustav Mahler	Gustav Mahler was a Jewish composer known for his significant contributions to the world of music. He lived in the United States and was of German nationality.	Gustav Mahler (German; 7 July 1860 – 18 May 1911) was an Austro-Bohemian late-Romantic composer, and one of the leading conductors of his generation...
James Hayter	James Hayter was a male actor born in Scotland, known for his profession in acting. He passed away in Spain.	Henry James Goodenough Hayter (23 April 1907 – 27 March 1983), better known as James Hayter, was a British actor. He is best remembered for his roles as Friar Tuck in the film <i>The Story of Robin Hood and His Merrie Men</i> (1952) and...

Table 6: Comparison of generated entity descriptions with non-generated entity descriptions on the FB13 dataset.

Parameter	Value
optimizer	adamw
learning rate	3e-4
epoch	3
weight decay	0
LoRA modules	q_proj, k_proj, v_proj, o_proj
LoRA r	8
LoRA alpha	16
LoRA dropout	0.05

Table 7: Hyper-parameters of KG-LLAMA-7B.

following prompt template, PT_3 and PT_4 , to create training samples for classification, as shown in Figure 7. PT_4 introduces the $D(e)$ to generate more precise and distinguishable hidden states, linking entities in the Yago with entities in the LLM, thereby improving the overall relation prediction performance.

It is worth noting that "ALL" represents 1,079,040 training samples. LLaMA-MLP and LLAMA-DES2 (GPT) only use 0.6% of the training set to train the probing classifier. It can be seen that LLAMA-DES2 (GPT) with frozen language model parameters achieves results very close to KG-LLAMA-7B, which is fine-tuned on the full dataset.

B.2 Case Study

Table 9 shows the prediction results of different models for two samples in the WN11 test set. For the first case, it can be seen that among the methods using frozen LLMs, only LLAMA-7B-ICL, LLAMA-MLP, and LLAMA-DES-H predict correctly. However, the LLAMA-7B-ICL method predicts "True" for almost all test samples. For the second case, it can be seen that only LLAMA-MLP, LLAMA-DES-H, and KG-LLAMA-7B predict correctly. However, KG-LLAMA-7B is fine-tuned on the full training set. The correct predictions by LLAMA-MLP and LLAMA-DES-H indicate

that the LLM itself has the relevant knowledge to make accurate predictions, whereas methods like LLAMA-7B-ICL and ALPACA-7B do not fully utilize the knowledge stored in the language model or generate hallucinations during the response process.

B.3 Efficiency Analysis

We compared the performance of the KG-LLAMA method and LLAMA-MLP on the WN11 full dataset in terms of GPU memory and time consuming metrics using an Nvidia 3090 GPU. The results are shown in Table 8. For the computation of GPU memory usage, we use "torch.cuda.memory_allocated" to obtain the peak memory usage at each step. For the calculation of GPU memory reduction factor, we focus solely on the training phase, dividing the memory usage of KG-LLAMA by that of LLAMA-MLP. For the reduction factor of time consumption, we first sum the time consumed during both the training and inference phases for each method and then divide the results. For all methods, the batch size for all procedures is set to 1. The KG-LLAMA method employs LoRA for supervised fine-tuning, and its hyperparameters are listed in Table 7, with the epoch set to 1 in the efficiency experiment. For the training stage of KG-LLAMA, we employ 8-bit quantization technique, while for the inference stage, we configure not to use beam search. For the inference stage of LLAMA-MLP, we probe both the training data and the testing data. Thus, the sum of the three times in the table corresponds to the time required for probing the training data, probing the testing data, and the MLP forward pass, respectively.

It is worth noting that in practical use, our probing method only requires a small portion of the training set to complete the training of classifiers (such as MLP, Logistic Regression, etc.). Here, we used the full dataset for fairness in testing. We can

Method	Procedure	GPU Memory	Time
KG-LLAMA	Training (LLM:1 epoch)	14.68G (LLM Parameters+LoRA+Gradient etc)	83h (Forward+Backward)
	Inference (LLM:Generation)	12.94G (LLM Parameters+LoRA)	2h50min (Forward)
LLAMA-MLP	Training (MLP:10 epoch)	0.078G (MLP Parameters+Gradient etc)	33min (Forward+Backward)
	Inference (LLM:Probing+MLP)	12.82G+0.078G (LLM Parameters+MLP Parameters)	5h10min+29min+15s (Forward)

Table 8: Efficiency Comparison between KG-LLAMA and LLAMA-MLP on the WN11 dataset. The "Procedure" column represents several key steps of these methods.

QUERY	MODEL	PRED	LABEL
HEAD: parsnip; REL: type of; TAIL: herb;	LLAMA-7B	N/A	TRUE
	LLAMA-7B-ICL	TRUE	
	ALPACA-7B	FALSE	
	ALPACA-7B-ICL	FALSE	
	LLAMA-MLP	TRUE	
HEAD: market synset; REL: domain topic; TAIL: brain stem;	LLAMA-7B	N/A	FALSE
	LLAMA-7B-ICL	TRUE	
	ALPACA-7B	TRUE	
	ALPACA-7B-ICL	TRUE	
	LLAMA-MLP	FALSE	
	LLAMA-DES-H	FALSE	
	KG-LLAMA-7B	FALSE	

Table 9: Case study (triple classification) on two representative examples selected from the WN11 dataset. "N/A" indicates that the model's output does not contain the predicted label information (i.e., yes or no).

clearly observe in the Table 8 that the proposed probing method, which uses frozen language models, consumes less GPU memory at all stages compared to KG-LLAMA, even though KG-LLAMA employs parameter-efficient fine-tuning techniques like LoRA to save memory. Additionally, since our method only requires a forward pass through the LLM, it consumes significantly less time compared to KG-LLAMA.

B.4 Analysis of Methods for Entity Description Generation

From Table 2, it can be observed that the performance of LLAMA-DES2 (Tri) is significantly inferior to that of LLAMA-DES2 (GPT), and even LLAMA-MLP. This indicates that using subgraph triples as entity descriptions directly does not enhance the model's classification performance; it may even impair its judgment. This phenomenon may be attributed to subgraph triples diverging significantly from the language model's pre-training

corpus, thus providing erroneous stimulus information. However, organizing triples into coherent semantic natural language text using methods in Appendix A.1 appears to mitigate this impact.

B.5 Analysis of Using Frozen LLM in KGC

It has been observed that the predictive performance achieved by the frozen language models can not achieve comparable performance with supervised fine-tuning the language models (Zhang et al., 2023; Yao et al., 2023). But the knowledge graphs used in the experiments are encyclopedic knowledge graphs, such as FB15K-237 (Toutanova and Chen, 2015), which are subsets of FB15k (Bordes et al., 2013) derived from Wikipedia. Large Language Models like LLaMA (Touvron et al., 2023), which are pretrained on datasets such as Wikipedia, CommonCrawl, etc., have stored this type of world knowledge (Davison et al., 2019). Liu et al. (2023) shows that prompting can effectively access the knowledge within LLMs without fine-tuning. Therefore, frozen LLMs have sufficient knowledge and capability to complete KGC tasks.

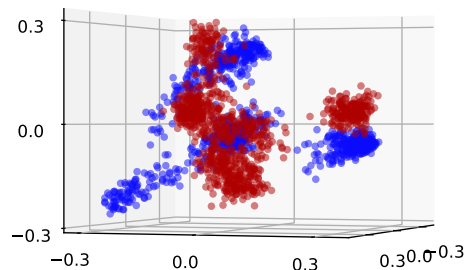


Figure 8: We visualize the hidden states obtained from stimulation in the FB13 test set in three-dimensional space using PCA. The high dimensional vectors are obtained using the LLAMA-DES2 (GPT) method, collecting the language model's hidden states from the 16th layer through stimulation.