An Introduction to Reinforcement Learning: Fundamental Concepts and Practical Applications

Majid Ghasemi
Wilfrid Laurier University
mghasemi@wlu.ca

Ibrahim Sorkhoh Wilfrid Laurier University ibrahim.sorkhoh@me.com

Fadi Alzhouri Concordia University fadi.alzhouri@concordia.ca Amir Hossein Moosavi Concordia University s.amirhosein.mn@gmail.com

Anjali Agarwal Concordia University anjali.agarwal@concordia.ca

> Dariush Ebrahimi Wilfrid Laurier University debrahimi@wlu.ca

Abstract

Reinforcement Learning (RL) is a branch of Artificial Intelligence (AI) which focuses on training agents to make decisions by interacting with their environment to maximize cumulative rewards. An overview of RL is provided in this paper, which discusses its core concepts, methodologies, recent trends, and resources for learning. We provide a detailed explanation of key components of RL such as states, actions, policies, and reward signals so that the reader can build a foundational understanding. The paper also provides examples of various RL algorithms, including model-free and model-based methods. In addition, RL algorithms are introduced and resources for learning and implementing them are provided, such as books, courses, and online communities. This paper demystifies a comprehensive yet simple introduction for beginners by offering a structured and clear pathway for acquiring and implementing real-time techniques.

1 Introduction

Reinforcement Learning (RL) is another type of learning in AI that focuses on training by interacting with the environment. In contrast to supervised learning, where an agent learns from labeled examples, or unsupervised learning, which is based on detecting patterns in the data, RL deals with an autonomous agent that must make intuitive decisions and consequently learn from its actions. The key idea is to learn how the world works (e.g., what action gets a reward and which does not) to maximize cumulative rewards over time through trial-and-error exploration [1]. This paper will serve as a crash course in RL, with the aim that readers should be geared up for solving real-world problems using it. This paper considers the readers to have basic knowledge of Machine Learning (ML) algorithms like Supervised and Unsupervised Learning.

RL revolves around several key concepts: States, Actions, Policies, and Rewards. Each of these components plays a crucial role in defining the agent's interaction with its environment and the overall learning process.

A State (s) represents a specific condition or configuration of the environment at a given time as perceived by the agent. A state sets the scene for the agent to make choices and select actions. This is the state space, which describes all states from which an agent can choose for each action that occurs. For example, in chess, a state might be one specific layout of pieces on the board. Actions (a) are the set of possible moves or decisions an agent can make while interacting with the environment. A selected action is part of the strategy followed by an agent to reach its desired goals according to its current states and policy. In the chess example, moving a piece from one square to another is an action. A policy (π) guides the behavior of a learning agent by mapping perceived states of the environment into actions. This could be a simple

function, a lookup table, or a complex computation. Policies can also be stochastic, defining the likelihood of taking certain actions. A deterministic policy assigns a specific action to each state, while a stochastic policy assigns probabilities for all potential actions in any given state. The Rewards (r) are a critical factor in RL because it provides the agent with an objective at each time step, defining both local and global goals that the agent aims to achieve over time. Rewards differentiate positive from negative events and help update policies according to the outcomes of actions. Rewards depend on the state of the environment and the actions taken. For instance, in a game scenario, winning points might be the reward, while losing points could be the penalty. Environment Model is an approximation or prediction of the environment, mapping out what will be available (the next state and reward) given a particular input from the state and action. These models help with planning by identifying what actions should be taken based on possible future events. RL approaches that use models are called model-based methods, whereas those relying solely on trial-and-error learning are model-free methods.

To cement these concepts, let us consider an RL agent navigating a maze. The state represents the agent's current position within the maze. The actions could be moving north, south, east, or west. The policy dictates which direction the agent should move based on its current state. The reward signal might give a positive reward when the agent reaches the end of the maze and negative rewards for hitting walls or making incorrect move.

Figure 1 illustrates the interaction between an RL agent and its environment. The agent observes the current state (S_t) , selects an action (A_t) based on its policy, and receives a reward (R_t) along with the next state (S_{t+1}) . This feedback loop is critical for the agent to learn and update its policy to maximize cumulative rewards.

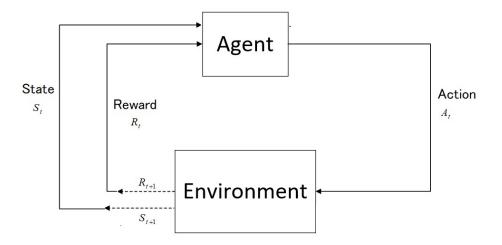


Figure 1: Overview model of Reinforcement Learning, influenced by [1]

Several critical challenges must be addressed in order to understand and implement RL. A key challenge is balancing exploration with exploitation. As part of exploration, the agent tries new actions in order to determine their effects and gather more information about the environment. To learn and improve the agent's understanding of the potential rewards of different actions, this information is essential. Alternatively, exploitative behavior involves the agent using its current knowledge to make decisions that maximize immediate rewards. In order to achieve the highest possible reward, the agent utilizes the best-known actions in accordance with its learned policy [2]. Traditionally, the Epsilon-Greedy method is used to resolve this trade-off. An agent chooses a random action with a probability of ϵ (exploration) and the best-known action with a probability of $1 - \epsilon$ (exploitation). The value of ϵ may be fixed or may decay over time [3, 1].

To solve problems with RL, we have to formulate them by Markov decision processes (MDPs). Using an MDP, one can model decision-making where outcomes are partly determined by chance and partly controlled by the decision-maker. As a result, the core idea is to capture the fundamental challenges faced by an agent interacting with its environment in order to achieve its goals. It is essential that the agent perceives the environment's state, takes actions which affect it, and has objectives related to the environment's states

that are embodied in the reward signal. The process of forming a problem in MDP often poses a variety of challenges, which can be viewed as the second challenge[1].

The rest of the paper is organized as follows: Section 2 introduces multi-bandits, that are helpful in understanding the nature of RL problems by starting with an easy example. A thorough introduction to Markov Decision Processes is given in section 3, a fundamental step in learning RL. A complete introduction to policies and value functions, core ideas of every RL algorithms, is given in section 4. Section 5 examines the limitation of policy iteration by introducing a new concept called Value Iteration. Understanding various methods in RL is pivotal to learning and implementing RL. Hence, section 6 gives complete descriptions about each method. In section 7, we outline the advancements in RL from its early foundations to recent trends, giving readers a comprehensive understanding of the field's development. Additionally, Also, must-know widely-used algorithms are provided in section 8. Finally, useful resources for learning RL are provided to avoid perplexion.

The following section explore simple problems involving finite states and actions, followed by a discussion of the main problem framework, finite Markov decision processes. This includes key concepts like Bellman equations and value functions essential for decision-making problems.

2 K-Armed Bandits

In this section, we examine a simple RL form with a single state called bandit problems to broaden our understanding of RL in a simple environment to cement the mentioned points in the former section.

Firstly, we need to understand what is the difference between types of feedback, as the reward signal is a form of a feedback received by agents. In Figure 2, an agent interacts with the environment, takes observations (O_t) at each timestep, and based on these observations, performs actions. There are four possible actions: A_1, A_2, A_3 , and A_4 . Assume the best action a^* is A_2 , but the agent chose A_4 .



Figure 2: Agent interaction in a simple environment of four-armed bandit

Instructive feedback indicates the chosen action is wrong and the best action is A_2 , typical in supervised learning tasks. Evaluative feedback only indicates the chosen action is not good, typical in RL tasks, and evaluative feedback depends entirely on the actions taken. The stated example shows the difference of the feedback received in RL environment.

In the following sections, evaluating action-values will be examined in a simple form of RL, which is Immediate Reinforcement Learning (IRL).

In order to understand the K-armed bandit problem or IRL, assume that you are required to select from a number of options (actions) repeatedly. You receive a numerical reward (or punishment) after each choice based on a stationary probability distribution. The concept of "stationarity" refers to the fact that probability distributions for rewards and transitions remain unchanged over time. For the purpose of simplifying learning, RL algorithms rely on stationarity and model-free methods such as Q-learning. However, this assumption does not always hold in real-world applications, so algorithms for non-stationary environments are required [4].

For each of the k actions available, there is an expected average reward, referred to as the value of the action [1]. Let us denote the action chosen at time step t as A_t and the reward received as R_t . Define $q^*(a)$ as the value of an arbitrary action a.

The value of an action $q^*(a)$ is defined as the expected reward when the agent takes action a at any given time step t. Mathematically, this is represented as:

$$q^*(a) = \mathbb{E}[R_t \mid A_t = a] \tag{1}$$

Here, we are defining $q^*(a)$ as the expected reward for taking action a. This forms the basis for evaluating actions in the k-armed bandit problem.

If we knew the best action to take, solving the problem would be trivial as we would always choose the best action. Without this knowledge, we must estimate each action's value, denoted as $Q_t(a)$ at time step t, which should approximate $q^*(a)$.

After estimating action values, there is at least one action with the highest estimated value at each time step. These are called greedy actions. Selecting a greedy action exploits current knowledge for immediate reward, while selecting non-greedy actions explores to improve estimates. Balancing exploration and exploitation is crucial in RL. As mentioned earlier, opting for exploitation maximizes immediate reward, while exploration can yield higher overall reward depending on various factors [1, 2].

Estimating action values through sampling averages is efficient for stationary bandit problems. In real-world RL problems with non-stationary environments, it makes sense to weight recent rewards more. Using a constant step-size parameter is popular. Rewriting the sample-average equation as:

To update the action value, we use the following update rule:

$$Q_{n+1} \equiv Q_n + \alpha [R_n - Q_n] \tag{2}$$

Here:

- Q_{n+1} : The updated action value after the *n*-th reward.
- Q_n : The current action value before the *n*-th reward.
- α : The learning rate, a parameter that determines the extent to which new information overrides the old information.
- R_n : The reward received after taking an action at step n.

This update rule incrementally adjusts the action value based on the difference between the received reward and the current estimate, weighted by the learning rate α . This iterative process allows the agent to refine its value estimates and improve decision-making over time.

To estimate action-values in K-armed bandit problems, we use the following equation, which represents the action value $Q_t(a)$ as the average of the rewards received from that action up to time step t.

We explore techniques for assessing action value and making choices based on these estimates, known as action-value methods. The true value of an action corresponds to its average reward upon selection, estimated by averaging received rewards, as written in equation below:

$$Q_t(a) = \frac{\text{sum of rewards when the action } a \text{ is taken prior to time step } t}{\text{number of times the action } a \text{ is taken prior to time step } t} \tag{3}$$

 $Q_t(a)$ can be mathematically expressed as:

$$Q_t(a) = \frac{\sum_{i=1}^{t-1} R_i \cdot \mathbf{1}_{\{A_i = a\}}}{\sum_{i=1}^{t-1} \mathbf{1}_{\{A_i = a\}}}$$
(4)

where $\mathbf{1}_{\{A_i=a\}}$ is the indicator function. The indicator function $\mathbf{1}_{\{A_i=a\}}$ is used to count the number of times action a has been taken up to time step t.

$$\mathbf{1}_{\{A_i=a\}} = \begin{cases} 1 & \text{if action } a \text{ is taken at time step } i \\ 0 & \text{otherwise} \end{cases} \tag{5}$$

If the denominator is zero, $Q_t(a)$ is defined as a default value (e.g., 0). It is noted to be that as the denominator approaches infinity, $Q_t(a)$ converges to $q^*(a)$ by the law of large numbers [5].

An estimated action value is calculated based on an average of reward samples using the sample-average method. This method may not be the most effective, but it can be used as a starting point for selecting actions based on the estimates [1].

$$A_t \equiv \arg\max_{a} Q_t(a) \tag{6}$$

Here, A_t represents the action selected at time step t, which is the action with the highest estimated value $Q_t(a)$.

Greedy selection exploits current knowledge to maximize immediate reward. However, it can be problematic as it requires exploring all actions to know their rewards. A simple yet efficient alternative is being greedy most of the time but selecting randomly from all actions with a small probability, ϵ . This method, called the ϵ -greedy method, balances exploration and exploitation.

These methods ensure all actions are sampled enough to estimate their true value accurately, making the selection of the best action almost certain over time. However, these are theoretical long-term benefits and may not directly indicate practical effectiveness [6].

Estimating action values by sampling averages is inefficient for large numbers of samples (K > n). A more efficient approach derives Q_n as:

Now, the action value using the following formula for the sample average is defined in a following way:

$$Q_n \equiv \frac{R_1 + R_2 + \dots + R_{n-1}}{n-1} \tag{7}$$

We can express the update rule for action value recursively as follows:

$$Q_{n+1} = Q_n + \frac{1}{n} [R_n - Q_n] \tag{8}$$

This recursive equation requires memory only for Q_n and n, with minimal computation for each reward. The general form of the update rule for action value is:

$$NewEstimate \leftarrow OldEstimate + StepSize[Target - OldEstimate]$$
 (9)

The target suggests a preferred direction for adjustment, despite noise. In the example, the target is the nth reward [7].

Sample averages apply to stationary bandit problems. In non-stationary environments, recent rewards are more relevant. Using a constant step-size parameter, the equation can be rewritten as:

$$Q_{n+1} \equiv Q_n + \alpha [R_n - Q_n] \tag{10}$$

The initial estimates of action values, $Q_1(a)$, play a crucial role in the learning process. These initial guesses influence the early decisions made by the agent. While sample-average methods can reduce this initial bias after each action is chosen at least once, methods using a constant step-size parameter, α , tend to mitigate this bias more gradually over time. Setting optimistic initial values can be particularly advantageous. By assigning higher initial estimates (e.g., +5), the agent is encouraged to explore more actions early on. This is because the initial optimism makes untried actions appear more attractive, thus promoting exploration even when the agent uses a greedy strategy. This approach helps ensure that the agent thoroughly investigates the action space before converging to a final policy.

However, this strategy requires careful consideration in defining the initial values, which are often set to zero in standard practice. The choice of initial values should reflect an informed guess about the potential rewards, and overly optimistic values can prevent the agent from converging efficiently if not properly managed.

Overall, optimistic initial values can be a useful technique to balance exploration and exploitation in RL, encouraging broader exploration and potentially leading to more optimal long-term policies [8].

As a result of the uncertainty associated with the estimation of action values, exploration is essential. In the /epsilon-greedy method, non-greedy actions are explored indiscriminately. It is preferable to explore non-greedy actions selectively based on their potential optimality and uncertainty. Based on the Upper Confidence Bound (UCB) method, actions are selected based on the following criteria:

$$A_t \equiv \arg\max_{a} \left[Q_t(a) + c\sqrt{\frac{\ln t}{N_t(a)}} \right]$$
 (11)

Here, $\ln t$ denotes the natural logarithm of t, c > 0 controls exploration, and $N_t(a)$ is the number of times action a has been taken prior to time step t. If $N_t(a) = 0$, a is considered a maximizing action.

As part of its value estimation, UCB incorporates uncertainty into its calculation of an action's upper limit. Confidence levels are adjusted by the constant c. By choosing action a, the uncertainty associated with a decreases as $N_t(a)$ increases, whereas by choosing other actions, the uncertainty associated with a increases as t increases. Using the natural logarithm, all actions are eventually explored as uncertainty adjustments decrease over time. The frequency with which actions with low estimates or frequent selections are chosen decreases over time [9].

3 Finite Markov Decision Process

This section describes the formal problem of finite Markov decision processes (MDPs). An MDP provides a framework for sequential decision-making in which actions affect immediate rewards as well as future outcomes. In MDPs, immediate rewards are balanced with delayed rewards. In contrast to bandit problems in which the goal is to determine the value of each action a, MDPs aim to measure the value of taking action a in state s, or the value of being in state s assuming optimal actions are taken. A correct assessment of the long-term effects of interventions requires the estimation of these state-specific values [1]. Finite MDPs consist of states, actions, and rewards (S, A, R). Discrete probability distributions are assigned to the random variables R_t and S_t based on the preceding state and action. Using the probabilities of occurrence of the random variables R_t and S_t , derive equations for these variables. A system is considered Markovian when the outcome of an action is independent of past actions and states, relying solely on the current state [10]. The Markov property requires the state to encapsulate significant details of the entire past interaction influencing future outcomes [11]. This definition is the basis of MDPs being used in RL. To describe the dynamics of an MDP, we use the state-transition probability function $p(s', r \mid s, a)$, which is defined as follows:

$$p(s', r \mid s, a) \equiv \Pr\{S_t = s', R_t = r \mid S_{t-1} = s, A_{t-1} = a\}$$
(12)

where the function p defines the MDP dynamics.

The following state-transition probabilities, state-action and state-action-next-state triple rewards can be derived from the four-argument dynamic function p. We can derive the state-transition probabilities, the expected reward for state-action pairs, and the expected rewards for state-action-next-state triples as follows:

$$p(s' \mid s, a) \equiv \Pr\{S_t = s' \mid S_{t-1} = s, A_{t-1} = a\} = \sum_{r \in R} p(s', r \mid s, a)$$
(13)

$$r(s,a) \equiv \mathbb{E}\{R_t \mid S_{t-1} = s, A_{t-1} = a\} = \sum_{r \in R} r \sum_{r \in R} p(s', r \mid s, a)$$
(14)

$$r(s, a, s') \equiv \mathbb{E}\{R_t \mid S_{t-1} = s, A_{t-1} = a, S_t = s'\} = \sum_{r \in R} \frac{rp(s', r \mid s, a)}{p(s' \mid s, a)}$$
(15)

The concept of actions encompasses any decisions relating to learning, and the concept of states encompasses any information that is available in order to inform those decisions. As part of the MDP framework, goal-directed behavior is abstracted through interaction. Any learning problem can be reduced to three signals between an agent and its environment: actions, states, and rewards. A wide range of applications have been demonstrated for this framework [1].

We are now able to formally define and solve RL problems. We have defined rewards, objectives, probability distributions, the environment, and the agent. Some concepts, however, were defined informally. According to our statement, the agent seeks to maximize future rewards, but how can this be mathematically expressed?

The return, denoted G_t , is the cumulative sum of rewards received from time step t onwards. For episodic tasks, it is defined as follows:

Let the sequence of rewards received after time step t be:

$$G_t \equiv R_{t+1} + R_{t+2} + \dots + R_T \tag{16}$$

Here, G_t is a specific function of the reward sequence.

In what way does terminating the sequence at T serve a purpose? As the name suggests, episodic problems are those in which the interactions between agents and their environment occur naturally in sequence, known as episodes, and tasks are termed episodic tasks. The game hangman is a good example of this. At the end of each episode, a standard starting state is restored. The term "new games" refers to the next state after the terminal state, which is the final state leading to the end of an episode.

It is common for ongoing tasks to involve interactions that persist continuously throughout the duration of the task, such as process control or applications that utilize robots with prolonged lifespans. The term "continuing tasks" refers to these activities. As there are no terminal states in continuing tasks (T = /infty), the return for continuing tasks should be defined differently. It is possible that the return could be infinite if the agent consistently receives a reward. For continuing tasks, define the return as follows:

For continuing tasks, where there is no terminal state, the return G_t is defined as the discounted sum of future rewards:

$$G_t \equiv R_{t+1} + \gamma R_{t+2} + \gamma^2 R_{t+3} + \dots = \sum_{k=0}^{\infty} \gamma^k R_{t+k+1}$$
 (17)

where γ is the discount rate $(0 \le \gamma \le 1)$.

The discount rate affects the current worth of future rewards. When $\gamma < 1$, the infinite sum converges to a finite value. With $\gamma = 0$, the agent maximizes immediate rewards. As γ approaches 1, future rewards carry more weight. Define return recursively as:

We can also express the return G_t recursively as:

$$G_t \equiv R_{t+1} + \gamma G_{t+1} \tag{18}$$

The return is finite if the reward is nonzero and constant, and $\gamma < 1$. Use one formula for both episodic and continuing tasks:

For both episodic and continuing tasks, the return G_t can be defined as:

$$G_t \equiv \sum_{k=t+1}^{T} \gamma^{k-t-1} R_k \tag{19}$$

This formula works for both episodic and continuing tasks if $T = \infty$ or $\gamma = 1$, respectively. Now, we can discuss the two most important RL concepts: Policies and Value functions.

4 Policies and Value Functions: Zero to Hero

The value function estimates the expected return of the agent being in a certain state (or performing an action in a particular state). Depending on the actions selected, these factors will vary. There is a link between value functions and policies, which are linked to probabilities of action based on states. Value functions can be divided into two broad categories as follows:

State Value Functions: The value function of a state s under policy π , $v_{\pi}(s)$, is the expected return starting in s and following π thereafter.

Action Value Functions: The value of taking action a in state s under policy π , $q_{\pi}(s, a)$, is the expected return starting from s, taking action a, and following π thereafter.

For MDPs, v and q are defined as:

The state value function $v_{\pi}(s)$ represents the expected return starting from state s and following policy π . It is mathematically defined as follows:

$$v_{\pi}(s) \equiv \mathbb{E}_{\pi} \left[\sum_{k=0}^{\infty} \gamma^{k} R_{t+k+1} \mid S_{t} = s \right], \quad \text{for all } s \in S$$
 (20)

The action value function $q_{\pi}(s, a)$ represents the expected return starting from state s, taking action a, and then following policy π . It is defined as follows:

$$q_{\pi}(s, a) \equiv \mathbb{E}_{\pi}[G_t \mid S_t = s, A_t = a] = \mathbb{E}_{\pi} \left[\sum_{k=0}^{\infty} \gamma^k R_{t+k+1} \mid S_t = s, A_t = a \right]$$
 (21)

It is important to note the difference between v and q, namely that q depends on the actions taken in each state. With ten states and eight actions per state, q requires 80 functions, while v requires only 10 functions.

Following policy π , if an agent averages returns from each state, the average converges to $v^{\pi}(s)$. Averaging returns from each action converges to $q^{\pi}(s,a)$ [1].

In Monte Carlo methods, many random samples of returns are averaged. This method does not provide sample efficiency, requiring separate averages to be calculated for each state. Estimates can be improved through the use of parameterized functions that have fewer parameters. v should be written recursively as follows:

$$v_{\pi}(s) \equiv \mathbb{E}_{\pi}[G_t \mid S_t = s] = \mathbb{E}_{\pi}[R_{t+1} + \gamma G_{t+1} \mid S_t = s] = \sum_{a} \pi(a|s) \sum_{s'} \sum_{r} p(s', r|s, a) [r + \gamma v_{\pi}(s')]$$
 (22)

This is the Bellman equation for v_{π} . The Bellman equation relates the value of a state to its potential successor states' values. The diagram illustrates the anticipation from a state to its successors. The value of the initial state equals the discounted value of the expected next state plus the anticipated reward [12, 1].

4.1 When to Use What?

State-value functions $v_{\pi}(s)$ and action-value functions $q_{\pi}(s,a)$ serve different purposes in RL.

In the evaluation of deterministic policies or when understanding the value of being in a particular state is required, **state-value functions** are used. In policy evaluation and policy iteration methods, where a policy is explicitly defined and it is necessary to evaluate the performance of being in a particular state under the policy, these methods are highly useful. The use of state-value functions is beneficial when there are many actions, since they reduce complexity by requiring only an evaluation of state values.

Action-value functions are used to evaluate and compare the potential for different actions when they are taking place in the same state. They are crucial for the selection of actions, such as in Q-learning and SARSA, where the goal is to determine the most appropriate action for each situation. As action-value functions take into account the expected return of different actions, they are particularly useful in environments with stochastic policies. Moreover, when dealing with continuous action spaces, action-value functions can provide a more detailed understanding of the impact of actions, aiding in the fine-tuning of policy implementation.

Consider a gambling scenario where a player starts with \$10 and faces decisions regarding the amount to bet. This game illustrates state and action value functions in RL.

State Value function $(v^{\pi}(s))$: The state value function $v^{\pi}(s)$ quantifies expected cumulative future rewards for a state s, given policy π . Suppose the player has \$5:

- With a consistent \$1 bet, $v^{\pi}(5) = 0.5$ indicates an expected gain of \$0.5.
- With a consistent \$2 bet, $v^{\pi}(5) = -1$ indicates an expected loss of \$1.

Action Value function $(q^{\pi}(s,a))$: The action value function $q^{\pi}(s,a)$ assesses expected cumulative future rewards for action a in state s. For instance:

- $q^{\pi}(5,1) = 1$ suggests a \$1 bet from \$5 results in a cumulative reward of \$1.
- $q^{\pi}(5,2) = -0.5$ indicates a loss of \$0.5 for a \$2 bet from \$5.

This gambling game scenario highlights the role of state and action value functions in RL, guiding optimal decision-making in dynamic environments.

Solving an RL task involves identifying a policy that maximizes long-term rewards. For finite MDPs, an optimal policy is defined in the next subsection.

4.2 Optimal Policies and Optimal Value Functions

Value functions create a partial ordering over policies, allowing comparison and ranking based on expected cumulative rewards. A policy π is better than or equal to π_0 if $v^{\pi}(s) \geq v^{\pi_0}(s)$ for all states s. An optimal policy is better than or equal to all other policies, denoted by π_* , sharing the same optimal state-value function v^* :

The optimal state value function $v^*(s)$ is defined as the maximum value function over all possible policies:

$$v^*(s) \equiv \max_{\pi} v^{\pi}(s) \quad \text{for all } s \in S$$
 (23)

Optimal policies also share the same optimal action-value function q^* :

The optimal action value function $q^*(s, a)$ is defined as the maximum action value function over all possible policies:

$$q^*(s, a) \equiv \max_{\sigma} q^{\pi}(s, a) \quad \text{for all } s \in S$$
 (24)

The relationship between the optimal action value function $q^*(s, a)$ and the optimal state value function $v^*(s)$ is given by the following equation:

$$q^*(s,a) = \mathbb{E}[R_{t+1} + \gamma v^*(S_{t+1}) \mid S_t = s, A_t = a]$$
(25)

The equation expresses expected cumulative return for state-action pairs in terms of immediate rewards and discounted future states' values.

Optimal value functions and policies represent an ideal state in RL. It is however rare to find truly optimal policies in computationally demanding tasks due to practical challenges. RL agents strive to approximate optimal policies. Dynamic Programming (DP) helps identify optimal values, assuming a perfect model of the environment.

The fundamental idea of DP and RL is using value functions to organize the search for good policies. For finite MDPs, the environment's dynamics are given by probabilities $p(s', r \mid s, a)$. DP finds exact solutions in special cases, like finding the shortest path in a graph.

The Bellman optimality equations for the optimal state value function $v^*(s)$ and the optimal action value function $q^*(s,a)$ are given as follows:

$$v^*(s) = \max_{a} \mathbb{E}[R_{t+1} + \gamma v^*(S_{t+1}) \mid S_t = s, A_t = a] = \max_{a} \sum_{s',r} p(s',r \mid s,a)[r + \gamma v^*(s')]$$
 (26)

$$q^*(s, a) = \mathbb{E}[R_{t+1} + \max_{a'} q^*(S_{t+1}, a') \mid S_t = s, A_t = a] = \sum_{s', r} p(s', r \mid s, a)[r + \gamma \max_{a'} q^*(s', a')]$$
 (27)

DP algorithms are derived by transforming Bellman equations into update rules.

4.3 Policy Evaluation (Prediction)

Policy evaluation, also known as prediction, involves computing the state-value function v^{π} for a given policy π . This process assesses the expected return when following policy π from each state. The state-value function $v_{\pi}(s)$ is defined as the expected return starting from state s and following policy π :

$$v_{\pi}(s) \equiv \mathbb{E}_{\pi}[R_{t+1} + \gamma G_{t+1} \mid S_t = s] \tag{28}$$

This can be recursively expressed as:

$$v_{\pi}(s) = \mathbb{E}_{\pi}[R_{t+1} + \gamma v_{\pi}(S_{t+1}) \mid S_t = s] = \sum_{a} \pi(a \mid s) \sum_{s', r} p(s', r \mid s, a) [r + \gamma v_{\pi}(s')]$$
(29)

In these equations, $\pi(a \mid s)$ denotes the probability of taking action a in state s under policy π . The existence and uniqueness of v^{π} are guaranteed if $\gamma < 1$ or if all states eventually terminate under π . Dynamic Programming (DP) algorithm updates are termed "expected updates" because they rely on the expectation over all potential next states, rather than just a sample [1].

4.4 Policy Improvement

The purpose of calculating the value function for a policy is to identify improved policies. Assume v^{π} for a deterministic policy π . For a state s, should we alter the policy to select action $a \neq \pi(s)$? We know the effectiveness of adhering to the existing policy from state s ($v^{\pi}(s)$), but would transition to a new policy yield a superior outcome? We can answer this by selecting action a in s and then following π :

To determine if a policy can be improved, we compare the value of taking a different action a in state s with the current policy. This is done using the action value function $q_{\pi}(s,a)$:

$$q_{\pi}(s, a) \equiv \mathbb{E}[R_{t+1} + \gamma v_{\pi}(S_{t+1}) \mid S_t = s, A_t = a] = \sum_{s', r} p(s', r \mid s, a)[r + \gamma v_{\pi}(s')]$$
(30)

The key criterion is whether this value exceeds $v^{\pi}(s)$. If $q_{\pi}(s,a) > v^{\pi}(s)$, consistently choosing action a in s is more advantageous than following π , leading to an improved policy π' .

4.5 Policy Improvement Theorem

The policy improvement theorem states that if $q_{\pi}(s, \pi'(s)) \geq v_{\pi}(s)$ for all states s, then the new policy π' is at least as good as the original policy π . Formally, it is expressed as follows:

Let π and π' be deterministic policies such that for all $s \in S$:

$$q_{\pi}(s, \pi'(s)) \ge v_{\pi}(s) \tag{31}$$

If π' achieves greater or equal expected return from all states $s \in S$:

$$v_{\pi'}(s) \ge v_{\pi}(s) \tag{32}$$

If there is strict inequality at any state, π' is superior to π . Extend this to all states and actions, selecting the action that maximizes $q_{\pi}(s, a)$:

The new policy π' is obtained by selecting the action that maximizes the action value function $q_{\pi}(s,a)$:

$$\pi'(s) \equiv \arg\max_{a} q_{\pi}(s, a) = \arg\max_{a} \mathbb{E}[R_{t+1} + \gamma v_{\pi}(S_{t+1}) \mid S_{t} = s, A_{t} = a] = \arg\max_{a} \sum_{s', r} p(s', r \mid s, a) [r + \gamma v_{\pi}(s')]$$
(33)

Policy improvement creates a new policy that enhances an initial policy by adopting a greedy approach based on the value function.

Assume π' is equally effective as π but not superior. Then $v_{\pi} = v_{\pi'}$, ensuring for all states $s \in S$:

The relationship between the optimal state value function $v^*(s)$ and the optimal action value function $q^*(s, a)$ is given by the following equation:

$$v_{\pi'}(s) = \max_{a} \mathbb{E}[R_{t+1} + \gamma v_{\pi'}(S_{t+1}) \mid S_t = s, A_t = a] = \max_{s', r} p(s', r \mid s, a)[r + \gamma v_{\pi'}(s')]$$
(34)

This is the Bellman optimality equation, implying $v_{\pi'} = v^*$ and both π and π are optimal policies. Policy improvement yields a superior policy unless the initial policy is already optimal.

This concept extends to stochastic policies. Stochastic policies introduce a set of probabilities for actions, with the action most aligned with the greedy policy assigned the highest probability.

4.6 Policy Iteration

After enhancing a policy π using v_{π} to derive an improved policy π' , compute $v_{\pi'}$ and further refine it to obtain a superior policy π'' . This process generates a sequence of improving policies and corresponding value functions:

The process of policy iteration involves alternating between policy evaluation and policy improvement to obtain a sequence of improving policies and value functions:

$$\pi_0 \xrightarrow{\text{Evaluation}} v_{\pi_0} \xrightarrow{\text{Improvement}} \pi_1 \xrightarrow{\text{Evaluation}} v_{\pi_1} \xrightarrow{\text{Improvement}} \pi_2 \xrightarrow{\text{Evaluation}} \dots \xrightarrow{\text{Improvement}} \pi_* \xrightarrow{\text{Evaluation}} v^*$$
(35)

Each policy in this sequence is a marked improvement over its predecessor unless the preceding one is already optimal. Given a finite MDP, this iterative process converges to an optimal policy and value function in a finite number of iterations. This method is called policy iteration.

5 Value Iteration

One limitation of policy iteration is that each iteration requires policy evaluation, often necessitating multiple passes through the entire state set [13]. To address this, policy evaluation can be abbreviated without losing convergence guarantees. This method, known as value iteration, terminates policy evaluation after a single sweep. It combines policy improvement with a truncated form of policy evaluation. Value iteration merges one pass of policy evaluation with policy improvement in each iteration, ensuring convergence to an optimal policy for discounted finite MDPs [14].

The update rule for value iteration is given by:

$$v_{k+1}(s) \equiv \max_{a} \mathbb{E}[R_{t+1} + \gamma v_k(S_{t+1}) \mid S_t = s, A_t = a] = \max_{a} \sum_{s',r} p(s', r \mid s, a)[r + \gamma v_k(s')]$$
(36)

Value iteration combines one sweep of policy evaluation and policy improvement in each iteration. It converges to an optimal policy for discounted finite MDPs [14].

Policy iteration involves two processes: policy evaluation aligns the value function with the current policy, and policy improvement makes the policy greedier based on the value function. These processes iteratively reinforce each other until an optimal policy is obtained.

In value iteration, the key advantage is its efficiency, as it reduces the computational burden by merging policy evaluation and improvement into a single update step. This method is particularly useful for large state spaces where full policy evaluation at each step of policy iteration is computationally prohibitive [1]. Additionally, value iteration can be implemented using a synchronous update approach, where all state values are updated simultaneously, or an asynchronous update approach, where state values are updated one at a time, potentially allowing for faster convergence in practice [13].

Another notable aspect of value iteration is its robustness to initial conditions. Starting from an arbitrary value function, value iteration iteratively refines the value estimates until convergence, making it a reliable method for finding optimal policies even when the initial policy is far from optimal [15].

Furthermore, value iteration provides a foundation for more advanced algorithms, such as Q-learning and other reinforcement learning techniques, by illustrating the principle of bootstrapping, where the value of a state is updated based on the estimated values of successor states. This principle is central to many modern reinforcement learning algorithms that seek to balance exploration and exploitation in dynamic and uncertain environments [16].

6 Terminology

Understanding the various methodologies and concepts within RL is essential for the effective design and implementation of RL algorithms. Methods in RL can be classified as either off-policy or on-policy, as well as model-free and model-based. These categories offer different approaches and techniques for learning from interactions with the environment.

6.1 Model-Free Methods

Model-free methods determine the optimal policy or value function directly without constructing a model of the environment. There is no requirement for them to know transition probabilities and rewards, as they learn entirely from observed states, actions, and rewards. Compared with model-based methods, model-free methods are simpler to implement, relying on experience-based learning. There are two primary types:

Value-based methods focus on learning the action-value function to derive an optimal policy. For instance, Q-learning (discussed in section 8) is an off-policy algorithm that learns the value of the optimal policy independently of the agent's actions by using a max operator in its update rule. SARSA (also discussed in section 8), on the other hand, is an on-policy algorithm that updates its Q-values based on the actions actually taken by the policy. Both methods update their action-value estimates based on the Bellman equation until convergence. In contrast, policy-based methods, like REINFORCE (discussed in section 8), work by directly learning the policy without explicitly learning a value function. These methods adjust the policy parameters directly by following the gradient of the expected reward. This approach is particularly useful in environments with high-dimensional action spaces where value-based methods may not be effective. Policy-based methods are also capable of handling stochastic policies, providing a natural framework for dealing with uncertainty in action selection.

In addition to these primary types, there are also hybrid approaches that combine value-based and policy-based methods, such as Actor-Critic algorithms (which will be discussed in section 8). These methods consist of two components: an actor that updates the policy parameters in a direction suggested by the critic, and a critic that evaluates the action-value function. Combining both types of learning is intended to provide more stable and efficient learning [17].

The best way to understand hybrid approaches is to imagine a robot vacuum cleaner navigating a living room and cleaning it efficiently. It is imperative that the robot decides the best course of action in order to cover the entire area while avoiding obstacles and maximizing its battery life.

As part of the value-based component, the robot estimates the value of being in each location in the living room based on a value-based method. The robot learns a state-value function that indicates how much dirt should be removed if it starts at a specific location and follows a specific strategy. Through this component, the robot understands the long-term benefits of being in different locations. Simultaneously, the robot uses a policy-based method to determine the right action to take (for example, moving forward, turning left, turning right). As a result of the policy, the robot adjusts parameters to improve its decision-making process. For example, if moving forward usually results in more dirt being cleaned, the robot is more likely to choose this action in the future when it encounters similar circumstances.

When these two components are combined, the robot is able to navigate and clean the living room more effectively. A value-based approach provides a broader understanding of which areas are most valuable to visit, while a policy-based approach focuses on making the best decisions for the present based on the current situation. The hybrid approach ensures that the robot not only plans its long-term strategy effectively, but also reacts appropriately to immediate circumstances, resulting in an overall more efficient cleaning process.

Another significant advancement in model-free methods is the development of Deep RL (DRL) By integrating deep neural networks with traditional RL algorithms, methods such as Deep Q-Networks (DQN) [18] and Proximal Policy Optimization (PPO) [19] have achieved remarkable success in complex, high-dimensional environments, including games and robotic control tasks. The advancement of these technologies has opened up new possibilities for the application of RL to real-world problems, enabling the demonstration of robust performance in domains which were previously intractable. It is beyond the scope of this paper to discuss these algorithms, and wee refer you to [20, 3, 21, 22] to understand DRL deeply and effectively.

6.2 Model-Based Methods

It is possible to predict the outcomes of actions using model-based methods, which facilitate strategic planning and decision-making. The use of these methods enhances learning efficiency by providing opportunities for virtual experimentation, despite the complexity of developing and refining accurate models [7].

Autonomous driving systems are an example of how model-based methods can be applied in the real world. As autonomous vehicles navigate in dynamic environments, obstacle avoidance, and optimal routing must be made in real time.

Autonomous vehicles create detailed models of their environment. These models include static elements, such as roads and buildings, as well as dynamic elements, such as other vehicles and pedestrians. Sensor data, including cameras, LIDAR, and radar, are used to build this model. Through the use of the environmental model, the vehicle is capable of predicting the outcome of various actions. For instance, when a vehicle considers changing lanes, it uses its model to predict the behavior of surrounding vehicles to determine the safest and most efficient way to make the change. The model assists the vehicle in planning its route

and making strategic decisions. To minimize travel time, avoid congestion, and enhance safety, it evaluates different routes and actions. Simulation allows the vehicle to select the best course of action by simulating various scenarios before implementation in the real world. The vehicle, for example, may use the model to simulate different actions in the event of a busy intersection, such as waiting for a gap in traffic or taking an alternate route. Considering the potential outcomes of each action, the vehicle can make an informed decision that balances efficiency with safety. In addition to improving the ability of autonomous vehicles to navigate safely and efficiently in real-world conditions, this model-based approach enables them to make complex decisions with a high level of accuracy. As a result of continuously refining the model based on new data, the vehicle is able to enhance its decision-making capabilities over time, thereby improving performance and enhancing safety on the road.

There are several advantages to using model-based methods over methods that do not use models. By simulating future states and rewards, they can plan and evaluate different action sequences without interacting directly with the environment. It is believed that this capability may lead to a faster convergence to an optimal policy, since learning can be accelerated by leveraging the model's predictions. A model-based approach can also adapt more quickly to changes in the environment, since it enables the model to be updated and re-planned accordingly. Although model-based methods have many advantages, they also face a number of challenges, primarily in regards to accuracy and computational cost. In order to create an accurate model of the environment, a high-fidelity model needs to be created. Moreover, the planning process may be computationally expensive, especially in environments with a large number of states and actions. However, advances in computing power and algorithms continue to improve the feasibility and performance of model-based methods, making them a valuable approach in RL [23].

6.3 Off-Policy and On-Policy Methods

On-policy and off-policy learning are methodologies within model-free learning approaches, not relying on environment transition probabilities. They are classified based on the relationship between the behavior policy and the updated policy [1].

6.3.1 On-Policy Methods

On-policy methods evaluate and improve the policy used to make decisions, intertwining exploration and learning. These methods update the policy based on the actions taken and the rewards received while following the current policy. This ensures that the policy being optimized is the one actually used to interact with the environment, allowing for a coherent learning process where exploration and policy improvement are naturally integrated.

Example: Consider a customer service chatbot that learns to provide better responses to user queries. The chatbot follows a specific policy to decide which responses to give. In on-policy learning, the chatbot updates its policy based on the actual responses it uses and the feedback received from users (e.g., user satisfaction ratings). This ensures that the policy being learned is directly tied to the actions taken in real interactions, leading to stable and consistent improvement.

6.3.2 Off-Policy Methods

Off-policy methods involve learning the value of the optimal policy independently of the agent's actions. In these methods, we distinguish between two types of policies: the behavior policy and the target policy that are discussed later in this chapter. The behavior policy explores the environment, while the target policy aims to improve performance based on the gathered experience. This allows for a more exploratory behavior policy while learning an optimal target policy. A significant advantage of off-policy methods is that they can learn from data generated by any policy, not just the one currently being followed, making them highly flexible and sample-efficient.

Example: Consider a recommendation system for an online streaming service like Netflix. The behavior policy in this system could be a strategy that recommends a wide variety of content to users, ensuring that the system explores different genres, new releases, and less popular titles. This exploration helps gather diverse data about user preferences and content performance. Simultaneously, the target policy aims to optimize recommendations to maximize user engagement and satisfaction. It learns from the data generated

by the behavior policy, identifying patterns and preferences to recommend content that users are most likely to enjoy. By separating the behavior policy from the target policy, Netflix can experiment with different recommendation strategies without compromising the quality of the final recommendations. This approach allows the recommendation system to be both exploratory in gathering new data and exploitative in providing the best possible content to users.

The decoupling of the behavior and target policies allows off-policy methods to reuse experiences more effectively. For instance, experiences collected using a behavior policy that explores the environment broadly can be used to improve the target policy, which aims to maximize rewards. This characteristic makes off-policy methods particularly powerful in dynamic and complex environments where extensive exploration is required [24, 25].

6.3.3 Distinguishing On-Policy vs. Off-Policy Methods

The relationship between the update policy and the behavior policy determines if a method is on-policy or off-policy. Identical policies indicate on-policy, while differing policies indicate off-policy. Implementation details and objectives also influence classification. To better distinguish these methods, we have to first learn what are the different policies.

Behavior Policy is a strategy used by an agent to determine which actions to take at each time step. The behavior policy might, for example, include recommending a variety of movies in order to explore user preferences in the recommendation system example.

Update policy governs how the agent updates its value estimates in response to observed outcomes. Depending on the feedback received from the recommended movies, the update policy of the recommendation system may update the estimated user preferences. A thorough understanding of the interactions between these policies is essential for the implementation of effective learning systems. An agent's behavior policy determines how it explores an environment, balancing exploration with exploitation to gather useful information. Alternatively, the update policy determines how the agent learns from these experiences in order to improve its estimates of value.

When using on-policy methods, the behavior policy and the update policy are the same, meaning that the actions taken to interact with the environment are also used to update the value estimates. The result is stable learning, but it can be less efficient because the policy may not sufficiently explore the state space [26].

There is a difference between the behavior policy and the update policy in off-policy methods. As opposed to the behavior policy, the update policy focuses on optimizing the value estimates by taking the most appropriate action. Despite the fact that this separation can make learning more efficient, it can also introduce instability if the behavior policy diverges too far from the optimal policy [16, 25]. Furthermore, advanced methods, such as Actor-Critic algorithms, separate the behavior policy (actor) and the update policy (critic). Actors make decisions according to current policies, while critics evaluate these decisions and provide feedback to improve policies, thus combining the stability of on-policy methods with the efficiency of off-policy methods [27, 28].

7 A Timeline of Reinforcement Learning Evolution

In recent decades, reinforcement learning has undergone significant changes. The timeline below highlights key milestones and advancements in the field, beginning with the earliest contributions and moving on to the most recent trends. In addition, the timeline provides readers with an opportunity to gain insight into the developments and potential directions for research.

• 1950s-1960s: Early Foundations

- **1954:** Marvin Minsky's SNARC, an early neural network-based machine, was one of the first to use reinforcement principles [29].
- **1954:** Richard Bellman's work on dynamic programming laid the foundation for modern reinforcement learning [30].

1965: Bellman and Kalaba introduced the Bellman equation, fundamental to many RL algorithms [31].

• 1970s-1980s: Theoretical Development

- 1972: Klopf's work on drive-reduction theory in neural networks contributed to the theoretical underpinnings of RL [32].
- 1984: Barto, Sutton, and Anderson developed the concept of temporal difference (TD) learning, a cornerstone of RL [33].
- 1989: Watkins introduced Q-learning, a pivotal off-policy RL algorithm [34].
- 1989: Sutton and Barto's book, "Reinforcement Learning: An Introduction," became a foundational text in the field [35].

• 1990s: Early Applications and Further Theory

- 1992: Watkins and Dayan formalized Q-learning and provided theoretical convergence guarantees [24].
- 1994: Rummery and Niranjan developed SARSA, an on-policy RL algorithm [26].
- 1996: Chris Watkins' Dyna-Q algorithm combined model-free and model-based approaches [36].

• 1999 - 2000s: Advances in Algorithms and Applications

- 1999: Konda and Tsitsiklis introduced actor-critic methods, blending value and policy-based approaches [27].
- 1999: Ng, Harada, and Russell's work on apprenticeship learning advanced RL applications in robotics [37].
- 2001: Tsitsiklis and Van Roy developed the theory of least-squares temporal difference (LSTD) learning [38].

• 2010s: Deep Reinforcement Learning and Breakthroughs

- 2013: Mnih et al. introduced Deep Q-Networks (DQN), integrating deep learning with RL, and demonstrated success on Atari games [18].
- 2016: Silver et al. developed AlphaGo, combining deep RL and Monte Carlo Tree Search, achieving significant success in the game of Go [39].
- 2017: Schulman et al. proposed Proximal Policy Optimization (PPO), a robust policy gradient method for RL [19].
- 2018: Hessel et al. presented Rainbow, combining several DQN improvements into a single algorithm [25].

• Current Trends and Future Directions

- **2017:** Jaderberg et al. introduced "Population Based Training," enhancing the efficiency of RL training processes [40].
- 2018 Espeholt et al. proposed "IMPALA" (Importance Weighted Actor-Learner Architectures), addressing scalability in RL [41].
- 2019: OpenAI's Dactyl demonstrated RL's potential in robotic manipulation by solving a Rubik's cube with a robotic hand [42].
- The recent trends are focusing more on Interpretability under the umbrella of Interpretable and Explainable RL, Hierarchical and Multi-Agent RL, and Integrations with recent advancements such as Transformers, Large Language Models (LLMs), Human-in-the-loop RL, Social Reinforcement Learning, Transfer Learning, Lifelong Learning, and Continual Learning. It can be seen in details in Table 1.

8 Essential Algorithms: An Overview

The purpose of this section is to provide a brief overview of essential algorithms based on the material discussed so far. In addition, reference papers are provided for each algorithm to facilitate the search for the original source and facilitate the learning process. In addition to providing a brief description of each algorithm, real-world examples are provided as well. In order to obtain detailed information about each algorithm, readers should refer to the reference papers. Table 2 summarizes all the information.

8.1 TD Learning

Temporal Difference (TD) Learning is a fundamental method in reinforcement learning where updates are made based on the difference between predicted and actual rewards. This approach combines ideas from Monte Carlo methods and dynamic programming [35].

The update rule for TD Learning is:

$$V(s) \leftarrow V(s) + \alpha \left[R_{t+1} + \gamma V(S_{t+1}) - V(s) \right] \tag{37}$$

where V(s) is the value of state s, α is the learning rate, R_{t+1} is the reward received after taking an action, γ is the discount factor, and S_{t+1} is the next state.

In stock trading, TD Learning can be used to predict future stock prices based on past price movements. By continuously updating the predicted value of each state (price), traders can make more informed decisions on buying or selling stocks.

8.2 Q-Learning

Q-Learning is an off-policy algorithm that learns the value of an optimal policy independently of the agent's actions. It aims to find the best action to take in each state to maximize the total reward [24].

The update rule for Q-Learning is:

$$Q(s,a) \leftarrow Q(s,a) + \alpha \left[r + \gamma \max_{a'} Q(s',a') - Q(s,a) \right]$$
(38)

where Q(s, a) is the value of taking action a in state s, α is the learning rate, r is the reward received, γ is the discount factor, s' is the next state, and a' is the next action.

In robotics, Q-Learning can be used to train a robot to navigate through a maze. The robot learns the optimal path to the exit by updating the values of actions taken in each state, even when it explores suboptimal paths during training.

8.3 State-Action-Reward-State-Action (SARSA)

SARSA is an on-policy algorithm where the policy is updated based on the action taken by the current policy. It stands for the sequence of states and actions used to update the Q-values [26].

The update rule for SARSA is:

$$Q(s,a) \leftarrow Q(s,a) + \alpha \left[r + \gamma Q(s',a') - Q(s,a) \right] \tag{39}$$

where Q(s, a) is the value of taking action a in state s, α is the learning rate, r is the reward received, γ is the discount factor, s' is the next state, and a' is the next action taken according to the policy.

In video games, SARSA can be used to train game agents to make decisions based on the current game state and the actions actually taken, ensuring that the learning process aligns with the agent's behavior, leading to stable and consistent performance.

8.4 REINFORCE

REINFORCE is an on-policy algorithm that uses Monte Carlo methods to update the policy. It directly optimizes the policy by following the gradient of expected rewards [59].

Trends	Reference Paper(s)
Interpretability and Explainable	[43], [44]
RL	
Hierarchical RL	[45], [46]
Multi-Agent RL	[47], [48]
Integrations with Transformers	[49], [50]
and LLMs	
Human-in-the-loop RL	[51], [52]
Social Reinforcement Learning	[53], [54]
Transfer Learning	[55], [56]
Lifelong Learning and Continual	[57], [58]
Learning	

Table 1: Recent trends in reinforcement learning and key reference papers

Algorithm	Description	\mathbf{Type}	Policy	Reference
TD Learning	A fundamental method where updates are made based on the difference between predicted and actual rewards.	Model-free	On-policy	[35]
Q-Learning	An off-policy algorithm that learns the value of an optimal policy independently of the agent's actions.	Model-free	Off-policy	[24]
SARSA	An on-policy algorithm where the policy is updated based on the action taken by the current policy.	Model-free	On-policy	[26]
REINFORCE	An on-policy algorithm that uses Monte Carlo methods to update the policy.	Model-free	On-policy	[59]
Actor-Critic	Combines value function (critic) and policy (actor) updates.	Model-free	On- policy/Off- policy	[27]
Dyna-Q	Combines model-free and model-based methods by integrating planning, acting, and learning.	Model-based	Off-policy	[36]
DQN	Combines Q-learning with deep neural networks to handle high-dimensional state spaces.	Model-free	Off-policy	[16]
TRPO	Ensures large updates do not destroy the learned policy by enforcing a trust region.	Model-free	On-policy	[60]
PPO	Improves on TRPO by simplifying the algorithm while retaining its performance.	Model-free	On-policy	[19]
SAC	An off-policy actor-critic algorithm that maximizes both expected reward and entropy.	Model-free	Off-policy	[61]

Table 2: Essential Reinforcement Learning Algorithms

The update rule for REINFORCE is:

$$\theta \leftarrow \theta + \alpha \nabla_{\theta} \log \pi_{\theta}(a|s) G_t \tag{40}$$

where θ are the policy parameters, α is the learning rate, $\pi_{\theta}(a|s)$ is the policy probability of taking action a in state s, and G_t is the return (total accumulated reward).

In personalized marketing, REINFORCE can be used to adjust marketing strategies based on user interactions and feedback. By optimizing the policy to maximize customer engagement, businesses can improve their marketing effectiveness.

8.5 Actor-Critic

Actor-Critic methods combine value function (critic) and policy (actor) updates. The actor updates the policy parameters in the direction suggested by the critic, which evaluates the action-value function [27].

The update rules for Actor-Critic are:

$$\delta_t = R_{t+1} + \gamma V(S_{t+1}) - V(S_t) \tag{41}$$

$$\theta \leftarrow \theta + \alpha \delta_t \nabla_\theta \log \pi_\theta(A_t | S_t) \tag{42}$$

where δ_t is the temporal difference error, θ are the policy parameters, α is the learning rate, $\pi_{\theta}(A_t|S_t)$ is the policy probability, and $V(S_t)$ is the value function.

In autonomous driving, Actor-Critic methods can be used to improve the driving policy by having the actor suggest actions and the critic evaluate the consequences. This leads to safer and more efficient driving behaviors.

8.6 Soft Actor-Critic

Soft Actor-Critic (SAC) is an off-policy actor-critic algorithm that maximizes both expected reward and entropy. It aims to encourage exploration by adding an entropy term to the objective [61].

The update rules for SAC are:

$$\mathcal{L}(\theta) = \mathbb{E}_{(s,a) \sim D} \left[-Q(s,a) + \alpha \log \pi_{\theta}(a|s) \right] \tag{43}$$

where α is the temperature parameter controlling the trade-off between exploration and exploitation.

In energy management systems, SAC can be used to optimize energy consumption by balancing the trade-off between energy savings and operational efficiency, ensuring robust and adaptable policies.

8.7 Dyna-Q

Dyna-Q combines model-free and model-based methods by integrating planning, acting, and learning. It uses a learned model of the environment to simulate experiences and update the policy [36].

The update rule for Dyna-Q is:

$$Q(s,a) \leftarrow Q(s,a) + \alpha \left[r + \gamma \max_{a'} Q(s',a') - Q(s,a) \right]$$
(44)

and additionally, simulated experiences are used to update the Q-values.

In logistics, Dyna-Q can be used to optimize delivery routes by simulating different scenarios and learning from both real and simulated experiences. This improves route planning and efficiency.

8.8 Deep Q-Network

Deep Q-Network (DQN) combines Q-learning with deep neural networks to handle high-dimensional state spaces. It uses a neural network to approximate the Q-values [16].

The update rule for DQN is similar to Q-learning, but the Q-values are approximated using a neural network:

$$Q(s, a; \theta) \leftarrow Q(s, a; \theta) + \alpha \left[r + \gamma \max_{a'} Q(s', a'; \theta') - Q(s, a; \theta) \right]$$
(45)

where θ are the neural network parameters.

In playing complex video games like Atari, DQN can be used to train agents to play the games at superhuman levels by learning directly from pixel inputs and using neural networks to approximate the optimal policies.

8.9 Trust Region Policy Optimization

Trust Region Policy Optimization (TRPO) ensures large updates do not destroy the learned policy by enforcing a trust region. It uses a constraint to limit the step size of policy updates [60].

The update rule for TRPO is:

$$\max_{\theta} \mathbb{E}_{s \sim \rho^{\pi}, a \sim \pi_{\theta}} \left[\frac{\pi_{\theta}(a|s)}{\pi_{\theta_{\text{old}}}(a|s)} A^{\pi_{\theta_{\text{old}}}}(s, a) \right]$$
(46)

subject to:

$$\mathbb{E}_{s \sim \rho^{\pi}} \left[D_{KL} \left(\pi_{\theta_{\text{old}}}(\cdot|s) || \pi_{\theta}(\cdot|s) \right) \right] \le \delta \tag{47}$$

where D_{KL} is the Kullback-Leibler divergence and δ is a small positive number.

In robotic control, TRPO can be used to optimize the movements of robotic arms, ensuring stable and efficient learning of complex tasks without drastic policy changes.

8.10 Proximal Policy Optimization

Proximal Policy Optimization (PPO) improves on TRPO by simplifying the algorithm while retaining its performance. It uses a clipped objective to limit policy updates [19].

The update rule for PPO is:

$$\mathcal{L}^{\text{CLIP}}(\theta) = \mathbb{E}_t \left[\min \left(r_t(\theta) \hat{A}_t, \operatorname{clip} \left(r_t(\theta), 1 - \epsilon, 1 + \epsilon \right) \hat{A}_t \right) \right]$$
(48)

where $r_t(\theta) = \frac{\pi_{\theta}(a_t|s_t)}{\pi_{\theta_{\text{old}}}(a_t|s_t)}$, \hat{A}_t is the advantage estimate, and ϵ is a small positive number.

In virtual personal assistants, PPO can be used to train the assistant to handle various tasks efficiently while ensuring stable improvements in performance.

9 Resources to Learn Reinforcement Learning

It is a complex set of problems and applications within RL that require a greater level of research resources. By making these resources available, it is not only possible to gain a deeper understanding of theoretical concepts and practical tools, but it will also contribute to the advancement of state-of-the-art research through the support of the community. The importance of comprehensive resources for successful real-life research is highlighted in this chapter, and we provide a list of some of the most helpful books, courses, videos, and online communities to assist readers in getting started with their real-life research without being overwhelmed.

9.1 Books

We provide a list of highly recommended books which provide foundational knowledge and practical insight into reinforcement learning. A comprehensive overview of basic concepts, advanced algorithms, and practical examples is provided in these books, which will provide you with an understanding of the field on a deeper level

- 1. "Reinforcement Learning: An Introduction" by Richard S. Sutton and Andrew G. Barto
 - The foundational book on reinforcement learning, covering basic concepts, algorithms, and theoretical foundations.
- 2. "Deep Reinforcement Learning Hands-On" by Maxim Lapan

Practical guide to deep reinforcement learning using Python and PyTorch, with hands-on examples.

3. "Grokking Deep Reinforcement Learning" by Miguel Morales

 A beginner-friendly introduction to deep reinforcement learning with intuitive explanations and hands-on exercises.

4. "Algorithms for Reinforcement Learning" by Csaba Szepesvári

• A concise and clear introduction to reinforcement learning algorithms.

9.2 Online Courses

The following is a list of online courses that offer comprehensive reinforcement learning experiences. There is a range of courses available, from introductory to advanced levels, covering fundamental concepts and practical implementations along with real-life applications.

1. Coursera: Reinforcement Learning Specialization by University of Alberta

• A comprehensive series of courses covering fundamental concepts, algorithms, and applications of reinforcement learning.

2. Udacity: Deep Reinforcement Learning Nanodegree

Focuses on deep reinforcement learning using PyTorch, including projects and practical implementations.

3. edX: Fundamentals of Reinforcement Learning by University of Alberta

• An introduction to the fundamentals of reinforcement learning, including key algorithms and techniques.

4. Reinforcement Learning Winter 2019

• Lecture videos and materials from Stanford's advanced reinforcement learning course.

9.3 Video Lectures

The following are links to video lecture series produced by leading researchers and institutions. A variety of topics in RL are covered in these lectures, providing valuable insights and knowledge from experts in the field.

1. DeepMind x UCL — Reinforcement Learning Lectures Series

- A series of lectures by leading researchers in reinforcement learning, covering fundamental and advanced topics.
- Link: YouTube Playlist

2. David Silver's Reinforcement Learning Course

- Lectures by David Silver, a principal researcher at DeepMind, providing an in-depth introduction to reinforcement learning.
- Link: YouTube Playlist

3. Pascal Poupart's Reinforcement Learning Course - CS885

- Lectures by Pascal Poupart, an esteemed professor at the University of Waterloo, providing an in-depth introduction to reinforcement learning.
- Link: YouTube Playlist

4. Sarath Chandar's Reinforcement Learning Course

- Lectures by Sarath Chandar, principal investigator of the Chandar Research Lab (CRL) in the Department of Computer and Software Engineering at Polytechnique Montreal.
- Link: YouTube Playlist

9.4 Tutorials and Articles

These resources include educational materials, tutorials, and articles that provide practical guidance on implementing RL algorithms. Code examples are provided as well as theoretical background and step-by-step instructions for various RL techniques in these resources.

1. OpenAI Spinning Up in Deep RL

- An educational resource from OpenAI that provides an introduction to deep reinforcement learning, including code examples and theoretical background.
- Link: Spinning Up

2. Deep Reinforcement Learning Course by PyTorch

- A free online course provided by PyTorch, focusing on practical implementations of deep reinforcement learning.
- Link: Deep RL Course

3. RL Adventure by Denny Britz

- A series of Jupyter notebooks covering various reinforcement learning algorithms with detailed explanations and implementations.
- Link: RL Adventure

9.5 Online Communities and Forums

Here, you will find online communities and forums where you can discuss real-life scenarios with other practitioners, ask questions, exchange insights, and stay up-to-date with the latest developments in the field. In addition to providing valuable support, these platforms provide networking opportunities for both learners and professionals.

1. Reddit: r/reinforcementlearning

- A subreddit dedicated to discussions and resources on reinforcement learning.
- Link: r/reinforcementlearning

2. Stack Overflow

- A community where you can ask questions and get answers from experienced practitioners in reinforcement learning.
- Link: Stack Overflow

3. AI Alignment Forum

- A forum for discussions on AI alignment, including topics related to reinforcement learning.
- Link: AI Alignment Forum

10 Conclusion

In this paper, we have introduced the fundamental concepts and methodologies of Reinforcement Learning (RL) in an accessible manner for beginners. We have established a foundation for understanding how RL agents learn and make decisions by providing a detailed description of the core elements of RL, such as states, actions, policies, and reward signals. The purpose of this paper is to provide an overview of various RL algorithms, including both model-free and model-based approaches, in order to illustrate the diversity of approaches within the field of RL. To facilitate deeper learning and practical application of RL, this guide aims to provide new learners with the necessary knowledge and confidence to embark on their RL journey. As part of future research, we will analyze RL in the literature in order to identify its strengths and weaknesses, providing a valuable resource for researchers. In addition, a benchmark dataset of RL algorithms will be developed from various sources, providing detailed information on RL papers and their applications.

References

- [1] Richard S Sutton and Andrew G Barto. Reinforcement learning: An introduction. MIT press, 2018.
- [2] Sebastian B Thrun. Efficient exploration in reinforcement learning. Carnegie Mellon University, 1992.
- [3] Kai Arulkumaran et al. "A brief survey of deep reinforcement learning". In: arXiv preprint arXiv:1708.05866 (2017).
- [4] Mengbing Li et al. "Testing stationarity and change point detection in reinforcement learning". In: arXiv preprint arXiv:2203.01707 (2022).
- [5] Paul Erd. "On a new law of large numbers". In: J. Anal. Muth 22 (1970), pp. 103-l.
- [6] Pawel Ladosz et al. "Exploration in deep reinforcement learning: A survey". In: *Information Fusion* 85 (2022), pp. 1–22.
- [7] Fan-Ming Luo et al. "A survey on model-based reinforcement learning". In: Science China Information Sciences 67.2 (2024), p. 121101.
- [8] Marco A Wiering and Martijn Van Otterlo. "Reinforcement learning". In: Adaptation, learning, and optimization 12.3 (2012), p. 729.
- [9] Aurélien Garivier and Eric Moulines. "On upper-confidence bound policies for switching bandit problems". In: *International conference on algorithmic learning theory*. Springer. 2011, pp. 174–188.
- [10] Martijn Van Otterlo and Marco Wiering. "Reinforcement learning and markov decision processes". In: Reinforcement learning: State-of-the-art. Springer, 2012, pp. 3–42.
- [11] Leslie Pack Kaelbling, Michael L Littman, and Andrew W Moore. "Reinforcement learning: A survey". In: *Journal of artificial intelligence research* 4 (1996), pp. 237–285.
- [12] Brendan O'Donoghue et al. "The uncertainty bellman equation and exploration". In: *International conference on machine learning*. 2018, pp. 3836–3845.
- [13] Dimitri P Bertsekas. "Approximate policy iteration: A survey and some new methods". In: *Journal of Control Theory and Applications* 9.3 (2011), pp. 310–335.
- [14] Michael Lutter et al. "Value iteration in continuous actions, states and time". In: arXiv preprint arXiv:2105.04682 (2021).
- [15] Dimitri Bertsekas. Dynamic programming and optimal control: Volume I. Vol. 4. Athena scientific, 2012.
- [16] Volodymyr Mnih et al. "Human-level control through deep reinforcement learning". In: *nature* 518.7540 (2015), pp. 529–533.
- [17] Ivo Grondman et al. "A survey of actor-critic reinforcement learning: Standard and natural policy gradients". In: *IEEE Transactions on Systems, Man, and Cybernetics, part C (applications and reviews)* 42.6 (2012), pp. 1291–1307.
- [18] Volodymyr Mnih et al. "Playing atari with deep reinforcement learning". In: arXiv preprint arXiv:1312.5602 (2013).

- [19] John Schulman et al. "Proximal policy optimization algorithms". In: arXiv preprint arXiv:1707.06347 (2017).
- [20] Yuxi Li. "Deep reinforcement learning: An overview". In: arXiv preprint arXiv:1701.07274 (2017).
- [21] Vincent François-Lavet et al. "An introduction to deep reinforcement learning". In: Foundations and Trends® in Machine Learning 11.3-4 (2018), pp. 219–354.
- [22] Shengbo Eben Li. "Deep reinforcement learning". In: Reinforcement learning for sequential decision and optimal control. Springer, 2023, pp. 365–402.
- [23] Thomas M Moerland et al. "Model-based reinforcement learning: A survey". In: Foundations and Trends® in Machine Learning 16.1 (2023), pp. 1–118.
- [24] Peter Dayan and CJCH Watkins. "Q-learning". In: Machine learning 8.3 (1992), pp. 279–292.
- [25] Matteo Hessel et al. "Rainbow: Combining improvements in deep reinforcement learning". In: *Proceedings of the AAAI conference on artificial intelligence*. Vol. 32. 1. 2018.
- [26] Gavin A Rummery and Mahesan Niranjan. On-line Q-learning using connectionist systems. Vol. 37. University of Cambridge, Department of Engineering Cambridge, UK, 1994.
- [27] Vijay Konda and John Tsitsiklis. "Actor-critic algorithms". In: Advances in neural information processing systems 12 (1999).
- [28] Timothy P Lillicrap et al. "Continuous control with deep reinforcement learning". In: arXiv preprint arXiv:1509.02971 (2015).
- [29] Marvin Lee Minsky. Theory of neural-analog reinforcement systems and its application to the brain-model problem. Princeton University, 1954.
- [30] Richard Bellman. "The theory of dynamic programming". In: Bulletin of the American Mathematical Society 60.6 (1954), pp. 503–515.
- [31] Richard Bellman, Robert E Kalaba, et al. Dynamic programming and modern control theory. Vol. 81. Citeseer, 1965.
- [32] A Harry Klopf. Brain function and adaptive systems: a heterostatic theory. 133. Air Force Cambridge Research Laboratories, Air Force Systems Command, United ..., 1972.
- [33] Richard Stuart Sutton. Temporal credit assignment in reinforcement learning. University of Massachusetts Amherst, 1984.
- [34] Christopher John Cornish Hellaby Watkins. "Learning from delayed rewards". In: (1989).
- [35] Richard S Sutton. "Learning to predict by the methods of temporal differences". In: *Machine learning* 3 (1988), pp. 9–44.
- [36] Richard S Sutton. "Integrated architectures for learning, planning, and reacting based on approximating dynamic programming". In: *Machine learning proceedings* 1990. Elsevier, 1990, pp. 216–224.
- [37] Andrew Y Ng, Daishi Harada, and Stuart Russell. "Policy invariance under reward transformations: Theory and application to reward shaping". In: *Icml.* Vol. 99. 1999, pp. 278–287.
- [38] John N Tsitsiklis and Benjamin Van Roy. "Regression methods for pricing complex American-style options". In: *IEEE Transactions on Neural Networks* 12.4 (2001), pp. 694–703.
- [39] David Silver et al. "Mastering the game of Go with deep neural networks and tree search". In: *nature* 529.7587 (2016), pp. 484–489.
- [40] Max Jaderberg et al. "Population based training of neural networks". In: arXiv preprint arXiv:1711.09846 (2017).
- [41] Lasse Espeholt et al. "Impala: Scalable distributed deep-rl with importance weighted actor-learner architectures". In: *International conference on machine learning*. PMLR. 2018, pp. 1407–1416.
- [42] Ilge Akkaya et al. "Solving rubik's cube with a robot hand". In: arXiv preprint arXiv:1910.07113 (2019).
- [43] Prashan Madumal et al. "Explainable reinforcement learning through a causal lens". In: *Proceedings* of the AAAI conference on artificial intelligence. Vol. 34. 03. 2020, pp. 2493–2500.

- [44] Alexander Mott et al. "Towards interpretable reinforcement learning using attention augmented agents". In: Advances in neural information processing systems 32 (2019).
- [45] Pierre-Luc Bacon, Jean Harb, and Doina Precup. "The option-critic architecture". In: *Proceedings of the AAAI conference on artificial intelligence*. Vol. 31. 1. 2017.
- [46] Alexander Sasha Vezhnevets et al. "Feudal networks for hierarchical reinforcement learning". In: *International conference on machine learning*. PMLR. 2017, pp. 3540–3549.
- [47] Ryan Lowe et al. "Multi-agent actor-critic for mixed cooperative-competitive environments". In: Advances in neural information processing systems 30 (2017).
- [48] Jakob Foerster et al. "Learning to communicate with deep multi-agent reinforcement learning". In: Advances in neural information processing systems 29 (2016).
- [49] Kevin Lu et al. "Frozen pretrained transformers as universal computation engines". In: *Proceedings of the AAAI conference on artificial intelligence*. Vol. 36. 7. 2022, pp. 7628–7636.
- [50] Wenlong Huang et al. "Language models as zero-shot planners: Extracting actionable knowledge for embodied agents". In: *International conference on machine learning*. PMLR. 2022, pp. 9118–9147.
- [51] Paul F Christiano et al. "Deep reinforcement learning from human preferences". In: Advances in neural information processing systems 30 (2017).
- [52] James MacGlashan et al. "Interactive learning from policy-dependent human feedback". In: *International conference on machine learning*. PMLR. 2017, pp. 2285–2294.
- [53] Micah Carroll et al. "On the utility of learning about humans for human-ai coordination". In: Advances in neural information processing systems 32 (2019).
- [54] Edouard Leurent and Jean Mercat. "Social attention for autonomous decision-making in dense traffic". In: arXiv preprint arXiv:1911.12250 (2019).
- [55] Andrei A Rusu et al. "Progressive neural networks". In: arXiv preprint arXiv:1606.04671 (2016).
- [56] Jane X Wang et al. "Learning to reinforcement learn". In: arXiv preprint arXiv:1611.05763 (2016).
- [57] Khimya Khetarpal et al. "Towards continual reinforcement learning: A review and perspectives". In: Journal of Artificial Intelligence Research 75 (2022), pp. 1401–1476.
- [58] Jaehong Yoon et al. "Lifelong learning with dynamically expandable networks". In: arXiv preprint arXiv:1708.01547 (2017).
- [59] Ronald J Williams. "Simple statistical gradient-following algorithms for connectionist reinforcement learning". In: *Machine learning* 8 (1992), pp. 229–256.
- [60] John Schulman et al. "Trust region policy optimization". In: International conference on machine learning. PMLR. 2015, pp. 1889–1897.
- [61] Tuomas Haarnoja et al. "Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor". In: *International conference on machine learning*. PMLR. 2018, pp. 1861–1870.