HISTOGYM: A REINFORCEMENT LEARNING ENVIRONMENT FOR HISTOPATHOLOGICAL IMAGE ANALYSIS

Zhi-Bo Liu^{1*} Xiaobo Pang¹ Jizhao Wang² Shuai Liu^{1†} Chen Li^{1†} ¹ Xi'an Jiaotong University ² First Affiliated Hospital of Xi'an Jiaotong University

ABSTRACT

In pathological research, education, and clinical practice, the decision-making process based on pathological images is critically important. This significance extends to digital pathology image analysis: its adequacy is demonstrated by the extensive information contained within tissue structures, which is essential for accurate cancer classification and grading. Additionally, its necessity is highlighted by the inherent requirement for interpretability in the conclusions generated by algorithms. For humans, determining tumor type and grade typically involves multi-scale analysis, which presents a significant challenge for AI algorithms. Traditional patch-based methods are inadequate for modeling such complex structures, as they fail to capture the intricate, multi-scale information inherent in whole slide images. Consequently, there is a pressing need for advanced AI techniques capable of efficiently and accurately replicating this complex analytical process. To address this issue, we introduce *HistoGym*, an open-source reinforcement learning environment for histopathological image analysis. Following OpenAI Gym APIs, *HistoGym* aims to foster whole slide image diagnosis by mimicking the real-life processes of doctors. Leveraging the pyramid feature of WSIs and the OpenSlide API, HistoGym provides a unified framework for various clinical tasks, including tumor detection and classification. We detail the observation, action, and reward specifications tailored for the histopathological image analysis domain and provide an open-source Python-based interface for both clinicians and researchers. To accommodate different clinical demands, we offer various scenarios for different organs and cancers, including both WSI-based and selected region-based scenarios, showcasing several noteworthy results.

Keywords Deep reinforcement learning · Computational pathology · Medical image analysis

1 Introduction

Pathology data analysis plays a critical role in the diagnosis, treatment, and prognosis of cancer[1]. In clinical practice, pathologists primarily rely on whole slide images (WSIs) for cancer diagnosis[2]. However, due to the vast amount of information in WSIs and the limited field of view under a microscope, the process of examining tissue samples reflects the diagnostic approach of pathologists, which is mirrored in teaching practices as well. Pathologists adjust the magnification and navigate through different regions of a slide to make a diagnosis, a process that can be modeled algorithmically by actions such as zooming in, zooming out, and shifting the field of view in digital pathology.

This paper addresses the question: *Is the diagnostic process of doctors better modeled as a decision-making task rather than a classification task?* We explore whether providing a reinforcement learning (RL) environment to simulate this diagnostic process is a worthwhile endeavor. The motivation for this work is straightforward: to create an RL environment that models the cancer diagnosis process using histopathological data.

Recent advancements in large language models (LLMs), including customized and fine-tuned models, along with the Mixture of Experts model, are increasingly influential in the decision-making process for cancer diagnosis[3, 4].

^{*}http://zhibo-liu.com

[†]Co-corresponding authors

The code for this project is available at https://github.com/XjtuAI/HistoGym.

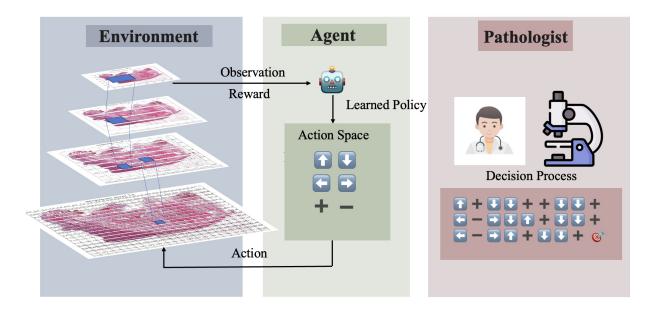


Figure 1: An illustration of the *HistoGym* Environment. This figure illustrates the core components of the HistoGym environment, including the agent's interaction with the whole slide image (WSI) through a series of actions. The environment leverages tile-based processing and multi-scale navigation, allowing the agent to effectively analyze high-resolution histopathology images.

Multi-modal approaches, incorporating both text and images, are crucial for treatment and prognosis[5]. Our literature review and studies suggest that exploring the application of RL in this field is both necessary and feasible. Once cancer diagnosis is framed as a decision-making task, explainability, which has long challenged computer vision due to its "black-box" nature, can be addressed more intuitively. By illustrating the diagnostic trajectory, experts can easily interpret the process, despite the time-consuming nature of this approach.

Micro-environmental factors are critical in cancer diagnosis[6]. Given the gigapixel scale of WSIs, patch-based methods have been a straightforward solution, with several works introducing hierarchical approaches by combining features from different scales[7, 8, 9, 10]. Reinforcement learning offers a novel way to model these complex micro-environments, capturing information from the organ down to the cellular level without loss[11].

Although various RL environments exist, few focus on medical image tasks. While some environments, such as those used in gaming[12], robotics[13], and autonomous driving[14], may be too simple or resource-intensive for state-of-the-art algorithms, medical imaging tasks present the opposite challenge—demanding tasks that push the limits of current algorithms.

In this paper, we propose *HistoGym*, a novel open-source RL environment designed to model the diagnostic process in histopathology. Unlike other environments that serve merely as testbeds, *HistoGym* aims to promote the study of treating diagnosis as an RL decision-making problem.

Contributions:

- We introduce *HistoGym*, a reinforcement learning environment where agents learn to identify tumor regions at various scales—from organ to tissue to cell level—fully utilizing the pyramid structure of WSIs.
- *HistoGym* offers a lossless virtual environment, where agents control their field of view and learn to diagnose slides through actions, mirroring the real-life practices of pathologists. The environment provides configurable feature embeddings and rewards, supporting tasks such as detection and classification.
- We evaluate state-of-the-art algorithms across publicly available multi-organ datasets, providing an extensive set of reference results for future research.

2 Motivation and Related Work

2.1 Mimicking and Explainability

Explainability is crucial in medical AI algorithms, impacting research, education, and clinical decision support systems. From an image analysis perspective, two primary levels are considered: patch level and WSI level. At the patch level, techniques such as GradCAM[15] and LRP[16], as applied to MILPLE[17], are used to highlight key pixels within the patch. At the WSI level, multiple instance learning (MIL) methods are generally categorized into instance-level[7, 8] and embedding-level[9, 10] approaches, with embedding-level methods being more prevalent due to their ability to handle large data volumes, despite weaker generalization capabilities. In these methods, WSIs are treated as bags, with cropped patches serving as instances. Interpretability is primarily achieved through attention mechanisms that highlight significant patches within the WSI. Some methods combine graph-based approaches with transformers, such as patch-GCN[18] and cgc-Net[19], to score the entire WSI. However, these methods often fail to explicitly identify salient regions.

From a visual-textual perspective, recent studies have explored task inference through textual descriptions paired with visual-linguistic similarities, proposing new methods of interpretability[3, 4, 5]. However, these approaches are not well-suited for gigapixel images[20]. Additionally, in current pathology practices, most paired image-text data is available only at the patch level[4, 21]. This limitation complicates the design of WSI-level interpretable predictive models based solely on patch-level descriptions. Pathology report descriptions are often incomplete, and the image-text data in textbooks is both limited and primarily pedagogical.

2.2 Computational Efficiency

Currently, WSI classification is predominantly performed using multi-instance learning (MIL)[22], which necessitates the computation of embeddings for each patch. However, the large number of patches per WSI makes this approach computationally expensive, even when feature extractors are pre-trained on auxiliary tasks[23]. Some methods[24, 25] attempt to reduce computational burden by randomly sampling patches from a WSI during training; however, this inevitably leads to information loss. Gao et al.[26] proposed a prediction rejection strategy based on efficiency uncertainty, which reduces computational burden while efficiently utilizing critical information.

2.3 Reinforcement Learning Environments in the Medical Domain

Reinforcement learning algorithms have found success in diverse domains, including board games like Go[27], video games such as Atari[28] and Honor of Kings[12], as well as in autonomous driving[14]. However, extending their application to the medical domain introduces unique challenges. Historically, RL algorithms have been effective in structured environments, such as Backgammon[29], Chess[30], and Go[27], where the rules are well-defined and easily encoded into algorithms. This specificity may constrain the exploration of RL algorithms in environments that require learning through interaction. The introduction of OpenAI Gym APIs has facilitated the creation of GYM-style environments across various domains, including Gym-preCICE[31] for physical AFC applications, Scenario Gym[32] for safe autonomous driving, OpenAI Gym-like[33] environments for robotics applications, and PowerGym[34] for power distribution systems.

In digital pathology filed, Qaiser et al.[35] were the first to apply RL to the discrimination of diagnostically relevant regions in WSI, using immunohistochemical (IHC) scores of HER2 as a continuous learning task. Xu et al.[36] optimized the deep hybrid attention approach with reinforcement learning to achieve high classification accuracy while significantly reducing the number of raw pixels used. Zhao et al.[37] subsequently developed RLogist, enabling the agent to explore different resolutions to produce a concise observation path. Building on these advancements, it is crucial to establish a standardized benchmarking environment in pathology.

3 Problem Formulation: From Classification to Reinforcement Learning

In whole slide image (WSI) analysis, traditional machine learning techniques like supervised learning[38], multiinstance learning (MIL)[39, 40, 41, 42], and reinforcement learning (RL)[43] offer diverse approaches to address medical imaging challenges. This section outlines the transition from classification-based methods to RL, highlighting the advantages for WSI analysis.

3.1 Supervised Learning

Supervised learning is foundational in WSI analysis[44], where models map input images X to labels Y. Given a dataset $\mathcal{D} = \{(\mathbf{X}_i, \mathbf{Y}_i)\}_{i=1}^N$, the objective is to minimize the empirical risk:

$$\min_{\theta} \frac{1}{N} \sum_{i=1}^{N} \mathcal{L}(f_{\theta}(\mathbf{X}_i), \mathbf{Y}_i),$$
(1)

where \mathcal{L} is typically binary cross-entropy. This paradigm, though effective, is static and relies heavily on labeled data.

3.2 Multi-instance Learning

MIL addresses the challenge of labeling large WSIs by treating each WSI as a bag $\mathbf{B}_i = {\{\mathbf{x}_{i,j}\}}_{j=1}^{M_i}$ of instances (small patches), with the bag labeled positive if any instance is positive:

$$Y_i = \max_{j=1,\dots,M_i} f_{\theta}(\mathbf{x}_{i,j}),\tag{2}$$

MIL optimizes bag-level predictions using small patches to generate slide-level representations, eliminating the need for detailed instance labeling and reducing annotation burden[45].

3.3 Reinforcement Learning for WSI Analysis

RL introduces a dynamic approach to WSI analysis, framing it as an agent-environment interaction. The WSI is the environment, and the agent's goal is to maximize cumulative rewards through sequential actions. The problem is modeled as a Markov Decision Process (MDP) (S, A, P, R, γ):

- S: states, representing the agent's position within the WSI.
- A: actions, such as zooming or panning.
- $P(s_{t+1} | s_t, a_t)$: state transitions, deterministic in *HistoGym*.
- $R(s_t, a_t)$: rewards, based on decision accuracy.
- γ : discount factor.

The objective is to learn a policy $\pi_{\theta}(a_t \mid s_t)$ that maximizes expected cumulative rewards:

$$\max_{\theta} \mathbb{E}_{\pi_{\theta}} \left[\sum_{t=0}^{T} \gamma^{t} R(s_{t}, a_{t}) \right],$$
(3)

RL's active learning process offers adaptive strategies for real-time WSI analysis.

3.4 Transition to RL

Transitioning from classification to RL represents a shift from passive prediction to active decision-making, where the model interacts dynamically with the WSI environment, optimizing long-term outcomes for improved analysis.

4 HistoGym Environment

The *HistoGym* environment is a specialized reinforcement learning environment designed for the analysis of whole slide images, providing a comprehensive platform for developing and testing RL algorithms in medical image analysis. This section introduces the core components and functionalities of HistoGym, detailing its integration with the Farama Gymnasium framework, the customization of its RL environment class, and the flexibility it offers in defining various scenarios and observation spaces, thus facilitating advanced experimentation and research in digital pathology.

4.1 The RL Environment Class

Gym Environment Classes: The Farama Gymnasium[46], originally known as OpenAI's Gym toolkit[47], provides a standardized interface for developing and testing RL algorithms in Python. This standardization facilitates the seamless integration of various RL environments, including HistoGym, into established research workflows, enabling consistent and reproducible experimentation.

4.2 HistoGym Environment Class

The HistoGym environment is a custom-designed RL environment tailored for the analysis of WSIs. It leverages the OpenSlide[48] library for WSI processing and the DeepZoomGenerator for tile generation, allowing the agent to interact with the image data at multiple magnification levels.

Implemented as a subclass of gym. Env, HistoGym adheres to the standard Gym interface, which ensures compatibility with existing RL frameworks such as Stable Baselines3[49] and Tianshou[50]. This design allows the agent to navigate the WSI through a series of discrete actions, including directional movements (up, down, left, right) and zooming in or out.

The HistoEnv class is designed with several key features that are fundamental to its functionality:

- State and Observation Space
- Action Space
- Reward Mechanism
- Episode Dynamics

These components are discussed in detail in the following subsections, where we explore how each element contributes to the overall effectiveness of the HistoEnv framework.

4.3 RL Framework

To effectively implement and experiment with reinforcement learning algorithms in the HistoGym environment, we employ several state-of-the-art RL frameworks, including stable_baselines3 [49], Tianshou [50]. These frameworks offer a range of pre-built algorithms and tools for training and evaluating RL agents, facilitating seamless experimentation and benchmarking across different RL strategies within *HistoGym*.

4.4 Environment Complexity & Scenario of Different Levels

HistoGym supports multiple scenarios with varying levels of detail, enabling researchers to tailor experiments to specific research questions or application needs. These scenarios range from basic setups focused on simple navigation and scanning tasks to more complex configurations that require sophisticated decision-making processes as shown in Figure 2. Designed to facilitate academic research, these scenarios provide a controlled environment where hypotheses about RL strategies in WSI analysis can be rigorously tested and validated.

For example, one scenario might involve the agent learning to prioritize regions of the WSI that are more likely to contain pathological features, while another might require the agent to optimize the scanning process to minimize the time required for diagnosis. The flexibility in scenario design allows researchers to explore a wide range of challenges and solutions within the RL framework.

4.5 State & Observations

In the HistoGym environment, the *state* represents the complete set of information returned by the environment after an action is taken. This includes data such as the agent's current x, y position on the slide, the zoom level z, the type of tissue being analyzed, and the current pixel data from the WSI.

An *observation*, on the other hand, refers to any transformation of the state that serves as input to the control algorithms. Observations are critical for guiding the agent's decision-making process, and different representations can be employed depending on the research focus. We propose three distinct observation representations:

• **Pixel Space**: This representation utilizes raw pixel data normalized from [0, 255] to $R \in [0, 1]$, making it the most intuitive but computationally intensive method. Pixel space observations are valuable for research that involves fine-grained analysis, as they provide a direct view of the WSI.

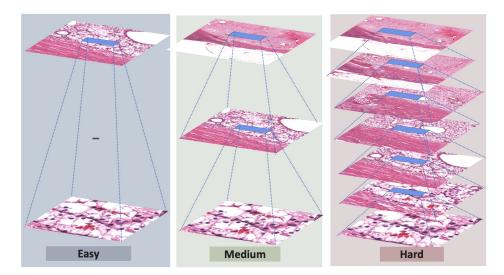


Figure 2: HistoGym Environment Complexity

- Feature Space: In addition to high-dimensional RGB pixels, low-dimensional embedding features are also supported. We leverage pretrained feature extractors such as ResNet [51] and CLAM [52] to generate compact feature representations:
 - **ResNet Embedding**: Feature maps generated by ResNet[51] encode structural and textural information about the tissue, capturing essential characteristics necessary for accurate analysis.
 - CLAM Embedding: The CLAM[52] embedding provides a compact vector summarizing various aspects
 of the WSI, including tissue type, cell density, and specific biomarkers, making it suitable for scenarios
 requiring more abstract representations.

4.6 Action Space

The HistoGym environment defines a versatile action space, categorized into two primary types: discrete and continuous actions.

- **Discrete Actions**: These include standard movement actions (e.g., up, down, left, right) within the same zoom level, as well as actions to zoom in or out. In the initial version of the environment, actions were strictly constrained, requiring the agent to follow discrete steps. For example, after moving in a direction, the agent scans the adjacent region, and after zooming in, it focuses on the next level of detail within the WSI.
- **Continuous Actions**: To overcome the limitations of discrete actions and better explore the expansive state space, we extended the action space to include continuous actions. This allows the agent to perform more granular adjustments, such as smoothly zooming in or out and making fine-grained movements across the slide. Continuous actions are particularly useful in optimizing the scanning process and improving the agent's overall performance [53].

4.7 Episode Dynamics

An episode in the WSI analysis task is defined by the sequence of actions taken by the agent from the start of the slide analysis to the completion of the task. The episode concludes when the agent successfully identifies the target region (e.g., a cancerous area) or when a predefined scanning limit (e.g., maximum number of steps) is reached. The agent's performance across different episodes can be analyzed to assess its learning progress and the effectiveness of the RL strategies employed [27].

4.8 Rewards

HistoGym supports both sparse and dense reward configurations, each tailored to different analysis tasks and tissue types. The reward function is managed by the Coor.check_overlap module, which calculates the reward score based on the overlap ratio between the agent's bounding box and the target region within the WSI. Sparse rewards are given

for achieving significant milestones, such as identifying the target region, while dense rewards provide continuous feedback based on the agent's proximity to the target. These configurations allow researchers to explore different reward structures and their impact on the agent's learning process.

5 Example & Experiments

5.1 Python Example

The HistoGym environment follows the widely used Farama Gymnasium API [46]. Below we show an example code that runs a random agent on our environment. We provide an example for using our environment in Listing 1.For more detail, please refer to Appendix and the github documentation page.

5.2 Experimental Setup

In this section, we detail the experimental validation of state-of-the-art deep reinforcement learning algorithms within the *HistoGym* environment. We specifically focus on two widely recognized algorithms: Proximal Policy Optimization (PPO)[54], a policy gradient method known for its robustness, and Ape-X DQN[55], a distributed version of the Deep Q-Network(DQN) [56] that leverages modern advances in deep learning for enhanced performance.

All experiments utilized ResNet-based feature representations as inputs for observation and discrete actions. The experiments were conducted using the stable-baselines3 [49] library, a widely used framework that ensures consistency and reproducibility in reinforcement learning research. For full details on the training setup, including architecture and hyperparameters, we refer the reader to our GitHub repository.

```
import numpy as np
 import numpy as np
2
 from gym_histo import HistoEnv
3
5 # Initialize Arguments
6 img_path ='/path/to/wsi.tif'
7 xml_path = '/path/to/annotaion.xml'
8 tile_size = 128
 result_path = './results'
9
10
 env = HistoEnv(img_path, xml_path, tile_size, result_path)
11
12 obs = env.reset()
14 done = False
15
 while not done:
      action = env.action_space.sample()
16
      obs, reward, done, info = env.step(action)
      print('action=', action, 'info=', info, 'reward=', reward, 'done=', done)
18
      env.render(mode="human")
19
20
      if done:
          print("Episode Terminated", "reward=", reward)
          break
```



5.3 Impact of Environmental Complexity

The experimental results, as detailed in Table 1, underscore the profound influence of environmental complexity on both training dynamics and the performance of agents in detecting cancerous regions within WSIs. We quantify environmental complexity by the number of levels in the WSI, utilizing openslide to define the easy, medium, and hard settings, corresponding to 3, 5, and 7 levels, respectively. As shown in Figure 2, increasing the number of levels reduces the magnification between layers, thereby expanding the search space and increasing the difficulty of the task.

In our study, we also investigated the performance of agents under discrete and continuous action spaces. Notably, our findings reveal that as environmental complexity surpasses the simple level, vanilla PPO and DQN models struggle to converge when operating with continuous actions. This divergence highlights a critical area for further research, as it suggests that these models may be ill-suited for handling complex, continuous decision spaces in WSI analysis.

In scenarios characterized by simpler environments and discrete action spaces, both PPO and Ape-X DQN were able to successfully identify cancerous regions within a reasonable number of timesteps. However, as the complexity increased, neither DQN nor PPO achieved convergence. This performance degradation likely stems from the expanded search space and the challenges associated with sparse reward signals in more intricate environments. The inability of these models to converge under high complexity conditions indicates that current approaches may require substantial modifications or novel strategies to effectively navigate and analyze complex WSIs."

Env. Complexity	Reward(PPO)		Reward(DQN)	
	Cont.	Discrete	Cont.	Discrete
Easy	0	18.4	0	8.7
Medium	0	11.3	<0	<0
Hard	<0	<0	<0	<0

Table 1: Performance under different environmental complexities.

5.4 Representation Learning from Raw Observations

An intriguing research direction involves training reinforcement learning agents directly from raw pixel data, a method that has demonstrated success in simpler environments like Atari [56], but remains particularly challenging in more complex domains such as histopathological image analysis. Within the *HistoGym* environment, we compared the effectiveness of using raw pixel data against more abstract feature representations, such as those extracted by ResNet and CLAM, as detailed in Table 2. Our findings suggest that simultaneously learning the policy alongside the feature extractor is demanding and introduces instability into the model, which warrants further investigation.

Table 2: Comparison of representation learning approaches in HistoGym using CAMELYON16

Representation	Reward(PPO)	Reward(DQN)
Pixels	<0	<0
ResNet Features	13.2	8.3
CLAM Features	16.2	8.5

6 Conclusion

In this paper, we introduced *HistoGym*, an open-source reinforcement learning environment tailored for histopathological image analysis. By reframing the diagnostic process as a decision-making task, *HistoGym* provides a novel platform for exploring the application of RL in medical imaging, effectively mirroring the real-world practices of pathologists. This environment not only addresses key challenges in WSI analysis, such as handling high-dimensional data and integrating multi-scale information, but also lays the groundwork for future research in RL methodologies. We believe *HistoGym* will serve as a valuable tool for advancing the field of computational pathology.

References

- [1] Miao Cui and David Zhang. Artificial intelligence and computational pathology. *Laboratory Investigation; a Journal of Technical Methods and Pathology*, 101:412 422, 2021.
- [2] Muhammad Khalid Khan Niazi, Anil V. Parwani, and Metin N. Gurcan. Digital pathology and artificial intelligence. *The Lancet. Oncology*, 20 5:e253–e261, 2019.
- [3] Ming Y Lu, Bowen Chen, Andrew Zhang, Drew FK Williamson, Richard J Chen, Tong Ding, Long Phi Le, Yung-Sung Chuang, and Faisal Mahmood. Visual language pretrained multiple instance zero-shot transfer for histopathology images. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 19764–19775, 2023.
- [4] Zhi Huang, Federico Bianchi, Mert Yuksekgonul, Thomas J Montine, and James Zou. A visual-language foundation model for pathology image analysis using medical twitter. *Nature medicine*, 29(9):2307–2316, 2023.

- [5] Estelle Aflalo, Meng Du, Shao-Yen Tseng, Yongfei Liu, Chenfei Wu, Nan Duan, and Vasudev Lal. Vl-interpret: An interactive visualization tool for interpreting vision-language transformers. In *Proceedings of the IEEE/CVF Conference on computer vision and pattern recognition*, pages 21406–21415, 2022.
- [6] Mikhail Binnewies, Edward W. Roberts, Kelly Kersten, Vincent Chan, Douglas Fearon, Miriam Merad, Lisa M. Coussens, Dmitry I. Gabrilovich, Suzanne Ostrand-Rosenberg, Suzanne Ostrand-Rosenberg, Catherine C. Hedrick, Robert H. Vonderheide, Mikael J. Pittet, Rakesh K. Jain, Weiping Zou, Thomas K. Howcroft, Elisa C. Woodhouse, Robert A. Weinberg, and Matthew F. Krummel. Understanding the tumor immune microenvironment (time) for effective therapy. *Nature Medicine*, 24:541 550, 2018.
- [7] Philip Chikontwe, Meejeong Kim, Soo Jeong Nam, Heounjeong Go, and Sang Hyun Park. Multiple instance learning with center embeddings for histopathology classification. In *Medical Image Computing and Computer Assisted Intervention–MICCAI 2020: 23rd International Conference, Lima, Peru, October 4–8, 2020, Proceedings, Part V 23*, pages 519–528. Springer, 2020.
- [8] Fahdi Kanavati, Gouji Toyokawa, Seiya Momosaki, Michael Rambeau, Yuka Kozuma, Fumihiro Shoji, Koji Yamazaki, Sadanori Takeo, Osamu Iizuka, and Masayuki Tsuneki. Weakly-supervised learning for lung carcinoma classification using deep learning. *Scientific reports*, 10(1):9297, 2020.
- [9] Zeyu Gao, Bangyang Hong, Yang Li, Xianli Zhang, Jialun Wu, Chunbao Wang, Xiangrong Zhang, Tieliang Gong, Yefeng Zheng, Deyu Meng, et al. A semi-supervised multi-task learning framework for cancer classification with weak annotation in whole-slide images. *Medical Image Analysis*, 83:102652, 2023.
- [10] Jiangbo Shi, Chen Li, Tieliang Gong, Yefeng Zheng, and Huazhu Fu. Vila-mil: Dual-scale vision-language multiple instance learning for whole slide image classification. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11248–11258, 2024.
- [11] Bolei Xu, Jingxin Liu, Xianxu Hou, Bozhi Liu, Jon Garibaldi, Ian O. Ellis, Andy Green, Linlin Shen, and Guoping Qiu. Attention by Selection: A Deep Selective Attention Approach to Breast Cancer Classification. *IEEE Transactions on Medical Imaging*, 39(6):1930–1941, 2020.
- [12] Hua Wei, Jingxiao Chen, Xiyang Ji, Hongyang Qin, Minwen Deng, Siqin Li, Liang Wang, Weinan Zhang, Yong Yu, Liu Linc, et al. Honor of kings arena: an environment for generalization in competitive reinforcement learning. *Advances in Neural Information Processing Systems*, 35:11881–11892, 2022.
- [13] Jacopo Panerati, Hehui Zheng, Siqi Zhou, James Xu, Amanda Prorok, Angela P. Schoellig University of Toronto Institute for A Studies, Vector Institute for Artificial Intelligence, and University of Cambridge. Learning to fly—a gym environment with pybullet physics for reinforcement learning of multi-agent quadcopter control. 2021 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pages 7512–7519, 2021.
- [14] B Ravi Kiran, Ibrahim Sobh, Victor Talpaert, Patrick Mannion, Ahmad A Al Sallab, Senthil Yogamani, and Patrick Pérez. Deep reinforcement learning for autonomous driving: A survey. *IEEE Transactions on Intelligent Transportation Systems*, 23(6):4909–4926, 2021.
- [15] Ramprasaath R Selvaraju, Michael Cogswell, Abhishek Das, Ramakrishna Vedantam, Devi Parikh, and Dhruv Batra. Grad-cam: Visual explanations from deep networks via gradient-based localization. In *Proceedings of the IEEE international conference on computer vision*, pages 618–626, 2017.
- [16] Grégoire Montavon, Sebastian Lapuschkin, Alexander Binder, Wojciech Samek, and Klaus-Robert Müller. Explaining nonlinear classification decisions with deep taylor decomposition. *Pattern recognition*, 65:211–222, 2017.
- [17] Ario Sadafi, Oleksandra Adonkina, Ashkan Khakzar, Peter Lienemann, Rudolf Matthias Hehr, Daniel Rueckert, Nassir Navab, and Carsten Marr. Pixel-level explanation of multiple instance learning models in biomedical single cell images. In *International Conference on Information Processing in Medical Imaging*, pages 170–182. Springer, 2023.
- [18] Richard J Chen, Ming Y Lu, Muhammad Shaban, Chengkuan Chen, Tiffany Y Chen, Drew FK Williamson, and Faisal Mahmood. Whole slide images are 2d point clouds: Context-aware survival prediction using patch-based graph convolutional networks. In *Medical Image Computing and Computer Assisted Intervention–MICCAI 2021:* 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part VIII 24, pages 339–349. Springer, 2021.
- [19] Yanning Zhou, Simon Graham, Navid Alemi Koohbanani, Muhammad Shaban, Pheng-Ann Heng, and Nasir Rajpoot. Cgc-net: Cell graph convolutional network for grading of colorectal cancer histology images. In Proceedings of the IEEE/CVF international conference on computer vision workshops, pages 0–0, 2019.
- [20] Chunyuan Li, Cliff Wong, Sheng Zhang, Naoto Usuyama, Haotian Liu, Jianwei Yang, Tristan Naumann, Hoifung Poon, and Jianfeng Gao. Llava-med: Training a large language-and-vision assistant for biomedicine in one day. *Advances in Neural Information Processing Systems*, 36, 2024.

- [21] Ming Y Lu, Bowen Chen, Drew FK Williamson, Richard J Chen, Ivy Liang, Tong Ding, Guillaume Jaume, Igor Odintsov, Long Phi Le, Georg Gerber, et al. A visual-language foundation model for computational pathology. *Nature Medicine*, 30(3):863–874, 2024.
- [22] Andrew H Song, Guillaume Jaume, Drew FK Williamson, Ming Y Lu, Anurag Vaidya, Tiffany R Miller, and Faisal Mahmood. Artificial intelligence for digital and computational pathology. *Nature Reviews Bioengineering*, 1(12):930–949, 2023.
- [23] Muhammad Shaban, Ruqayya Awan, Muhammad Moazam Fraz, Ayesha Azam, Yee-Wah Tsang, David Snead, and Nasir M Rajpoot. Context-aware convolutional neural network for grading of colorectal cancer histology images. *IEEE transactions on medical imaging*, 39(7):2395–2405, 2020.
- [24] Ellery Wulczyn, David F Steiner, Zhaoyang Xu, Apaar Sadhwani, Hongwu Wang, Isabelle Flament-Auvigne, Craig H Mermel, Po-Hsuan Cameron Chen, Yun Liu, and Martin C Stumpe. Deep learning-based survival prediction for multiple cancer types using histopathology images. *PloS one*, 15(6):e0233678, 2020.
- [25] Ellery Wulczyn, David F Steiner, Melissa Moran, Markus Plass, Robert Reihs, Fraser Tan, Isabelle Flament-Auvigne, Trissia Brown, Peter Regitnig, Po-Hsuan Cameron Chen, et al. Interpretable survival prediction for colorectal cancer using deep learning. NPJ digital medicine, 4(1):71, 2021.
- [26] Zeyu Gao, Anyu Mao, Jialun Wu, Yang Li, Chunbao Wang, Caixia Ding, Tieliang Gong, and Chen Li. Uncertaintybased model acceleration for cancer classification in whole-slide images. In 2022 IEEE International Conference on Bioinformatics and Biomedicine (BIBM), pages 1534–1538. IEEE, 2022.
- [27] David Silver, Julian Schrittwieser, Karen Simonyan, Ioannis Antonoglou, Aja Huang, Arthur Guez, Hubert Thomas, Timothy Lillicrap, Andrzej Madry, and Demis Hassabis. Mastering the game of go with deep neural networks and tree search. *Nature*, 529(7587):484–489, 2016.
- [28] Lukasz Kaiser, Mohammad Babaeizadeh, Piotr Milos, Blazej Osinski, Roy H Campbell, Konrad Czechowski, Dumitru Erhan, Chelsea Finn, Piotr Kozakowski, Sergey Levine, et al. Model-based reinforcement learning for atari. arXiv preprint arXiv:1903.00374, 2019.
- [29] Gerald Tesauro. Td-gammon, a self-teaching backgammon program, achieves master-level play. *Neural computation*, 6(2):215–219, 1994.
- [30] Feng-Hsiung Hsu. Behind Deep Blue: Building the computer that defeated the world chess champion. Princeton University Press, 2002.
- [31] Johan Larsson, Hans Westergren, Birgitta Häggman-Henrikson, Aurelija Ilgunas, Anders Wänman, and Eva-Maj Malmström. The feasibility of gym-based exercise therapy for patients with persistent neck pain. *Scandinavian Journal of Pain*, 20(2):261–272, 2020.
- [32] Hamish Scott, Lorenzo Niccolini, Chess Stetson, Nils Goldbeck, Ioannis Souflas, Noyan Songur, Alireza Ahrabian, Eduardo Candela, and Panagiotis Angeloudis. Scenario gym: A scenario-centric lightweight simulator. In 2023 IEEE 26th International Conference on Intelligent Transportation Systems (ITSC), pages 5216–5222. IEEE, 2023.
- [33] Jacopo Panerati, Hehui Zheng, SiQi Zhou, James Xu, Amanda Prorok, and Angela P Schoellig. Learning to fly—a gym environment with pybullet physics for reinforcement learning of multi-agent quadcopter control. In 2021 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pages 7512–7519. IEEE, 2021.
- [34] Ting-Han Fan, Xian Yeow Lee, and Yubo Wang. Powergym: A reinforcement learning environment for volt-var control in power distribution systems. In *Learning for Dynamics and Control Conference*, pages 21–33. PMLR, 2022.
- [35] Talha Qaiser and Nasir M Rajpoot. Learning where to see: a novel attention model for automated immunohistochemical scoring. *IEEE transactions on medical imaging*, 38(11):2620–2631, 2019.
- [36] Bolei Xu, Jingxin Liu, Xianxu Hou, Bozhi Liu, Jon Garibaldi, Ian O Ellis, Andy Green, Linlin Shen, and Guoping Qiu. Look, investigate, and classify: a deep hybrid attention method for breast cancer classification. In 2019 IEEE 16th international symposium on biomedical imaging (ISBI 2019), pages 914–918. IEEE, 2019.
- [37] Boxuan Zhao, Jun Zhang, Deheng Ye, Jian Cao, Xiao Han, Qiang Fu, and Wei Yang. Rlogist: fast observation strategy on whole-slide images with deep reinforcement learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 3570–3578, 2023.
- [38] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep Learning*. MIT Press, 2016. http://www.deeplearningbook.org.
- [39] Ming Y. Lu, Drew F. K. Williamson, Tiffany Y. Chen, Richard J. Chen, Matteo Barbieri, and Faisal Mahmood. Data-efficient and weakly supervised computational pathology on whole-slide images. *Nature Biomedical Engineering*, 5:555 – 570, 2020.

- [40] Rui Aguiar and Jon Braatz. Selecting Regions of Interest in Large Multi-Scale Images for Cancer Pathology. *arixv*, 2020.
- [41] Maximilian Ilse, Jakub M. Tomczak, and Max Welling. Attention-based deep multiple instance learning. In *International Conference on Machine Learning*, 2018.
- [42] Bin Li, Yin Li, and Kevin W. Eliceiri. Dual-stream multiple instance learning network for whole slide image classification with self-supervised contrastive learning. 2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pages 14313–14323, 2020.
- [43] Richard S Sutton and Andrew G Barto. Reinforcement learning: An introduction. MIT press, 2018.
- [44] Geert Litjens, Thijs Kooi, Babak Ehteshami Bejnordi, Arnaud Arindra Adiyoso Setio, Francesco Ciompi, Mohsen Ghafoorian, Jeroen AWM Van Der Laak, Bram Van Ginneken, and Clara I Sánchez. A survey on deep learning in medical image analysis. *Medical image analysis*, 42:60–88, 2017.
- [45] Oded Maron and Tomas Lozano-Perez. A framework for multiple-instance learning. In *Neural Information Processing Systems*, 1997.
- [46] Mark Towers, Ariel Kwiatkowski, Jordan Terry, John U Balis, Gianluca De Cola, Tristan Deleu, Manuel Goulão, Andreas Kallinteris, Markus Krimmel, Arjun KG, et al. Gymnasium: A standard interface for reinforcement learning environments. arXiv preprint arXiv:2407.17032, 2024.
- [47] Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. Openai gym. 2016.
- [48] Adam Goode, Benjamin Gilbert, Jan Harkes, Drazen Jukic, and Mahadev Satyanarayanan. Openslide: A vendor-neutral software foundation for digital pathology. *Journal of Pathology Informatics*, 4, 2013.
- [49] Antonin Raffin, Ashley Hill, Adam Gleave, Anssi Kanervisto, Maximilian Ernestus, and Noah Dormann. Stablebaselines3: Reliable reinforcement learning implementations. *Journal of Machine Learning Research*, 22(268):1–8, 2021.
- [50] Jiayi Weng, Huayu Chen, Dong Yan, Kaichao You, Alexis Duburcq, Minghao Zhang, Yi Su, Hang Su, and Jun Zhu. Tianshou: A highly modularized deep reinforcement learning library. *Journal of Machine Learning Research*, 23(267):1–6, 2022.
- [51] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In Proceedings of the IEEE conference on computer vision and pattern recognition, pages 770–778, 2016.
- [52] Ming Y. Lu, Drew F. K. Williamson, Tiffany Y. Chen, Richard J. Chen, Matteo Barbieri, and Faisal Mahmood. Data-efficient and weakly supervised computational pathology on whole-slide images. *Nature Biomedical Engineering*, 5:555 – 570, 2020.
- [53] Volodymyr Mnih, Adria Puigdomenech Badia, Mehdi Mirza, Alex Graves, Tim Harley, Timothy Lillicrap, David Silver, and Koray Kavukcuoglu. Asynchronous methods for deep reinforcement learning. In *International Conference on Machine Learning*, pages 1928–1937. PMLR, 2016.
- [54] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. ArXiv, abs/1707.06347, 2017.
- [55] Dan Horgan, John Quan, David Budden, Gabriel Barth-Maron, Matteo Hessel, H. V. Hasselt, and David Silver. Distributed prioritized experience replay. ArXiv, abs/1803.00933, 2018.
- [56] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin A. Riedmiller. Playing atari with deep reinforcement learning. *ArXiv*, abs/1312.5602, 2013.

Appendix

class HistoEnv(gym.Env)

Custom environment for histology image analysis.

Parameters:

- img_path (str): Path to the histology image file.
- xml_path (str): Path to the XML file containing annotations.
- tile_size (int): Size of the tiles used for analysis.
- result_path (str): Path to save the resulting images.

Attributes:

- UP (int): Action code for moving up.
- DOWN (int): Action code for moving down.
- LEFT (int): Action code for moving left.
- RIGHT (int): Action code for moving right.
- ZOOM_IN (int): Action code for zooming in.
- ZOOM_OUT (int): Action code for zooming out.
- STAY (int): Action code for staying in the same position.
- img_path (str): Path to the histology image file.
- xml_path (str): Path to the XML file containing annotations.
- tile_size (int): Size of the tiles used for analysis.
- result_path (str): Path to save the resulting images.
- plt_size (int): Size of the plot.
- slide (openslide.OpenSlide): OpenSlide object for reading the histology image.
- dz (DeepZoomGenerator): DeepZoomGenerator object for generating tiles.
- dz_level (int): Initial DeepZoom level.
- OBS_W (int): Observation width.
- OBS_H (int): Observation height.
- STATE_W (int): State width.
- STATE_H (int): State height.
- coor_xml (Coor): Coor object for parsing XML annotations.
- coor_dz_all (Coor): Coor object for getting DeepZoom coordinates.
- segment_dz_all (Coor): Coor object for getting segment coordinates.
- if_overlap (bool): Flag indicating if there is overlap.
- overlap_seg_index (int): Index of the overlapping segment.
- overlap_ratio (float): Ratio of overlap.
- n_actions (int): Number of actions.
- action_space (gym.spaces.Discrete): Action space.
- observation_space (gym.spaces.Box): Observation space.
- agent_pos (list): Agent position in the form [z, x, y].
- STATE_D (int): Initial DeepZoom level for setting bounds.
- state (numpy.ndarray): Current state.
- count (int): Step count within the episode.
- max_step (int): Maximum number of steps per episode.
- bound (list): List of bounds.

Methods:

- __init__(self, img_path, xml_path, tile_size, result_path): Initializes the environment.
- reset(self): Resets the environment and returns the initial state.
- step(self, action): Takes a step in the environment based on the given action.
- render(self, mode="save"): Renders the current state of the environment.