

Comprehensive Overview of Reward Engineering and Shaping in Advancing Reinforcement Learning Applications

SINAN IBRAHIM¹, MOSTAFA MOSTAFA¹, ALI JNADI², AND PAVEL OSINENKO¹.

¹Skolkovo Institute of Science and Technology, 121205 Moscow, Russia

²Innopolis University, 420500 Innopolis, Russia

Corresponding author: Sinan Ibrahim (e-mail: Sinan.Ibrahim@Skoltech.ru).

ABSTRACT The aim of Reinforcement Learning (RL) in real-world applications is to create systems capable of making autonomous decisions by learning from their environment through trial and error. This paper emphasizes the importance of reward engineering and reward shaping in enhancing the efficiency and effectiveness of reinforcement learning algorithms. Reward engineering involves designing reward functions that accurately reflect the desired outcomes, while reward shaping provides additional feedback to guide the learning process, accelerating convergence to optimal policies. Despite significant advancements in reinforcement learning, several limitations persist. One key challenge is the sparse and delayed nature of rewards in many real-world scenarios, which can hinder learning progress. Additionally, the complexity of accurately modeling real-world environments and the computational demands of reinforcement learning algorithms remain substantial obstacles. On the other hand, recent advancements in deep learning and neural networks have significantly improved the capability of reinforcement learning systems to handle high-dimensional state and action spaces, enabling their application to complex tasks such as robotics, autonomous driving, and game playing. This paper provides a comprehensive review of the current state of reinforcement learning, focusing on the methodologies and techniques used in reward engineering and reward shaping. It critically analyzes the limitations and recent advancements in the field, offering insights into future research directions and potential applications in various domains.

INDEX TERMS Reinforcement Learning, Reward Engineering, Reward Planning, Reward Shaping.

I. INTRODUCTION

REWARD DESIGN in Reinforcement Learning (RL) is a critical component that significantly influences the performance and learning efficiency of RL agents [1]–[3]. RL, a prominent subset of Machine Learning, trains intelligent agents to make sequential decisions by learning from interactions with their environment [4]. These agents aim to maximize cumulative rewards over time, making the design of the reward function pivotal to their success. Reward design is a nuanced and intricate process that involves defining the reward function in a way that aligns with the desired behavior and goals of the RL agent. As highlighted in [5], the importance of reward design cannot be overstated, as it directly impacts the agent's ability to learn and adapt to complex environments. The art of reward design can be categorized into two primary areas. The first is Reward Engineering [6] which involves the creation of the reward function itself. This involves the initial creation of the reward function. The reward

function, $R(s, a, s')$, maps states s , actions a , and successor state s' to a numerical reward value. A well-designed reward function should provide informative feedback to the agent, guiding it toward desired actions and behaviors. The reward function must strike a balance between being informative enough to facilitate learning and sparse enough to prevent trivial solutions. For example, in a grid-world navigation task, the reward function might be defined as:

$$R(s, a, s') = \begin{cases} +10 & \text{if } s' \text{ is the goal state} \\ -1 & \text{if } s' \text{ is a non-goal state.} \end{cases}$$

The reward function [3], [7], [8] serves as a signal to the RL agent, guiding it towards desirable actions and behaviors. A well-designed reward function should be informative, providing the agent with clear feedback on the quality of its actions. It should also be sparse enough to prevent trivial solutions but dense enough to facilitate learning. For example, in a game-playing scenario, reward engineering might involve assigning

positive rewards for winning moves and negative rewards for losing moves, with additional considerations for intermediate actions that contribute to the overall strategy.

The second category is Reward Shaping [9], [10]. Once the reward function is established, reward shaping comes into play to fine-tune and enhance the reward signals. Reward shaping involves modifying the reward function to improve the learning process without altering the optimal policy. One common approach is potential-based reward shaping [11], where a potential function $\Phi(s)$ is introduced to modify the rewards:

$$R'(s, a, s') = R(s, a, s') + \gamma\Phi(s') - \Phi(s). \quad (1)$$

Here, γ is the discount factor. The potential function $\Phi(s)$ should be carefully designed to ensure it does not change the optimal policy but accelerates learning by providing intermediate rewards. For instance, in a robotic arm manipulation task, $\Phi(s)$ could represent the negative distance to the target object, encouraging the agent to move closer to the target. Techniques such as potential-based shaping functions can be used to provide additional guidance to the agent, accelerating the learning process by giving intermediate rewards for progress toward the ultimate goal. For instance, in a navigation task, shaping rewards could include providing positive feedback for reaching sub-goals or making progress towards the destination, even if the final goal is not yet achieved.

Effective reward design requires a deep understanding of the problem domain, the agent's learning dynamics, and potential pitfalls such as reward hacking, where the agent finds unintended shortcuts to maximize rewards without achieving the desired behavior. To mitigate such problems, iterative testing and validation of the reward function are essential, ensuring that the designed rewards lead to the intended outcomes. Reward design in RL is a fundamental aspect that encompasses both the creation and refinement of reward functions. Through careful reward engineering and shaping, one can guide RL agents to learn complex behaviors efficiently and effectively, ultimately leading to the development of intelligent systems capable of performing sophisticated tasks.

For deep understanding, consider an RL problem formulated as a Markov Decision Process (MDP), defined by the tuple (S, A, P, R, γ) , where:

- S is the set of states,
- A is the set of actions,
- $P(s'|s, a)$ is the transition probability function,
- $R(s, a)$ is the reward function,

The goal of the RL agent is to learn a policy $\pi(a|s)$ that maximizes the expected cumulative reward, given by the return G_t :

$$G_t = \sum_{k=0}^{\infty} \gamma^k R(s_{t+k}, a_{t+k}). \quad (2)$$

The value function $V^\pi(s)$ and the action-value function $Q^\pi(s, a)$ are defined as:

$$V^\pi(s) = \mathbb{E}_\pi \left[\sum_{k=0}^{\infty} \gamma^k R(s_{t+k}, a_{t+k}) \middle| s_t = s \right], \quad (3)$$

$$Q^\pi(s, a) = \mathbb{E}_\pi \left[\sum_{k=0}^{\infty} \gamma^k R(s_{t+k}, a_{t+k}) \middle| s_t = s, a_t = a \right]. \quad (4)$$

In reward shaping, the modified reward function $R'(s, a, s')$ ensures the policy remains optimal while improving the learning speed. The shaping potential $\Phi(s)$ is chosen such that the difference in potential provides informative guidance:

$$\Phi(s) = \text{heuristic}(s). \quad (5)$$

For instance, in a maze-solving task, $\Phi(s)$ could be the negative Manhattan distance to the goal, providing incremental rewards as the agent approaches the goal.

Reward design in RL is a fundamental aspect that encompasses both the creation and refinement of reward functions and it has been used in various areas [12]–[15]. Through careful reward engineering and shaping, one can guide RL agents to learn complex behaviors efficiently and effectively, ultimately leading to the development of intelligent systems capable of performing sophisticated tasks. Efficiently, the complexity of modern systems demands a more nuanced approach to reward engineering. The work cited as [6] argues for a shift in focus toward developing alternative frameworks that can effectively guide these agents toward desired behaviors, ensuring they "do the right thing" in increasingly complex and ethically-charged scenarios.

Traditional control methods such as MPC, or LQR in robotics often rely on pre-programmed behaviors and lack the adaptability and learning capabilities of RL. However, RL lacks inherent performance guarantees in agent-environment interactions, requiring additional assurance measures [16]. Reward engineering provides a powerful tool for bridging the gap between conventional control and intelligent, learning-based systems. While early AI research could focus solely on achieving goals.

Therefore, this work aims to explore and provide a comprehensive review of reward design, investigating the key concepts, trends, challenges, and opportunities in reward shaping/engineering. It explores how the design of reward functions plays a crucial role in influencing the behavior of learning agents in various tasks and environments. Moreover, it investigates how advancements in reward engineering are paving the way for more efficient and effective learning algorithms. This review sheds light on the importance of reward design in reinforcement learning and highlights the potential of reward engineering to drive innovation in the fields of RL and Artificial Intelligence (AI). As AI agents become more sophisticated and autonomous, the design of reward mechanisms becomes a crucial, yet increasingly challenging aspect of their development.

This article is structured as follows. Section I presents this review with an introduction. Section II presents the process

of selection papers. Section III provides the background and the fundamental concepts. Section IV outlines the taxonomy of reward shaping & Engineering. Section V shows the applications in robotics and other domains. A comprehensive exploration of Sim-to-Real is presented in Section VI. Section VIII discusses the shortcomings and the advantages of reward Engineering. The open challenges & future directions and conclusion are presented in Sections IX and X respectively.

II. PAPERS SELECTION PROCESS

A comprehensive literature review was conducted using a systematic search strategy across multiple databases. To ensure the transparency and reproducibility of our findings, we adhered to the PRISMA 2020 guidelines [17] for conducting and reporting systematic literature reviews. The search focused on reward shaping techniques in AI-based control systems, yielding a final set of 55 relevant papers after rigorous filtering and manual review. To ensure the reliability of the review, a quality assessment was performed on each included study using a set of benchmark questions.

Search terms included combinations of "reward shaping," "reward engineering," "reinforcement learning," "reward design," "machine learning," and "control systems." Due to the recentness of this topic there is a limited number of papers that we potentially can review, therefore our inclusion criteria were established to focus on studies published in English between 1999 and 2024, which directly addressed the application of reward shaping techniques in AI-based control systems, and presented empirical results. Papers solely focused on theoretical frameworks or lacking empirical data were excluded, except for [6], [18]–[20] because of their high impact on our review.

III. BACKGROUND AND FUNDAMENTAL CONCEPTS

Reward shaping becomes more advantageous as the likelihood of an agent wasting time exploring pointless areas of the environment increases, and thus well-designed reward shaping can more effectively guide exploration, in addition to reward shaping, reward design has also been explored as a means of policy teaching, [21]–[23]

To define Reward Shaping and Reward Engineering, it is essential to go through the core RL concepts:

- Agent: An entity that interacts with the environment.
- Environment: The world in which the agent operates, governed by specific rules and dynamics.
- Policy: A function mapping states to actions, defining the agent's behavior.
- Reward: A signal received by the agent based on its actions, indicating the desirability of a state or action.
- Value Function: A function that estimates the expected future reward for a given state or state-action pair.
- Exploration vs. Exploitation: The balance between trying new actions and exploiting known good ones.

Based on the findings of [6], it can be stated that **Reward shaping**: is a technique inspired by animal training where supplemental rewards are provided to make a problem easier

to learn. This includes modifying the original reward function by introducing additional incentives or penalties to guide the agent's learning process.

Reward engineering: encompasses a broader set of techniques, including using other algorithms to design the reward function or designing reward functions from scratch.

The concept of reward plays a pivotal role in the field of artificial intelligence, particularly within the framework of reinforcement learning.

Two distinct perspectives on the nature and sufficiency of reward have emerged, sparking debate among researchers. The first perspective, championed by the "Reward is Enough" hypothesis [18], posits that maximizing a scalar reward, a single numerical value representing progress towards a goal could be the key to understanding and further building artificial intelligence. This view proposes that complex cognitive abilities, like learning, language, and social intelligence, emerge as a consequence of striving for this reward. The complexity of the environment, it is argued, naturally drives agents to develop these abilities to achieve their goals more efficiently. However, the "Scalar Reward is Not Enough" perspective challenges this view [19], asserting that relying solely on a single numerical value fails to capture the multifaceted nature of human intelligence, particularly in domains involving ethical considerations or complex, subjective goals. This perspective advocates for the use of vector-valued rewards, which represent multiple aspects of progress and can better guide the development of safe, human-aligned AI. While both perspectives acknowledge the importance of reward in learning, the debate centers on the sufficiency of a single scalar value in representing the full spectrum of intelligent behavior. The "Scalar Reward is Not Enough" perspective highlights the need for more nuanced reward representations that can account for the intricate and often context-dependent nature of human intelligence.

A. GENERAL PITFALLS IN REWARD DESIGN:

As was established, reward design can be challenging and time-consuming, furthermore, its effects usually can be noticeable in the behavior of the agent in addition to the environment.

For a given task, understanding the difficulties in reward engineering can help to determine the most compatible, suitable, and successful reward shaping techniques:

- Reward Sparsity: Lack or delay of frequent reward signals can lead to slow learning.
- Deceptive Rewards: Reward signals may encourage the agent to find "easy" solutions that are not aligned with the true objective.
- Reward Hacking: Agents may exploit unintended loopholes in the reward function to achieve high rewards without fulfilling the desired goal.
- Unintended Consequences: Reward designs can lead to unexpected and undesirable behaviors due to the complex interplay between agent actions and the environment.

- **Misaligned Reward with True Objective:** This highlights the crucial problem of ensuring the reward function actually incentivizes the desired behavior.
- **Reward Function Complexity:** A complex reward function with multiple factors can be difficult to design and interpret.
- **Difficulty in Evaluating Reward Design:** It can be difficult to objectively evaluate the effectiveness of a reward function, especially in complex environments.

These are some of the factors why Reward Engineering could be an acceptable substitute to conventional reward design.

B. SCALAR VS VECTOR REWARD

In RL, the choice between scalar and vector rewards significantly impacts the agent’s learning process. Scalar rewards, represented by a single numerical value, provide a simple measure of progress towards a goal. This simplicity makes them computationally efficient and easy to interpret. However, they often fail to capture the nuances of complex tasks, potentially leading to suboptimal behavior. Vector rewards, on the other hand, utilize multiple values to represent different aspects of the task, offering a more comprehensive evaluation of the agent’s actions. This richer feedback allows for a finer-grained learning process, enabling the agent to prioritize specific aspects of the task and potentially achieve more desirable outcomes. While vector rewards can lead to improved performance, they come with the challenge of designing effective reward functions, balancing multiple objectives, and navigating the computational complexities associated with multi-dimensional feedback. The choice between scalar and vector rewards depends on the specific task, the desired level of performance, and the available computational resources.

IV. TAXONOMY OF REWARD SHAPING/ENGINEERING TECHNIQUES

This section contains a categorization of reward shaping techniques based on underlying principles, along with detailed explanations of each category, specific algorithms, advantages, disadvantages, and evaluation criteria.

Psychologists differentiate between extrinsic motivation, where actions are driven by specific anticipated rewards, and intrinsic motivation, where actions are motivated by inherent enjoyment. [24]. Similarly in RL, Rewards can be categorized into intrinsic and extrinsic types, illustrated in Figure 1.

These rewards play critical roles in motivating and guiding agent behavior, making the shaping and design of these functions crucial for determining the success or failure of algorithms. In their study of reward functions [25] introduced a computational framework aimed at optimizing these rewards to improve agent behaviors. Their approach focuses on defining optimal reward structures based on fitness functions and environmental distributions. Similarly, [26] further explored intrinsic motivation within the RL framework. They proposed an evolutionary-inspired optimal reward framework

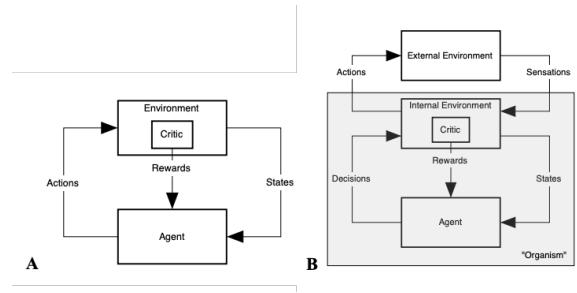


Figure 1: Agent-Environment Interaction in Reinforcement Learning. **A:** The agent receives rewards from a "critic" within its environment. **B:** This panel expands on Panel A by distinguishing between an internal and an external environment, with rewards originating from the internal environment. The shaded box represents what could be likened to the "organism.", [Figure 1] [24].

that emphasizes designing reward functions to enhance evolutionary success across diverse environments. This framework explores the delicate balance between intrinsic and extrinsic motivations, emphasizing the computational modeling of intrinsic motivation driven by internal rewards crucial for intellectual growth. They define the optimal reward as:

$$r_{\mathcal{A}}^* = \arg \max_{r_{\mathcal{A}} \in \mathcal{R}_{\mathcal{A}}} \mathbb{E}_{E \sim P(\varepsilon)} \mathbb{E}_{h \sim \langle A(r_{\mathcal{A}}), E \rangle} \{ \mathcal{F}(h) \}, \quad (6)$$

where \mathbb{E} denotes the expectation operator. A special reward function in $\mathcal{R}_{\mathcal{A}}$ is the fitness-based reward function, that most directly translates fitness \mathcal{F} into an RL reward function, i.e., where the fitness function \mathcal{F} measures a scalar evaluation of the agent based on its interaction history h , which is sampled from the distribution resulting from its interaction with the environment. The fitness value of a lifetime-length history is the cumulative fitness-based reward for that history, [26, Equation 1].

Previous studies highlight the importance of advanced reward shaping methodologies in improving agent learning and adaptation.

A. POLICY GRADIENT METHODS

Policy gradient methods directly optimize an agent’s policy to maximize cumulative rewards [27]. Unlike value-based approaches, which estimate value functions, policy gradient methods focus solely on improving the policy itself.

In RL, an agent aims to maximize its total reward over time, referred to as its return. It’s crucial to note that the sequence of environment states is influenced by the selected reward function, thereby affecting the goals of the agent’s designer. The challenge of finding the optimal reward stems from the fact that, while the objective reward function is fixed in the problem formulation, the choice of reward function remains within the designer’s control [28]. Addressing this challenge, previous research introduced the Policy Gradient for Reward Design (PGRD), which employs online gradient ascent to

iteratively adjust reward parameters during the agent's operation. They argue that "the optimal reward parameters are determined by solving the optimal reward problem" [28, Equation 1]:

$$\theta^* = \arg \max_{\theta \in \Theta} \lim_{N \rightarrow \infty} \mathbb{E} \left[\frac{1}{N} \sum_{t=0}^N \mathcal{R}_O(s_t) | \mathcal{R}(\cdot, \theta) \right], \quad (7)$$

where \mathcal{R}_O is objective reward function given by the designer and $\mathcal{R}(\cdot)$ is separate agent reward function. Authors abstractly represent this selection by parameterizing the reward with a vector of parameters θ chosen from a parameter space Θ . Each $\theta \in \Theta$ defines a reward function $R(\cdot; \theta)$, which subsequently generates a distribution over the sequences of environment states using the agent's RL method. The expected return achieved by the designer for the choice of θ is denoted as $J(\theta)$.

PGRD adjusts to accommodate the agent's abilities and uncertainties in model accuracy. It formalizes updates to the reward function by estimating gradients of the objective return and policy, ensuring convergence with rigorous proofs. Results illustrate its effectiveness in discrete-time, partially observable environments, as depicted in Figure 2, to maximize the expected mean objective reward over an infinite horizon. Unlike traditional methods that impose fixed goals on agents, PGRD enhances results compared to conventional policy gradient methods, highlighting its capacity to improve agent performance across various scenarios through dynamic reward optimization.

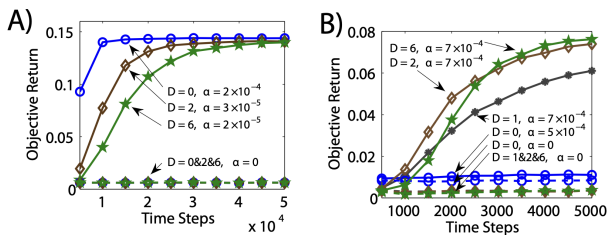


Figure 2: PGRD performance with A) poor model, B) partially observable world, [28, Figure 3].

In a similar vein, [29] introduced the Learning Intrinsic Reward for Policy Gradient (LIRPG) algorithm. LIRPG enhances RL by enabling agents to dynamically learn intrinsic rewards in addition to traditional extrinsic rewards. They propose the following equation for updating policy parameters θ by incorporating both policy and intrinsic reward parameters through regular policy gradient updates [29, Equation 4]:

$$\theta' \approx \theta + \alpha G^{ex+in}(s_t, a_t) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t). \quad (8)$$

LIRPG has demonstrated improved learning efficiency and performance in complex environments, reducing sample complexity and accelerating learning processes. Results indicate that LIRPG optimizes agent performance across Atari games and Mujoco domains, as illustrated for Hopper and HalfCheetah in Figure 3, consistently outperforming baseline

agents that rely solely on extrinsic rewards. However, challenges include the necessity for meticulous parameter tuning and potential sensitivity to the selection and interaction of intrinsic reward functions with policy updates. It is noteworthy that LIRPG expands on the concept of reward shaping by allowing agents to adjust their behavior based on internal signals of progress or success, alongside the external rewards provided by the environment.

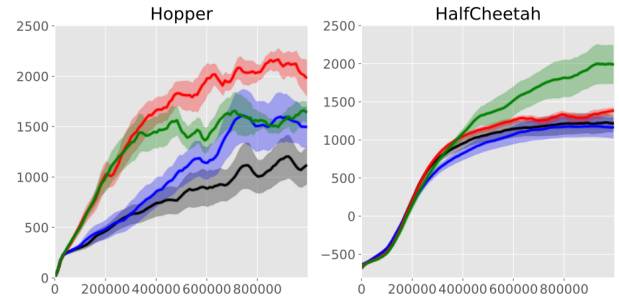


Figure 3: The x-axis represents time steps during the learning process, while the y-axis denotes the average reward over the last 100 training episodes. The black curves correspond to the baseline PPO architecture. The blue curves represent the PPO-live-bonus baseline. The red curves depict our augmented architecture using LIRPG. The green curves show the performance of our LIRPG architecture where the policy module was trained solely with intrinsic rewards. The darker curves represent averages across 10 runs with different random seeds. The shaded area indicates the standard errors across these 10 runs, [29, Figure 4].

As an extension of the Deep Deterministic Policy Gradient (DDPG) algorithm [30], DDPG from Demonstrations (DDPGfD) is tailored for robotic RL tasks with sparse rewards. DDPGfD employs off-policy learning by integrating demonstration trajectories into the replay buffer, thereby leveraging human-provided guidance to bootstrap learning and address exploration challenges common in high-dimensional control problems such as robotics. The algorithm modifies DDPG in several key ways: integrating transitions from a human demonstrator into the replay buffer and utilizing prioritized replay to effectively sample transitions from both demonstration and agent data. The learning process includes a mix of 1-step $L_1(\theta^Q)$ and n-step return $L_n(\theta^Q)$ losses to enhance performance. Furthermore, it updates multiple times per environment step, thereby improving learning efficiency. Regularization is implemented with L2 penalties on the critic's weights $L_{reg}^C(\theta^Q)$ and the actor's weights $L_{reg}^C(\theta^\pi)$, promoting stable training and generalization. The experimental setup involves tasks of inserting a two-pronged deformable plastic clip into a housing using a 7-DOF robotic arm, with results depicted in Figure 4.

DDPGfD simplifies learning by integrating human guidance and eliminates the need for intricate reward shaping. However, significant challenges persist in maintaining

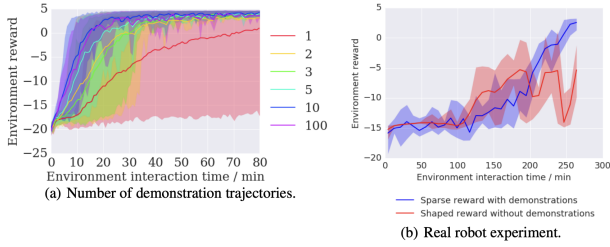


Figure 4: (a) Learning curves illustrating DDPG from Demonstrations (DDPGfD) performance on the clip insertion task with different amounts of demonstration data. DDPGfD demonstrates the ability to solve sparse-reward tasks effectively with minimal human demonstration, showcasing robust learning capabilities. (b) Results from 2 runs conducted on a physical robot. DDPGfD exhibits accelerated learning compared to DDPG and achieves performance without requiring handcrafted reward functions, as shown in [30, Figure 4].

demonstration quality and scalability across a wide range of robotic applications.

B. METHODS WITH ROBUSTNESS AND ADAPTABILITY

Robustness and adaptability are critical aspects of RL, robustness ensures RL agents perform well under uncertain or changing conditions by handling disturbances and model inaccuracies, while adaptability allows RL models to adjust to new environments, tasks, or dynamics, ensuring flexibility beyond initial training [31].

Reward shaping offers a way to enhance robustness [32]. A leader-follower framework employs a technique similar to that described in [33], where the leader, by modifying the follower’s reward function, seeks to influence their actions in the desired direction, therefore enhancing the robustness of the system.

Nevertheless, when dealing with real-world rewards collected from sensors, these sensors are often affected by noise, which can distort reward signals and result in sub-optimal performance in RL models. To tackle these issues, [32] introduces a robust RL framework that uses a confusion matrix to estimate and correct noisy rewards. This framework incorporates an unbiased estimation algorithm designed to function without making assumptions about the underlying distribution of errors. The method involves defining unbiased surrogate rewards \hat{r} based on estimated confusion matrices [32, Theorem 1] and applies the *Q-learning* algorithm with surrogate rewards [32, Equation 3]:

$$Q_{t+a}(s_t, a_t) = (1-\alpha_t)Q(s_t, a_t) + \alpha_t \left[\hat{r}_t + \gamma \max_{b \in \mathcal{A}} Q(s_{t+1}, b) \right], \tag{9}$$

where $\alpha \in (0, 1)$: the learning rate, will converge to the optimal *Q-function* as long as $\sum_t \alpha_t = \infty$ and $\sum_t \alpha_t^2 < \infty$. Experimental validation on platforms such as OpenAI Gym and Atari games demonstrate notable performance improvements

for trained policies, especially when combined with the Proximal Policy Optimization (PPO) algorithm. This integration results in higher expected rewards under noisy conditions, as shown in Figure 5. Additionally, the framework sometimes achieves greater cumulative rewards by utilizing noise for better exploration and employing noise-removal mechanisms.

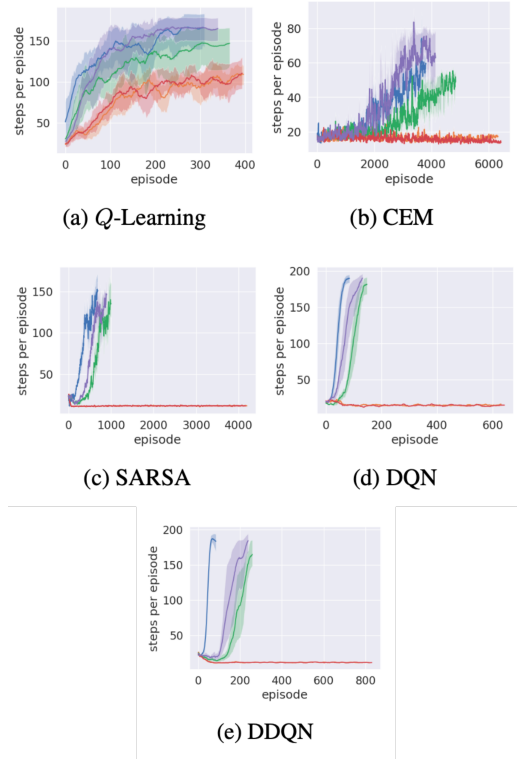


Figure 5: Learning curves from five rewards robust RL algorithms on CartPole game with true rewards (r), noisy rewards (\tilde{r}), sample-mean noisy rewards, estimated surrogate rewards (\hat{r}), and sample-mean estimated surrogate rewards, [32, Figure 4].

However, the method’s computational complexity may present challenges, especially in real-time or resource-limited scenarios. Additionally, its effectiveness across various noise patterns and environments hinges on precise noise characterization and parameter tuning. Ultimately, this process can be viewed as a form of reward engineering, aimed at adjusting or refining the reward function to mitigate noise impact and enhance learning process reliability.

Similarly, to ensure that reinforcement learning (RL) policies meet specific control criteria, [34] introduces a systematic approach for shaping rewards to align optimal policy trajectories with these requirements. This method tackles the challenge of achieving control objectives such as settling time and steady-state error without explicit models of system dynamics.

C. EXPLORATION STRATEGIES

In RL, exploration strategies are techniques that balance the trade-off between exploration (discovering new information) and exploitation (leveraging existing knowledge) [35]. These strategies help RL agents learn optimal policies by exploring their environment while exploiting learned knowledge.

The effectiveness of count-based exploration methods in small, discrete spaces contrasts with the challenges they face in larger, continuous environments where state re-encounters are infrequent. In their study on extending count-based exploration to high-dimensional and continuous state spaces, [36] introduced the use of hash codes to facilitate state counting and exploration. This method employs static hashing techniques, such as locality-sensitive hashing SimHash, which retrieves a binary code of state $s \in \mathcal{S}$ as described in [36, Equation 2]:

$$\phi(s) = \text{sgn}(A\mathbf{g}(s)) \in \{-1, 1\}^k, \quad (10)$$

where \mathbf{g} is an optional preprocessing function and A is a matrix with i.i.d. entries drawn from a standard Gaussian distribution $\mathcal{N}(0, 1)$. Additionally, the study uses learned hashing via autoencoders (AE) to assign exploration bonuses based on state visitation counts, as illustrated in Figure 6.

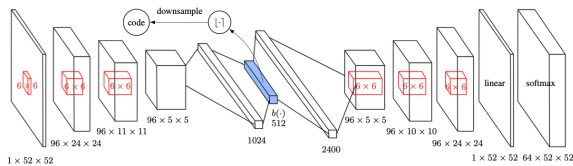


Figure 6: The architecture of the AE, [36, Figure 1].

The results illustrated in Figure 7 compare Trust Region Policy Optimization (TRPO) (baseline), TRPO-SimHash, and Variational Information Maximizing Exploration (VIME) [37] on tasks such as MountainCar, Cart-PoleSwingup, HalfCheetah, and SwimmerGather.

However, The method's primary advantages are its adaptability to high-dimensional spaces and its potential applicability across various RL domains. Nonetheless, challenges include the complexity of tuning hash functions and sensitivity to the quality of state representations, which could impact performance consistency across different environments.

To enhance the learning efficiency of reinforcement learning (RL) agents dealing with sparse or noisy reward signals, [39] introduce Exploration-Guided Reward Shaping (EXPLORS). This framework combines intrinsic reward learning with exploration-based bonuses in a fully self-supervised manner, aiming to maximize the agent's effectiveness in obtaining extrinsic rewards:

Experimental findings across various environments validate the method's effectiveness in accelerating learning compared to conventional RL approaches, demonstrating its capability to surpass the limitations of traditional reward shaping methods, as shown in Figure 8. This is particularly evident

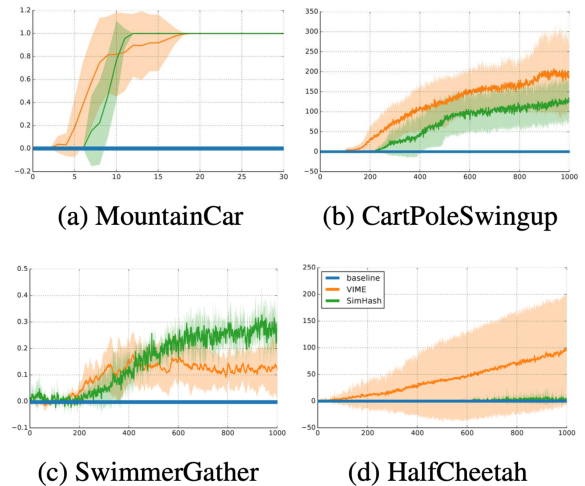


Figure 7: The mean average return of different algorithms on rllab [38] tasks with sparse rewards. The solid line shows the mean average return, while the shaded area represents one standard deviation, over 5 seeds for the baseline and SimHash (with baseline curves overlapping the axis). Count-based exploration with hashing enables goal achievement in all environments (indicated by a nonzero return), while baseline TRPO with Gaussian control noise fails completely. TRPO-SimHash effectively captures the sparse reward on HalfCheetah but does not perform as well as VIME. SimHash's performance is comparable to VIME on MountainCar and surpasses VIME on SwimmerGather [36, Figure 3].

Algorithm 1 Online Reward Shaping, [39, Algorithm 1]

- 1: **Input:** Extrinsic reward \bar{R} , and RL algorithm L
- 2: **Initialization:** π_0, \hat{R}_0
- 3: **for** $k = 1, 2, \dots, K$ **do**
- 4: update policy $\pi_k \leftarrow L(\pi_{k-1}, \hat{R}_{k-1})$
- 5: update reward \hat{R}_k using \hat{R}_{k-1} and π_k
- 6: **end for**
- 7: **Output:** π_K

in scenarios where traditional methods are impractical or ineffective. However, the study also acknowledges several constraints, including the need for extensive evaluation in more complex environments and the challenges associated with effectively combining intrinsic rewards with exploration bonuses.

Within the same framework, [40] introduce Reward Uncertainty for Exploration (RUNE), a method within preference-based RL algorithms that integrates uncertainty in learned reward functions as an exploration bonus. By incorporating the variance in predictions from an ensemble of reward functions optimized to align with human feedback, RUNE aims to enhance exploration in environments where learning is guided by human preferences, as depicted in Figure 9.

This approach offers several benefits: it provides a systematic way to balance exploration and exploitation by priori-

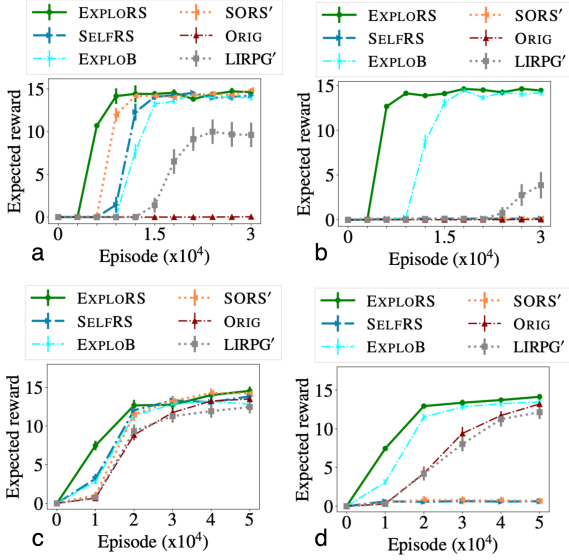


Figure 8: a) Room⁰, REINFORCE b) Room⁺, REINFORCE c) LineK⁰, REINFORCE d) LineK⁺, REINFORCE. These plots illustrate the agent’s convergence in performance relative to training episodes. (a, b) display results for the REINFORCE agent on Room⁰ (ROOM variant without any distractor state) and Room⁺ (ROOM variant with a distractor state). (c, d) present results for the REINFORCE agent on LineK⁰ (LineK variant without any distractor state) and LineK⁺ (LineK variant with distractor states) [39, Figure 5].

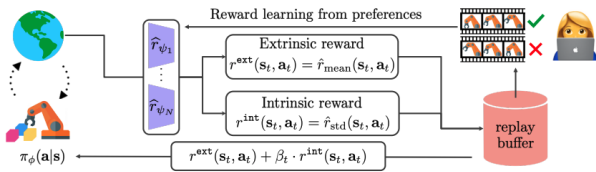


Figure 9: The agent interacts with the environment and learns an ensemble of reward functions based on teacher preferences. Each state-action pair’s total reward combines the extrinsic reward with the mean of the ensemble’s predicted values and the intrinsic reward with the standard deviation among the ensemble’s predictions [40, Figure 1].

tizing actions with higher uncertainty in expected rewards, potentially accelerating learning and improving sample efficiency compared to traditional preference-based RL methods. Experimental results in Figure 10 demonstrate RUNE’s effectiveness in enhancing asymptotic success rates and overall feedback efficiency during training scenarios. However, challenges remain, such as developing robust techniques to manage varying levels of reward uncertainty and addressing the computational overhead of maintaining an ensemble of reward function predictions. Nevertheless, this work represents a significant advancement in RL research by proposing a mechanism to integrate reward uncertainty into exploration strategies, paving the way for future developments in adaptive

learning algorithms driven by human feedback.

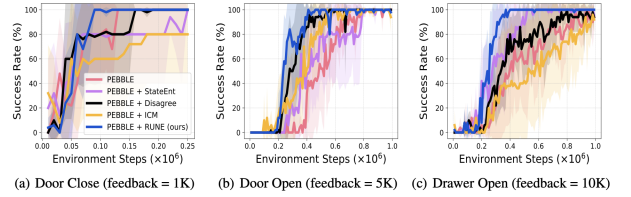


Figure 10: Learning curves on robotic manipulation tasks measuring success rates. Exploration methods consistently improve the sample efficiency of PEBBLE. Notably, RUNE shows larger gains compared to other existing exploration baselines. The solid line represents the mean and the shaded regions denote standard deviations across five runs [40, Figure 3].

D. POLICY PARAMETERIZATION

Policy parameterization refers to explicitly modeling the policy as a function of learnable parameters (often denoted as θ). These parameters determine the agent’s behavior, and common choices include neural network weights [41]. By optimizing these parameters, we improve the policy’s performance through gradient-based updates.

Continuous control tasks traditionally rely on complex neural network methods. However, [42] examines the effectiveness of simpler policy parameterizations, such as linear and Radial Basis Function (RBF) policies, in these settings. The primary concept is to enrich the representational capacity by using random Fourier features of the observations. These features are defined as [42, Equation 6]:

$$y_t^{(i)} = \sin \left(\frac{\sum_j P_{ij} s_t^{(j)}}{v} + \phi^{(i)} \right), \quad (11)$$

where each element of P_{ij} is drawn from $\mathcal{N}(0, 1)$, v is the bandwidth parameter, and ϕ is a random phase shift. The study shows that these streamlined policies can achieve competitive performance on benchmarks such as OpenAI Gym and can be trained faster than neural networks. Nevertheless, conventional training methods often result in policies susceptible to perturbations, which is critical for real-world applications. By diversifying initial state distributions during training, the research demonstrates enhanced policy robustness, similar to the benefits observed with model ensembles and domain randomization.

Despite these advantages, simple policy approaches may face challenges. Their scalability to extensive state and action spaces can be limited compared to the adaptability of neural networks. Sensitivity to initial state distributions necessitates careful tuning for robustness. In complex scenarios demanding intricate behaviors, simple policies may not match the peak performance achievable with advanced neural networks. Additionally, their rigidity may hinder adaptation to dynamic or intricate environments compared to more flexible neural network architectures.

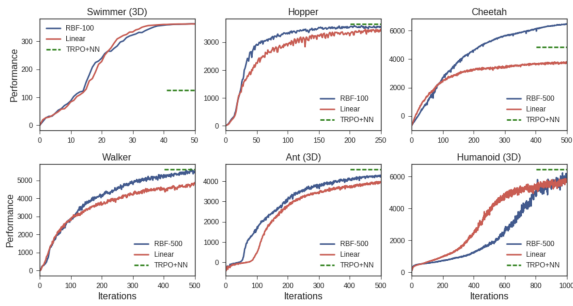


Figure 11: Learning curves for the Linear and RBF policy architectures. The green line indicates the reward achieved by neural network policies on the OpenAI Gym website as of 02/24/2017 (trained with TRPO), [42, Figure 1].

E. INVERSE REWARD DESIGN

Inverse Reward Design (IRD) tackles the challenge of inferring the true objective behind a designed reward function. Instead of manually engineering rewards, IRD allows RL agents to learn from expert demonstrations and deduce the underlying intention driving those actions.

In RL, the agent selects an action in a known state and receives a reward generated by a reward function R that may be unknown to the agent. The state transitions are based on the previous state and action, which is described by the transition function T , which may also be unknown. Conversely, in Inverse Reinforcement Learning (IRL), the inputs and outputs for the learner L are reversed. L observes the states and actions $\{(s, a), (s, a), \dots, (s, a)\}$ of an expert E (or its policy π_E), and learns a reward function \hat{R}_E that best explains E 's behavior as the output [43]. It is important to note that the learned reward function may not exactly correspond to the true reward function, as illustrated in Figure 12.

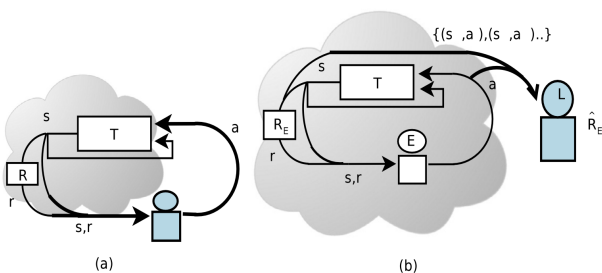


Figure 12: The figure depicts RL and IRL. The subject agent (shaded in blue), [43, Figure 3].

Coinciding with previous work, [44] proposed Inverse Reward Design (IRD), an approach that approximates the true reward function by treating the proxy reward as expert demonstrations. This method aids in planning risk-averse behavior and addresses issues like misspecified rewards and reward manipulation. IRD prevents harmful behaviors by avoiding dangerous areas, as shown in experiments with robots avoiding lava Figure 13. It also mitigates reward manipulation by treating designed rewards as observations rather

than fixed objectives. IRD's risk-averse planning ensures agents avoid both known hazards and potential risks, enhancing safety and reliability. Additionally, IRD systems are robust to changes in high-dimensional feature spaces. However, IRD faces computational challenges in solving planning problems during inference and often relies on simplified assumptions about reward functions and environments, limiting its applicability in complex scenarios. Accurate inference remains challenging, potentially leading to sub-optimal behaviors.

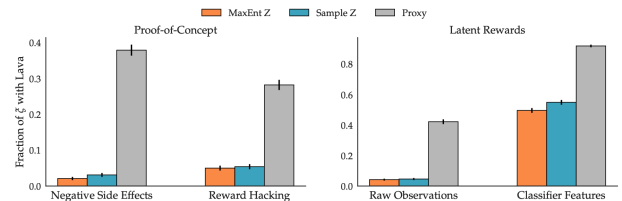


Figure 13: The results comparing [44] method to a baseline that directly plans with the proxy reward function, [44, Figure 4].

F. REWARD HORIZON

The impact of using shaping to reduce the reward horizon is illustrated through a straightforward algorithm, Algorithm 2, that guarantees learning time is polynomial relative to the size of the critical region and independent of the MDP's size [45].

Algorithm 2 The Horizon_Learn, [45, Figure 1]

- 1: **Input:** MDP M and Reward Horizon H
- 2: **Initialization:** π
- 3: **while** successive episodes occur visiting only known states **do**
- 4: Assign s as the current state of M
- 5: **if** s is terminal **then**
- 6: reset to s_0
- 7: **end if**
- 8: **if** s is known **then**
- 9: execute $\pi(s)$
- 10: **else**
- 11: execute any policy in $m_H(s)$ that still needs to be explored
- 12: **if** s becomes known **then**
- 13: Select the action for s in the optimal policy of $m_H(s)$, a
- 14: Set $\pi(s) = a$
- 15: **end if**
- 16: **end if**
- 17: **end while**
- 18: **return** π

By shortening the reward horizon, they identify easier-to-learn MDPs, indicating that standard RL algorithms, such as Q-learning with ϵ -greedy exploration, can greatly benefit

from this technique. Experimental data support that reducing the reward horizon speeds up learning, with shaping strategies leading to faster performance improvements compared to no shaping, as shown in Figure 14. Specifically, the time required to reach a certain performance level is significantly reduced with shaping; algorithms that explore based on reward feedback are notably quicker when the reward horizon is minimized.

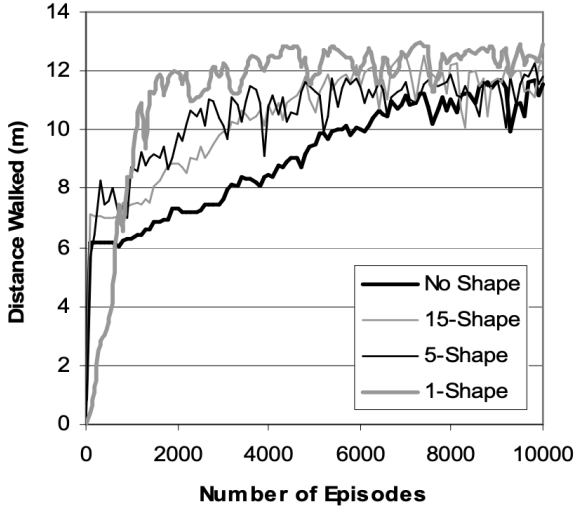


Figure 14: Average Learning Curves as the Reward Horizon is Reduced from No Shaping to Shaping Every Action, [45, Figure 2].

The study emphasizes the crucial role of the reward horizon in determining the complexity of learning tasks, showing that shaping can dramatically decrease the time required for RL agents to learn optimal policies. However, accurately determining and implementing the appropriate reward horizon is challenging, as improper shaping might not yield the expected acceleration in learning.

G. POTENTIAL BASED METHODS

Potential-based methods [11] in RL focus on shaping the value function to guide an agent's behavior. By introducing auxiliary potentials, these methods encourage desired states and actions, leading to improved exploration and convergence. These methods usually involve defining a potential function, $\phi(s)$, over the state space, which captures the agent's desired progress towards a goal state.

$$R'(s, a) = R(s, a) + \gamma[\phi(s') - \phi(s)]. \quad (12)$$

Guiding RL agents toward goals can be improved by analyzing cumulative rewards from episodes [46]. By reinforcing reward signals based on episode rewards, they proposed the Potential-Based Reward Shaping (PBRS) method to enhance learning efficiency and performance in both single-task and multi-task environments within the Arcade learning domain Figure 15. The reward function must also handle sparse reward signals by analyzing agent transitions in environments

with sparse rewards. The method proposed the following function [46, Equation 12]:

$$\phi(s, a, t) = \begin{cases} 0 & \mathcal{R}(s, a) = 0 \\ 1 + \frac{\mathcal{R}^{ep} - \mathcal{R}_u^{ep}(t)}{\mathcal{R}_u^{ep}(t) - \mathcal{R}_l^{ep}(t)} & O.W, \end{cases} \quad (13)$$

where $\mathcal{R}(s, a)$ is the immediate reward, \mathcal{R}^{ep} is the sum of rewards in the current episode (episode reward), $\mathcal{R}_u^{ep}(t)$ is the minimum value of episode reward until now, and $\mathcal{R}_l^{ep}(t)$ is the maximum value of episode reward until now. The potential function discourages unproductive states, reinforces positive rewards, and indicates the significance of negative rewards. This dynamic adjustment ensures continuous improvement and efficient exploration.

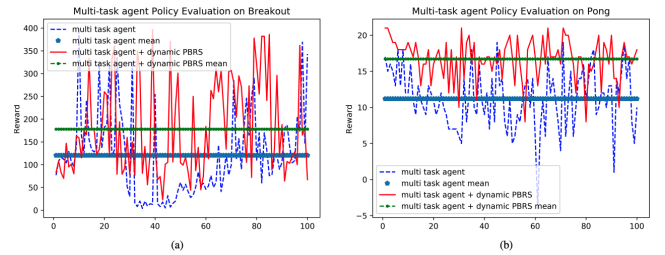


Figure 15: Results of PBRS on Pong and Breakout, [46, Figure 5].

Evaluations during learning and final policy assessments show that this method competes well with baseline methods, particularly in multitasking scenarios, thus advancing techniques for speeding up RL algorithms and improving adaptability in complex environments.

1) Theoretical foundations for Multi-Agent Systems (MAS)

To investigate the theoretical implications of potential-based reward shaping in multi-agent systems, this research [20] extends previous findings, demonstrating that this technique maintains equivalence to Q-table initialization and does not affect the Nash Equilibria of the underlying stochastic game. Crucially, the study empirically reveals that potential-based shaping influences exploration, potentially leading to different converged joint policies. While the research focuses on fully observable domains, it highlights the potential of potential-based reward shaping for incorporating heuristic knowledge into multi-agent learning. The authors suggest that this technique can increase the likelihood of converging to a higher global utility and reduce convergence time, potentially mitigating the risks associated with unintended cyclical policies.

2) PBRS-MAXQ-0 method

Potential Based Reward Shaping (PBRS) and MAXQ are two extensively utilized techniques in reinforcement learning. [47] introduced PBRS-MAXQ-0, a novel algorithm that merges these methods within a hierarchical reinforcement

learning (HRL) framework. PBRs-MAXQ-0 seeks to integrate heuristics into HRL tasks both effectively and efficiently, offering theoretical convergence guarantees under specific conditions, independent of additional rewards applied. Evaluations underscore several benefits: with appropriate heuristics, PBRs-MAXQ-0 notably accelerates convergence relative to the standard MAXQ-0 algorithm and competes well with other advanced MAXQ-based methods. Importantly, even with misleading heuristics, PBRs-MAXQ-0 shows resilience, eventually achieving convergence after prolonged learning periods, as illustrated in Figure 16.

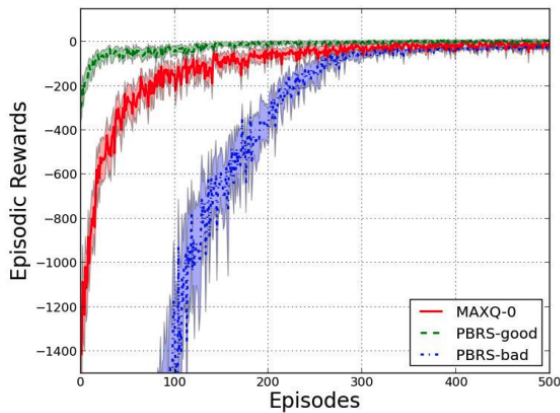


Figure 16: Performances of PBRs-MAXQ-0 in the Fickle Taxi problem, where PBRs-MAXQ-0 with reasonable heuristics (denoted by PBRs-good) and with misleading heuristics (denoted by PBRs-bad) [47, Figure 2].

However, integrating PBRs into MAXQ presents challenges, such as optimizing heuristic values and ensuring robust convergence across diverse environments. Fine-tuning PBRs parameters and maintaining heuristic accuracy are essential for maximizing the algorithm's efficacy across various HRL scenarios.

3) Potential-Based Advice

Potential-based shaping functions ensure that policies learned with shaped rewards remain effective in the original MDP, maintaining near-optimal policies [11]. On the other hand, Reward shaping involves augmenting the reward function of MDP to accelerate learning by providing additional guidance beyond the intrinsic rewards of the MDP.

This paper [48] presents a novel framework for expressing arbitrary reward functions as potential-based advice within the context of reinforcement learning (RL). This method ensures policy invariance by learning an auxiliary value function, derived from a modified version of the original reward function. The potential-based approach facilitates efficient encoding of behavioral domain knowledge, leading to significant improvements in learning speed compared to existing methods. Notably, the framework introduces minimal computational overhead, as maintaining the auxiliary value function requires only linear time and space complexity.

While the proposed method demonstrates theoretical soundness, it currently lacks practical applications and specific algorithms. The paper primarily focuses on theoretical concepts, leaving further development of practical implementations for future research. The authors highlight the challenges associated with different reward shaping approaches: while potential-based methods offer guarantees, they often require extensive domain knowledge for effective implementation; auxiliary task-based methods offer flexibility but can become complex as the number of auxiliary tasks increases; and intrinsic motivation methods while promising for encouraging exploration, can be sensitive to parameter tuning.

The authors conclude that effective reward shaping requires a nuanced understanding of the specific problem domain and a careful balance between theoretical soundness and practical considerations. Future research should prioritize the development of more automated and robust reward shaping techniques to advance the field of RL.

4) PBRs in episodic reinforcement learning

PBRs in episodic RL, explored by [49], sheds light on its applications in model-free, model-based algorithms, and multi-agent RL. It examines reward shaping in episodic tasks like games, revealing insights: potential-based shaping alters equilibria in stochastic games, introduces new equilibria with non-zero terminal state potentials, and reevaluates its role in PAC-MDP learning. It challenges the need for admissible potential functions, proving $\forall s \in \text{Unkown}, \Phi(s) \geq 0$ ensures optimistic exploration. The study provides analytical justification for PBRs, crucial in episodic RL with distinct initial and terminal states, emphasizing The potential role in enhancing learning efficiency.

5) Constrained RL with potential-based reward functions (PBRF)

To generate safety-oriented aspects of reward functions from verified hybrid systems models [50] proposed an approach of using logically constrained RL to integrate formal methods and RL. Demonstrated on a standard RL environment for longitudinal vehicle control, this method showed faster convergence during training with augmented reward functions, particularly with logically constrained and potential-based reward functions (PBRF). The study found that partly auto-generated reward functions produced agents that generally maintained the safety level of hand-tuned reward functions, and reward scaling could emphasize certain aspects of the generated rewards. The training process was evaluated in terms of the number of epochs until convergence and the average accumulated reward across evaluation periods.

6) Difference Rewards incorporating Potential-Based Reward Shaping (DRIP) and Counterfactuals as Potential (CaP)

DRIP is introduced as a novel reward shaping technique for multi-agent reinforcement learning [51]. DRIP combines difference rewards, which incentivize agents to contribute to

the overall system performance, with potential-based reward shaping. Potential-based shaping (see Equation 15) accelerates learning and maintains desired Nash equilibria by modifying the reward function using a potential function derived from domain-specific knowledge. While effective, DRiP requires a carefully designed potential function based on deep domain understanding, which can be challenging and time-consuming to obtain. CaP, on the other hand, automatically generates a dynamic potential function, eliminating the need for manual design and guaranteeing stable Nash equilibria. Although both CaP and DRiP capture similar knowledge, combining them doesn't provide extra benefits and can even negatively impact performance. For applications requiring theoretical guarantees, CaP is preferred; for performance priority, DRiP is recommended, especially when domain knowledge is readily available. The work [51] tested these techniques in various domains, showcasing DRiP's consistent outperformance in accelerating learning and achieving better policies.

H. DYNAMIC POTENTIAL-BASED REWARD SHAPING (DPBRS)

For improving reinforcement learning in single and multi-agent systems, this method introduces a dynamic potential-based function to perform the reward shaping, and to guide agents without affecting the optimal policy [52]. This function changes over time, adapting to the current state of the agents and the environment. The idea can be represented as follows through the formula of Q-Learning:

$$Q(s, a) \leftarrow Q(s, a) + \alpha [r + F(s, s') + \gamma \max_{a'} Q(s', a') - Q(s, a)], \quad (14)$$

where $F(s, s')$ is the general form of any state-based shaping reward:

$$F(s, s') = \gamma \Phi(s') - \Phi(s). \quad (15)$$

For the dynamic potential based, we can extend Equation 15 and include t ; the agent's arrival time in the previous state s , and t' is its arrival time at the current state s' (i.e., $t < t'$):

$$F(s, t, s', t') = \gamma \Phi(s', t') - \Phi(s, t). \quad (16)$$

The DPBRS maintains existing guarantees, its advantages include its ability to improve decentralized multi-agent learning through carefully designed, domain-specific potential functions. These functions foster cooperation by addressing challenges like coordination, information asymmetry, and scalability. While the potential benefits of this approach include faster convergence, enhanced cooperation, and greater robustness, the method lacks comparisons with other algorithms and lacks examples in robotics or highly non-linear systems, where it was tested on a 2-D maze for Single-Agent learning as we see in Figure 17, and on Boutilier's Coordination Game for Multi-Agent learning.

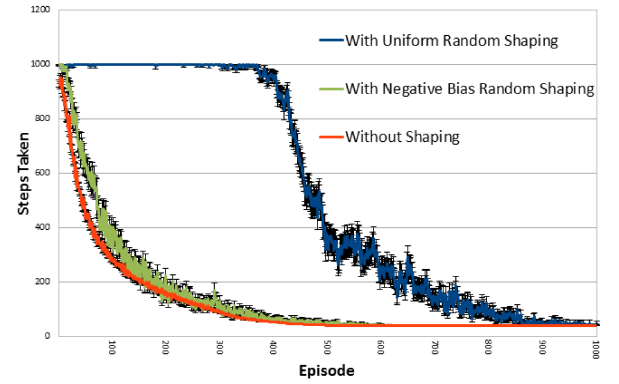


Figure 17: DPBRS Single-Agent Maze Results [52, Figure 2].

I. UPPER CONFIDENCE BOUND VALUE ITERATION (UCBVI)

Well-designed reward shaping can significantly improve sample complexity and enhance exploration, leading to better performance compared to uninformed exploration strategies. This is demonstrated in the following work, which investigates the benefits of reward shaping in reinforcement learning (RL) through a combination of theoretical analysis and experimental validation.

1) UCBVI

The UCBVI algorithm [53] is a method for shaping rewards that extends the Value Iteration technique, ensuring that the resulting value function serves as an upper confidence bound (UCB) with a high probability on the optimal value function. It is important to note that this algorithm bears similarity to model-based interval estimation (MBIE-EB) [54]. The authors present proofs for their theorems and introduce several modified versions, including UCBVI-CH, which incorporates Chernoff Hoeffding's concentration inequality. However, no empirical results are provided.

2) UCBVI-shaped

A modified version of the UCBVI algorithm [53] incorporates reward shaping to modify bonuses and value function projection [55]. Their analysis reveals that reward shaping can effectively prune irrelevant parts of the state space, sharpening optimism in a task-directed manner. This reduction in state space dependence leads to improved regret bounds and sample complexity benefits while retaining asymptotic performance.

The research was conducted on maze environments, comparing the performance of UCBVI-shaped with the standard UCBVI algorithm. Their findings show that reward shaping can enhance the performance of UCBVI, particularly in environments where agents are prone to wasting time exploring irrelevant areas.

This work contributes to a deeper understanding of reward shaping's impact on sample complexity and its potential to guide exploration in a more efficient manner. It encourages

future research to incorporate reward shaping more formally into sample complexity analysis, moving away from reward-agnostic approaches.

J. DIFFERENCE REWARDS (D)

For single agent systems, difference rewards enhance the original reward function by incorporating a difference term that measures the discrepancy between the agent's current state and a designated reference state. This difference term serves as a guiding force, encouraging the agent to transition towards the reference state, which could be a desired goal state or a state representing a desirable condition. The modified reward function takes the form:

$$R'(s, a) = R(s, a) + \gamma[D(s', r) - D(s, r)], \quad (17)$$

where $R(s, a)$ is the original reward for taking action a in state s , $R'(s, a)$ is the modified reward, γ is a discount factor, $D(s, r)$ is the difference function, which measures the difference between the current state s and the reference state r , and s' is the next state after taking action a .

The simplicity of difference-based reward shaping makes it adaptable to various tasks and environments. However, its effectiveness hinges on a carefully chosen reference state, and in complex scenarios, it may not provide as comprehensive information as alternative methods.

For Multi Agents Systems (MAS) We define Difference Rewards Di as [56], and [57] defined it:

$$Di(s_i, a_i) = G(s, a) - G(s - i \cup s_{c_i}, a - i \cup a_{c_i}). \quad (18)$$

The global system utility, denoted as $(G(s, a))$, depends on the system state (s) and the joint action (a). A counterfactual term, $(G(s - i \cup s_{c_i}, a - i \cup a_{c_i}))$, estimates the global utility without agent (i)'s contribution, considering states and actions excluding agent (i) and fixed states and actions independent of agent (i). The main idea of Di in MAS is to encourage agents to contribute to the overall system utility by providing a reward that reflects the difference between the system's performance with and without the agent's contribution.

1) Individual and Difference Rewards

RL can be used to find this optimal strategy in route choice problem in road networks, and we can test two different kinds of rewards. Individual rewards focus on the individual agent's benefit, leading to a selfish approach that can exacerbate congestion. Difference rewards D , on the other hand, promote system-wide optimization, leading to a more efficient and equitable allocation of traffic.

This work [58] explores two reinforcement learning approaches, IQ-learning and DQ-learning, for solving the route choice problem in road networks. Both use the same configuration but differ in their reward function. IQ-learning uses individual utility as the reward function, while DQ-learning uses a difference reward function that aims to maximize system utility. The difference reward function incentivizes agents to choose routes that minimize overall travel time, leading to

a more balanced distribution of traffic across the network. Experiments show that DQ-learning significantly improves travel time compared to IQ-learning, successive averages, incremental assignment, and all-or-nothing assignment. The study uses statistical testing with Gaussian distribution and confidence intervals to demonstrate the significance of DQ-learning's improvement. However, there are concerns about generalizing these results to other domains due to the specific focus on traffic assignment and the inherent assumptions about driver behavior in the model.

K. KNOWLEDGE-BASED MULTI-OBJECTIVE MULTI-AGENT REINFORCEMENT LEARNING (MOMARL)

Reward shaping techniques Difference Rewards and potential-based reward shaping are popular methods for reward shaping. The research cited as [57] compares and evaluates these techniques in two studies, one using a novel benchmark problem called the Multi-Objective Beach Problem Domain (MOBPD) and the other using the Dynamic Economic Emissions Dispatch problem.

The results demonstrate that both D and PBRS can effectively guide agents towards Pareto optimal solutions in MOMARL domains, confirming that appropriate reward shaping is crucial in these settings. However, both techniques have limitations: D requires global knowledge of the system and the mathematical form of the evaluation function, while PBRS necessitates handcrafted potential functions which can be time-consuming and challenging to design effectively. Furthermore, the study found that D generally outperforms PBRS in terms of performance, especially when the required constraints are met.

The study concludes that the optimal technique for a given MOMARL application depends on specific constraints, such as the availability of system knowledge, bandwidth for communication, and the designer's expertise. The work establishes the MOBPD as a benchmark for future MOMARL research and highlights the need for further investigation into the design and application of these reward shaping methods.

If we consider every agent to be an individual learner,

L. PLAN BASED METHODS

Plan-based methods combine the advantages of model-based planning and RL. These methods allow agents to simulate "what-if" scenarios and generate policy updates without causing state changes in the environment. Imagine it as agents using their imagination to explore different paths before taking real actions.

Plan-based reward shaping, as discussed by [59], utilizes domain knowledge to accelerate the convergence and improve the optimality of RL methods. It effectively addresses exploration challenges when integrated with model-free approaches. While model-based methods can mitigate these issues independently, the addition of reward shaping consistently boosts learning efficiency. The study introduces a STRIPS-based reward shaping technique, utilizing a Stanford Research Institute Problem Solver (STRIPS) representa-

tion of actions and goals through preconditions and effects. Compared to traditional MDP-based approaches, STRIPS-based shaping directs agents more effectively toward optimal policies. It suggests refining MDP-based reward shaping by focusing on the best path derived from the STRIPS plan rather than the entire state space's value function. Evaluations demonstrate the robustness of STRIPS-based shaping against plan knowledge errors, highlighting its superiority in enhancing policy quality and convergence speed. This approach provides a viable alternative to MDP-based methods, offering domain experts flexibility in expressing and utilizing domain knowledge.

Similarly [60] compared two reward shaping methods: plan-based and abstract MDP. The plan-based method supplements an agent's actions with additional rewards based on predefined plans. In contrast, the abstract MDP approach involves solving a higher-level MDP to shape behavior using its value function. The comparison evaluates these methods in terms of total reward, convergence speed, and scalability to complex environments. In large-scale settings, the plan-based method outperforms abstract MDP by offering detailed, sequential guidance to agents. However, in multi-agent scenarios with conflicting goals, abstract MDP excels due to its ability to manage coordination challenges better than plan-based methods. This highlights the importance of selecting reward shaping methods based on specific environmental characteristics to optimize agent performance effectively.

M. BELIEF REWARD SHAPING (BRS)

Belief Reward Shaping (BRS) [61] enhances reinforcement learning by incorporating prior knowledge about the environment's reward structure. It augments the standard reward signal with "belief rewards" derived from a Bayesian framework, reflecting prior assumptions or beliefs about the distribution of rewards. This approach diverges from traditional methods by avoiding sole reliance on environmental interactions for learning the reward structure. BRS directly provides shaping rewards based on both the state and action, addressing a limitation of potential-based reward shaping (PBRS), which only considers the state.

By integrating these prior beliefs, the authors suggest that an agent's reward should be influenced not only by external environmental sensations but also by its internal belief system. This belief system, represented by an internal critic, is dynamically updated based on both prior beliefs and environmental sensations. The critic then provides an updated reward to the agent, taking into account both its prior beliefs and the current sensory information. BRS leverages Bayesian methods to specify prior beliefs on the environment's reward distribution, demonstrating that more complex and accurate prior beliefs lead to improved agent performance. Theoretical guarantees for BRS's consistency when augmenting Q-learning are provided, but these guarantees hold only if the true environment reward distribution falls within the critic's hypothesized set of models.

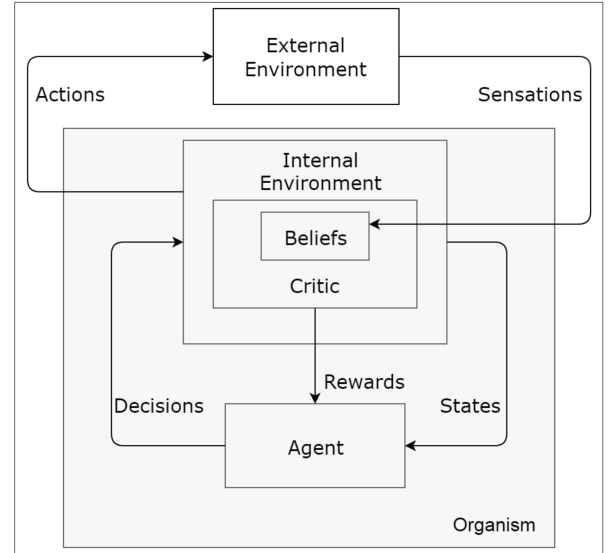


Figure 18: BRS and the relationship between the agent and the environment [61, Figure 1].

N. BI-LEVEL OPTIMIZATION OF PARAMETERIZED REWARD SHAPING (BIPARS)

BiPaRS [10] is a novel approach to address the challenge of effectively utilizing shaping rewards in reinforcement learning. Recognizing that human-designed reward functions can be imperfect due to cognitive biases, BiPaRS employs a bi-level optimization framework. This framework learns to adaptively utilize shaping rewards by optimizing a parameterized weight function for the shaping reward at the upper level, while simultaneously optimizing the policy using the shaped reward at the lower level. This reward shaping technique modifies the original reward function by adding a parameterized shaping term. This technique is represented by the equation:

$$\tilde{r}(s, a) = r(s, a) + z\phi(s, a)f(s, a), \quad (19)$$

where $\tilde{r}(s, a)$ denotes the shaped reward for taking action a in state s . $r(s, a)$ is the original reward function. $z\phi(s, a)$ is the shaping weight function, which assigns a weight to each state-action pair and is parameterized by ϕ , and $f(s, a)$ represents the shaping reward function and performs a bi-level optimization for $\tilde{r}(s, a)$, which is a nested optimization problem.

This allows BiPaRS to identify and exploit beneficial shaping rewards while mitigating the impact of unhelpful or even detrimental ones. The paper demonstrates BiPaRS's effectiveness through experiments on cartpole and MuJoCo tasks, showing its ability to leverage beneficial shaping and suppress negative influences. However, its performance on MuJoCo tasks may not yet match the cutting edge in the DRL domain. BiPaRS holds promise for adapting and shaping rewards dynamically, but further research is needed to enhance its performance and explore its broader applicability.

O. META-REWARD-NET (MRN)

Bi-level optimization, as we've mentioned can be an efficient tool for Reward Engineering, and when combined with reward learning and limited human feedback, it can generate an accurate Q-table, compared with the State-of-The-Art methods [62]. This work proposes MRN, a new framework for preference-based reinforcement learning that leverages human feedback to improve learning efficiency. MRN integrates bi-level optimization to learn both reward functions and policies simultaneously. This approach allows the agent to learn effectively even with limited human input, outperforming previous methods in a variety of simulated robotic tasks. The authors argue that traditional reward shaping methods are inadequate for robust and efficient reinforcement learning. On the other hand, the need for human-guided reward engineering that prioritizes exploration, stability, and context-specific design, can be considered as a drawback, because it will depend on the human's query quality. The paper highlights the importance of iterative refinement and human feedback in overcoming challenges like sparse, delayed, and noisy rewards. The research focuses on robotic simulations and also mentions that the code for MRN is available for others to implement and test.

P. OTHER METHODS

Various innovative reward-shaping frameworks enhance RL approaches across diverse challenges and environments. One approach employs barrier functions (BFs) to ensure safe RL agent behavior, demonstrating accelerated convergence and reduced actuation effort in simulations and real-world deployments [63]. Another method utilizes natural language instructions to generate dense rewards, improving RL efficiency while posing challenges in natural language processing integration [64]. Additionally, temporal logic-based reward shaping for average-reward RL leverages formal logic to enhance learning rates [65]. Addressing RL over-optimization, a framework penalizes rewards based on uncertainties, while another focuses on using reward expectations to stabilize and accelerate convergence in uncertain RL environments [13], [66].

In a reward planning scheme that relies on the tessellation of the state space, and dividing the tasks into sub-tasks, then planning the agent's behavior thought the state space, the work [67] proposes a novel reward planning method, "Greedy Divide and Conquer" this method is designed for underactuated robotic systems operating under parameter uncertainty. The method utilizes a single reinforcement learning (RL) agent to address the challenge of swing-up and balancing a Pendubot system with uncertain parameters. This approach allows the agent to adapt to parameter uncertainty and achieve faster convergence compared to using a non-shaped reward function. The method was tested on a Pendubot system with uncertainties up to 200-300% in various parameters, achieving an average 95% accuracy across trials. The method's strengths lie in its ability to handle significant uncertainties and design reward functions systematically by breaking down

complex tasks into sub-problems. It can also be used to avoid specific actions or behaviors during task execution. However, the method's downside is the potential for time-consuming development of the reward function, requiring a thorough understanding of the system.

V. APPLICATIONS IN ROBOTICS AND OTHER DOMAINS

Discuss the specific challenges and opportunities of reward engineering in robotics, review notable robotic applications, touch upon other relevant domains, and relate the applications back to the techniques discussed in Section 3. This section can address[QA2] in the context of specific applications.

A. REWARD SHAPING FOR SAFE AND EFFICIENT HUMAN-ROBOT COLLABORATION

To enhance safe interactions between humans and robots in industrial settings [68] presented a deep reinforcement learning (DRL) approach, the study focused on enabling robots to autonomously learn policies that minimize risks and optimize task efficiency. The framework of Human Robot Collaboration (HRC) is illustrated in Figure 19. Central to the approach is the development of the Intrinsic Reward-Deep Deterministic Policy Gradient (IRDDPG) algorithm, which integrates deterministic policy gradient (DPG) methods with an optimized reward function combining intrinsic and extrinsic rewards.

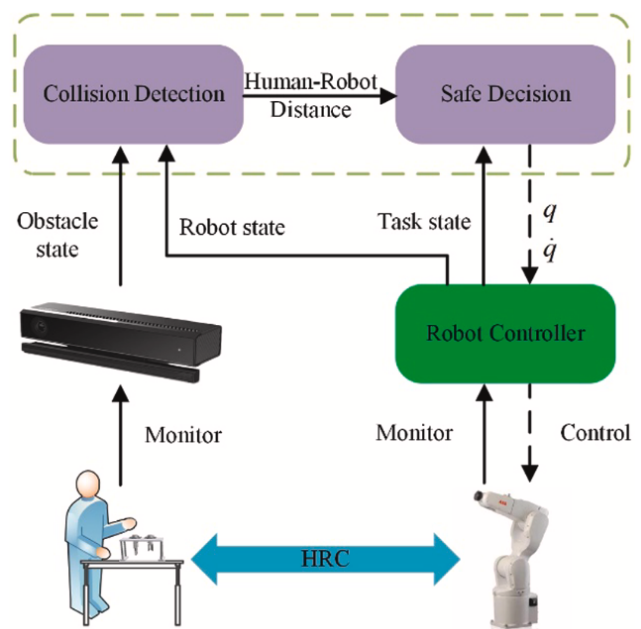


Figure 19: The framework of collision avoidance in safe HRC, [68, Figure 2].

Experimental results demonstrate that IRDDPG enables robots to learn collision-avoidance policies effectively, ensuring safety in human-robot interactions while achieving task objectives. This method shows better results than manually designed reward functions by dynamically adjusting rewards

during learning, it also demonstrated the efficacy of tailored reward structures in guiding agent behavior towards desired safety and efficiency outcomes, which improved safety through autonomous collision avoidance and task completion efficiency, yet challenges may arise in the complexity of reward function optimization and computational demands.

In the same context, [69] enhances DRL for domestic robots performing household tasks like organizing objects with a robotic arm by exploring the application of interactive feedback. The study evaluates three learning methods: autonomous DRL, agent-assisted interactive DRL (agent-IDRL), and human-assisted interactive DRL (human-IDRL). The schematic is illustrated in Figure 20, comparing their effectiveness in accelerating learning and reducing errors.

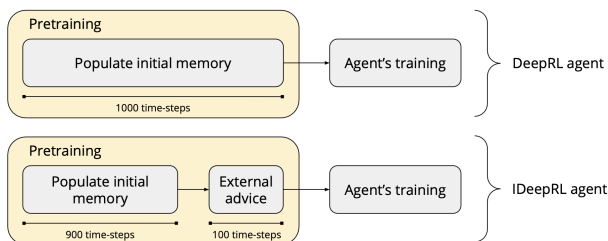


Figure 20: The learning process for autonomous and interactive agents. Both approaches include a pretraining stage comprising 1000 actions. For interactive agents, the final part of the pretraining is performed using external advice instead of random actions, [69, Figure 2].

Results demonstrate that interactive feedback from both human trainers and artificial agents significantly improves performance metrics such as total collected rewards and task completion speed compared to autonomous DeepRL. Human feedback exhibits slightly superior results in certain scenarios, highlighting the value of incorporating human expertise into robotic learning processes. This approach emphasizes the optimization of feedback strategies to guide agent behavior towards achieving specific task objectives efficiently, which enhances learning efficiency and effectiveness through interactive feedback mechanisms. However, challenges may involve optimizing these feedback strategies for diverse real-world applications.

VI. SIM-TO-REAL IN REWARD ENGINEERING/SHAPING

Reward shaping and engineering are essential for effectively transferring DRL and RL policies from simulations to real-world scenarios. It facilitates this transition by encouraging behaviors that are robust in both simulated and real environments. The connections between various methods for transferring from simulation to reality are illustrated in Figure 22.

The shift of DRL policies from simulation to real-world robotic applications is challenging due to discrepancies between the two environments, compounded by concerns about safety, cost, and efficiency. Techniques to address this per-

formance gap include domain adaptation, domain randomization, and progressive neural networks (PNNs) [70]–[72]. Domain adaptation aims to minimize the differences between simulated and real environments, as illustrated in the upper Figure 21. On the other hand domain randomization enhances policy robustness through varied simulation parameters, illustrated in the lower left Figure 21, PNNs and meta-reinforcement learning further improve transfer efficiency by leveraging knowledge from previous tasks, illustrated in the lower right Figure 21.

To address these challenges, [73] introduced the Consensus-based Sim-And-Real DRL algorithm (CSAR), which exemplifies reward shaping by optimizing policies suitable for both simulation and real contexts, ensuring consistent reward structures throughout different training stages. The CSAR algorithm integrates consensus-based training with DRL in both simulated and real environments, optimizing policies by concurrently training agents in both settings. This consensus-based method, which runs simulated and real agents in parallel, mitigates transition issues and reduces training time. Results indicate that an increased number of agents in simulation benefits both sim-and-real training, as illustrated in Figure 23. Similarly, [74] presents a two-step sim-to-real process that utilizes an intermediate semi-virtual environment. This approach integrates real robot dynamics with simulated sensors and obstacles, as illustrated in Figure 24. This configuration enables the controlled incorporation of real-world complexity while preserving the flexibility of simulation.

Figure 25 shows the computational graph of the method, featuring an environment interaction thread (left) and a model update thread (right). Both threads interact with the replay buffer, necessitating the use of a mutex to prevent conflicts. Fortunately, the environment interaction thread adds an entry at the end of its cycle, while the model updates thread samples from it early on, resulting in a low likelihood of mutual blocking. Moreover, parallel data collection and model updates for real-time fine-tuning allow the RL model to adapt to real-world changes without disrupting operations. Deploying the model at a high inference frequency achieves performance nearly equivalent to simulation, even without initial fine-tuning.

In the same context, rewarding a cleaning robot for maintaining a mess-free environment can lead to reward hacking [75]. In such scenarios, the robot might disable its vision to avoid detecting messes, cover messes with opaque materials, or hide when humans are around to prevent them from pointing out new types of messes. Reward hacking occurs when agents exploit loopholes in the reward function to achieve high rewards without actually fulfilling the intended tasks.

Integrating reward shaping with advanced techniques like domain adaptation, domain randomization, meta-learning, and consensus-based training is essential for overcoming challenges in transferring DRL and RL policies from simulation to real-world robotics. These approaches collectively strengthen policy robustness and efficiency, facilitating their

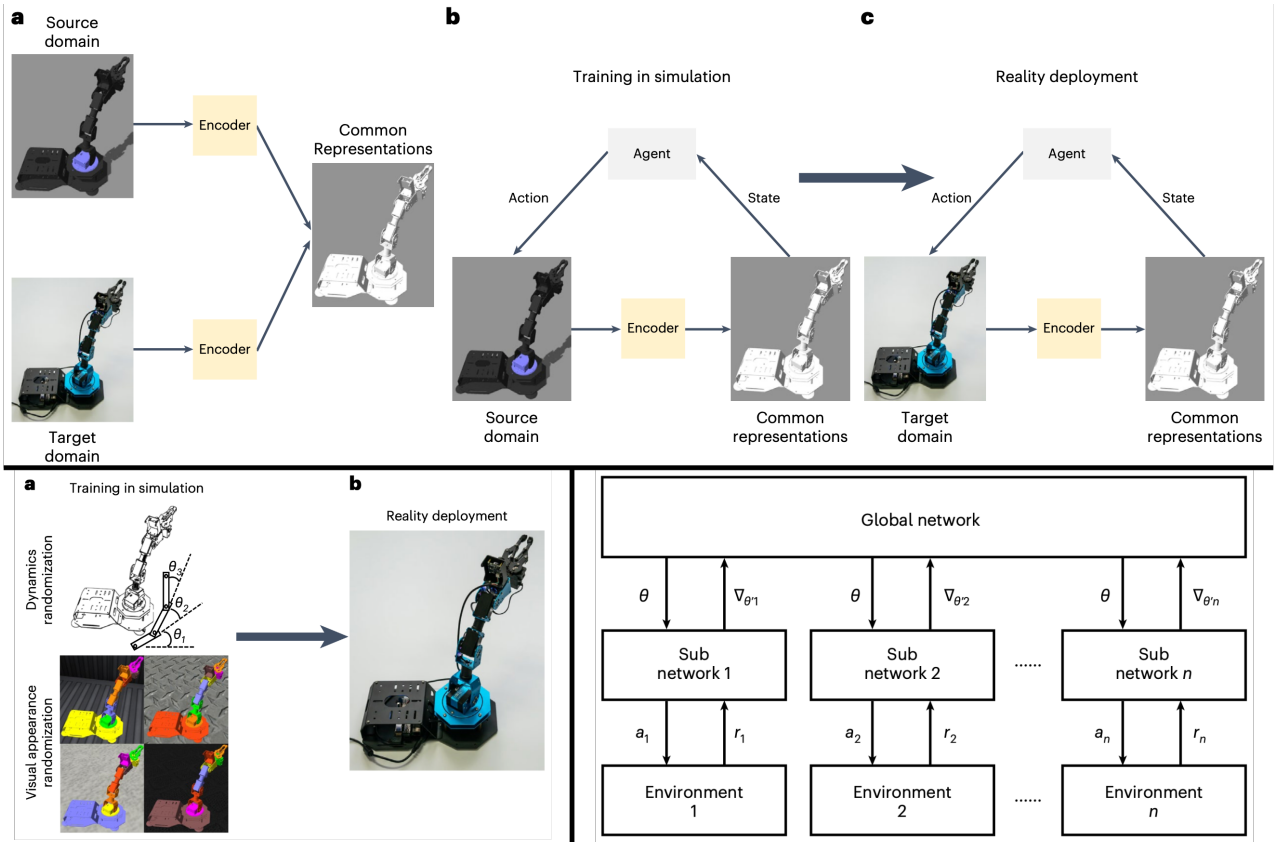


Figure 21: Top: *Domain Adaption* [70, Figure 1]: **a**) An encoder learns to map both the simulated (source) and real (target) environments to a shared state space. **b**) This shared state space is then used to train the policy within the simulation. **c**) The policy trained in the simulation is transferred to the real environment, with states being mapped to the shared representations for further learning.

Bottom Left: *Domain Randomization* [70, Figure 2]: **a**) The agent’s training experience is enhanced by randomizing the physical dynamics and/or visual appearance within simulated environments. **b**) The simulation-trained policy is expected to perform well in real-world tasks after a one-shot transfer.

Bottom Right: *Meta RL Learning* [70, Figure 4]: The overall policy network is transferred to a set of subpolicy networks, which interact with a batch of sampled meta-training tasks (environments 1, 2, ..., n). The subpolicy network is updated based on rewards from the corresponding task, and the global network is optimized using the parameters of the subpolicy networks.

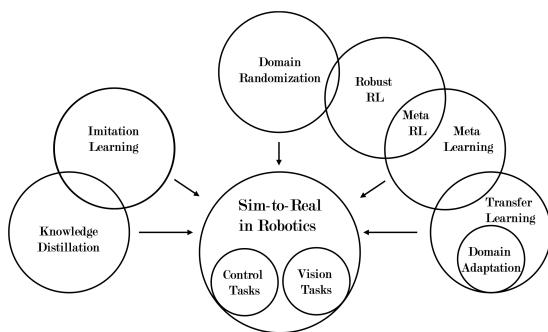


Figure 22: Various techniques for transferring from simulation to reality in deep reinforcement learning and their interconnections [71, Figure 2]

effective deployment in real-world applications. Continuous enhancements in simulation quality, efficient learning strategies, and well-defined reward structures are pivotal for advancing the field and achieving dependable performance of DRL and RL systems in real-world settings. Furthermore, ensuring effective reward shaping is crucial to prevent reward hacking, ensuring that rewards promote desirable behaviors in both simulated and real environments.

VII. ADVANTAGES AND DISADVANTAGES OF REWARD ENGINEERING: IS IT THE FUTURE?

Reward shaping/engineering is a powerful technique used to enhance the performance of RL agents. It can significantly improve the effectiveness of RL algorithms in several ways. By providing additional information through shaping, agents can learn optimal policies much faster, and this leads to accelerated learning. This is especially beneficial in complex

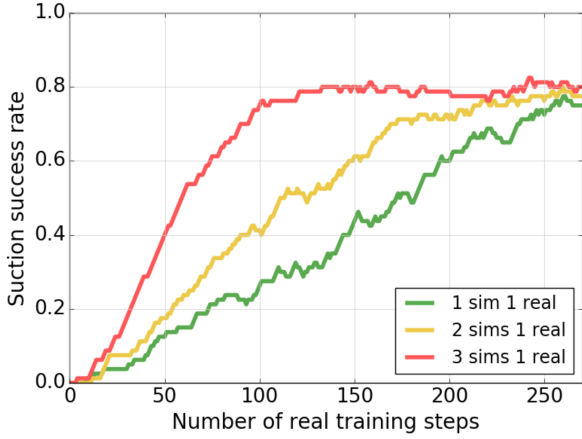


Figure 23: Suction success rates of the real robot with a different number of simulated robots using Sim-and-Real strategy [73, Figure 6].




Figure 24: The evaluation maps [74, Figure 3]

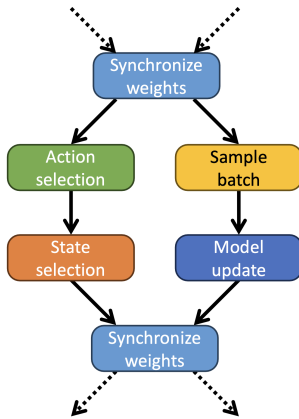


Figure 25: Environment interaction thread (left) and a model update thread (right) [74, Figure 1]

environments where traditional RL methods might struggle to converge quickly. This is highlighted in discussions of STRIPS-based shaping, UCBVI-shaped, DRiP, PBRS, and other methods. Reward shaping can incentivize agents to explore more effectively, particularly in environments with sparse rewards, and therefore improve exploration. This allows agents to discover valuable states and actions that might otherwise go unnoticed. Reward shaping can sometimes lead to agents achieving higher performance levels than they would without shaping, as was discussed in Section IV, and other methods demonstrating performance gains.

Reward shaping can improve the robustness of learned policies, making them less susceptible to noise, uncertainty,

or changes in the environment.

Despite its numerous benefits, reward shaping also poses certain challenges, many reward shaping methods rely heavily on domain knowledge to design effective shaping functions. This can be a significant limitation, especially in complex or unfamiliar environments where expert knowledge might be scarce or difficult to acquire.

Furthermore, computational complexity could be considered a disadvantage for some reward shaping methods, especially those involving potential-based shaping, which can increase the computational burden on the learning algorithm. This can be a concern in real-time applications or with limited computational resources, but this drawback is only for some methods, other methods can decrease the computational complexity. The effectiveness of many reward shaping techniques depends on carefully tuned parameters, although some approaches IV-N can tune their parameter, but finding the optimal parameter settings can be a challenging process, and incorrect parameter values can negatively impact performance. Finally, some reward shaping techniques require careful designing and shaping reward functions, and this can be a time-intensive process.

In conclusion, reward shaping is a valuable tool in the reinforcement learning toolbox. While it offers many advantages, careful consideration must be given to its potential drawbacks. Choosing the right reward shaping method is crucial for successful application.

VIII. OPEN CHALLENGES AND FUTURE DIRECTIONS

Future research directions in robotic manipulation, pivotal across sectors such as manufacturing, healthcare, and space exploration, especially in Industry 4.0 contexts, involve enhancing sample efficiency, bolstering algorithm robustness, promoting human-robot collaboration, and investigating advanced neural network architectures [76]. The importance of reward shaping and engineering in optimizing learning outcomes within Deep Reinforcement Learning (DRL) underscores potential avenues for further advancements in this vital domain.

For tasks involving image processing or complex sensor data where designing rewards is difficult, we find that end-to-end RL approaches can tackle these tasks, such as the research [14] which uses end-to-end RL combining deep neural networks with Soft Actor-Critic (SAC), enabling robots to learn from a limited number of successful demonstrations. This reduces the reliance on explicit reward functions, making it particularly beneficial for tasks involving image processing or complex sensor data where designing rewards is difficult. The method was evaluated on robotic manipulation tasks, such as picking and placing objects, and the authors claim to achieve high success rates and accuracy (100%).

However, the research has several limitations. Firstly, the robot's behavior may not always be optimal, potentially leading to sub-optimal solutions or inefficient movements. Secondly, the method is not robust to uncertainties in the environment, such as variations in object placement or lighting con-

ditions. Thirdly, the reliance on user queries can potentially be time-consuming, especially for tasks with a large number of possible actions or complex decision-making processes.

IX. CONCLUSION

This work provides a comprehensive review of reward shaping techniques within the field of RL. A detailed taxonomy of methods is presented encompassing descriptions, advantages, disadvantages, application domains, and relevant metrics. This analysis addresses open challenges and future directions, offering valuable insights for future research and development.

Our findings highlight the significant benefits of reward shaping, including its ability to highly expedite learning, manage uncertainties, bolster robustness, enhance system outcomes, and increase the success rate of RL agents. While reward shaping demonstrably improves learning outcomes, its implementation can be complex and time-consuming, particularly in scenarios with significant domain complexity. Automated parameter tuning methods mitigate this challenge to some extent. Further research is required to evaluate reward shaping techniques in real-world applications and explore the potential of incorporating human feedback into the training process.

This work aims to establish a comprehensive resource for understanding reward shaping in RL. This resource facilitates the selection of appropriate methods based on the specific problem, enabling researchers and practitioners to effectively leverage the power of reward shaping for improved RL performance.

References

- [1] Judy Cameron and W David Pierce. Reinforcement, reward, and intrinsic motivation: A meta-analysis. *Review of Educational research*, 64(3):363–423, 1994.
- [2] Rati Devidze, Goran Radanovic, Parameswaran Kamlaruban, and Adish Singla. Explicable reward design for reinforcement learning agents. *Advances in neural information processing systems*, 34:20118–20131, 2021.
- [3] Jonas Eschmann. Reward function design in reinforcement learning. *Reinforcement Learning Algorithms: Analysis and Applications*, pages 25–33, 2021.
- [4] Leslie Pack Kaelbling, Michael L Littman, and Andrew W Moore. Reinforcement learning: A survey. *Journal of artificial intelligence research*, 4:237–285, 1996.
- [5] Richard S Sutton and Andrew G Barto. *Reinforcement learning: An introduction*. MIT press, 2018.
- [6] Daniel Dewey. Reinforcement learning and the reward engineering principle. In *2014 AAAI Spring Symposium Series*, 2014.
- [7] Norman M White. Reward or reinforcement: what's the difference? *Neuroscience & Biobehavioral Reviews*, 13(2-3):181–186, 1989.
- [8] Kenji Doya. Reinforcement learning in continuous time and space. *Neural computation*, 12(1):219–245, 2000.
- [9] Adam Daniel Laud. *Theory and application of reward shaping in reinforcement learning*. University of Illinois at Urbana-Champaign, 2004.
- [10] Yujing Hu, Weixun Wang, Hangtian Jia, Yixiang Wang, Yingfeng Chen, Jianye Hao, Feng Wu, and Changjie Fan. Learning to utilize shaping rewards: A new approach of reward shaping. *Advances in Neural Information Processing Systems*, 33:15931–15941, 2020.
- [11] Andrew Y Ng, Daishi Harada, and Stuart Russell. Policy invariance under reward transformations: Theory and application to reward shaping. In *Icml*, volume 99, pages 278–287, 1999.
- [12] Elizabeth Bates, Vasilios Mavroudis, and Chris Hicks. Reward shaping for happier autonomous cyber security agents. *Proceedings of the 16th ACM Workshop on Artificial Intelligence and Security*, 2023.
- [13] Yuanzhao Zhai, Han Zhang, Yu Lei, Yue Yu, Kele Xu, Dawei Feng, Bo Ding, and Huaimin Wang. Uncertainty-penalized reinforcement learning from human feedback with diverse reward lora ensembles. *arXiv preprint arXiv:2401.00243*, 2023.
- [14] Avi Singh, Larry Yang, Kristian Hartikainen, Chelsea Finn, and Sergey Levine. End-to-end robotic reinforcement learning without reward engineering. *arXiv preprint arXiv:1904.07854*, 2019.
- [15] Ana C Tenorio-Gonzalez, Eduardo F Morales, and Luis Villasenor-Pineda. Dynamic reward shaping: training a robot by voice. In *Advances in Artificial Intelligence—IBERAMIA 2010: 12th Ibero-American Conference on AI, Bahía Blanca, Argentina, November 1-5, 2010. Proceedings 12*, pages 483–492. Springer, 2010.
- [16] Pavel Osinenko, Dmitrii Dobriborsci, and Wolfgang Aumer. Reinforcement learning with guarantees: a review. *IFAC-PapersOnLine*, 55(15):123–128, 2022.
- [17] Matthew J Page, Joanne E McKenzie, Patrick M Bossuyt, Isabelle Boutron, Tammy C Hoffmann, Cynthia D Mulrow, Larissa Shamseer, Jennifer M Tetzlaff, and David Moher. Updating guidance for reporting systematic reviews: development of the prisma 2020 statement. *Journal of clinical epidemiology*, 134:103–112, 2021.
- [18] David Silver, Satinder Singh, Doina Precup, and Richard S Sutton. Reward is enough. *Artificial Intelligence*, 299:103535, 2021.
- [19] Peter Vamplew, Benjamin J Smith, Johan Källström, Gabriel Ramos, Roxana Rădulescu, Diederik M Roijers, Conor F Hayes, Fredrik Heintz, Patrick Mannion, Pieter JK Libin, et al. Scalar reward is not enough: A response to silver, singh, precup and sutton (2021). *Autonomous Agents and Multi-Agent Systems*, 36(2):41, 2022.
- [20] Sam Devlin and Daniel Kudenko. Theoretical considerations of potential-based reward shaping for multi-agent systems. In *Tenth International Conference on*

- Autonomous Agents and Multi-Agent Systems*, pages 225–232. ACM, 2011.
- [21] Kiarash Banihashem, Adish Singla, Jiarui Gan, and Goran Radanovic. Admissible policy teaching through reward design. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 6037–6045, 2022.
- [22] Haoqi Zhang and David C Parkes. Value-based policy teaching with active indirect elicitation. In *AAAI*, volume 8, pages 208–214, 2008.
- [23] Haoqi Zhang, David C Parkes, and Yiling Chen. Policy teaching through reward function learning. In *Proceedings of the 10th ACM conference on Electronic commerce*, pages 295–304, 2009.
- [24] Andrew G Barto, Satinder Singh, Nuttapon Chentanez, et al. Intrinsically motivated learning of hierarchical collections of skills. In *Proceedings of the 3rd International Conference on Development and Learning*, volume 112, page 19. Citeseer, 2004.
- [25] Satinder Singh, Richard L Lewis, and Andrew G Barto. Where do rewards come from. In *Proceedings of the annual conference of the cognitive science society*, pages 2601–2606. Cognitive Science Society, 2009.
- [26] Satinder Singh, Richard L Lewis, Andrew G Barto, and Jonathan Sorg. Intrinsically motivated reinforcement learning: An evolutionary perspective. *IEEE Transactions on Autonomous Mental Development*, 2(2):70–82, 2010.
- [27] Wouter JA van Heeswijk. Natural policy gradients in reinforcement learning explained. *arXiv preprint arXiv:2209.01820*, 2022.
- [28] Jonathan Sorg, Richard L Lewis, and Satinder Singh. Reward design via online gradient ascent. *Advances in Neural Information Processing Systems*, 23, 2010.
- [29] Zeyu Zheng, Junhyuk Oh, and Satinder Singh. On learning intrinsic rewards for policy gradient methods. *Advances in Neural Information Processing Systems*, 31, 2018.
- [30] Mel Vecerik, Todd Hester, Jonathan Scholz, Fumin Wang, Olivier Pietquin, Bilal Piot, Nicolas Heess, Thomas Rothörl, Thomas Lampe, and Martin Riedmiller. Leveraging demonstrations for deep reinforcement learning on robotics problems with sparse rewards. *arXiv preprint arXiv:1707.08817*, 2017.
- [31] Rodolfo Valiente, Behrad Toghi, Ramtin Pedarsani, and Yaser P Fallah. Robustness and adaptability of reinforcement learning-based cooperative autonomous driving in mixed-autonomy traffic. *IEEE Open Journal of Intelligent Transportation Systems*, 3:397–410, 2022.
- [32] Jinggang Wang, Yang Liu, and Bo Li. Reinforcement learning with perturbed rewards. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pages 6202–6209, 2020.
- [33] Shuo Wu, Haoxiang Ma, Jie Fu, and Shuo Han. Robust reward design for markov decision processes. *arXiv preprint arXiv:2406.05086*, 2024.
- [34] Francesco De Lellis, Marco Coraggio, Giovanni Russo, Mirco Musolesi, and Mario di Bernardo. Guaranteeing control requirements via reward shaping in reinforcement learning. *IEEE Transactions on Control Systems Technology*, 2024.
- [35] Woojun Kim, Jeonghye Kim, and Youngchul Sung. Lesson: learning to integrate exploration strategies for reinforcement learning via an option framework. *arXiv preprint arXiv:2310.03342*, 2023.
- [36] Haoran Tang, Rein Houthoofd, Davis Foote, Adam Stooke, OpenAI Xi Chen, Yan Duan, John Schulman, Filip DeTurck, and Pieter Abbeel. # exploration: A study of count-based exploration for deep reinforcement learning. *Advances in neural information processing systems*, 30, 2017.
- [37] Rein Houthoofd, Xi Chen, Yan Duan, John Schulman, Filip De Turck, and Pieter Abbeel. Vime: Variational information maximizing exploration. *Advances in neural information processing systems*, 29, 2016.
- [38] Yan Duan, Xi Chen, Rein Houthoofd, John Schulman, and Pieter Abbeel. Benchmarking deep reinforcement learning for continuous control. In *International conference on machine learning*, pages 1329–1338. PMLR, 2016.
- [39] Rati Devidze, Parameswaran Kamalaruban, and Adish Singla. Exploration-guided reward shaping for reinforcement learning under sparse rewards. *Advances in Neural Information Processing Systems*, 35:5829–5842, 2022.
- [40] Xinran Liang, Katherine Shu, Kimin Lee, and Pieter Abbeel. Reward uncertainty for exploration in preference-based reinforcement learning. *arXiv preprint arXiv:2205.12401*, 2022.
- [41] Zhiao Huang, Litian Liang, Zhan Ling, Xuanlin Li, Chuang Gan, and Hao Su. Reparameterized policy learning for multimodal trajectory optimization. In *International Conference on Machine Learning*, pages 13957–13975. PMLR, 2023.
- [42] Aravind Rajeswaran, Kendall Lowrey, Emanuel V Todorov, and Sham M Kakade. Towards generalization and simplicity in continuous control. *Advances in neural information processing systems*, 30, 2017.
- [43] Saurabh Arora and Prashant Doshi. A survey of inverse reinforcement learning: Challenges, methods and progress. *Artificial Intelligence*, 297:103500, 2021.
- [44] Dylan Hadfield-Menell, Smitha Milli, Pieter Abbeel, Stuart J Russell, and Anca Dragan. Inverse reward design. *Advances in neural information processing systems*, 30, 2017.
- [45] Adam Laud and Gerald DeJong. The influence of reward on the speed of reinforcement learning: An analysis of shaping. In *Proceedings of the 20th International Conference on Machine Learning (ICML-03)*, pages 440–447, 2003.
- [46] Babak Badnava, Mona Esmaili, Nasser Mozayani, and Payman Zarkesh-Ha. A new potential-based reward

- shaping for reinforcement learning agent. In *2023 IEEE 13th Annual Computing and Communication Workshop and Conference (CCWC)*, pages 01–06. IEEE, 2023.
- [47] Yang Gao and Francesca Toni. Potential based reward shaping for hierarchical reinforcement learning. In *Twenty-Fourth International Joint Conference on Artificial Intelligence*, 2015.
- [48] Anna Harutyunyan, Sam Devlin, Peter Vrancx, and Ann Nowé. Expressing arbitrary reward functions as potential-based advice. In *Proceedings of the AAAI conference on artificial intelligence*, volume 29, 2015.
- [49] Marek Grzes. Reward shaping in episodic reinforcement learning. 2017.
- [50] Marian Qian and Stefan Mitsch. Reward shaping from hybrid systems models in reinforcement learning. In *NASA Formal Methods Symposium*, pages 122–139. Springer, 2023.
- [51] Sam Devlin, Logan Yliniemi, Daniel Kudenko, and Kagan Tumer. Potential-based difference rewards for multiagent reinforcement learning. In *Proceedings of the 2014 international conference on Autonomous agents and multi-agent systems*, pages 165–172, 2014.
- [52] Sam Michael Devlin and Daniel Kudenko. Dynamic potential-based reward shaping. In *11th International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2012)*, pages 433–440. IFAAMAS, 2012.
- [53] Mohammad Gheshlaghi Azar, Ian Osband, and Rémi Munos. Minimax regret bounds for reinforcement learning. In *International conference on machine learning*, pages 263–272. PMLR, 2017.
- [54] Alexander L Strehl and Michael L Littman. A theoretical analysis of model-based interval estimation. In *Proceedings of the 22nd international conference on Machine learning*, pages 856–863, 2005.
- [55] Abhishek Gupta, Aldo Pacchiano, Yuexiang Zhai, Sham Kakade, and Sergey Levine. Unpacking reward shaping: Understanding the benefits of reward engineering on sample complexity. *Advances in Neural Information Processing Systems*, 35:15281–15295, 2022.
- [56] David H Wolpert, Kevin R Wheeler, and Kagan Tumer. Collective intelligence for control of distributed dynamical systems. *Europhysics Letters*, 49(6):708, 2000.
- [57] Patrick Mannion, Sam Devlin, Jim Duggan, and Enda Howley. Reward shaping for knowledge-based multi-objective multi-agent reinforcement learning. *The Knowledge Engineering Review*, 33:e23, 2018.
- [58] Ricardo Grunitzki, Gabriel de Oliveira Ramos, and Ana Lucia Cetertich Bazzan. Individual versus difference rewards on reinforcement learning for route choice. In *2014 Brazilian Conference on Intelligent Systems*, pages 253–258. IEEE, 2014.
- [59] Marek Grzes and Daniel Kudenko. Plan-based reward shaping for reinforcement learning. In *2008 4th International IEEE Conference Intelligent Systems*, volume 2, pages 10–22. IEEE, 2008.
- [60] Kyriakos Efthymiadis and Daniel Kudenko. A comparison of plan-based and abstract mdp reward shaping. *Connection Science*, 26(1):85–99, 2014.
- [61] Ofir Marom and Benjamin Rosman. Belief reward shaping in reinforcement learning. In *Proceedings of the AAAI conference on artificial intelligence*, volume 32, 2018.
- [62] Runze Liu, Fengshuo Bai, Yali Du, and Yaodong Yang. Meta-reward-net: Implicitly differentiable reward learning for preference-based reinforcement learning. *Advances in Neural Information Processing Systems*, 35:22270–22284, 2022.
- [63] Abhishek Ranjan, Shreenabh Agrawal, Aayush Jain, Pushpak Jagtap, Shishir Kolathaya, et al. Barrier functions inspired reward shaping for reinforcement learning. *arXiv preprint arXiv:2403.01410*, 2024.
- [64] Prasoon Goyal, Scott Niekum, and Raymond J Mooney. Using natural language for reward shaping in reinforcement learning. *arXiv preprint arXiv:1903.02020*, 2019.
- [65] Yuqian Jiang, Suda Bharadwaj, Bo Wu, Rishi Shah, Ufuk Topcu, and Peter Stone. Temporal-logic-based reward shaping for continuing reinforcement learning tasks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 7995–8003, 2021.
- [66] Yubin Wang, Yifeng Sun, Jiang Wu, Hao Hu, Zhiqiang Wu, and Weigui Huang. Reinforcement learning using reward expectations in scenarios with aleatoric uncertainties. In *2022 IEEE Conference on Games (CoG)*, pages 261–267. IEEE, 2022.
- [67] Sinan Ibrahim, Ramil Khusainov, Ali Jnadi, and SM Ahsan Kazmi. Reward planning for underactuated robotic systems: A study on pendubot with parameters uncertainty. In *2023 7th Scientific School Dynamics of Complex Networks and their Applications (DCNA)*, pages 101–104. IEEE, 2023.
- [68] Quan Liu, Zhihao Liu, Bo Xiong, Wenjun Xu, and Yang Liu. Deep reinforcement learning-based safe interaction for industrial human-robot collaboration using intrinsic reward function. *Advanced Engineering Informatics*, 49:101360, 2021.
- [69] Ithan Moreira, Javier Rivas, Francisco Cruz, Richard Dazeley, Angel Ayala, and Bruno Fernandes. Deep reinforcement learning with interactive feedback in a human-robot environment. *Applied Sciences*, 10(16):5574, 2020.
- [70] Hao Ju, Rongshun Juan, Randy Gomez, Keisuke Nakamura, and Guangliang Li. Transferring policy of deep reinforcement learning from simulation to reality for robotics. *Nature Machine Intelligence*, 4(12):1077–1087, 2022.
- [71] Wenshuai Zhao, Jorge Peña Queraltá, and Tomi Westerlund. Sim-to-real transfer in deep reinforcement learning for robotics: a survey. In *2020 IEEE symposium series on computational intelligence (SSCI)*, pages 737–744. IEEE, 2020.
- [72] Luíza Caetano Garaffa, Maik Basso, Andréa Aparecida Konzen, and Edison Pignaton de Freitas. Reinforce-

ment learning for mobile robotics exploration: A survey. *IEEE Transactions on Neural Networks and Learning Systems*, 34(8):3796–3810, 2021.

- [73] Wenxing Liu, Hanlin Niu, Wei Pan, Guido Hermann, and Joaquin Carrasco. Sim-and-real reinforcement learning for manipulation: A consensus-based approach. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 3911–3917. IEEE, 2023.
- [74] Arvi Jonnarth, Ola Johansson, and Michael Felsberg. Sim-to-real transfer of deep reinforcement learning agents for online coverage path planning. *arXiv preprint arXiv:2406.04920*, 2024.
- [75] Dario Amodei, Chris Olah, Jacob Steinhardt, Paul Christiano, John Schulman, and Dan Mané. Concrete problems in ai safety. *arXiv preprint arXiv:1606.06565*, 2016.
- [76] Dong Han, Beni Mulyana, Vladimir Stankovic, and Samuel Cheng. A survey on deep reinforcement learning algorithms for robotic manipulation. *Sensors*, 23(7):3762, 2023.



SINAN IBRAHIM received the B.S. degree in Mechatronics Engineering from Tishreen University, Syria, in 2021 and the M.S. degree in Robotics and Computer vision from Innopolis University, Russia, in 2023, and is currently pursuing a PhD in Computational and Data Science and Engineering at Skolkovo Institute for Science and Technology. Mr. Ibrahim is a highly accomplished researcher and engineer with expertise in robotics, computer vision, and reinforcement learning. He

has a proven track record of developing innovative solutions and is passionate about both scientific advancement and its real-world business applications. His experience includes Computer Vision, Robotics, and data-based control. His career has involved a blend of teaching, coaching, business, fundraising, go-to-market, and hyper-growth for startups, demonstrating his adaptability and diverse skill set.



MOSTAFA MOSTAFA received a Bachelor of Mechanical and Electrical Engineering degree from the Mechatronics Engineering Department at Tishreen University, Latakia, Syria, in 2017. He received his Master's Degree with Honors in Intelligent Technology in Robotics from ITMO University, Saint Petersburg, Russia, in 2020. He is currently pursuing a Ph.D. at the Skolkovo Institute of Science and Technology, in Moscow, Russia.

Mr. Mostafa received certificates in various fields, Advances in Robotics from LUT University (Finland) and ITMO University (Russia), Elements of AI (Artificial Intelligence) from the University of Helsinki (Finland), and Professional Development (Active Learning in STEM) (Skolkovo Institute of Science and Technology). From 2020 to 2022, Mr. Mostafa worked as a Quality Engineer (Process Engineer) in Saint Petersburg, Russia, where he established methods for solving technical problems, conducted performance loss studies, systematized maintenance tools, and implemented production management tools. Additionally, he identified key projects to achieve performance targets and collaborated with technical experts and other manufacturing sites to create optimal solutions. He is currently pursuing his Ph.D., focusing on reinforcement learning and robotics.



ALI JNADI received the B.Sc. degree in Mechatronics from Tishreen University, Syria, in 2011, and the M.Sc. degree in Robotics and Computer Vision from Innopolis University, Russia, in 2023. He is currently pursuing the Ph.D. degree at Innopolis University, focusing on advanced control systems for under-actuated systems.

From 2013 to 2018, he taught Informatics at the National Center for Distinguished in Syria, and from 2018 to 2019, he was a Specialist Instructor with the Ministry of Education in Syria. From 2019 to 2021, he taught and supervised robotics and control labs at Manara University, Syria. Since August 2022, he has been a Teaching Assistant at Innopolis University, teaching labs in Differential Equations, Data Structures and Algorithms, Human AI Interaction Design, and Physics. Since November 2023, he has also been an Engineer at Innopolis University's Technology Center for Robotics and Mechatronics Components, working on local planning and control algorithms for autonomous vehicles. Additionally, since 2023, he has been a researcher on a project called Robotic Incremental Metal Sheet Forming. His research interests include model predictive control, reinforcement learning, and robotics, with published works on explicit model predictive control design and reinforcement learning methods for 'Pendubot' balancing.

Mr. Jnadi has received several awards, including first and second places in high school sumo competitions at ARC7 Syria in 2022, second place in the future engineer category at the WRO 2021 Finals Future Engineer category, and the gold medal at The "Al Bassel" Fair for Invention and Innovation for his hybrid motorcycle project in 2011.



PAVEL OSINENKO Pavel Osinenko received a diploma with honors from Bauman Moscow State Technical University in 2009, and a PhD degree from Dresden University of Technology in 2014. From 2011 through 2020, Pavel worked in German academic and industrial sectors focusing on research, project supervision and teaching. Since 2020, Pavel has been an assistant professor at Skoltech, Moscow. His profile is focused on reinforcement learning, nonlinear system stabilization

and computational aspects of dynamical systems.

...