

SZTU-CMU at MER2024: Improving Emotion-LLaMA with Conv-Attention for Multimodal Emotion Recognition

Zebang Cheng^{*}
ShenZhen Technology University
Shenzhen, China
zebang.cheng@gmail.com

Shuyuan Tu^{*}
Carnegie Mellon University
Pittsburgh, USA
francisshuyuan@gmail.com

Dawei Huang^{*}
ShenZhen Technology University
Shenzhen, China
huangdawei2023@email.szu.edu.cn

Minghan Li
Carnegie Mellon University
Pittsburgh, USA
lperlpm@gmail.com

Xiaojiang Peng[†]
ShenZhen Technology University
Shenzhen, China
pengxiaojiang@sztu.edu.cn

Zhi-Qi Cheng[†]
Carnegie Mellon University
Pittsburgh, USA
zhiqic@cs.cmu.edu

Alexander G. Hauptmann
Carnegie Mellon University
Pittsburgh, USA
Alex@cs.cmu.edu

Abstract

This paper presents our winning approach for the *MER-NOISE* and *MER-OV* tracks of the *MER2024 Challenge* on multimodal emotion recognition. Our system leverages the advanced emotional understanding capabilities of *Emotion-LLaMA* to generate high-quality annotations for unlabeled samples, addressing the challenge of limited labeled data. To enhance multimodal fusion while mitigating modality-specific noise, we introduce *Conv-Attention*, a lightweight and efficient hybrid framework. Extensive experimentation validates the effectiveness of our approach. In the *MER-NOISE* track, our system achieves a state-of-the-art weighted average F-score of 85.30%, surpassing the second and third-place teams by 1.47% and 1.65%, respectively. For the *MER-OV* track, our utilization of *Emotion-LLaMA* for open-vocabulary annotation yields an 8.52% improvement in average accuracy and recall compared to *GPT-4V*, securing the highest score among all participating large multimodal models. The code and model for *Emotion-LLaMA* are available at <https://github.com/ZebangCheng/Emotion-LLaMA>.

CCS Concepts

• Computing methodologies → Artificial intelligence; • Computer vision; • Humancentered computing; • HCI design and evaluation methods.;

Z. Cheng (Emotion-LLaMA), S. Tu (Conv-Attention), D. Huang (feature engineering) contrib. equally. M. Li (replicated last year's champ solution). X. Peng & Z-Q. Cheng (corresponding authors, guided research/system, organized and rewrote the paper). A. Hauptmann (valuable insights & suggestions).

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

MRAC '24, October 28–November 1 2024, Melbourne, VIC, Australia

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 979-8-4007-1203-6/24/10

<https://doi.org/10.1145/3689092.3689404>

Keywords

MER2024, Noise Robustness, Open-Vocabulary Recognition

ACM Reference Format:

Zebang Cheng^{*}, Shuyuan Tu^{*}, Dawei Huang^{*}, Minghan Li, Xiaojiang Peng[†], Zhi-Qi Cheng[†], and Alexander G. Hauptmann. 2024. SZTU-CMU at MER2024: Improving Emotion-LLaMA with Conv-Attention for Multimodal Emotion Recognition. In *Proceedings of the 2nd International Workshop on Multimodal and Responsible Affective Computing (MRAC '24)*, October 28–November 1 2024, Melbourne, VIC, Australia. ACM, New York, NY, USA, 10 pages. <https://doi.org/10.1145/3689092.3689404>

1 Introduction

Multimodal Emotion Recognition (MER) aims to integrate information from various modalities—such as text, speech, and visual cues—to accurately identify and understand human emotions. This field has shown great promise in applications ranging from human-computer interaction to mental health care and education. However, achieving robust performance in real-world scenarios remains a significant challenge. The *MER2024 Challenge* addresses these challenges through two specialized tracks: *MER-NOISE* and *MER-OV*.

The *MER-NOISE* track focuses on enhancing noise robustness in emotion recognition systems. In practical settings, noise is pervasive, making it difficult to ensure that audio streams are free of distortions and video frames maintain high resolution. This track targets the two most prevalent types of noise: audio additive noise and image blur. Participants are encouraged to employ data augmentation techniques [48] and other innovative methods [38] to improve the resilience of emotion recognition systems against these noise factors.

The *MER-OV* track introduces the concept of open-vocabulary emotion recognition, addressing the inherent subjectivity and ambiguity in emotion labeling. Traditional datasets often constrain label spaces to a few discrete categories, relying on multiple annotators and majority voting to determine the most likely label. This approach can overlook correct but non-candidate or minority

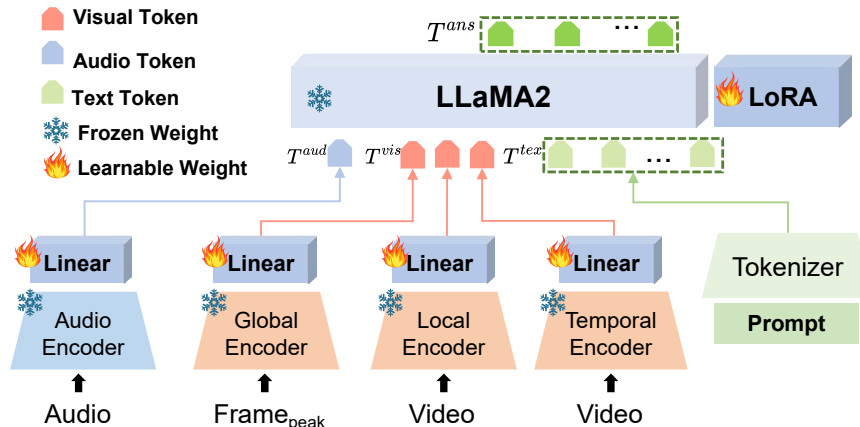


Figure 1: Overview of the Emotion-LLaMA architecture, which integrates audio, visual, and text inputs for advanced multimodal emotion recognition and reasoning. The model aligns and fuses audio and visual features into a shared semantic space, thereby enhancing the contextual understanding of textual inputs. Emotion-LLaMA leverages multiple visual encoders to capture global, local, and temporal visual aspects, which are then combined with audio and text features to generate detailed emotion descriptions. For further details, refer to the original Emotion-LLaMA paper [7].

labels, leading to potential inaccuracies. The *MER-OV* track challenges participants to generate any number of labels across diverse categories, striving for a more nuanced and precise description of emotional states [32].

To address these challenges, we propose a robust system that integrates the advanced capabilities of *Emotion-LLaMA* for generating high-quality labels with a *Conv-Attention* model designed for efficient multimodal feature fusion. Our approach is detailed in Figure 2, where we outline the workflow and demonstrate how each component contributes to overcoming the limitations of existing methods. A key limitation of previous approaches [8] lies in their reliance on models to generate pseudo-labels for unlabeled data, which are then used to augment training datasets. The effectiveness of this strategy depends heavily on the initial model’s quality—if the model lacks robustness, it can produce low-quality pseudo-labels, which may introduce errors in subsequent training phases. To mitigate this issue, we introduce *Emotion-LLaMA* [7], a model specifically designed to generate high-quality pseudo-labels for the unlabeled samples in the *MER2024* dataset. As illustrated in Figure 1, *Emotion-LLaMA* processes inputs from multiple modalities, utilizing visual and auditory features as contextual information to enhance the interpretation of text-based emotions. This approach ensures robust multimodal emotion understanding, even in the presence of loss or noise of modality.

In the feature extraction stage, we leverage high-performing unimodal models referenced in the official baseline papers [32, 34], such as *HuBERT* [22] and *CLIP* [50]. Our experiments revealed that visual modality models are particularly vulnerable to noise, prompting us to pre-train *MAE* [19] and *VideoMAE* [56] on the unlabeled samples from the *MER2024* dataset. This pre-training effectively captures both static and dynamic visual expression features. Additionally, to enhance the accuracy of textual feature extraction, we employed prompt-based strategies for models like *Qwen* [3, 55] and *Baichuan* [63], which were carefully evaluated for their effectiveness in capturing emotion-related information.

Despite the strong performance of *Emotion-LLaMA* in *MER*, its substantial computational overhead and slow iteration cycle present challenges. To address these, we propose *Conv-Attention*, a lightweight and efficient hybrid framework that combines convolutional and global attention mechanisms for feature fusion. *Conv-Attention* leverages the inductive biases inherent in convolutional operations, allowing the model to perform effectively even with limited data. By integrating a simple attention mechanism with multiple convolutional blocks, the model can prioritize critical features while minimizing the impact of noise. The attention mechanism excels in querying features from a global perspective, while the convolutional operation focuses on capturing fine-grained semantic details within a limited receptive field. This combined approach mitigates the disadvantages of each individual method, enhancing overall model performance.

In summary, our team makes the following contributions:

- In the *MER-OV* track, we utilize *Emotion-LLaMA* to extract multimodal emotion descriptions and employ *LLaMA-3* for open-vocabulary annotation. The results from *Emotion-LLaMA* serve as high-quality annotations for the unlabeled samples in the *MER2024* dataset, addressing the need for extensive and accurate training data.
- In the *MER-NOISE* track, we introduce *Conv-Attention*, a lightweight and effective hybrid framework for feature fusion that combines convolution and global attention mechanisms. Our model achieves comprehensive feature fusion by integrating the limited receptive fields of convolutions with the global querying capabilities of attention.
- Our approach achieves a state-of-the-art weighted average F-score of 85.30% in the *MER-NOISE* track, outperforming the second and third-place entries by 1.47% and 1.65%, respectively. In the *MER-OV* track, the application of *Emotion-LLaMA* for open-vocabulary annotation resulted in an 8.52% improvement in average accuracy and recall compared to *GPT-4V*, significantly enhancing our competitive position.

Table 1: Prompts for generating emotion-related descriptions using Large Multimodal Models (LMMs). Prompts marked with † output only emotion categories, while those with ‡ provide complete emotion descriptions. These prompts direct the models to focus on key aspects of the input, ensuring high-quality, contextually rich outputs.

Models	Language	Prompt
Emotion-LLaMA†	English	Please determine which emotion label in the video represents: happy, sad, neutral, angry, worried, surprise.
Emotion-LLaMA‡	English	Please analyze all the clues in the video and reason out the emotional label of the person in the video.
LLaMA-3	English	You are an emotion analysis expert. Please analyze the input multimodal emotion description and output keywords related to the emotion description. Input: [Multimodal Emotion Description] Output:
Qwen1.5-32B	Chinese	Please analyze the provided text content and classify emotions into six categories: [neutral, angry, happy, sad, worried, surprise], and explain the specific reasons: <Text>
Baichuan-13B (prompt 1)	Chinese	Please analyze the provided text content and classify emotions into six categories: [neutral, angry, happy, sad, worried, surprise], and explain the specific reasons: <Text>
Baichuan-13B (prompt 2)	Chinese	Please analyze the provided text content and classify emotions into six categories: [neutral, angry, happy, sad, worried, surprise]: <Text>
Baichuan-13B (prompt 3)	Chinese	Please analyze the provided text content: <Text>

2 Related Work

2.1 Multimodal Emotion Recognition

Multimodal Emotion Recognition (MER) has become a focal point in multimedia research, driven by the limitations of single-modal approaches in handling noise and ensuring robustness. The rise of multimedia sensors has shifted research towards multimodal datasets from real-world scenarios, emphasizing the importance of feature alignment and fusion [1, 25, 31, 49]. Early *MER* approaches utilized separate models for feature extraction across different modalities, such as ResNet [20], MAE [19], VideoMAE [56], BERT [13], and HuBERT [22], followed by basic linear fusion layers [8, 31, 68]. However, these simplistic models struggled to capture the complexity of multimodal data, prompting the development of more sophisticated cross-attention-based fusion models [5, 14, 16]. Despite their advancements, these fusion techniques [30, 38, 44, 53] often lead to competition between modalities, where dominant modalities disproportionately influence the results.

To address these challenges, *PMR* [41] introduced a common message hub to better capture cross-modal dynamics. Subsequent research has focused on pre-fusion alignment, as seen in *EmotionCLIP* [66], which aligns temporal visual and textual data, and *VAT* [15], which aligns visual with audio features. However, these models still face challenges, including the need for large datasets and the difficulty of capturing fine-grained emotional features due to a reliance on global attention mechanisms.

Our work overcomes these limitations by leveraging the advanced capabilities of *Emotion-LLaMA* for generating high-quality pseudo-labels and introducing a *Conv-Attention* model for efficient multimodal feature fusion, significantly improving the robustness and accuracy of emotion recognition in noisy environments.

2.2 Large Models in Emotion Understanding

The advent of large multimodal models (*LMMs*) has revolutionized emotion understanding, providing unprecedented inferential capabilities [2, 6, 23, 47, 57]. Instruction-tuning techniques, pioneered by models such as *InstructionGPT* [46], *FLAN* [11], and *OPT-IML* [24], have further expanded the practical applications of these models [58, 59]. In the context of emotion recognition, *Instruc-tERC* [26] has advanced conversation-based emotion recognition by introducing additional emotion alignment tasks. *DFER-CLIP* [67], built on the *CLIP* model [50], has shown promise in dynamic facial expression recognition. *MER-MCE* [9] has pushed the boundaries by inferring the causes of emotional triggers in conversations through multimodal inputs. Notably, *GPT-4V* [35] has demonstrated strong capabilities in generalized emotion recognition tasks.

Despite these advances, most approaches rely on single emotion labels, often neglecting non-candidate or minority yet correct labels. Addressing the need for more nuanced emotion descriptions in real-world contexts, *AffectGPT* [36] proposes a multimodal, explainable, open-vocabulary emotion recognition approach, using *GPT-4V* to generate visual and acoustic signals and extract reliable labels. *EmoVIT* [62] further contributes by generating visual emotion instruction data using paired annotations.

Building on these developments, our approach utilizes *Emotion-LLaMA* [7] to generate detailed multimodal emotional descriptions, resulting in comprehensive open-vocabulary labels. *Emotion-LLaMA*'s capability to align multimodal features within a semantic space allows it to maintain robust emotion understanding even in the presence of modality loss or noise, significantly enhancing the accuracy and robustness of emotion recognition systems in real-world applications.

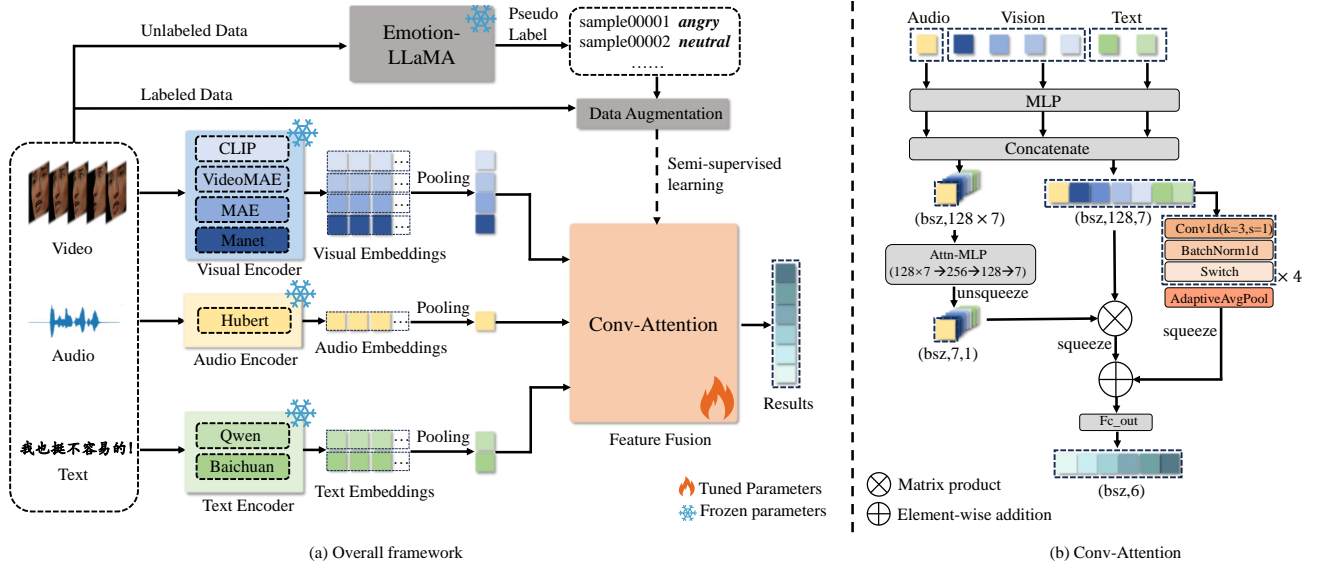


Figure 2: Overview of our framework for MER2024. In the feature extraction phase, frozen encoders extract features from text, video, and audio, which are pooled to integrate multimodal information. In the feature fusion stage, our Conv-Attention mechanism is applied, as detailed in part (b) of the figure. The pre-trained Emotion-LLaMA [7] model generates pseudo-labels, which are combined with original labeled data, enhancing the dataset through augmentation. Finally, the augmented dataset is used to train the Conv-Attention model, boosting the performance and robustness of our emotion recognition system.

3 Methodology

This section presents our method that secured the highest performance in Track 2: MER-NOISE at the MER 2024 contest. First, we detail our feature extraction process (Sec. 3.1). Next, we describe how *Emotion-LLaMA* generates multimodal emotional descriptions and derives high-quality emotion labels (Sec. 3.2). Finally, we explain the Conv-Attention model used for feature fusion (Sec. 3.3).

3.1 Multimodal Feature Engineering

We employed domain-specific models to extract unimodal features from auditory, visual, and textual data, with each model leveraging prior knowledge tailored to its respective domain.

3.1.1 Auditory Modality. The MER2024 dataset contains exclusively Mandarin speech dialogues, prompting the selection of audio encoders that support the Chinese language. We prioritized Chinese-Hubert [22] and emotion2vec [42], with Chinese-Hubert being a variant of Hubert pre-trained on Chinese datasets. This model excels in processing Mandarin, producing high-quality embeddings suitable for complex emotion detection, making it ideal for the challenges presented in MER2024. To enhance the robustness and accuracy of our auditory emotion recognition pipeline, we also incorporated multilingual models such as Whisper [51], VGGish [21], and eGeMAPS [18]. Whisper, a significant advancement in Automatic Speech Recognition (ASR), combined with VGGish and eGeMAPS, provided a comprehensive audio processing framework.

3.1.2 Visual Modality. Building on the experience and results from the MER2023 competition, we selected a series of high-performing visual encoders for comparative analysis, including CLIP [50], MAE

[19], VideoMAE [56], and MANet [37]. CLIP, pre-trained on large-scale image-text pairs, excels at associating images with textual descriptions, making it particularly effective for affective computing tasks. MAE, designed for the visual domain, reconstructs obscured segments of input images, compelling the model to learn both global and local features, which is advantageous for facial recognition and emotion analysis. VideoMAE extends MAE’s concept to video by applying random masking to video frames and training the model to reconstruct missing parts, effectively leveraging spatiotemporal characteristics for tasks such as video classification. Both MAE and VideoMAE were further fine-tuned to enhance their performance in noisy environments.

3.1.3 Textual Modality. Given that the subtitles extracted from audio are primarily in Chinese, we focused on models with strong Chinese language proficiency, including ChatGLM2 [17], Qwen [3], and Baichuan [63]. These models, pre-trained on extensive Chinese corpora, are particularly effective for handling Chinese text inputs. We also utilized multilingual models such as RoBERTa [39], MacBERT [12], and BLOOM [61]. Inspired by In-Context Learning [4] and Chain-of-Thought (CoT) [60] techniques, we employed a prompt strategy to enhance feature extraction. This approach involved generating emotion-associated descriptions by appending a designed prompt before the text input, as formalized in the following equation:

$$\begin{aligned} T' &= \text{prompt} \oplus T \\ T_{\text{embedding}} &= M(T') \end{aligned} \quad (1)$$

Here, T' represents the augmented text input, \oplus denotes the concatenation operation, and M is the language model used for feature

extraction. This prompt-based method guides the model to capture emotional cues more effectively, resulting in richer and more accurate emotional descriptions.

3.2 Emotion-LLaMA Pseudo-Labeling

Emotion-LLaMA [7], developed in our previous work, is a multimodal emotion recognition model that supports inputs across text, audio, and visual domains. By aligning audio and visual features within a shared semantic space as contextual information for the text modality, Emotion-LLaMA excels in multimodal emotion recognition and reasoning tasks. We leveraged Emotion-LLaMA’s capabilities for the MER2024 competition.

To address the challenge of limited labeled data, especially for the MER-NOISE track, we used Emotion-LLaMA to generate pseudo-labels. By performing multimodal emotion recognition on 20,000 unlabeled samples, we significantly augmented the training set with pseudo-labeled data. This approach not only increased the volume of training data but also introduced greater diversity, thereby enhancing the model’s generalization capabilities.

3.2.1 Prompt Design and Data Processing. We designed specific prompts for Emotion-LLaMA and LLaMA-3 to extract detailed emotion-related descriptions and labels. These prompts guide the models to focus on relevant aspects of the input data, improving the quality and relevance of the generated labels. Table 1 provides examples of these prompts, illustrating their effectiveness in eliciting precise and informative responses.

We processed the data by feeding it into Emotion-LLaMA with a simple instruction prompt to obtain emotion-related descriptions and category labels, as formalized below:

$$\begin{aligned}\hat{\mathcal{T}}_{description} &= E(\mathcal{A}'_u, \mathcal{V}'_u, \mathcal{T}'_u; \mathcal{P}^\ddagger) \\ \hat{\mathcal{L}} &= E(\mathcal{A}'_u, \mathcal{V}'_u, \mathcal{T}'_u; \mathcal{P}^\dagger)\end{aligned}\quad (2)$$

where E represents Emotion-LLaMA, $\hat{\mathcal{T}}_{description}$ is the emotion-related description generated for the MER-OV track, $\hat{\mathcal{L}}$ denotes the pseudo-label set, and $\mathcal{A}'_u, \mathcal{V}'_u, \mathcal{T}'_u$ are the data in the audio, visual, and textual modalities, respectively. The prompts \mathcal{P}^\dagger and \mathcal{P}^\ddagger are used for multimodal emotion classification and reasoning, respectively.

3.2.2 Keyword Extraction and Dataset Augmentation. We employed LLaMA-3 as a keyword extractor to convert emotional descriptions into labels, which were then used as the final prediction results for MER-OV. These pseudo-labeled samples were combined with the Train&Val dataset from MER2024 to create the training set for the multimodal fusion model:

$$\begin{aligned}\mathcal{L}_{OV} &= \text{LLaMA}(\hat{\mathcal{T}}_{description}) \\ \mathcal{D}_{aug} &= \mathcal{D}_I \cup (\mathcal{D}'_u, \hat{\mathcal{L}})\end{aligned}\quad (3)$$

where \mathcal{L}_{OV} represents the open vocabulary labels, \mathcal{D}_I is the labeled dataset from MER2024, \mathcal{D}'_u is the unlabeled dataset, and \mathcal{D}_{aug} is the augmented dataset. By leveraging the capabilities of Emotion-LLaMA, our methodology significantly enhances the volume and quality of data available for training, effectively addressing the issue of sample scarcity.

3.3 Multimodal Feature Fusion

To address the limitations of pure attention mechanisms, we employed the Conv-Attention structure, as illustrated in Figure 2(b). This structure integrates convolutional blocks with attention mechanisms to introduce inductive biases, improving performance on limited-scale data. The convolutional branch captures semantic details due to its limited receptive fields, while the attention branch focuses on global, emotionally salient features.

We began by using a multilayer perceptron (MLP) to standardize the channel depth of features from different modalities (audio, visual, text) to a common dimension. Each feature is represented as (batch, depth). These features were then concatenated along their embedding depths and sequence lengths to obtain hybrid features F_d and F_s :

$$\begin{aligned}F_d &= \text{Concat}(\text{MLP}(A), \text{MLP}(V), \text{MLP}(T), \text{dim} = 1), \\ F_s &= \text{Stack}(\text{MLP}(A), \text{MLP}(V), \text{MLP}(T), \text{dim} = 2)\end{aligned}\quad (4)$$

where $A = \{A_{hubert}\}$, $V = \{V_{clip}, V_{videomae}, V_{mae}, V_{manet}\}$, and $T = \{T_{qwen}, T_{baichuan}\}$ refer to audio, visual, and text features, respectively.

In the attention branch, we applied $\text{Attn_MLP}(\cdot)$ to F_d , down-sampling its embedding depth to align with the sequence length of F_s . We then performed a matrix product between the downsampled F_d and F_s to obtain the attention-based fusion feature F_{attn} , which enhances the model’s ability to identify emotionally salient components across different modalities:

$$F_{attn} = \text{Unsqueeze}(\text{Attn_MLP}(F_d), \text{dim} = -1) \times F_s \quad (5)$$

where \times denotes the matrix product, and $\text{Unsqueeze}(\cdot)$ denotes the unsqueeze operation.

In the convolutional branch, we designed a lightweight convolution block consisting of a convolution layer $\text{Conv1d}(\cdot)$, batch normalization $\text{BN}(\cdot)$, and an activation function $\text{Swish}(\cdot)$. The convolutional branch includes N convolution blocks and an adaptive average pooling layer $\text{Pool}(\cdot)$, which reshapes the ultimate fusion features. The convolutional operators’ inductive bias and limited receptive fields encourage the model to focus on fine-grained details, enhancing robustness, particularly when trained on limited-scale datasets:

$$\begin{aligned}F_{conv}^k &= \text{Swish}(\text{BN}(\text{Conv1d}(F_{conv}^{k-1}))), \\ F_{conv} &= \text{Pool}(F_{conv}^N)\end{aligned}\quad (6)$$

where $k(k = 1, 2, \dots, N)$ refers to the index of the convolution block, and F_{conv} indicates the final convolution-based fusion feature. Note that $F_{conv}^0 = F_s$.

Finally, we employed a residual connection to combine F_{conv} and F_{attn} into the final fusion feature F_{fusion} , which is then fed into a linear classification head $\text{FC}_{out}(\cdot)$ for emotion prediction:

$$\text{emotion}_{pred} = \text{FC}_{out}(F_{conv} + F_{attn}) \quad (7)$$

The pseudo-labels generated by Emotion-LLaMA were integrated with the 5030 Train&Val datasets from MER2024 to form the training set for our Conv-Attention model, as depicted in Figure 2(b). This integration through data augmentation significantly improves the performance and robustness of our emotion recognition system.

4 Experiments

This section presents a comprehensive evaluation of our approach on Track 2 (MER-NOISE) and Track 3 (MER-OV) of the MER2024 competition. We begin by analyzing the performance of single-modal models, followed by multimodal fusion experiments, and conclude with ablation studies. Our goal is to provide detailed insights that can inform future research and practical applications in multimodal emotion recognition, particularly in noisy and open-vocabulary environments.

4.1 Single-Modal Performance on Track 2: MER-NOISE

We assessed several single-modal models on the MER-NOISE track to analyze the contributions of auditory, visual, and textual modalities to emotion recognition performance. The results are summarized in Table 2.

Table 2: Performance (%) of Single-Modal Models on Track 2: MER-NOISE. *: Using prompts to extract features as input for the large language model.

Features	Train&Val		MER-NOISE
	WAF (↑)	ACC (↑)	WAF (↑)
Audio Modality			
eGeMAPS [18]	39.68	42.88	28.92
VGGish [21]	48.60	50.20	40.70
Whisper-base [51]	56.65	57.08	41.26
emotion2vec [42]	56.08	56.48	45.66
HuBERT-large [22]	72.77	72.96	72.67
Visual Modality			
MANet-RAFDB [37]	60.31	61.33	54.62
MAE-MER2024 [19]	61.48	62.40	51.11
VideoMAE [56]	57.40	58.10	49.18
VideoMAE-MER2024 [56]	64.87	65.46	57.87
CLIP-large [50]	66.73	67.28	58.80
Text Modality			
RoBERTa-large [39]	52.66	52.92	49.06
ChatGLM2-6B [17]	53.04	53.28	50.39
MacBERT-large [12]	52.19	52.47	50.24
BLOOM-7B [61]	53.13	53.30	50.38
Qwen1.5-32B [55]	54.47	54.82	50.12
Qwen1.5-32B [55] *	55.41	55.89	58.88
Baichuan-13B [63]	55.15	55.40	57.94
Baichuan-13B [63] *	54.29	54.48	59.32

4.1.1 Auditory Modality. Given the limited availability of audio extraction models tailored for the Chinese language, we evaluated five models: eGeMAPS [18], VGGish [21], Whisper [51], emotion2vec [42], and Chinese-Hubert [22]. The Chinese-Hubert model emerged as the top performer with a Weighted Average F-score (WAF) of 72.67%. This superior performance can be attributed to its pre-training on Chinese datasets, which enables it to capture contextual representations more effectively than other models.

4.1.2 Visual Modality. In the visual modality, we evaluated four models: MANet [37], MAE [19], VideoMAE [56], and CLIP [50], along with versions fine-tuned for MER2024. CLIP achieved the highest WAF of 58.80%, likely due to its extensive pre-training and multimodal learning capabilities. VideoMAE was further enhanced by domain-specific fine-tuning for emotion recognition tasks.

4.1.3 Textual Modality. For the textual modality, we focused on models with strong Chinese language proficiency. Baichuan-13B, when used with carefully designed prompts, attained the highest WAF of 59.32%, closely followed by Qwen1.5-32B with a WAF of 58.88%. The strong performance of these models can be attributed to their large-scale pre-training on Chinese corpora and the effective use of prompts, which significantly enhanced their ability to recognize and classify emotions in textual data. Further analysis of prompt designs, as shown in Table 3, revealed that Prompt 1 provided the best performance across both single-modal and multimodal fusion scenarios.

Table 3: Performance (%) of different prompts on Track 2: MER-NOISE. The contents of the three prompts are detailed in Table 1. We select acoustic features from HuBERT (HB), visual features from CLIP (CL), and textual features from Baichuan (BC).

		Features		Train&Val		MER-NOISE
A	V	T	WAF (↑)	ACC (↑)	WAF (↑)	
-	-	BC(w/o)	55.15	55.40	57.94	
-	-	BC(w/ prompt 1)	54.29	54.48	59.32	
-	-	BC(w/ prompt 2)	57.87	61.15	58.66	
-	-	BC(w/ prompt 3)	56.53	59.00	57.77	
HB	CL	BC(w/o)	78.58	79.96	78.73	
HB	CL	BC(w/ prompt 1)	80.91	81.01	79.73	
HB	CL	BC(w/ prompt 2)	78.96	79.33	78.71	
HB	CL	BC(w/ prompt 3)	79.11	79.50	77.61	

4.2 Multimodal Fusion on Track 2: MER-NOISE

Leveraging the findings from the single-modal evaluations, we conducted multimodal fusion experiments by integrating features from the best-performing models in each modality. The results, as presented in Table 4, demonstrate the effectiveness of our proposed Conv-Attention model. The configuration combining HuBERT, CLIP, VideoMAE, Qwen, and Baichuan features yielded the highest WAF and ACC scores of 81.59% and 81.71% on the Train&Val dataset. On the MER-NOISE track, the optimal setup, which also included additional visual models (MAE and MANet), achieved a WAF of 80.10%. These results underscore the effectiveness of multimodal fusion, particularly when employing our Conv-Attention model, which consistently outperformed other fusion strategies across all metrics (Table 5) when trained on the augmented dataset.

4.3 Performance on Track 3: MER-OV

For Track 3 (MER-OV), which addresses open-vocabulary emotion recognition, we evaluated various large language models using Accuracy_s, Recall_s, and their average (Avg). The results are detailed in Table 6. Emotion-LLaMA outperformed other models in terms

Table 4: Performance (%) of Multimodal Fusion Methods on MER-NOISE Track. * Denotes methods using prompt-extracted features as input for large language models.

A	V	Features					Train&Val		MER-NOISE
		V	V	T	T	WAF (↑)	ACC (↑)	WAF (↑)	
HuBERT	CLIP	-	-	-	Qwen *	-	78.43	78.67	77.44
HuBERT	CLIP	-	-	-	-	Baichuan *	80.91	81.01	79.73
HuBERT	CLIP	-	-	-	Qwen *	Baichuan *	80.50	80.63	79.79
HuBERT	CLIP	VideoMAE	-	-	Qwen *	-	79.22	79.23	77.10
HuBERT	CLIP	VideoMAE	-	-	-	Baichuan *	80.44	80.48	78.49
HuBERT	CLIP	VideoMAE	-	-	Qwen *	Baichuan *	81.59	81.71	79.63
HuBERT	CLIP	VideoMAE	MAE	-	Qwen *	-	78.98	78.93	76.80
HuBERT	CLIP	VideoMAE	MAE	-	-	Baichuan *	81.52	81.59	79.03
HuBERT	CLIP	VideoMAE	MAE	-	Qwen *	Baichuan *	81.49	81.55	79.93
HuBERT	CLIP	VideoMAE	MAE	MANet	Qwen *	-	79.35	79.48	77.30
HuBERT	CLIP	VideoMAE	MAE	MANet	-	Baichuan *	81.45	81.57	79.93
HuBERT	CLIP	VideoMAE	MAE	MANet	Qwen *	Baichuan *	81.40	81.53	80.10

Table 5: Performance (%) Comparison of Multimodal Fusion Models on Track 2: MER-NOISE.

Model	Train WAF	Train ACC	Noise WAF
MLP [31]	56.44	65.08	50.02
Attention [32]	82.29	82.59	83.48
FBP [68]	80.98	81.17	83.21
Convolution	81.90	82.35	84.50
Transformer	80.81	81.23	84.55
Conv-Attention (ours)	83.59	83.83	85.30

of average performance. The version that outputs only emotion categories achieved an accuracy of 83.43%, while the version that generates complete emotion descriptions attained the highest recall of 62.59% and an average score of 66.10%. The success of Emotion-LLaMA can be attributed to three key factors: (1) emotion-specific pre-training on corpora rich in emotional content, enabling the model to capture subtle emotional nuances; (2) multi-task learning, which allows the model to excel in both emotion classification and description generation; and (3) an open-vocabulary design, which is well-suited for handling diverse and complex emotion descriptions. The trade-off observed between accuracy and recall suggests that while more detailed emotion descriptions enhance recall, they may also introduce a higher risk of misclassification.

4.4 Ablation Studies

To gain deeper insights into the effectiveness of our proposed Conv-Attention model, we conducted a series of ablation studies to evaluate the impact of various components and hyperparameters.

4.4.1 Component Ablation. Table 7 presents the results of our component ablation study. The findings highlight several important observations: (1) The ReLU activation function is crucial for introducing non-linearity, which significantly improves the model’s ability to learn complex patterns. Removing ReLU resulted in a noticeable performance drop. (2) The use of multiple convolutional

Table 6: Performance (%) of Single-Modal Models on Track 3: MER-OV. The “avg” column represents the average of “Accuracy_s” and “Recall_s”. †: Only outputs emotion categories; ‡: Outputs complete emotion descriptions.

Model	Accuracy _s	Recall _s	Avg
Empty	0.00	0.00	0.00
Random	13.42	24.85	19.13
Ground Truth	93.37	52.51	72.94
Valley [40]	20.16	13.26	16.71
Otter [27]	29.64	23.04	26.34
PandaGPT [52]	35.75	31.57	33.66
Video-LLaMA [65]	31.08	32.26	31.67
VideoChat [28]	43.17	44.92	44.05
VideoChat2 [29]	46.91	34.78	40.85
Video-ChatGPT [43]	46.20	39.33	42.77
SALMONN [54]	42.20	44.75	43.47
Qwen-Audio [10]	55.12	32.91	44.02
mPLUG-Owl [64]	44.80	46.54	45.67
AffectGPT [33]	66.14	46.56	56.35
GPT-4V [45]	56.19	58.97	57.58
Emotion-LLaMA [7] †	83.43	47.49	65.46
Emotion-LLaMA [7] ‡	69.61	62.59	66.10

blocks enhances the model’s capability to capture hierarchical features, which is beneficial for recognizing multi-scale patterns in multimodal data. The best performance was observed with two convolutional blocks.(3) Batch normalization plays a vital role in stabilizing the learning process and improving generalization. The inclusion of batch normalization layers led to a performance boost, likely due to their effect in reducing the internal covariate shift.

4.4.2 Impact of Data Ratio and Learning Rate. We also explored the effects of varying data ratios and learning rates on model performance. Tables 8 and 9 summarize our findings. Increasing the data ratio consistently improved performance, with 100% data usage

Table 7: Performance Impact (%) of Conv-Attention.

Model	Train WAF	Train ACC	Noise WAF
Relu	80.52	80.69	81.70
Attention(Conv-Block×0)	81.20	81.43	81.48
Conv-Block×1	80.88	81.05	81.74
Conv-Block×2	81.00	81.09	82.09
Conv-Block×3	80.88	80.85	82.29
w/o Batch-Normalization	80.96	81.13	81.64
Conv-Attention	81.37	81.45	82.68

Table 8: Impact of Data Ratio on Performance(%).

Data Ratio	Train WAF	Train ACC	Noise WAF
20%	79.18	79.72	79.88
40%	80.06	80.36	81.29
60%	81.29	81.54	82.2
80%	81.98	82.19	82.5
100%	82.05	82.3	83.87

Table 9: Impact of Learning Rate on Performance(%).

Learning Rate	Train WAF	Train ACC	Noise WAF
1e-4	83.29	83.38	83.10
5e-4	82.95	83.20	83.72
1e-3	82.05	82.30	83.87
5e-3	79.87	80.29	83.32
1e-2	78.58	79.45	82.09
5e-2	72.82	76.13	73.31

yielding the highest scores across all metrics. This suggests that pseudo-labeling effectively augments the training data, enabling the model to learn from a larger and more diverse dataset. However, it is important to consider that while using 100% of pseudo-labeled data can enhance performance, it may also introduce some noise. The optimal ratio may depend on the quality of the pseudo-labels.

Regarding learning rates, a rate of 1e-3 provided the best balance between convergence speed and model accuracy, achieving the highest Noise WAF. Lower learning rates (e.g., 1e-4) resulted in slower convergence, while higher rates (e.g., 5e-3 and above) caused unstable training and poor generalization, especially in noisy environments. These findings highlight the critical importance of proper hyperparameter tuning in achieving optimal performance, particularly in challenging multimodal and noisy settings.

4.4.3 Modality Alignment. Building on previous work [69], we examined the impact of modality alignment on MER, with results presented in Table 10. Interesting phenomena emerged from these experiments: (1) Post-alignment, the scores of the previously weaker visual and textual modalities improved. However, this came at the cost of a performance decline in the best-performing audio modality, suggesting that alignment may sometimes dilute the complementary strengths of individual modalities. (2) The performance of the multimodal fusion dropped significantly after alignment. This indicates that while alignment may homogenize features across

modalities, it can reduce the benefits derived from the diversity of information carried by different modalities.

Table 10: Modality Alignment Impact on Performance (%). Features: HuBERT (HB) for acoustic, CLIP (CL) for visual, Baichuan (BC) for textual.

A	Features		Train&Val		MER-NOISE
	V	T	WAF (↑)	ACC (↑)	WAF (↑)
HB	-	-	72.77	72.96	72.67
HB(aligned)	-	-	66.18	66.63	66.04
-	CL	-	66.73	67.28	58.80
-	CL(aligned)	-	69.07	69.50	65.93
-	-	BC	54.29	54.48	59.32
-	-	BC(aligned)	59.87	57.78	48.66
HB	CL	BC	80.91	81.01	79.73
HB(aligned)	CL(aligned)	BC(aligned)	73.01	73.29	70.67

4.5 Limitations & Future Work

Despite the effectiveness of our methods, several limitations remain that warrant further investigation: (1) Our research is limited to Chinese language data, highlighting the need for validation across other languages and cross-lingual scenarios. (2) The models are not optimized for real-time emotion recognition, indicating a need for improvements in computational efficiency. (3) While our ablation studies provide valuable insights, enhancing the interpretability of multimodal fusion models is crucial, particularly in understanding the contributions of each modality. (4) Our emphasis on the *MER-NOISE* track underscores the importance of exploring model robustness across different noise types and levels. Addressing these limitations is crucial for the continued advancement of *multimodal emotion recognition* and the development of more flexible and effective systems for practical applications.

5 Conclusion

In this paper, we presented our winning approach for enhancing *multimodal emotion recognition* in the *MER2024 Challenge*, specifically targeting the *MER-NOISE* and *MER-OV* tracks. By leveraging the advanced capabilities of *Emotion-LLaMA* to generate high-quality pseudo-labels and introducing a *Conv-Attention* mechanism for efficient feature fusion, we significantly improved the robustness and accuracy of emotion recognition. Our method delivered state-of-the-art performance in the *MER-NOISE* track with a weighted average F-score of 85.30% and achieved top results in the *MER-OV* track, enhancing average accuracy and recall by 8.52% compared to GPT-4V. The integration of *Emotion-LLaMA* was pivotal in achieving these results, underscoring its potential to advance the field of multimodal emotion recognition.

Acknowledgments

The SZTU team acknowledges support from the National Natural Science Foundation of China (62176165), the Stable Support Projects for Shenzhen Higher Education Institutions (20220718110918001), and the Natural Science Foundation of Top Talent at SZTU (GDRC202131). The CMU team thanks the Student Travel Support for the ACM International Conference on Multimedia (ACM MM) and acknowledges the support of NSF CISE under grant number 1937998.

References

- [1] Ana Aguilera, Diego Mellado, and Felipe Rojas. 2023. An assessment of in-the-wild datasets for multimodal emotion recognition. *Sensors* 23, 11 (2023), 5184.
- [2] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. 2022. Flamingo: a visual language model for few-shot learning. *Advances in neural information processing systems* 35 (2022), 23716–23736.
- [3] Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu, Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Benfeng Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu. 2023. Qwen Technical Report. arXiv:2309.16609 [cs.CL]
- [4] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language Models are Few-Shot Learners. arXiv:2005.14165 [cs.CL] <https://arxiv.org/abs/2005.14165>
- [5] Chun-Fu Richard Chen, Quanfu Fan, and Rameswar Panda. 2021. Crossvit: Cross-attention multi-scale vision transformer for image classification. In *Proceedings of the IEEE/CVF international conference on computer vision*. 357–366.
- [6] Keqin Chen, Zhao Zhang, Wei Li Zeng, Richong Zhang, Feng Zhu, and Rui Zhao. 2023. Shikra: Unleashing Multimodal LLM's Referential Dialogue Magic. arXiv preprint arXiv:2306.15195 (2023).
- [7] Zebang Cheng, Zhi-Qi Cheng, Jun-Yan He, Jingdong Sun, Kai Wang, Yuxiang Lin, Zheng Lian, Xiaojiang Peng, and Alexander Hauptmann. 2024. Emotion-LLaMa: Multimodal Emotion Recognition and Reasoning with Instruction Tuning. arXiv preprint arXiv:2406.11161 (2024).
- [8] Zebang Cheng, Yuxiang Lin, Zhaoru Chen, Xiang Li, Shuyi Mao, Fan Zhang, Daijun Ding, Bowen Zhang, and Xiaojiang Peng. 2023. Semi-supervised multimodal emotion recognition with expression mae. In *Proceedings of the 31st ACM International Conference on Multimedia*. 9436–9440.
- [9] Zebang Cheng, Fuqiang Niu, Yuxiang Lin, Zhi-Qi Cheng, Bowen Zhang, and Xiaojiang Peng. 2024. Mips at semeval-2024 task 3: Multimodal emotion-cause pair extraction in conversations with multimodal language models. arXiv preprint arXiv:2404.00511 (2024).
- [10] Yunfei Chu, Jin Xu, Xiaohuan Zhou, Qian Yang, Shiliang Zhang, Zhijie Yan, Chang Zhou, and Jingren Zhou. 2023. Qwen-audio: Advancing universal audio understanding via unified large-scale audio-language models. arXiv preprint arXiv:2311.07919 (2023).
- [11] Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. 2022. Scaling instruction-finetuned language models. arXiv preprint arXiv:2210.11416 (2022).
- [12] Yiming Cui, Wanxiang Che, Ting Liu, Bing Qin, Shijin Wang, and Guoping Hu. 2020. Revisiting Pre-Trained Models for Chinese Natural Language Processing. In *Findings of the Association for Computational Linguistics: EMNLP 2020*. 657–668.
- [13] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. arXiv:1810.04805 [cs.CL] <https://arxiv.org/abs/1810.04805>
- [14] Chaoyue Ding, Jiakui Li, Daoming Zong, Baoxiang Li, Tianhao Zhang, and Qunyan Zhou. 2023. Stable Speech Emotion Recognition with Head-k-Pooling Loss. In *INTERSPEECH*.
- [15] Chaoyue Ding, Daoming Zong, Baoxiang Li, Ken Zheng, Dinghao Zhou, Jiakui Li, and Qunyan Zhou. 2023. Learning aligned audiovisual representations for multimodal sentiment analysis. In *Proceedings of the 1st International Workshop on Multimodal and Responsible Affective Computing*. 21–28.
- [16] Kevin Ding, Martin Zong, Jiakui Li, and Baoxiang Li. 2022. LETR: A lightweight and efficient transformer for keyword spotting. In *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 7987–7991.
- [17] Zhengxiao Du, Yujie Qian, Xiao Liu, Ming Ding, Jiezhong Qiu, Zhilin Yang, and Jie Tang. 2022. GLM: General Language Model Pretraining with Autoregressive Blank Infilling. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. 320–335.
- [18] Florian Eyben, Klaus R Scherer, Björn W Schuller, Johan Sundberg, Elisabeth André, Carlos Busso, Laurence Y Devillers, Julien Epps, Petri Laukka, Srikanth S Narayanan, et al. 2016. The Geneva minimalistic acoustic parameter set (GeMAPS) for voice research and affective computing. *IEEE Transactions on Affective Computing* 7, 2 (2016), 190–202.
- [19] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. 2021. Masked Autoencoders Are Scalable Vision Learners. arXiv:2111.06377 [cs.CV] <https://arxiv.org/abs/2111.06377>
- [20] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. 2016. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 770–778.
- [21] Shawn Hershey, Sourish Chaudhuri, Daniel PW Ellis, Jort F Gemmeke, Aren Jansen, R Channing Moore, Manoj Plakal, Devin Platt, Rif A Saurous, Bryan Seybold, et al. 2017. CNN architectures for large-scale audio classification. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 131–135.
- [22] Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Hubert Tsai, Kushal Lakhotia, Ruslan Salakhutdinov, and Abdelrahman Mohamed. 2021. Hubert: Self-supervised speech representation learning by masked prediction of hidden units. *IEEE/ACM Transactions on Audio, Speech, and Language Processing* 29 (2021), 3451–3460.
- [23] Dawei Huang, Chuan Yan, Qing Li, and Xiaojiang Peng. 2024. From Large Language Models to Large Multimodal Models: A Literature Review. *Applied Sciences* 14, 12 (2024). <https://doi.org/10.3390/app14125068>
- [24] Srinivasan Iyer, Xi Victoria Lin, Ramakanth Pasunuru, Todor Mihaylov, Daniel Simig, Ping Yu, Kurt Shuster, Tianlu Wang, Qing Liu, Punit Singh Koura, et al. 2022. OPT-IML: Scaling Language Model Instruction Meta Learning through the Lens of Generalization. arXiv preprint arXiv:2212.12017 (2022).
- [25] Xingxun Jiang, Yuan Zong, Wenming Zheng, Chuangao Tang, Wanchuang Xia, Cheng Lu, and Jiateng Liu. 2020. Dfew: A large-scale database for recognizing dynamic facial expressions in the wild. In *Proceedings of the 28th ACM international conference on multimedia*. 2881–2889.
- [26] Shanglin Lei, Guanting Dong, Xiaoping Wang, Keheng Wang, and Sirui Wang. 2023. Instructer: Reforming emotion recognition in conversation with a retrieval multi-task llms framework. arXiv preprint arXiv:2309.11911 (2023).
- [27] Bo Li, Yuanhan Zhang, Liangyu Chen, Jinghao Wang, Jingkang Yang, and Ziwei Liu. 2023. Otter: A Multi-Modal Model with In-Context Instruction Tuning. arXiv preprint arXiv:2305.03726 (2023).
- [28] KunChang Li, Yanan He, Yi Wang, Yizhuo Li, Wenhai Wang, Ping Luo, Yali Wang, Limin Wang, and Yu Qiao. 2023. Videochat: Chat-centric video understanding. arXiv preprint arXiv:2305.06355 (2023).
- [29] Kunchang Li, Yali Wang, Yanan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, Limin Wang, and Yu Qiao. 2024. MVBenchmark: A Comprehensive Multi-modal Video Understanding Benchmark. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.
- [30] Yunxin Li, Shenyuan Jiang, Baotian Hu, Longyue Wang, Wanqi Zhong, Wenhan Luo, Lin Ma, and Min Zhang. 2024. Uni-MoE: Scaling Unified Multimodal LLMs with Mixture of Experts. arXiv preprint arXiv:2405.11273 (2024).
- [31] Zheng Lian, Haiyang Sun, Licai Sun, Kang Chen, Mingyu Xu, Kexin Wang, Ke Xu, Yu He, Ying Li, Jiming Zhao, et al. 2023. Mer 2023: Multi-label learning, modality robustness, and semi-supervised learning. In *Proceedings of the 31st ACM International Conference on Multimedia*. 9610–9614.
- [32] Zheng Lian, Haiyang Sun, Licai Sun, Zhuofan Wen, Siyuan Zhang, Shun Chen, Hao Gu, Jiming Zhao, Ziyang Ma, Xie Chen, et al. 2024. MER 2024: Semi-Supervised Learning, Noise Robustness, and Open-Vocabulary Multimodal Emotion Recognition. arXiv preprint arXiv:2404.17113 (2024).
- [33] Zheng Lian, Haiyang Sun, Licai Sun, Jiangyan Yi, Bin Liu, and Jianhua Tao. 2024. AffectGPT: Dataset and Framework for Explainable Multimodal Emotion Recognition. arXiv preprint arXiv:2407.07653 (2024).
- [34] Zheng Lian, Licai Sun, Yong Ren, Hao Gu, Haiyang Sun, Lan Chen, Bin Liu, and Jianhua Tao. 2024. Merbench: A unified evaluation benchmark for multimodal emotion recognition. arXiv preprint arXiv:2401.03429 (2024).
- [35] Zheng Lian, Licai Sun, Haiyang Sun, Kang Chen, Zhuofan Wen, Hao Gu, Bin Liu, and Jianhua Tao. 2024. GPT-4V with emotion: A zero-shot benchmark for Generalized Emotion Recognition. *Information Fusion* (2024), 102367.
- [36] Zheng Lian, Licai Sun, Mingyu Xu, Haiyang Sun, Ke Xu, Zhuofan Wen, Shun Chen, Bin Liu, and Jianhua Tao. 2023. Explainable multimodal emotion reasoning. arXiv preprint arXiv:2306.15401 (2023).
- [37] Jingyun Liang, Guolei Sun, Kai Zhang, Luc Van Gool, and Radu Timofte. 2021. Mutual Affine Network for Spatially Variant Kernel Estimation in Blind Image Super-Resolution. arXiv:2108.05302 [cs.CV] <https://arxiv.org/abs/2108.05302>
- [38] Ye Liu, Siyuan Li, Yang Wu, Chang-Wen Chen, Ying Shan, and Xiaohu Qie. 2022. Umt: Unified multi-modal transformers for joint video moment retrieval and highlight detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 3042–3051.
- [39] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. RoBERTa: A Robustly Optimized BERT Pretraining Approach. arXiv preprint arXiv:1907.11692 (2019).
- [40] Ruipu Luo, Ziwang Zhao, Min Yang, Junwei Dong, Da Li, Pengcheng Lu, Tao Wang, Linmei Hu, Minghui Qiu, and Zhongyu Wei. 2023. Valley: Video assistant with large language model enhanced ability. arXiv preprint arXiv:2306.07207 (2023).
- [41] Fengmao Lv, Xiang Chen, Yanyong Huang, Lixin Duan, and Guosheng Lin. 2021. Progressive modality reinforcement for human multimodal emotion recognition from unaligned multimodal sequences. In *Proceedings of the IEEE/CVF Conference*

- on *Computer Vision and Pattern Recognition*. 2554–2562.
- [42] Ziyang Ma, Zhisheng Zheng, Jiaxin Ye, Jinchao Li, Zhifu Gao, Shiliang Zhang, and Xie Chen. 2023. emotion2vec: Self-Supervised Pre-Training for Speech Emotion Representation. *arXiv preprint arXiv:2312.15185* (2023).
- [43] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. 2023. Video-ChatGPT: Towards Detailed Video Understanding via Large Vision and Language Models. *arXiv preprint arXiv:2306.05424* (2023).
- [44] Arsha Nagrani, Shan Yang, Anurag Arnab, Aren Jansen, Cordelia Schmid, and Chen Sun. 2021. Attention bottlenecks for multimodal fusion. *Advances in neural information processing systems* 34 (2021), 14200–14213.
- [45] OpenAI. 2023. GPT-4V(ision) system card. <https://openai.com/research/gpt-4v-system-card>
- [46] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. 2022. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems* (2022).
- [47] Zhiliang Peng, Wenhui Wang, Li Dong, Yaru Hao, Shaohan Huang, Shuming Ma, and Furu Wei. 2023. Kosmos-2: Grounding Multimodal Large Language Models to the World. *arXiv preprint arXiv:2306.14824* (2023).
- [48] Nitin Nandkeo Pise and Parag Kulkarni. 2008. A survey of semi-supervised learning methods. In *2008 International conference on computational intelligence and security*, Vol. 2. IEEE, 30–34.
- [49] Soujanya Poria, Devamanyu Hazarika, Navonil Majumder, Gautam Naik, Erik Cambria, and Rada Mihalcea. 2018. Meld: A multimodal multi-party dataset for emotion recognition in conversations. *arXiv preprint arXiv:1810.02508* (2018).
- [50] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In *Proceedings of the International Conference on Machine Learning*. PMLR, 8748–8763.
- [51] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. 2022. Robust Speech Recognition via Large-Scale Weak Supervision. *arXiv:2212.04356 [eess.AS]* <https://arxiv.org/abs/2212.04356>
- [52] Yixuan Su, Tian Lan, Huayang Li, Jialu Xu, Yan Wang, and Deng Cai. 2023. PandaGPT: One Model To Instruction-Follow Them All. In *Proceedings of the 1st Workshop on Taming Large Language Models: Controllability in the era of Interactive Assistants*. 11–23.
- [53] Licai Sun, Zheng Lian, Bin Liu, and Jianhua Tao. 2023. Efficient multimodal transformer with dual-level feature restoration for robust multimodal sentiment analysis. *IEEE Transactions on Affective Computing* 15, 1 (2023), 309–325.
- [54] Changli Tang, Wenyi Yu, Guangzhi Sun, Xianzhao Chen, Tian Tan, Wei Li, Lu Lu, MA Zejun, and Chao Zhang. 2023. SALMONN: Towards Generic Hearing Abilities for Large Language Models. In *The Twelfth International Conference on Learning Representations*.
- [55] Qwen Team. 2024. Introducing Qwen1.5. <https://qwenlm.github.io/blog/qwen1.5/>
- [56] Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. 2022. VideoMAE: Masked Autoencoders are Data-Efficient Learners for Self-Supervised Video Pre-Training. In *Proceedings of the Advances in Neural Information Processing Systems*.
- [57] Wenhui Wang, Zhe Chen, Xiaokang Chen, Jiannan Wu, Xizhou Zhu, Gang Zeng, Ping Luo, Tong Lu, Jie Zhou, Yu Qiao, et al. 2023. Visionllm: Large language model is also an open-ended decoder for vision-centric tasks. *arXiv preprint arXiv:2305.11175* (2023).
- [58] Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A Smith, Daniel Khashabi, and Hannaneh Hajishirzi. 2022. Self-Instruct: Aligning Language Model with Self Generated Instructions. *arXiv preprint arXiv:2212.10560* (2022).
- [59] Yizhong Wang, Swaroop Mishra, Pegah Alipoormolabashi, Yeganeh Kordi, Amirreza Mirzaei, Anjana Arunkumar, Arjun Ashok, Arut Selvan Dhanasekaran, Atharva Naik, David Stap, et al. 2022. Benchmarking generalization via in-context instructions on 1,600+ language tasks. *arXiv preprint arXiv:2204.07705* (2022).
- [60] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. 2023. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. *arXiv:2201.11903 [cs.CL]* <https://arxiv.org/abs/2201.11903>
- [61] BigScience Workshop, Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagné, Alexandra Sasha Luccioni, François Yvon, et al. 2022. Bloom: A 176b-parameter open-access multilingual language model. *arXiv preprint arXiv:2211.05100* (2022).
- [62] Hongxia Xie, Chu-Jun Peng, Yu-Wen Tseng, Hung-Jen Chen, Chan-Feng Hsu, Hong-Fan Shuai, and Wen-Huang Cheng. 2024. EmoVIT: Revolutionizing Emotion Insights with Visual Instruction Tuning. *arXiv preprint arXiv:2404.16670* (2024).
- [63] Aiyuan Yang, Bin Xiao, Bingning Wang, Borong Zhang, Ce Bian, Chao Yin, Chenxu Lv, Da Pan, Dian Wang, Dong Yan, et al. 2023. Baichuan 2: Open large-scale language models. *arXiv preprint arXiv:2309.10305* (2023).
- [64] Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, Chaoya Jiang, Chenliang Li, Yuanhong Xu, Hehong Chen, Junfeng Tian, Qian Qi, Ji Zhang, and Fei Huang. 2023. mPLUG-Owl: Modularization Empowers Large Language Models with Multimodality. *arXiv:2304.14178 [cs.CL]*
- [65] Hang Zhang, Xin Li, and Lidong Bing. 2023. Video-llama: An instruction-tuned audio-visual language model for video understanding. *arXiv preprint arXiv:2306.02858* (2023).
- [66] Sitao Zhang, Yimu Pan, and James Z Wang. 2023. Learning emotion representations from verbal and nonverbal communication. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 18993–19004.
- [67] Zengqun Zhao and Ioannis Patras. 2023. Prompting visual-language models for dynamic facial expression recognition. *arXiv preprint arXiv:2308.13382* (2023).
- [68] Hengshun Zhou, Debin Meng, Yuanyuan Zhang, Xiaojiang Peng, Jun Du, Kai Wang, and Yu Qiao. 2019. Exploring emotion features and fusion strategies for audio-video emotion recognition. In *2019 International conference on multimodal interaction*. 562–566.
- [69] Daoming Zong, Chaoyue Ding, Baoxiang Li, Jiakui Li, Ken Zheng, and Qunyan Zhou. 2023. AcFormer: An Aligned and Compact Transformer for Multimodal Sentiment Analysis. In *Proceedings of the 31st ACM International Conference on Multimedia*. 833–842.