

Defining Boundaries: The Impact of Domain Specification on Cross-Lingual and Cross-Domain Transfer in Machine Translation

Lia Shahnazaryan and Meriem Beloucif

Uppsala University

Uppsala, Sweden

lia.shahnazaryan.9301@student.uu.se

meriem.beloucif@lingfil.uu.se

Abstract

Recent advancements in neural machine translation (NMT) have revolutionized the field, yet the dependency on extensive parallel corpora limits progress for low-resource languages and domains. Cross-lingual transfer learning offers a promising solution by utilizing data from high-resource languages but often struggles with in-domain NMT. This paper investigates zero-shot cross-lingual domain adaptation for NMT, focusing on the impact of domain specification and linguistic factors on transfer effectiveness. Using English as the source language and Spanish for fine-tuning, we evaluate multiple target languages, including Portuguese, Italian, French, Czech, Polish, and Greek. We demonstrate that both language-specific and domain-specific factors influence transfer effectiveness, with domain characteristics playing a crucial role in determining cross-domain transfer potential. We also explore the feasibility of zero-shot cross-lingual cross-domain transfer, providing insights into which domains are more responsive to transfer and why. Our results show the importance of well-defined domain boundaries and transparency in experimental setups for in-domain transfer learning.

1 Introduction

Advancements in neural machine translation (NMT) have transformed the field, but these systems often require large parallel corpora, which are scarce for low-resource languages. Cross-lingual transfer learning has emerged as a solution, leveraging high-resource language data to improve translation quality for low-resource languages. However, a critical limitation is the pre-training on heterogeneous data, which hampers the translation of specialized texts due to a mismatch between training data and the target domain. Domain adaptation mitigates this by adjusting NMT models to specific domains, enhancing translation performance for specialized content such as legal or medical

texts. Despite advancements, the intersection of cross-lingual transfer learning and domain adaptation—specifically zero-shot cross-lingual domain adaptation—remains under-explored.

In this paper, we investigate zero-shot cross-lingual domain adaptation for NMT, integrating transfer learning across languages with domain adaptation. The objective is to fine-tune multilingual pre-trained NMT models with domain-specific data from a resource-rich language pair, capturing domain-specific knowledge and transferring it to low-resource languages within the same domain. We focus our study on the following questions:

- 1. Enhancement of Domain-Specific Quality:** Evaluating whether the domain-specific quality of machine translation (MT) output for one language pair can be improved by fine-tuning the model on domain-relevant data from another language pair.
- 2. Transferability of Domains:** Identifying the transferable and non-transferable domains within the scope of zero-shot cross-lingual domain adaptation for NMT.
- 3. Influence of Language-Specific vs. Domain-Specific Factors:** Analyzing the relative influence of language-specific and domain-specific factors on the effectiveness of zero-shot cross-lingual domain adaptation.

Languages explored include English as the source, Spanish for fine-tuning, and Portuguese, Italian, French, Czech, Polish, and Greek as evaluation targets, representing varying linguistic similarities. Results demonstrate that domain-specific translation quality improves through zero-shot cross-lingual domain adaptation, with specialized domains (e.g., medical, legal, IT) benefiting more than mixed domains (e.g., movie subtitles, TED talks). The study underscores the critical role of

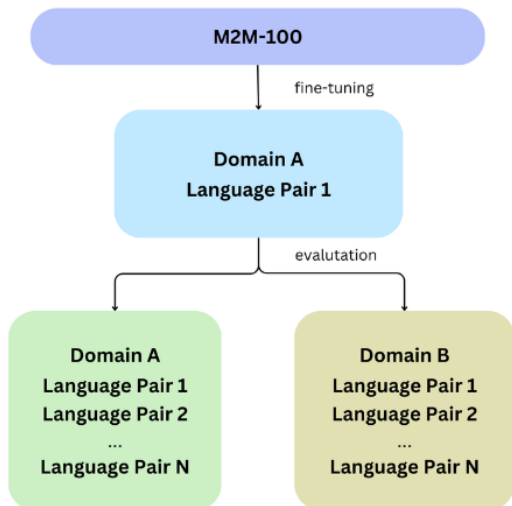


Figure 1: Illustration of the zero-shot cross-lingual domain adaptation and zero-shot cross-lingual cross-domain transfer setups.

well-defining domain data to effectively transfer domain-specific knowledge across languages and domains.

2 Background and Related Work

2.1 Transfer Learning Across Languages

Building on the advancements in NMT, particularly the Transformer architecture (Vaswani et al., 2017), transfer learning techniques have gained significant interest in recent years. The Transformer’s self-attention mechanism allows for effective modeling of long-range dependencies, leading to state-of-the-art performance in machine translation (MT) tasks. However, the success of these models is heavily reliant on the availability of large-scale parallel corpora, which are often scarce for low-resource languages. Cross-lingual transfer learning provides a promising solution to this data scarcity challenge by leveraging knowledge acquired from high-resource languages. The common approach uses multilingual pre-trained models like mT5 (Xue et al., 2021), mBERT (Devlin et al., 2019) and XLM-R (Conneau et al., 2020) that are initially trained on large multilingual corpora to capture cross-lingual representations. These models can then be fine-tuned on limited parallel data for low-resource languages, transferring knowledge from the high-resource languages present in the pre-training data (Costa-jussà et al., 2022; Fan et al., 2021). Importantly, the efficiency depends

on the linguistic proximity between the languages involved (Dabre et al., 2017). Extending further, recent work explores zero-shot translation capabilities for unseen language pairs when no parallel data exists, relying solely on multilingual pre-training (Ji et al., 2020; Firat et al., 2016). Approaches include pivoting through high-resource languages (Johnson et al., 2017), modifying architectures to build universal encoders that map diverse languages into shared representations (Gu and Feng, 2022), and auxiliary training objectives encouraging cross-lingual similarity (Al-Shedivat and Parikh, 2019). While promising, zero-shot translation remains challenging due to linguistic dissimilarities between languages and the model’s ability to generalize across diverse language pairs (Philippy et al., 2023; Lin et al., 2019).

2.2 Domain Adaptation

A separate key challenge in NMT is domain adaptation, as general-purpose NMT systems struggle to effectively translate specialized domains like legal or medical texts due to vocabulary and stylistic mismatches from their training data (Koehn and Knowles, 2017). A crucial aspect is how domains are defined. The conventional view defines a domain as “a corpus from a specific source, which may differ from other domains in terms of topic, genre, style, level of formality, etc.” (Koehn and Knowles, 2017). van der Wees et al. (2017) provide a more comprehensive view, defining a domain as a combination of provenance, topic, and genre, where provenance refers to the source of a given text, the topic pertains to the subject matter, and genre encompasses the function, register, syntax, and style of the text, as defined by Santini (2004). Of these, topic and genre are regarded as the most critical complementary features for characterizing a domain effectively (Saunders, 2022). Plank (2016), on the other hand, argues that topic and genre may not fully capture all domain factors, suggesting other aspects like sentence type, language, etc. Despite this, much of the research on domain adaptation in MT has mainly focused on genre as the primary domain differentiator, constructing experiments around datasets like OpenSubtitles¹ or TED (Cooper Stickland et al., 2021; Lai et al., 2022; Verma et al., 2022),² which offer data within the same genre while overlooking even topic specifics. However, a more comprehensive

¹<http://www.opensubtitles.org/>

²<https://www.ted.com>

approach should account for both topic and genre, as well as other domain-specific language patterns that may impact translation quality.

2.3 Zero-Shot Cross-Lingual Domain Adaptation

Building on transfer learning across languages and domain adaptation, zero-shot cross-lingual domain adaptation tackles adapting multilingual NMT to specialized domains for languages with limited parallel in-domain data. The approach leverages a multilingual pre-trained NMT model fine-tuned on domain-specific data from a high-resource language pair, enabling it to capture domain knowledge. This adapted model can then translate target languages within the same domain, transferring domain knowledge in a zero-shot manner. The effectiveness of this approach depends on several influencing factors, including the linguistic proximity between the pivot and target languages, the nature and complexity of the domain itself, as well as the composition of the initial general-purpose pre-training data. Moreover, as the model transitions from general pre-training to specialized fine-tuning, there is also a risk of catastrophic forgetting where previously learned general knowledge is overwritten (Saunders, 2022). Approaches like embedding freezing (Grosso et al., 2022) have proved effective in mitigating this issue. While Grosso et al. (2022) demonstrated the feasibility of zero-shot cross-lingual domain adaptation for the medical domain, comprehensive analysis across diverse languages and domains is still needed to understand these influencing factors and their relative impacts fully.

3 Experimental Setup

3.1 Domains, Datasets, and Languages

We curate data from six different domains, encompassing both specialized areas with well-defined topics and genres, as well as more mixed domains with distinct genres but diverse topics. The three main specialized domains under focus are medical (documents related to medicinal products and their use), legal (European Union laws), and information technology (IT) (localization documents and technical user manuals). Additionally, we include two domains (movie subtitles and TED talks) that do not strictly adhere to the conventional definition of a domain, as they exhibit distinct genres but lack a specific topical focus. These two are primarily

included for experimental purposes to understand the importance of domain specification in domain adaptation for NMT. The sixth domain we include is a general-purpose domain (sample of Wikipedia articles and online newspapers) to assess whether improvements in translation quality are consistent across all domains or specific to those that diverge significantly from the pre-training data (see Table 1).

Domain	Datasets
Medical	EMEA-V3 (Tiedemann, 2012)
Legal	MultiEURLEX (Chalkidis et al., 2021)
IT	Ubuntu, KDE4, GNOME, PHP, OpenOffice (Tiedemann, 2012)
Movie Subtitles	OpenSubtitles (Lison et al., 2018)
TED Talks	TED2020 (Reimers and Gurevych, 2020)
General	Wikipedia (Wolk and Marasek, 2014) NTREX-128 (Federmann et al., 2022)

Table 1: Datasets used for each domain.

For fine-tuning the model, we use English and Spanish as the source and target languages, respectively, across all six domains. When evaluating the fine-tuned models, English remains the source language, while the target languages are chosen based on their linguistic relatedness to Spanish, the pivot language used for fine-tuning. The target languages for evaluation are Portuguese, Italian, French, Czech, Polish, and Greek. By selecting English as the source language for both fine-tuning and evaluation, we ensure consistency across results while potentially benefiting from shared linguistic properties between English and the target languages. The test data for each domain is parallel across all languages used in the experiments.

3.2 Data Preprocessing

To prepare the datasets for fine-tuning and evaluation, we apply a standardized preprocessing pipeline. For the OPUS-sourced datasets³ in the medical, IT, movie subtitles, and TED talks domains, we download the English-to-Spanish parallel data as well as the English-to-target-language data for each of the six target languages. The Wikipedia dataset for English-to-Spanish is also obtained from OPUS to represent the general domain training and validation sets. For the multilingual legal domain data from MultiEURLEX,⁴ as well as the NTREX-128 test set⁵ representing the

³<https://opus.nlpl.eu/>

⁴<https://github.com/nlpueb/multi-eurlex>

⁵<https://github.com/MicrosoftTranslator/NTREX>

	en→es		en→pt		en→it		en→fr		en→cs		en→pl		en→el	
	BLEU	COMET	BLEU	COMET	BLEU	COMET	BLEU	COMET	BLEU	COMET	BLEU	COMET	BLEU	COMET
med_base	36	0.8451	31.7	0.8527	29.7	0.8481	28.6	0.8179	22.6	0.8582	18	0.8234	29.1	0.8595
med_ft	43.5 ↑	0.8663 ↑	34.4 ↑	0.8645 ↑	30.6 ↑	0.8563 ↑	29.2 ↑	0.8293 ↑	22.5	0.8659 ↑	18.1	0.8342 ↑	28.8	0.8644 ↑
leg_base	44.1	0.8494	42.9	0.8653	36.9	0.8721	41.8	0.8533	30.6	0.8905	33.2	0.8796	40.7	0.8972
leg_ft	49.6 ↑	0.8714 ↑	43.3	0.8774 ↑	38.3 ↑	0.8827 ↑	43.7 ↑	0.8694 ↑	33.4 ↑	0.9038 ↑	34.2 ↑	0.8906 ↑	43.9 ↑	0.9059 ↑
it_base	34.2	0.7954	26.6	0.79	29.2	0.7964	25.2	0.7386	19.1	0.7872	21.2	0.7818	27.1	0.7972
it_ft	44.4 ↑	0.8344 ↑	29.5 ↑	0.8104 ↑	33.4 ↑	0.8151 ↑	29.5 ↑	0.7619 ↑	19.7	0.8147 ↑	22.5 ↑	0.8078 ↑	28.5 ↑	0.816 ↑
sub_base	22.8	0.7548	20	0.7678	17.8	0.7446	16.1	0.6988	15	0.7594	14.6	0.7472	15.7	0.7768
sub_ft	24.7 ↑	0.7627 ↑	21.2 ↑	0.7741 ↑	18.8 ↑	0.7532 ↑	17.5 ↑	0.7073 ↑	15.3	0.766 ↑	15.1	0.7566 ↑	15.6	0.7725
ted_base	35.9	0.8189	31.1	0.8238	29.3	0.814	33.7	0.7926	21.8	0.8082	16.2	0.7857	29	0.8439
ted_ft	37.8 ↑	0.8262 ↑	31.9 ↑	0.8303 ↑	29.6	0.8199 ↑	35 ↑	0.7955	21.9	0.8194 ↑	16.6 ↑	0.7934 ↑	29.2	0.8475 ↑
gen_base	32.7	0.786	30.5	0.8032	31.5	0.8004	26.1	0.7534	25.1	0.7831	18.4	0.763	26.2	0.8138
gen_ft	32.5	0.7868	30.8	0.8043	31.3	0.8002	25.1↓	0.753	24.7	0.7874	18.1	0.7604	25.4↓	0.8065↓

Table 2: Main results, comparing the performance of the baseline (base) and fine-tuned (ft) models using BLEU and COMET scores across six domains: medical (med), legal (leg), IT (it), movie subtitles (sub), TED talks (ted), and a general domain (gen). **Bold** values indicate the higher score between the baseline and fine-tuned models for each metric, domain, and language pair. Arrows indicate significantly worse (↓) and better (↑) performance compared to the baseline according to each metric, domain, and language pair (p-value < 0.05).

general domain, we retrieve the corpora directly from their respective repositories. As the OPUS datasets are originally aligned at the sentence level, we first clean and filter the data using a consistent methodology across all domains. This involves removing sentences with token lengths outside the range of 3 to 100, irregular punctuation, duplicates, and sentences exhibiting a similarity of 60% or higher. Any source or target sentences that do not meet these criteria are discarded from the parallel data in each domain to mitigate potential noise. Next, we preprocess the data to extract a set of 1,000 parallel sentences as the test data for all eight languages (English and the seven target languages) in each domain.

These parallel test sentences are then removed from the English-Spanish parallel dataset, with the remaining data split into a validation set of 1,000 sentences and a training set of 150,000 sentences for each domain. For the NTREX-128 test set, we do not apply any data cleaning and simply extract the first 1,000 sentences for each of the eight languages to create the general domain test sets. The MultiEURLEX corpus, being document-aligned, requires aligning the data at the sentence level for the training, validation, and test splits provided in the corpus before the cleaning steps applied to the OPUS datasets.

3.3 Model

The baseline model employed in our experiments is the M2M-100 (many-to-many for 100 languages) multilingual NMT model (Fan et al., 2021). M2M-100 is a sequence-to-sequence Transformer model capable of translating directly between any pair of

its supported 100 languages without relying on English as an intermediary. The original M2M-100 model was trained on a diverse parallel corpus spanning 100 languages, curated through a novel data mining approach called the “bridge language family mining strategy” (Fan et al., 2021) and mined from the Common Crawl corpus.⁶ While all languages used in our experiments, except for Italian, are considered bridge languages in the M2M-100 model, the lack of information on the exact data sizes mined for each language limits our ability to comprehensively analyze how the amount of pre-training data affects the language-specific performance of the model. For our experiments, we utilize the m2m100_418M variant⁷ with 418 million parameters to meet the hardware limitations of our project.

3.4 Implementation

The implementation of the M2M-100 model is based on the Transformers library from Hugging Face.⁸ We fine-tune the model on the English-Spanish parallel dataset for each of the six domains separately, using the same set of configurations, including a learning rate of 1e-7, a batch size of 10, dropout of 0.1, weight decay of 0.0, label smoothing of 0.2, AdamW optimizer with betas of 0.9 and 0.98, a maximum input/output length of 128 tokens, mixed precision (FP16) training, and a maximum of 60,000 training steps, with epoch-level validation. Due to resource limitations, we do not

⁶<https://commoncrawl.org/>

⁷https://huggingface.co/facebook/m2m100_418M/tree/main

⁸<https://huggingface.co/docs/transformers/en/index>

train the models until convergence. We freeze the embedding layers of the encoder to prevent catastrophic forgetting of the pre-trained representations. The models are trained on a single NVIDIA-T4 GPU (each for around seven hours), and the best checkpoint is saved for inference. For inference, we load each fine-tuned M2M-100 model and its corresponding tokenizer and generate the translated output using beam search decoding with a beam size of 4. The baselines involve evaluating the initial `m2m100_418M` checkpoint on all target languages in each domain separately, using the same inference configurations as for the fine-tuned models. All experiments are conducted in the Google Colab environment.^{9,10}

We include BLEU (Papineni et al., 2002) as one of our evaluation metrics due to its widespread adoption within the MT research. We rely on sacreBLEU (Post, 2018) (13a tokenizer) and its implementation of paired bootstrap resampling (Koehn, 2004) with 300 resampling trials and a p-value threshold of 0.05. We also use COMET (Rei et al., 2020), for which we employ `comet-compare` (bootstrap resampling and a paired t-test, 300 resamples and a p-value of 0.05).

4 Results

First, we examine the effectiveness of fine-tuning a massively multilingual pre-trained model, M2M-100, on domain-specific data from an English-Spanish language pair and evaluate its performance across various target languages within the same domain.

Table 2 presents the main results, comparing the pre-trained baseline model’s performance against the fine-tuned models across six domains. Across the specialized medical, legal, and IT domains, the fine-tuned models consistently outperform the baseline model, achieving higher BLEU and COMET scores for all language pairs (see Appendix A for CometKiwi scores), with few exceptions depending on the evaluation metric. This improvement demonstrates the effectiveness of domain adaptation through fine-tuning, enabling the model to capture domain-specific knowledge and vocabulary more effectively within well-defined, specialized domains.

However, the degree of improvement varies

across domains and target languages. For the medical domain, while fine-tuning significantly improves the results for the English-Spanish language pair used for fine-tuning, the improvement becomes less pronounced as the target language diverges linguistically from the pivot language (Spanish). This trend is less evident in the legal and IT domains, where substantial improvements are observed across almost all language pairs, even for those linguistically distant from Spanish. In contrast, for the mixed domains of movie subtitles and TED talks, which lack a specific topical focus but exhibit distinct genres, the improvements from fine-tuning are more modest, although still consistent across most language pairs. Notably, the improvements are more consistent for the TED talks domain than the movie subtitles domain. Moreover, even the performance for the English-Spanish language pair used for fine-tuning shows only marginal improvements compared to the specialized domains. In the general domain, the fine-tuned model exhibits mixed performance, with statistically insignificant improvements in some language pairs and slight decreases in others compared to the baseline model. This could be attributed to the composition of the pre-training data, which contains substantial general-domain content, potentially limiting the benefits of fine-tuning on a specific language pair, as the baseline model is already well-trained on such data. Turning to the subject of domain transferability, Table 3 illustrates the results of zero-shot cross-lingual cross-domain transfer, where the model is fine-tuned on movie subtitles or TED talks mixed domains and evaluated on the specialized medical, legal, and IT domains across all language pairs. The results exhibit mixed performance, depending on the domain and language pair, with improvements generally more pronounced, while not statistically significant, when evaluated using COMET than BLEU. Notably, fine-tuning on TED talks leads to more effective cross-domain transfer compared to movie subtitles. Regarding the target specialized domains, cross-domain transfer appears more effective for the IT domain than legal or medical domains. This observation suggests certain domains may be more responsive to cross-domain transfer due to their inherent characteristics.

⁹<https://colab.research.google.com/>

¹⁰All models and data used in the experiments will be made public in the final version.

	en→es		en→pt		en→it		en→fr		en→cs		en→pl		en→el	
	BLEU	COMET	BLEU	COMET	BLEU	COMET	BLEU	COMET	BLEU	COMET	BLEU	COMET	BLEU	COMET
med_base	36	0.8451	31.7	0.8527	29.7	0.8481	28.6	0.8179	22.6	0.8582	18	0.8234	29.1	0.8595
sub2med	35.3↓	0.8416↓	30.4↓	0.8473↓	28.6↓	0.8444↓	27.9↓	0.8133↓	21.6↓	0.8506↓	16.9↓	0.815↓	27.4↓	0.8491↓
ted2med	35.7	0.8444	31.4	0.8528	29.4	0.8477	28↓	0.8155	22.1	0.8595	17.4↓	0.8217	28.4↓	0.8585
med_ft	43.5↑	0.8663↑	34.4↑	0.8645↑	30.6↑	0.8563↑	29.2↑	0.8293↑	22.5	0.8659↑	18.1	0.8342↑	28.8	0.8644↑
leg_base	44.1	0.8494	42.9	0.8653	36.9	0.8721	41.8	0.8533	30.6	0.8905	33.2	0.8796	40.7	0.8972
sub2leg	41.6↓	0.8424↓	40.3↓	0.8614↓	35.1↓	0.8645↓	40.2↓	0.8514	29.6↓	0.8866↓	30.7↓	0.8729↓	38.4↓	0.8919↓
ted2leg	43.4↓	0.8503	42.1↓	0.8671	36.6	0.8717	42	0.8589 ↑	31.3 ↑	0.8923	32.8	0.8823	41.3 ↑	0.899
leg_ft	49.6↑	0.8714↑	43.3	0.8774↑	38.3↑	0.8827↑	43.7↑	0.8694↑	33.4↑	0.9038↑	34.2↑	0.8906↑	43.9↑	0.9059↑
it_base	34.2	0.7954	26.6	0.79	29.2	0.7964	25.2	0.7386	19.1	0.7872	21.2	0.7818	27.1	0.7972
sub2it	34.2	0.7929	26.6	0.7866	29.9	0.7962	24.7	0.7335↓	18↓	0.7829	20.3↓	0.7793	25.7↓	0.7826↓
ted2it	35.9 ↑	0.8032 ↑	28.2 ↑	0.7968 ↑	30.8 ↑	0.8023 ↑	26.5 ↑	0.7451 ↑	19.7	0.7942 ↑	21.7	0.7898 ↑	28.3 ↑	0.8009
it_ft	44.4↑	0.8344↑	29.5↑	0.8104↑	33.4↑	0.8151↑	29.5↑	0.7619↑	19.7	0.8147↑	22.5↑	0.8078↑	28.5↑	0.816↑

Table 3: Results for zero-shot cross-lingual cross-domain transfer, where models fine-tuned on movie subtitles (sub) or TED talks (ted) are evaluated on medical (med), legal (leg), and IT (it) domains using BLEU and COMET scores. Scores compare cross-domain transfer models (sub2med, ted2med, etc.) against baseline (base) and models fine-tuned on the target domain (med_ft, leg_ft, it_ft). **Bold** values indicate higher score between the baseline and fine-tuned models for each metric, domain, and language pair. **Gray** rows show expected higher scores (also in **bold**) for direct fine-tuning. Arrows indicate significantly worse (↓) and better (↑) performance compared to the baseline according to each metric, domain, and language pair (p-value < 0.05).

5 Discussion

5.1 Enhancing Domain-Specific Translation Quality

The main results (see Table 2) imply that the domain-specific quality of MT output for one language pair can indeed be enhanced by fine-tuning the model on domain-relevant data from another language pair. The fine-tuned models consistently outperform the baseline across the specialized medical, legal, and IT domains, achieving higher BLEU and COMET scores for almost all language pairs. This improvement demonstrates the effectiveness of domain adaptation through fine-tuning, enabling the model to capture domain-specific knowledge and vocabulary more effectively within well-defined domains. While the degree of improvement varies across domains and target languages, the consistent gains observed underscore the potential of zero-shot cross-lingual domain adaptation. By utilizing domain-specific data from a single language pair, the model’s performance can be enhanced for multiple target languages within the same domain, even for those linguistically distant from the fine-tuning language pair.

5.2 Factors Influencing Domain Transferability

The results presented in Tables 2 and 3 reveal varying levels of improvement in zero-shot cross-lingual domain adaptation across specialized domains, as well as differences in how responsive certain domains are to cross-domain transfer. To

investigate the factors behind these observations, we take a deeper look into the characteristics of each domain. One key factor that emerges is the linguistic complexity of the domains, as evidenced by the average sentence length and vocabulary size shown in Table 4. The movie subtitles domain has approximately twice the shorter average sentence length and a 20% smaller vocabulary size in the training set compared to the TED talks domain, which could explain why fine-tuning on the more complex TED talks domain results in better generalization to specialized domains. Among the specialized domains, the IT domain stands out with the smallest average sentence length and vocabulary size, potentially making it easier for models to generalize and adapt to this domain. In contrast, the legal domain appears to be the most linguistically complex in terms of sentence length and vocabulary size. However, certain unique aspects of legal language may paradoxically facilitate transfer to this domain. The unique language style prevalent in legal texts, featuring archaic vocabulary, repetitive syntax patterns, and convoluted sentences can, while increasing overall complexity, also aid models in adapting to the legal domain’s language use. Additionally, the substantially longer average sentence length in the legal domain (around three times longer than the IT domain and two times longer than the medical domain) means that when training for a fixed number of epochs, the model was exposed to more training data in terms of the total number of words. This increased exposure to legal language likely contributed to better adaptation to this domain.

Domain	Train		Valid		Test	
	Avg Sent Len	Vocab Size	Avg Sent Len	Vocab Size	Avg Sent Len	Vocab Size
Medical	19.22	23,824	19.20	3,462	16.93	2,966
Legal	36.33	33,657	33.45	2,971	28.57	2,975
IT	12.07	25,111	12.54	2,428	9.41	1,830
Movie subtitles	9.76	34,310	10.35	2,193	10.34	2,117
TED talks	18.10	42,513	18.75	3,185	17.43	3,421

Table 4: Average sentence length (in words) and vocabulary size (number of unique words) for the training, validation, and test sets across specialized and mixed domains.

These findings demonstrate that domain transferability is not solely determined by a domain’s topical specificity or genre but is also influenced by its linguistic properties and inherent characteristics. While domains exhibiting greater linguistic complexity in terms of sentence length and vocabulary size tend to be more challenging for effective cross-lingual adaptation and cross-domain transfer, certain linguistic features can actually facilitate transfer. Consequently, in addition to the domain’s topical and genre specialization, a nuanced understanding of a domain’s inherent linguistic characteristics, as well as the amount of exposure to a domain’s language during training, is required for optimizing cross-lingual adaptation and cross-domain transfer. Fundamental properties like vocabulary size, sentence complexity, and consistent language styles emerge as key factors influencing transferability potential across domains.

5.3 Influence of Language-Specific and Domain-Specific Factors

The results also show that both language-specific and domain-specific factors have influence on the task, with language influences being more prominent in the main results, while domain-specific factors play a crucial role in determining cross-domain transfer effectiveness. The main results (see Table 2) highlight language influences, with larger gains observed for the fine-tuning language pair (English-Spanish) and less pronounced improvements as the linguistic distance from the pivot language increases. This trend shows the role of language-specific factors and linguistic proximity in the effectiveness of cross-lingual domain adaptation. However, domain-specific factors also play an essential role, as evident from the varied performance across specialized domains discussed in the previous section.

The findings suggest that while fine-tuning the model on closely related language pairs is advanta-

geous, inherent domain characteristics ultimately determine the limits of both zero-shot cross-lingual domain adaptation and cross-domain transfer. Additionally, as shown in Table 5, the specificity of domain vocabularies in specialized domains, where terminologies, though highly specialized, are consistent across languages, facilitates language transfer even for linguistically distant languages. This characteristic can be attributed to the presence of loanwords, which are fully or partly assimilated from one language into another, or terms that often remain untranslated. Furthermore, the influence of the pre-training data cannot be overlooked. Seven out of the eight languages involved in the experiments were considered bridge languages in the M2M-100 model, meaning the model was trained on comparatively larger amounts of data in these languages, capturing general language knowledge (the only exception is Italian, which, while not a bridge language in M2M-100, is still considered a relatively high-resource language). This pre-existing language knowledge likely contributes to the observed language transfer capabilities. Therefore, while language-specific factors play a more prominent role in the main task of zero-shot cross-lingual domain adaptation, domain-specific factors are crucial determinants of cross-domain transfer effectiveness. These findings highlight the importance of considering both language and domain aspects when adapting NMT systems for specialized domains. The results also demonstrate that domains can exhibit distinct linguistic properties outside the notions of topic and genre, which significantly impact the effectiveness of cross-lingual adaptation and cross-domain transfer.

Consequently, a more nuanced understanding of a domain’s inherent linguistic characteristics is crucial for optimizing these processes. By emphasizing the influence of domain-specific factors on transfer performance, this study highlights the importance of revisiting the traditional definitions

Medical Domain
<p>Source Text: Like all medicines, KOGENATE Bayer 1000 IU can cause side effects, although not everybody gets them.</p> <p>Italian Reference: Come tutti i medicinali, KOGENATE Bayer 1000 UI può causare effetti indesiderati sebbene non tutte le persone li manifestano.</p> <p>Polish Reference: Jak każdy lek, preparat KOGENATE Bayer 1000 j. m. może powodować działania niepożądane, chociaż nie u każdego one wystąpią.</p>
Legal Domain
<p>Source Text: 5. As soon as it adopts a delegated act, the Commission shall notify it simultaneously to the European Parliament and to the Council.</p> <p>Italian Reference: 5. Non appena adotta un atto delegato, la Commissione ne dà contestualmente notifica al Parlamento europeo e al Consiglio.</p> <p>Polish Reference: 5. Niezwłocznie po przyjęciu aktu delegowanego Komisja przekazuje go równocześnie Parlamentowi Europejskiemu i Radzie.</p>
IT Domain
<p>Source Text: The ISTIME() function returns True if the parameter is a time value. Otherwise, it returns False.</p> <p>Italian Reference: La funzione ISTIME() restituisce True se il parametro è un' espressione di tempo. Altrimenti restituisce False.</p> <p>Polish Reference: Funkcja ISTIME() zwraca True jeśli parametr ma wartość czasu, w przeciwnym wypadku False.</p>

Table 5: Examples of reference translations in the medical, legal, and IT domain test sets across English-to-Italian and English-to-Polish language pairs, highlighting the presence of loanwords and untranslated terms, marked in red in the source text and in blue in the references.

of “domain” in MT. Current research often skips over this distinction, relying primarily on topical or genre-based domain classifications. However, the findings highlight the need for a more comprehensive characterization that accounts for linguistic complexities and domain-specific language patterns to develop effective strategies for tailoring NMT systems to diverse specialized domains.

6 Conclusion and Future Work

The study explored zero-shot cross-lingual domain adaptation for NMT to bridge the gap between large multilingual models and their limited specialized domain performance. Experiments across six domains showed consistent translation quality improvements for most target languages compared to the pre-trained baseline when fine-tuning a pivot language from the same domain. However, the degree of improvement varied based on the linguistic proximity between pivot and target languages, as well as the domain’s linguistic complexity and data variety. The feasibility of zero-shot cross-lingual cross-domain transfer, using models fine-tuned on mixed domains for specialized domains, was also investigated. While achievable, effectiveness depended on the properties of pivot and target domains, with more consistent language domains being more responsive to cross-domain transfer. Future work can explore a broader range of specialized domains/languages and focus specifically on

cross-domain transfer techniques. Also, including diverse language families will enable a better understanding of how language characteristics interact with domain transferability potential.

7 Limitations

The findings of this research are subject to several limitations, the first and primary one being the use of an existing pre-trained model (M2M-100) rather than pre-training a model specifically for the languages and domains included in the experiments due to resource constraints. Pre-training a model from scratch would have allowed for better control over the pre-training data, ensuring minimal overlap with the domain-specific data used for fine-tuning. Furthermore, the models are not fine-tuned until convergence, which potentially impacts the full realization of their capabilities. Additionally, the experiments focus on languages primarily from the Indo-European family, limiting the insights into the influence of linguistic relatedness and transferability potential across more diverse language pairs. Addressing these limitations is crucial for future research to foster a more comprehensive representation of the proposed approach.

8 Ethical Considerations

In this paper, we used open-source datasets and models that were already published. Therefore, there are no ethical considerations for both our

models and results.

References

- Maruan Al-Shedivat and Ankur Parikh. 2019. [Consistency by agreement in zero-shot neural machine translation](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 1184–1197, Minneapolis, Minnesota. Association for Computational Linguistics.
- Ilias Chalkidis, Manos Fergadiotis, and Ion Androutsopoulos. 2021. [MultiEURLEX - a multi-lingual and multi-label legal document classification dataset for zero-shot cross-lingual transfer](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6974–6996, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online. Association for Computational Linguistics.
- Asa Cooper Stickland, Alexandre Berard, and Vassilina Nikoulina. 2021. [Multilingual domain adaptation for NMT: Decoupling language and domain information with adapters](#). In *Proceedings of the Sixth Conference on Machine Translation*, pages 578–598, Online. Association for Computational Linguistics.
- Marta R Costa-jussà, James Cross, Onur Çelebi, Maha Elbayad, Kenneth Heafield, Kevin Heffernan, Elahe Kalbassi, Janice Lam, Daniel Licht, Jean Maillard, et al. 2022. No language left behind: Scaling human-centered machine translation. *arXiv preprint arXiv:2207.04672*.
- Raj Dabre, Tetsuji Nakagawa, and Hideto Kazawa. 2017. [An empirical study of language relatedness for transfer learning in neural machine translation](#). In *Proceedings of the 31st Pacific Asia Conference on Language, Information and Computation*, pages 282–286. The National University (Phillippines).
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Angela Fan, Shruti Bhosale, Holger Schwenk, Zhiyi Ma, Ahmed El-Kishky, Siddharth Goyal, Mandeep Baines, Onur Celebi, Guillaume Wenzek, Vishrav Chaudhary, et al. 2021. Beyond english-centric multilingual machine translation. *Journal of Machine Learning Research*, 22(107):1–48.
- Christian Federmann, Tom Kocmi, and Ying Xin. 2022. [NTREX-128 – news test references for MT evaluation of 128 languages](#). In *Proceedings of the First Workshop on Scaling Up Multilingual Evaluation*, pages 21–24, Online. Association for Computational Linguistics.
- Orhan Firat, Baskaran Sankaran, Yaser Al-onaizan, Fatos T. Yarman Vural, and Kyunghyun Cho. 2016. [Zero-resource translation with multi-lingual neural machine translation](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 268–277, Austin, Texas. Association for Computational Linguistics.
- Mathieu Grosso, Alexis Mathey, Pirashanth Ratnamogan, William Vanhuffel, and Michael Fotso. 2022. [Robust domain adaptation for pre-trained multilingual neural machine translation models](#). In *Proceedings of the Massively Multilingual Natural Language Understanding Workshop (MMNLU-22)*, pages 1–11, Abu Dhabi, United Arab Emirates (Hybrid). Association for Computational Linguistics.
- Shuhao Gu and Yang Feng. 2022. [Improving zero-shot multilingual translation with universal representations and cross-mapping](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 6492–6504, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Baijun Ji, Zhirui Zhang, Xiangyu Duan, Min Zhang, Boxing Chen, and Weihua Luo. 2020. [Cross-lingual pre-training based transfer for zero-shot neural machine translation](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(01):115–122.
- Melvin Johnson, Mike Schuster, Quoc V. Le, Maxim Krikun, Yonghui Wu, Zhifeng Chen, Nikhil Thorat, Fernanda Viégas, Martin Wattenberg, Greg Corrado, Macduff Hughes, and Jeffrey Dean. 2017. [Google’s multilingual neural machine translation system: Enabling zero-shot translation](#). *Transactions of the Association for Computational Linguistics*, 5:339–351.
- Philipp Koehn. 2004. [Statistical significance tests for machine translation evaluation](#). In *Proceedings of the 2004 Conference on Empirical Methods in Natural Language Processing*, pages 388–395, Barcelona, Spain. Association for Computational Linguistics.
- Philipp Koehn and Rebecca Knowles. 2017. [Six challenges for neural machine translation](#). In *Proceedings of the First Workshop on Neural Machine Translation*, pages 28–39, Vancouver. Association for Computational Linguistics.

- Wen Lai, Alexandra Chronopoulou, and Alexander Fraser. 2022. [m⁴ adapter: Multilingual multi-domain adaptation for machine translation with a meta-adapter](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 4282–4296, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Yu-Hsiang Lin, Chian-Yu Chen, Jean Lee, Zirui Li, Yuyan Zhang, Mengzhou Xia, Shruti Rijhwani, Junxian He, Zhisong Zhang, Xuezhe Ma, Antonios Anastasopoulos, Patrick Littell, and Graham Neubig. 2019. [Choosing transfer languages for cross-lingual learning](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3125–3135, Florence, Italy. Association for Computational Linguistics.
- Pierre Lison, Jörg Tiedemann, and Milen Kouylekov. 2018. [OpenSubtitles2018: Statistical rescoring of sentence alignments in large, noisy parallel corpora](#). In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan. European Language Resources Association (ELRA).
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. [Bleu: a method for automatic evaluation of machine translation](#). In *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics*, pages 311–318, Philadelphia, Pennsylvania, USA. Association for Computational Linguistics.
- Fred Philippy, Siwen Guo, and Shohreh Haddadan. 2023. [Towards a common understanding of contributing factors for cross-lingual transfer in multilingual language models: A review](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5877–5891, Toronto, Canada. Association for Computational Linguistics.
- Barbara Plank. 2016. What to do about non-standard (or non-canonical) language in nlp. *arXiv preprint arXiv:1608.07836*.
- Matt Post. 2018. [A call for clarity in reporting BLEU scores](#). In *Proceedings of the Third Conference on Machine Translation: Research Papers*, pages 186–191, Brussels, Belgium. Association for Computational Linguistics.
- Ricardo Rei, Craig Stewart, Ana C Farinha, and Alon Lavie. 2020. [COMET: A neural framework for MT evaluation](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2685–2702, Online. Association for Computational Linguistics.
- Nils Reimers and Iryna Gurevych. 2020. [Making monolingual sentence embeddings multilingual using knowledge distillation](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4512–4525, Online. Association for Computational Linguistics.
- Marina Santini. 2004. State-of-the-art on automatic genre identification. *Information Technology Research Institute Technical Report Series, ITRI, University of Brighton*.
- Danielle Saunders. 2022. Domain adaptation and multi-domain adaptation for neural machine translation: A survey. *Journal of Artificial Intelligence Research*, 75:351–424.
- Jörg Tiedemann. 2012. [Parallel data, tools and interfaces in OPUS](#). In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC’12)*, pages 2214–2218, Istanbul, Turkey. European Language Resources Association (ELRA).
- ME van der Wees et al. 2017. *What’s in a domain?: Towards fine-grained adaptation for machine translation*.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc.
- Neha Verma, Kenton Murray, and Kevin Duh. 2022. [Strategies for adapting multilingual pre-training for domain-specific machine translation](#). In *Proceedings of the 15th biennial conference of the Association for Machine Translation in the Americas (Volume 1: Research Track)*, pages 31–44, Orlando, USA. Association for Machine Translation in the Americas.
- Krzysztof Wołk and Krzysztof Marasek. 2014. [Building subject-aligned comparable corpora and mining it for truly parallel sentence pairs](#). *Procedia Technology*, 18:126–132. International workshop on Innovations in Information and Communication Science and Technology, IICST 2014, 3-5 September 2014, Warsaw, Poland.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2021. [mT5: A massively multilingual pre-trained text-to-text transformer](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 483–498, Online. Association for Computational Linguistics.

A Complete Evaluation Results

In this section, we report full results, illustrating the translation performance on all language pairs for all models, evaluated using BLEU, COMET, and CometKiwi.

	en→es				en→pt		
	BLEU	COMET	CometKiwi		BLEU	COMET	CometKiwi
med_base	36	0.8451	0.8355	med_base	31.7	0.8527	0.8285
sub2med	35.3↓	0.8416↓	0.8307↓	sub2med	30.4↓	0.8473↓	0.8228↓
ted2med	35.7	0.8444	0.8358	ted2med	31.4	0.8528	0.8319↑
med_ft	43.5↑	0.8663↑	0.8481↑	med_ft	34.4↑	0.8645↑	0.8383↑
leg_base	44.1	0.8494	0.8514	leg_base	42.9	0.8653	0.8407
sub2leg	41.6↓	0.8424↓	0.8448↓	sub2leg	40.3↓	0.8614↓	0.8377
ted2leg	43.4↓	0.8503	0.8617↑	ted2leg	42.1↓	0.8671	0.851↑
leg_ft	49.6↑	0.8714↑	0.8682↑	leg_ft	43.3↑	0.8774↑	0.8559↑
it_base	34.2	0.7954	0.7681	it_base	26.6	0.79	0.7685
sub2it	34.2	0.7929	0.7656	sub2it	26.6	0.7866	0.7637↓
ted2it	35.9↑	0.8032↑	0.782↑	ted2it	28.2↑	0.7968↑	0.7788↑
it_ft	44.4↑	0.8344↑	0.7979↑	it_ft	29.5↑	0.8104↑	0.7886↑
sub_base	22.8	0.7548	0.767	sub_base	20	0.7678	0.7694
sub_ft	24.7↑	0.7627↑	0.771	sub_ft	21.2↑	0.7741↑	0.7722
ted_base	35.9	0.8189	0.8042	ted_base	31.1	0.8238	0.7979
ted_ft	37.8↑	0.8262↑	0.8076↑	ted_ft	31.9↑	0.8303↑	0.8032↑
gen_base	32.7	0.786	0.7723	gen_base	30.5	0.8032	0.7705
gen_ft	32.5	0.7868	0.7736	gen_ft	30.8	0.8043	0.7705

Table 6: Translation performance on en→es and en→pt language pairs for all models, evaluated using BLEU, COMET, and CometKiwi metrics. **Bold** values indicate the higher score between the baseline and fine-tuned models for each metric, domain, and language pair. Arrows indicate significantly worse (↓) and better (↑) performance compared to the baseline according to each metric, domain, and language pair (p-value < 0.05).

	en→it				en→fr		
	BLEU	COMET	CometKiwi		BLEU	COMET	CometKiwi
med_base	29.7	0.8481	0.8392	med_base	28.6	0.8179	0.8397
sub2med	28.6↓	0.8444↓	0.8351↓	sub2med	27.9↓	0.8133↓	0.8346↓
ted2med	29.4	0.8477	0.8416	ted2med	28↓	0.8155	0.8394
med_ft	30.6↑	0.8563↑	0.8456↑	med_ft	29.2↑	0.8293↑	0.8462↑
leg_base	36.9	0.8721	0.8567	leg_base	41.8	0.8533	0.8513
sub2leg	35.1↓	0.8645↓	0.8492↓	sub2leg	40.2↓	0.8514	0.8483↓
ted2leg	36.6	0.8717	0.8657↑	ted2leg	42	0.8589↑	0.8597↑
leg_ft	38.3↑	0.8827↑	0.8714↑	leg_ft	43.7↑	0.8694↑	0.8668↑
it_base	29.2	0.7964	0.7753	it_base	25.2	0.7386	0.7734
sub2it	29.9	0.7962	0.7798	sub2it	24.7	0.7335↓	0.7739
ted2it	30.8↑	0.8023↑	0.7909↑	ted2it	26.5↑	0.7451↑	0.7871↑
it_ft	33.4↑	0.8151↑	0.7974↑	it_ft	29.5↑	0.7619↑	0.7939↑
sub_base	17.8	0.7446	0.7783	sub_base	16.1	0.6988	0.7759
sub_ft	18.8↑	0.7532↑	0.7845↑	sub_ft	17.5↑	0.7073↑	0.7809↑
ted_base	29.3	0.814	0.8141	ted_base	33.7	0.7926	0.81
ted_ft	29.6	0.8199↑	0.8176↑	ted_ft	35↑	0.7955	0.8124
gen_base	31.5	0.8004	0.7837	gen_base	26.1	0.7534	0.7829
gen_ft	31.3	0.8002	0.7821	gen_ft	25.1↓	0.753	0.7835

Table 7: Translation performance on en→it and en→fr language pairs for all models, evaluated using BLEU, COMET, and CometKiwi metrics. **Bold** values indicate the higher score between the baseline and fine-tuned models for each metric, domain, and language pair. Arrows indicate significantly worse (↓) and better (↑) performance compared to the baseline according to each metric, domain, and language pair (p-value < 0.05).

	en→cs				en→pl		
	BLEU	COMET	CometKiwi		BLEU	COMET	CometKiwi
med_base	22.6	0.8582	0.8313	med_base	18	0.8234	0.8063
sub2med	21.6↓	0.8506↓	0.8249↓	sub2med	16.9↓	0.815↓	0.7987↓
ted2med	22.1	0.8595	0.8335	ted2med	17.4↓	0.8217	0.807
med_ft	22.5	0.8659↑	0.8402↑	med_ft	18.1	0.8342↑	0.817↑
leg_base	30.6	0.8905	0.8409	leg_base	33.2	0.8796	0.8251
sub2leg	29.6↓	0.8866↓	0.8394	sub2leg	30.7↓	0.8729↓	0.8201↓
ted2leg	31.3↑	0.8923	0.8582↑	ted2leg	32.8	0.8823	0.8358↑
leg_ft	33.4↑	0.9038↑	0.8614↑	leg_ft	34.2↑	0.8906↑	0.8427↑
it_base	19.1	0.7872	0.7558	it_base	21.2	0.7818	0.7518
sub2it	18↓	0.7829	0.7561	sub2it	20.3↓	0.7793	0.7488
ted2it	19.7	0.7942↑	0.7709↑	ted2it	21.7	0.7898↑	0.7629↑
it_ft	19.7	0.8147↑	0.7855↑	it_ft	22.5↑	0.8078↑	0.776↑
sub_base	15	0.7594	0.7622	sub_base	14.6	0.7472	0.755
sub_ft	15.3	0.766↑	0.7644	sub_ft	15.1	0.7566↑	0.7576
ted_base	21.8	0.8082	0.79	ted_base	16.2	0.7857	0.775
ted_ft	21.9	0.8194↑	0.7997↑	ted_ft	16.6↑	0.7934↑	0.7819↑
gen_base	25.1	0.7831	0.7471	gen_base	18.4	0.763	0.7445
gen_ft	24.7	0.7874	0.7502	gen_ft	18.1	0.7604	0.7452

Table 8: Translation performance on en→cs and en→pl language pairs for all models, evaluated using BLEU, COMET, and CometKiwi metrics. **Bold** values indicate the higher score between the baseline and fine-tuned models for each metric, domain, and language pair. Arrows indicate significantly worse (↓) and better (↑) performance compared to the baseline according to each metric, domain, and language pair (p-value < 0.05).

	en→el		
	BLEU	COMET	CometKiwi
med_base	29.1	0.8595	0.8152
sub2med	27.4↓	0.8491↓	0.8039↓
ted2med	28.4↓	0.8585	0.8152
med_ft	28.8	0.8644↑	0.8214↑
leg_base	40.7	0.8972	0.8384
sub2leg	38.4↓	0.8919↓	0.835
ted2leg	41.3↑	0.899	0.8499↑
leg_ft	43.9↑	0.9059↑	0.8552↑
it_base	27.1	0.7972	0.7563
sub2it	25.7↓	0.7826↓	0.7469↓
ted2it	28.3↑	0.8009	0.7662↑
it_ft	28.5↑	0.816↑	0.7754↑
sub_base	15.7	0.7768	0.7695
sub_ft	15.6	0.7725	0.7651
ted_base	29	0.8439	0.7934
ted_ft	29.2	0.8475↑	0.7991↑
gen_base	26.2	0.8138	0.7754
gen_ft	25.4↓	0.8065↓	0.7724

Table 9: Translation performance on en→el language pair for all models, evaluated using BLEU, COMET, and CometKiwi metrics. **Bold** values indicate the higher score between the baseline and fine-tuned models for each metric and domain. Arrows indicate significantly worse (↓) and better (↑) performance compared to the baseline according to each metric and domain (p-value < 0.05).