

Knowledge-Aware Conversation Derailment Forecasting Using Graph Convolutional Networks

Enas Altarawneh

York University
enas@eecs.yorku.ca

Michael Jenkin

York University
jenkin@eecs.yorku.ca

Ameeta Agrawal

Portland State University
ameeta@pdx.edu

Manos Papagelis

York University
papaggel@eecs.yorku.ca

Abstract

Online conversations are particularly susceptible to derailment, which can manifest itself in the form of toxic communication patterns including disrespectful comments and abuse. Forecasting conversation derailment predicts signs of derailment in advance enabling proactive moderation of conversations. State-of-the-art approaches to conversation derailment forecasting sequentially encode conversations and use graph neural networks to model dialogue user dynamics. However, existing graph models are not able to capture complex conversational characteristics such as context propagation and emotional shifts. The use of common sense knowledge enables a model to capture such characteristics, thus improving performance. Following this approach, here we derive commonsense statements from a knowledge base of dialogue contextual information to enrich a graph neural network classification architecture. We fuse the multi-source information on utterance into capsules, which are used by a transformer-based forecaster to predict conversation derailment. Our model captures conversation dynamics and context propagation, outperforming the state-of-the-art models on the CGA and CMV benchmark datasets

1 Introduction

The widespread availability of chat or messaging platforms, social media, forums and other online communities has led to an increase in the number of online conversations between individuals and groups. In contrast to offline or face-to-face communication, online conversations often utilize moderation to maintain the integrity of the platform and protect users' privacy and safety (Kilvington, 2021). Moderation can help to prevent harassment, trolling, hate speech, and other forms of abusive behavior (Tontodimamma et al., 2021). It can also help to prevent and address conversation derailment. Moderation typically takes place in terms of a gating process that reviews users' statements

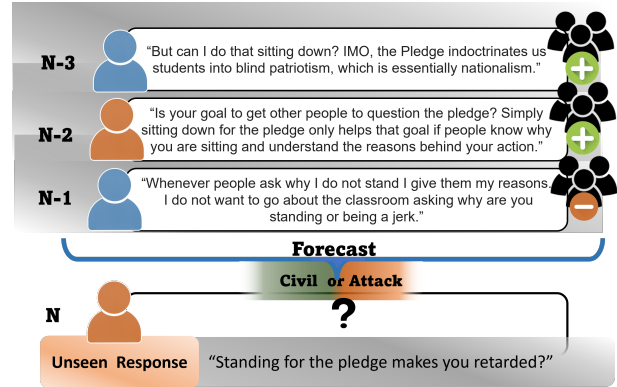


Figure 1: A sample conversation from the Reedit change my view (CMV) dataset showing a sequence of text utterances that end with a verbal abuse. Given the conversation context in the previous $N - 1$ turns, the task is to predict whether turn N will be a respectful or offensive statement **prior to it being presented** leading to derailment. The available data for utterances in the CMV dataset contain text, user ID and a public perception negative or positive score through public votes.

prior to being posted to the online platform. This ability to review statements prior to posting provides a unique opportunity to review such statements before they impact the online conversation. The critical question becomes one of automatically flagging such statements prior to their publication.

Conversation derailment refers to the process by which a conversation or discussion is redirected away from its original topic or purpose, typically as a result of inappropriate or off-topic comments or actions by one or more participants. In online conversations, derailment is exacerbated by the lack of nonverbal cues and the perceived anonymity associated with online conversations. Conversation derailment can lead to confusion, frustration, and a lack of productivity or progress in the conversation. Figure 1 shows an example conversation taken from the popular CGA benchmark dataset (Zhang et al., 2018). One can observe that there is offensive language being used in turn N that likely will lead the conversation to derail. Can we flag

the conversation prior to this statement?

In this research, we examine the problem of *forecasting conversation derailment*. The ability to predict conversation derailment has multifold benefits: (i) it is *more timely*, as it allows for proactive moderation of conversations (before they are published to the conversation and cause any harm) due to early warning, (ii) it is *more scalable*, as it allows to automatically monitor large active online communities, a task that is otherwise time-consuming, (iii) it is *more cost-effective*, as it may provide enough aid to limit the number of human moderators needed, and (iv) it may identify upsetting content early and prevent human moderators from being exposed to the upsetting content.

One effective approach to conversation derailment forecasting is a graph-based model that captures multi-party multi-turn dialogue dynamics (Altarawneh et al., 2023). Although this model outperforms other existing baselines, a limitation of this model is its inability to capture more complex conversational characteristics such as context propagation and emotional shifts. Conversation escalation or derailment is heavily impacted by the underlying commonsense knowledge shared between interlocutors. Studies on conversational emotional classification (Ghosal et al., 2020; Zhu et al., 2021) have shown that incorporating common sense knowledge allows for capturing such conversational characteristics.

Based on these observations, we propose a novel knowledge aware graph-based model that not only captures multi-party multi-turn dialogue dynamics but is also enriched with common sense knowledge. Thus, allowing the graph model to capture user dynamics, context propagation and mood shifts. Similar to Altarawneh et al. (2023), we leverage other available information associated with conversation utterances. We encapsulate utterance information into capsules that contain text, speaker ID and public perception on whether an utterance is either being positive or negative. Studies (Li et al., 2022; Jiao et al., 2019) have shown that encapsulating utterance information can aid in conversation classification tasks.

Another limitation of Altarawneh et al. (2023) is the simplicity of the fully connected network classifier used to perform the forecasting task. Inspired by the success of Transformers (Zhu et al., 2021) and to address the limitation in the current state-of-the-art model, we use a Transformer to predict de-

railment. Derailment of a conversation depends on the historical dialogue context. For this, We leverage an attention mechanism and the utterance capsules enriched with commonsense knowledge. The major contributions of this work are:

- We develop a novel graph convolutional neural network model, the *Knowledge Aware Forecasting Graph Convolutional Network (KA-FGCN)*, that captures dialogue user dynamics and leverages common sense knowledge for derailment forecasting.
- Through extensive empirical evaluation we show that KA-FGCN outperforms state-of-the-art models on the GCA and CMV benchmark datasets.
- The source code of KA-FGCN is publicly available to encourage reproducibility.¹

The remainder of the paper is organized as follows. Section 2 reviews related work. The technical problem of interest is presented formally in Section 3. Section 4 presents the KA-FGCN. Section 5 presents the experimental setup, the results are presented in Section 6. We conclude in Section 7 with a summary and a discussion of ongoing work.

2 Related Work

The CRAFT models introduced by Chang and Danescu-Niculescu-Mizil (2019a) were some of the first models to address the problem of forecasting conversation derailment. The CRAFT models integrate a generative dialog model that learns to represent conversational dynamics in an unsupervised fashion, and a supervised component that fine-tunes this representation to forecast future events. The performance of forecasting derailment using CRAFT models was improved by incorporating three task-specific loss functions proposed by Janiszewski et al. (2021). After the rise of language models (Kementchedjhieva and Søgaard, 2021) explored how BERT (Devlin et al., 2018), a pretrained transformer language encoder can be used for forecasting derailment. This model resulted in an improved classification F1-score and an earlier forecasting of conversation derailment. Another derailment forecasting transformer, Hierarchical-Multi, was proposed by Yuan and Singh (2023). Unlike

¹The GitHub repository will be made available prior to publication.

the Bert model, Hierarchical-Multi is a hierarchical transformer-based framework that combines utterance-level and conversation-level information to capture fine-grained contextual semantics. This work also demonstrates the effectiveness of incorporating multisource information for predicting the derailment of a outperforming previous models. FGCN (Altarawneh et al., 2023) also combines utterance-level and conversation-level information and uses multi-source information. Unlike these previous models which were based on sequence models, FGCN is built on a graph convolutional neural network that is better able to capture the dynamics of multi-party dialogue, including user relationships and public perception of conversation statements. FGCN performed significantly better than previous sequence models. But it lacked mechanisms to capture conversation characteristics such as context propagation and mood shifts. In this work we propose to leverage the gains of the graph-based model capturing not only multi-party multi-turn dialogue dynamics but also context propagation and mood shifts by enriching the model with common sense knowledge. In addition, we infuse available utterance information in utterance capsules that contain text, speaker ID, common sense knowledge and public perception on whether an utterance is perceived as either being positive or negative. Studies (Li et al., 2022; Jiao et al., 2019) have shown that encapsulating utterance information can aid in conversation classification tasks. The model proposed here also uses a Transformer classifier instead of a the simple classifier used in FGCN, allowing the model to capture long distance context encoded in the conversation representations.

There are many commonsense knowledge bases that can potentially be used to help inference tasks. For example, ConceptNet (Speer and Lowry-Duda, 2017) is a semantic network that contains concept-level relational commonsense knowledge that was used for Emotion Recognition in Conversations. Event2Mind (Rashkin et al., 2018) and ATOMIC (Sap et al., 2019) focus on inferential knowledge organized as typed if-then relations with variables. COMmonsEse Transformers (COMET) (Bosse-lut et al., 2019) is a generative model trained on ConceptNet and ATOMIC, which is able to generate novel, rich, and diverse knowledge that is not in the original knowledge bases. Common sense knowledge has proven to be beneficial for used

in conversation classification tasks (Zhong et al., 2019; Ghosal et al., 2020; Zhu et al., 2021). However, Our model will be the first to leverage common sense knowledge for forecasting conversation derailment.

3 Problem Definition

In this section, we formally define the problem of *forecasting conversation derailment*. For a conversation $\mathcal{C} = \{\{t_1, t_2, \dots, t_N\}, \{u_1, u_2, \dots, u_N\}, \{s_1, s_2, \dots, s_N\}, \{cn_1, cn_2, \dots, cn_N\}\}$ consisting of N turns, the last turn (i.e., the N 'th turn) is the potential site of derailment where $l = \{civil, personal\ attack\}$ denotes the label of this turn. For the i th turn, t_i denotes its text, u_i denotes its user, and s_i denotes an optional score, e.g., number of votes (up-vote/down-vote). An up-vote is a positive impression and a down-vote is a negative impression on the turn utterance. cn_i denotes the extracted utterance common sense knowledge. These types of input are detailed in section 4. The goal is to forecast the derailment label l of the N 'th turn given a conversation \mathcal{C} up to $N - 1$ turns (i.e., without any information about the N th turn).

4 The Knowledge Aware Conversation Derailment Forecasting Model

In this section, we describe KA-FGCN, visualized in Figure 2.

4.1 Sequential encoding

The input to the model $X = \{t, u, s, cn\}$ consists of the text t_i , user ID u_i the public perception score s_i and/or common sense knowledge cn_i for each turn in the conversation $i \in \{1, 2, \dots, N - 1\}$, as described below:

Textual input — the input consists of an encoding of the turn text t_i . We vary the text input creating two model variants: KA-FGCN-BRT and KA-FGCN-GPT. KA-FGCN-BRT uses BERT embedding extracted after fine tuning as described in Kementchedjhieva and Sogaard (2021), resulting in the sequential encoding of the text as the vector t'_i . KA-FGCN-GPT uses GPT embeddings with a BiLSTM sequential encoding resulting in t'_i .

User ID input — the input consists of an encoding of the user ID as a randomly initialized vector u_i , where each user has a unique vector; we use BiLSTM sequential encoding to obtain the utterance user ID vectors u'_i . We use unique randomly initialized vectors to avoid privacy issues that may arise

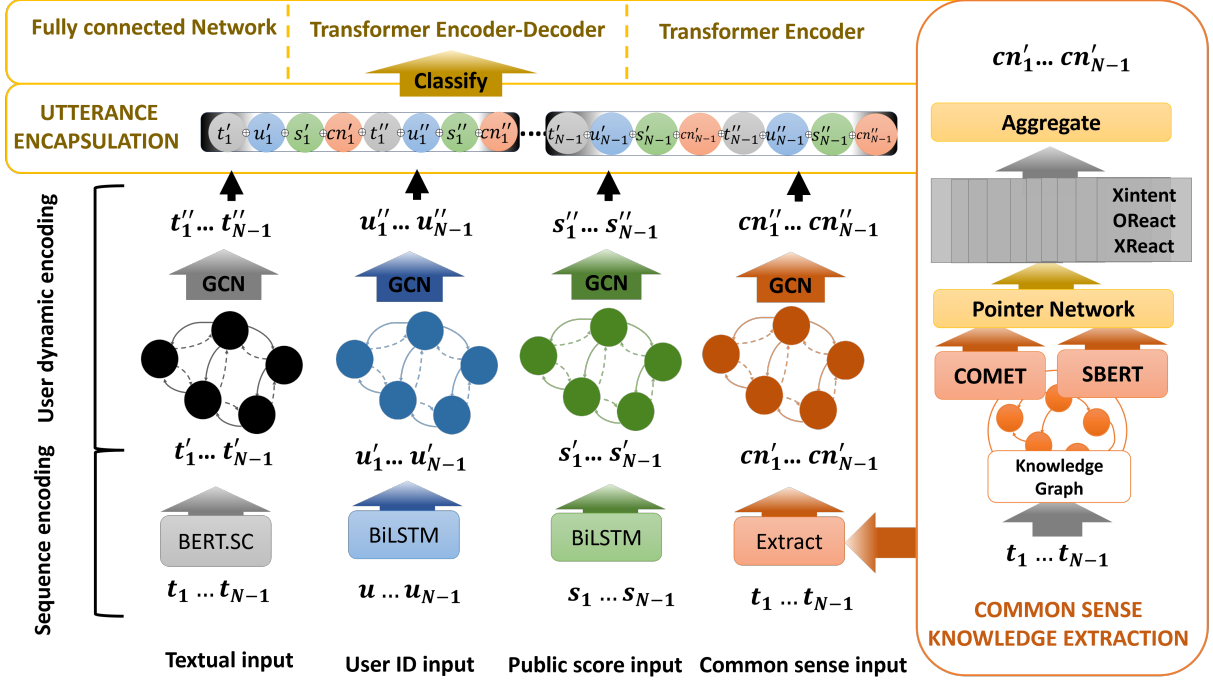


Figure 2: An overview of the Knowledge Aware Graph convolutional Network forecasting model KA-GCN

using actual IDs.

Public perception input — the input consists of a popularity score of the number of up-votes on a turn minus the number of down-votes on the same. To obtain the score vector s_i we use equal depth binning to capture three levels of popularity for positive scores and three levels of unpopularity for negative scores. We use a BiLSTM sequential encoder on s_i resulting in utterance public perception vectors s_i' .

Common sense input — We use ATOMIC (Sap et al., 2019) as a source of external knowledge. In ATOMIC, each node is a phrase describing an event. Edges are relation types linking from one event to another. ATOMIC thus encodes triples such as $\langle \text{event}, \text{relation type}, \text{event} \rangle$. There are a total of nine relation types in ATOMIC, of which three are used here: xIntent, the intention of the subject (e.g., ‘to get a raise’), xReact, the reaction of the subject (e.g., ‘be tired’), and oReact, the reaction of the object (e.g., ‘be worried’), since they are defined as the mental states of an event.

Given an utterance text t_i , we compare it with every node in the knowledge graph, and retrieve the most similar one. SBERT (Reimers and Gurevych, 2019) is used to compute the similarity between an utterance and events. We extract the top-K events, and obtain their intentions and reactions, which are denoted as $\{e_{i,k}^{sI}, e_{i,k}^{sR}, e_{i,k}^{oR}\}, k = 1, \dots, K$.

Other than SBERT, We also use the knowledge

generation model COMET, which is trained on ATOMIC, to retrieve more common sense knowledge. COMET can take t_i as input and generate the knowledge with the desired event relation types specified (e.g., xIntent, xReact or oReact). The generated knowledge can be unseen in ATOMIC since COMET is essentially a finetuned language model. We use COMET to generate the K most likely events, each with respect to the three event relation types. The produced events are denoted as $\{g_{i,k}^{sI}, g_{i,k}^{sR}, g_{i,k}^{oR}\}, k = 1, \dots, K$.

With the knowledge retrieved from ATOMIC, we build a pointer network (Vinyals et al., 2015) to choose the commonsense knowledge either from SBERT or COMET. The pointer network calculates the probability of choosing the candidate knowledge source as:

$$P(\Pi(t_i, e_i, g_i) = 1) = \sigma([t_i, e_i, g_i]W_\sigma),$$

where $\Pi(t_i, e_i, g_i)$ is an indicator function with value 1 or 0, and $\sigma(t) = 1/(1 + \exp(-t))$. We envelope σ with Gumbel Softmax (Jang et al., 2017) to generate the one-hot distribution. The integrated commonsense knowledge is expressed as:

$$cn_i = \Pi(t_i, e_i, g_i)e_i + (1 - \Pi(t_i, e_i, g_i))g_i,$$

where $cn_i = \{c_{n,k}^{sI}, c_{n,k}^{sR}, c_{n,k}^{oR}\}_k = 1$.

With the knowledge source selected, we proceed to select and aggregate the most informative knowledge using the method described in (Zhu et al., 2021) to obtain cn_i .

4.2 Graph Construction

For a given conversation, the output of the sequential encoder for each one of the input types t'_i , u'_i , s'_i and cn'_i is used to initialize the vertices in homogeneous graphs shown in Figure 2. The vertices in the graphs represent the turns in the conversation. Each graph $G_x = (V, E, R, W)$, for each type of input $x \in \{t, u, s, cn\}$, is constructed with vertices $v_i \in V$, $r_{ij} \in E$ is the labeled edges between v_i and v_j , the edge labels (relations) $\in R$ and α_{ij} is the weight of the labeled edge r_{ij} , with $0 \leq \alpha_{ij} \leq 1$, where $\alpha_{ij} \in W$, $i \in \{1, 2, \dots, N-1\}$ and $j \in$ the set of all neighboring vertices to v_i .

For each conversation we construct four types of graphs; G_x for $x \in X = \{t, u, s, cn\}$, a text-based G_t , a user-based G_u a public perception score-based G_s and common sense knowledge G_{cn} . Each conversation turn in these graphs is represented as a vertex $v_i \in V$ and is initialized with the sequentially encoded feature vector associated with the graph corresponding data type, for all $i \in \{1, 2, \dots, N-1\}$.

Edge construction. We establish the direct user to user relationship in a conversation through an edge construction of each graph adopted from (Altarawneh et al., 2023). This results in efficient graph modeling with less complexity compared to complete graphs. In user-to-user relationship edge construction, each vertex v_i representing a turn in the conversation has directed edges connecting it to its preceding (parent) and succeeding comments/turns (children). Same user comments (turns) are also connected through directed edges. The user-to-user relation $\in R$ of an edge r_{ij} is set based on the user-to-user dependency between user u_i (of turn v_i) and user u_j (of turn v_j) and is used to label the edge.

As the graph is directed, two vertices can have edges in both directions with different relations, for example, a forward edge labeled with user-to-user relation $u_1 \rightarrow u_2$ and a backward edge labeled with user-to-user relation $u_2 \rightarrow u_1$. We also use represent the past (backward) and future (forward) temporal dependency between the vertices. The edge weights are set using a similarity based attention module. The attention function is computed such that, for each vertex, the incoming set of edges has a sum total weight of 1. The weights are calculated as, $\alpha_{ij} = \text{softmax}(v_i \odot W_e[v_{j_1}, \dots, v_{j_m}])$, for j_k , where $k = 1, 2, \dots, m$, for the m vertices connected to v_i , ensuring the vertex v_i receives a total weight

contribution of 1.

4.3 Feature Transformation

The sequentially encoded text features t'_i , the user features u'_i , the public perception features s'_i and the common sense knowledge features cn'_i of the graph network are transformed from user dynamic independent into user dynamic dependent feature vectors using a two-step graph convolution process employed by Ghosal et al. (2019); Altarawneh et al. (2023). In the first step, a new feature vector is computed for each vertex in all four graphs for each input $x \in X = \{t, u, s, cn\}$ by aggregating local neighbourhood information:

$$x''_i = \sigma\left(\sum_{r \in R} \sum_{j \in N_i^r} \frac{\alpha_{ij}}{c_{i,r}} W_r x'_j + \alpha_{ii} W_0 x'_i\right),$$

for $i = 1, 2, \dots, N-1$, where, α_{ii} and α_{ij} are the edge weights, and N_i^r is the neighbouring indices of vertex i under relation $r \in R$. $c_{i,r}$ is a problem specific normalization constant automatically learned in a gradient based learning setup. Σ is an activation function such as ReLU, and W_r and W_0 are learnable parameters of the transformation. In the second step, another local neighbourhood based transformation is applied over the outputs of the first step, as:

$$x''_i = \sigma\left(\sum_{j \in N_i^r} W x''_j + \alpha_{ii} W_0 x''_i\right),$$

for $i = 1, 2, \dots, N-1$, where, W and W_0 are transformation parameters, and σ is the activation function. This two step transformation accumulates the normalized sum of the local neighbourhood.

4.4 The Derailment Forecaster

To form the final turn or utterance representation, the sequential encoded vectors t'_i , u'_i , s'_i and cn'_i , and the user dynamic encoded vectors t''_i , u''_i , s''_i and cn''_i are concatenated for each turn i in a conversation to form an utterance information capsule d_i .

We vary the information encapsulated in the utterance capsules to understand the impact of each data type on forecasting derailment, these variants are described in Table 4.

The utterance capsules d_i for $i \in \{1, 2, \dots, N-1\}$ are concatenated to form a representation of the conversation C :

$$C' = [d_1, d_2, \dots, d_{N-1}]$$

Variant	t	cn	u	s	Capsule d_i
TCN	✓	✓	✗	✗	$[t'_i, cn'_i, t''_i, cn''_i]$
TCNU	✓	✓	✓	✗	$[t'_i, u'_i, cn'_i, t''_i, u''_i, cn''_i]$
TCNS	✓	✓	✗	✓	$[t'_i, s'_i, cn'_i, t''_i, s''_i, cn''_i]$
TCNSU	✓	✓	✓	✓	$[t'_i, u'_i, s'_i, cn'_i, t''_i, u''_i, s''_i, cn''_i]$

Table 1: Variants of the utterance information capsules at classification time. The sequential encoded vectors t'_i , u'_i , s'_i and cn'_i , and the user dynamic encoded vectors t''_i , u''_i , s''_i and cn''_i are concatenated for each turn i in a conversation to form an utterance information capsule.

Finally, C' is fed to a classifier. We vary the types of classifiers in the study to show the impact of each type of classifier on derailment forecasting. These classifiers are described below.

Simple classifier (S) – C' is fed to a classifier with a linear layer, a full connected network and a sigmoid activation function, as described by Ghosal et al. (2019), to obtain the label \hat{l} of each conversation C .

Transformer Encoder only (E) – this is a transformer encoder classifier. For this classifier we preserve information about the boundaries between turns in C by inserting a [SEP] token between them. One [CLS] token is further added to the start of the input and one [SEP] token to its end. C' is fed to this encoder classifier to obtain the label \hat{l} of each conversation C .

Transformer Encoder-decoder(ED) – here we obtain prediction labels \hat{l} for each conversation C at each iteration time i . We use a Transformer encoder-decoder to map the conversation utterance sequence to a sequence of derailment prediction labels, optimally this sequence should have the same derailment prediction label at each utterance iteration, that is the conversation true derailment label. For this classifier each utterance representation is converted to the [CLS] representation. We enforce a masking scheme in the self-attention layer of the encoder to make the classifier predict derailment in an auto-regressive way, entailing that only the past utterances are visible to the encoder. This masking strategy, preventing the query from attending to future keys, suits better a real-world scenario in which the subsequent utterances are unseen when predicting the derailment at a point of time. As for the decoder, the output of the previous decoder block is input as a query to the self-attention layer. C' is fed to this encoder-decoder classifier. Since we obtain a sequence of predictions at each turn i , we use the label predicated the most in the gener-

Dataset	Train	Val	Test	Input		
				t	u	s
CGA	2508	840	840	✓	✓	✗
CMV	4106	1368	1368	✓	✓	✓

Table 2: Statistics of the datasets. t denotes text input, u denotes user ID input and s denotes public perception score input. All splits are balanced between the two classes.

ated label sequence to produce our classification result.

5 Experimental Setup

5.1 Datasets

We use two datasets for the task of forecasting derailment in conversations. Some statistics of the datasets are summarized in Table 2.

The Conversations Gone Awry (CGA) dataset (Zhang et al., 2018) was extracted from Wikipedia Talk Page conversations. The conversations were sampled from WikiConv (Hua et al., 2018) based on an automatic measure of toxicity that ranges from 0 (not toxic) to 1 (is toxic). A conversation is extracted as a sample of derailment if the N th comment in it has a toxicity score higher than 0.6 and all the preceding comments have a score lower than 0.4. Conversations having all comments with a toxicity score below 0.4 are extracted as samples of non-derailment. This set of conversations is further filtered through manual annotation to determine whether after an initial civil exchange a personal attack occurs from one user towards another. The conversations include the turn with the personal attack. This means all $N - 1$ turns in a conversation are civil and the N 'th one is either civil or contains a personal attack. The dataset also contains additional information about each comment in the conversation such as the user posting the comment and the ID of the parent comment that this comment was a reply to.

The Reddit ChangeMyView (CMV) dataset (Chang and Danescu-Niculescu-Mizil, 2019b) was extracted from Reddit conversations held under the ChangeMyView subreddit. Conversations were identified as derailed if there was a deletion of a turn by the platform moderators. This could have been done under Reddit's Rule: "Don't be rude or hostile to other users." Unlike CGA, there is no control to ensure that all the preceding comments to the last one would be civil, resulting in some noise

		CGA				CMV			
MODEL		Acc	P	R	F1	Acc	P	R	F1
STATIC	CRAFT	64.4	62.7	71.7	66.9	60.5	57.5	81.3	67.3
	BERT-SC	64.7	61.5	79.4	69.3	62.0	58.6	82.8	68.5
	FGCN	66.9	63.3	80.2	70.8	64.7	60.7	83.3	70.2
	KA-FGCN-GPT	64.8	61.6	78.6	69.1	63.5	59.4	83.1	68.2
	KA-FGCN-BRT	67.4	63.7	81.0	71.3	66.6	62.7	82.1	71.1
DYNAMIC	BERT-SC+	64.3	61.2	78.9	68.8	56.5	56.0	73.2	61.7
	HR-Multi	65.2	62.3	76.9	68.9	64.2	62.0	73.8	67.4
	FGCN+	65.9	62.4	80.2	70.2	63.5	59.7	83.1	69.5
	KA-FGCN-GPT+	64.1	60.9	78.6	68.7	59.6	56.5	79.2	65.9
	KA-FGCN-BRT+	66.7	63.0	81.0	70.9	65.0	61.1	82.1	70.1

Table 3: Experimental results for forecasting conversation derailment. For FGCN, FCCN+, KA-FGCN and KA-FGCN we report the best results of the models variants. Best F1-score are in bold.

in the data. The dataset also contains additional information about each comment in the conversation such as the user posting the comment, the ID of the parent comment that this comment was a reply to, and a votes score (i.e., the number of up-votes minus the number of down-votes).

5.2 Evaluation Metrics

Following prior work, we report the performance of the models in terms of accuracy (Acc), precision (P), recall (R), and F1-score. We also report the forecast horizon H introduced by Kementchedjhieva and Sogaard (2021), which is the mean of the turns in which the first detection of derailment occurred for the set of conversations that derail.

5.3 Implementation

We use two training paradigms, static and dynamic: In **static training**, for each conversation we use one training instance with all turns $\{t_1, \dots, t_{N-1}\}$, $\{u_1, \dots, u_{N-1}\}$ and/or $\{s_1, \dots, s_{N-1}\}$ as input. In **dynamic training**, we use multiple instances of each conversation, by varying the last turn used in each training instance. So, we use $\{t_1, u_1$ and/or $s_1\}$ as an instance, $\{\{t_1, t_2\}, \{u_1, u_2\}$, and/or $\{s_1, s_2\}\}$ as another instance, and so on until the last instance $\{\{t_1, \dots, t_{N-1}\}, \{u_1, \dots, u_{N-1}\}$ and/or $\{s_1, \dots, s_{N-1}\}\}$. So we have $N - 1$ instances of each conversation. We denote all dynamically trained models with an added “+” at the end of the model name.

At inference time, the model is tested dynamically, i.e., by using turn $\{t_1, u_1$ and/or $s_1\}$ as input, and making a prediction \hat{l}_1 , then using turns $\{\{t_1, t_2\}, \{u_1, u_2\}$, and/or $\{s_1, s_2\}\}$, and making

a prediction \hat{l}_2 , and so on until $N - 1$ predictions have been accumulated. The overall predicted label for a given conversation is then obtained as $\hat{l} = \max_{i=1}^{N-1} \hat{l}_i$.

Our models used the same BERT implementation (i.e., `bert-base-uncased`) as in the baseline models (Kementchedjhieva and Sogaard, 2021), for our textual sequential encoding, to ensure a comparable evaluation setting. However, it is worth mentioning that any pretrained language model can be used. The graph neural network component described in this work is implemented with settings similar to that reported by Ghosal et al. (2019). The results are reported as an average over 10 different runs with random initialization, to account for variance in model performance.

5.4 Baselines

Our KA-FGCN model and its variants are evaluated against the state-of-the-art methods below.

CRAFT (Chang and Danescu-Niculescu-Mizil, 2019b) is a model with a hierarchical recurrent neural network architecture, which integrates a generative dialog model that learns to represent conversational dynamics in an unsupervised fashion, and a supervised component that fine-tunes this representation to forecast future events. This model is trained statically.

BERT-SC (Kementchedjhieva and Sogaard, 2021) is a model consisting of the BERT checkpoint with a sequence classification (SC) head, trained statically.

BERT-SC+ (Kementchedjhieva and Sogaard, 2021) similar to BERT-SC consists of the BERT

KA-FGCN			FGCN		
Variant	S	E	ED	Variant	S
TCN	68.6	69.0	69.2	T	68.3
TCNU	69.1	69.5	69.5	TU	68.8
TCNS	69.3	69.8	69.9	TS	69.1
TCNSU	69.7	70.0	70.1	TSU	69.5

Table 4: Varying the utterance information capsule and classifier for CMV using dynamic training. S, E and ED are the types of classifiers used to obtain the reported F1-score. KA-FGCN variants have the same data as FGCN variants with the addition of common sense knowledge.

checkpoint with a sequence classification (SC) head, but is instead trained dynamically.

HR-Multi (Yuan and Singh, 2023) is a hierarchical transformer-based framework that combines utterance-level and conversation-level information. This model is trained dynamically.

FGCN (Altarawneh et al., 2023) is a graph convolutional neural network and that leverages utterance text, user ID and public perception information. This model is trained statically.

FGCN+ (Altarawneh et al., 2023) is a graph convolutional neural network and that leverages utterance text, user ID and public perception information. This model is trained dynamically.

6 Results and Discussion

In the forecasting conversation derailment experiment we report the results of the static and dynamic training of our model and compare with baselines. In the analyzing mean forecast horizon experiment we show how early each model can forecast derailment.

6.1 Forecasting Conversation Derailment

The results in Table 3 show that across both the datasets, our knowledge aware model KA-FGCN, outperforms baseline models for both static and dynamic training. The results show that incorporating common sense knowledge in the forecasting graph neural network model improves the models’ forecasting F1-score. This Indicates the effectiveness of incorporating common sense knowledge for the problem of derailment forecasting.

The results in Table 3 confirm previous studies comparing static and dynamic training for the problem of deralimnt forcaesting(Kementchedjhieva and Sogaard, 2021; Altarawneh et al., 2023). The

	CGA	CMV
CRAFT	2.36	4.01
BERT·SC	2.60	3.90
BERT·SC+	2.85	4.06
HR-Multi	2.98	3.78
FGCN-T	2.73	4.03
FGCN-T+	<u>2.96</u>	<u>4.12</u>
KA-FCCN-BRT	2.90	4.11
KA-FGCN-BRT+	3.02	4.16

Table 5: Experimental results of mean forecast horizon (H).The best result is shown in bold. The second best result has been underlined. The + sign denotes dynamically trained models.

results show that statically trained models outperform their corresponding dynamically trained models. In addition, our dynamically trained model on the CGA dataest outperform statically trained baselines.

6.2 Utterance Capsule Information and Classifier Type Sensitivity

KA-FGCN results in Table 4 show that the more data types included in the utterance capsules the better the model performance. The results also indicate that using a Transformer classifier (E, ED) is better. However, the encoder-decoder Transformer classifier (ED) only slightly outperforms the encoder only Transformer classifier (E). Indicating that the complexity of ED doesn’t provide much benefit for this binary classification task.

Table 4 also shows that KA-FGCN outperforms the state-of-the-art FGCN using the same classifier S. This indicates the importance of incorporating common sense knowledge to create knowledge aware forecasting models that are able to capture context propagation and mood shifts during the conversation and improve performance.

6.3 Analyzing Mean Forecast Horizon

How early can the model forecast the derailment? To answer this question we calculate the forecast horizon H , the mean of the turn in which the first detection of derailment occurred for the set of conversations that derail. A forecast horizon H of 1 means that a derailment coming up on turn N was first detected on turn $N - 1$. A longer forecast horizon (i.e., a higher H) allows for earlier interventions and potentially allows moderators to delete the upcoming personal attack as soon as it appears on their platform to avoid any form of es-

calation. Models that are able to detect a potential intervention earlier have a clear advantage.

In Table 5 we report the results of the mean forecast horizon H . The results show that our knowledge aware graph neural network model KA-FGCN+ with its dynamic training provides the earliest overall forecasting of derailment with a mean H of 4.16 for CMV, and 3.02 for CGA. Followed by another dynamically trained model graph model FGCN-T+. For the statically trained models (CRAFT, BERT.SC, FGCN-T and KA-FGCN), our model KA-FGCN has the best performance as it seems to be able to better model the dynamics between the users of the turns with its graph model by incorporating common sense relations, obtaining a mean H of 4.11 for CMV and, 2.90 for CGA.

7 Conclusion

Unlike previous models that neglect common sense knowledge KA-FGCN is a knowledge aware graph convolutional neural network forecasting model that is able to capture the dynamics of multi-party dialogue, context propagation and mood shifts. KA-FGCN performed better than state-of-the-art models on two widely used benchmark datasets, CGA and CMV. Conversation derailment frequently impacts our online social interactions. The ability to accurately predict derailment has the potential to enhance the effectiveness of moderation and thus protect individuals who are vulnerable to emotional abuse or harm and improve the overall quality of online interactions.

Limitations

Graph models require four or more utterances to form meaningful conversation connections and model their dynamics. In some cases, conversations that derail are not sufficiently long and may be best modeled by simpler sequential models. Any of these models will work best with asynchronous conversations where there is a time lag between the turns to allow for moderation after forecasting.

Ethics Statement

In our paper, we focus on the problem of forecasting conversation derailment. The practical employment of any such system on online platforms has potential positive impact, but several things would be important to first consider, including whether forecasting is fair (Williamson and Menon, 2019), how to inform users about the forecasting (in ad-

vance, and when the forecasting affects users), and finally what other action is taken when derailment is forecast. Please refer to (Kiritchenko et al., 2020) for a related overview of such considerations, in the context of abusive language detection.

References

- Enas Altarawneh, Ameeta Agrawal, Michael Jenkin, and Manos Papagelis. 2023. [Conversation derailment forecasting with graph convolutional networks](#). In *The 7th Workshop on Online Abuse and Harms (WOAH)*, pages 160–169, Toronto, Canada. Association for Computational Linguistics.
- Antoine Bosselut, Hannah Rashkin, Maarten Sap, Chaitanya Malaviya, Asli Celikyilmaz, and Yejin Choi. 2019. [COMET: Commonsense transformers for automatic knowledge graph construction](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4762–4779, Florence, Italy. Association for Computational Linguistics.
- Jonathan P. Chang and Cristian Danescu-Niculescu-Mizil. 2019a. [Trouble on the horizon: Forecasting the derailment of online conversations as they develop](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 4743–4754, Hong Kong, China. Association for Computational Linguistics.
- Jonathan P. Chang and Cristian Danescu-Niculescu-Mizil. 2019b. [Trouble on the horizon: Forecasting the derailment of online conversations as they develop](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 4743–4754, Hong Kong, China. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. [BERT: pre-training of deep bidirectional transformers for language understanding](#). *CoRR*, abs/1810.04805.
- Deepanway Ghosal, Navonil Majumder, Alexander Gelbukh, Rada Mihalcea, and Soujanya Poria. 2020. [COSMIC: COmmonSense knowledge for eMotion identification in conversations](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 2470–2481, Online. Association for Computational Linguistics.
- Deepanway Ghosal, Navonil Majumder, Soujanya Poria, Niyati Chhaya, and Alexander F. Gelbukh. 2019. [Dialoguegen: A graph convolutional neural network for emotion recognition in conversation](#). *CoRR*, abs/1908.11540.

- Yiqing Hua, Cristian Danescu-Niculescu-Mizil, Dario Taraborelli, Nithum Thain, Jeffery Sorensen, and Lucas Dixon. 2018. [WikiConv: A corpus of the complete conversational history of a large online collaborative community](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2818–2823, Brussels, Belgium. Association for Computational Linguistics.
- Eric Jang, Shixiang Gu, and Ben Poole. 2017. [Categorical reparameterization with gumbel-softmax](#). In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net.
- Piotr Janiszewski, Mateusz Lango, and Jerzy Stefanowski. 2021. [Time aspect in making an actionable prediction of a conversation breakdown](#). page 351–364, Berlin, Heidelberg. Springer-Verlag.
- Wenxiang Jiao, Haiqin Yang, Irwin King, and Michael R. Lyu. 2019. [HiGRU: Hierarchical gated recurrent units for utterance-level emotion recognition](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 397–406, Minneapolis, Minnesota. Association for Computational Linguistics.
- Yova Kementchedjhiya and Anders Søgaard. 2021. [Dynamic forecasting of conversation derailment](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7915–7919, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Daniel Kilvington. 2021. The virtual stages of hate: Using goffman’s work to conceptualise the motivations for online hate. *Media, Culture & Society*, 43(2).
- Svetlana Kiritchenko, Isar Nejadgholi, and Kathleen C. Fraser. 2020. [Confronting abusive language online: A survey from the ethical and human rights perspective](#). *CoRR*, abs/2012.12305.
- Zaijing Li, Fengxiao Tang, Ming Zhao, and Yusen Zhu. 2022. [EmoCaps: Emotion capsule based model for conversational emotion recognition](#). In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 1610–1618, Dublin, Ireland. Association for Computational Linguistics.
- Hannah Rashkin, Maarten Sap, Emily Allaway, Noah A. Smith, and Yejin Choi. 2018. [Event2Mind: Commonsense inference on events, intents, and reactions](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 463–473, Melbourne, Australia. Association for Computational Linguistics.
- Nils Reimers and Iryna Gurevych. 2019. [Sentence-BERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Maarten Sap, Ronan Le Bras, Emily Allaway, Chandra Bhagavatula, Nicholas Lourie, Hannah Rashkin, Brendan Roof, Noah A. Smith, and Yejin Choi. 2019. [ATOMIC: an atlas of machine commonsense for if-then reasoning](#). In *The Thirty-Third AAAI Conference on Artificial Intelligence, AAAI 2019, The Thirty-First Innovative Applications of Artificial Intelligence Conference, IAAI 2019, The Ninth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2019, Honolulu, Hawaii, USA, January 27 - February 1, 2019*, pages 3027–3035. AAAI Press.
- Robyn Speer and Joanna Lowry-Duda. 2017. [Concept-Net at SemEval-2017 task 2: Extending word embeddings with multilingual relational knowledge](#). In *Proceedings of the 11th International Workshop on Semantic Evaluation (SemEval-2017)*, pages 85–89, Vancouver, Canada. Association for Computational Linguistics.
- Alice Tontodimamma, Eugenia Nissi, Annalina Sarra, and Lara Fontanella. 2021. Thirty years of research into hate speech: topics of interest and their evolution. *Scientometrics*, 126(1):157–179.
- Oriol Vinyals, Meire Fortunato, and Navdeep Jaitly. 2015. [Pointer networks](#). In *Proceedings of the 28th International Conference on Neural Information Processing Systems - Volume 2, NIPS’15*, page 2692–2700, Cambridge, MA, USA. MIT Press.
- Robert Williamson and Aditya Menon. 2019. [Fairness risk measures](#). In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 6786–6797. PMLR.
- Jiaqing Yuan and Munindar P. Singh. 2023. [Conversation modeling to predict derailment](#). *Proceedings of the International AAAI Conference on Web and Social Media*, 17(1):926–935.
- Justine Zhang, Jonathan P. Chang, Cristian Danescu-Niculescu-Mizil, Lucas Dixon, Dario Taraborelli, Nithum Thain, and Dario Taraborelli. 2018. [Conversations gone awry: Detecting warning signs of conversational failure](#). In *Proceedings of ACL*.
- Peixiang Zhong, Di Wang, and Chunyan Miao. 2019. [Knowledge-enriched transformer for emotion detection in textual conversations](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 165–176, Hong Kong, China. Association for Computational Linguistics.

Lixing Zhu, Gabriele Pergola, Lin Gui, Deyu Zhou, and Yulan He. 2021. [Topic-driven and knowledge-aware transformer for dialogue emotion detection](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1571–1582, Online. Association for Computational Linguistics.