

WAV2SMALL: DISTILLING WAV2VEC2 TO 72K PARAMETERS FOR LOW-RESOURCE SPEECH EMOTION RECOGNITION

Dionyssos Kounadis-Bastian¹, Oliver Schrüfer¹, Anna Derington¹
Hagen Wierstorf¹, Florian Eyben¹, Felix Burkhardt¹, Björn W. Schuller^{1,2,3}

¹audEERING GmbH, Gilching, Germany,

²CHI - Chair of Health Informatics, MRI, Technical University of Munich, Germany,

³GLAM - Group on Language, Audio, & Music, Imperial College London, UK

ABSTRACT

Speech Emotion Recognition (SER) needs high computational resources to overcome the challenge of substantial annotator disagreement. Today SER is shifting towards dimensional annotations of arousal, dominance, and valence (A/D/V). Universal metrics as the L2 distance prove unsuitable for evaluating A/D/V accuracy due to non converging consensus of annotator opinions. However, Concordance Correlation Coefficient (CCC) arose as an alternative metric for A/D/V where a model’s output is evaluated to match a whole dataset’s CCC rather than L2 distances of individual audios. Recent studies have shown that wav2vec2 / wavLM architectures outputting a float value for each A/D/V dimension achieve today’s State-of-the-art (Sota) CCC on A/D/V. The Wav2Vec2.0 / WavLM family has a high computational footprint, but training small models using human annotations has been unsuccessful. In this paper we use a large Transformer Sota A/D/V model as Teacher/Annotator to train 5 student models: 4 MobileNets and our proposed Wav2Small, using only the Teacher’s A/D/V outputs instead of human annotations. The Teacher model we propose also sets a new Sota on the MSP Podcast dataset of valence CCC=0.676. We choose MobileNetV4 / MobileNet-V3 as students, as MobileNet has been designed for fast execution times. We also propose Wav2Small – an architecture designed for minimal parameters and RAM consumption. Wav2Small with an .onnx (quantised) of only 120KB is a potential solution for A/D/V on hardware with low resources, having only 72K parameters vs 3.12M parameters for MobileNet-V4-Small. ¹

Index Terms— speech emotion recognition, MobileNetV4

Funding from the Horizon Europe programme under the SHIFT project (Grant Agreement No. 101060660) is greatly acknowledged.

¹© 2024 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

1. INTRODUCTION

Table 1. A/D/V model’s resources at 32bit non quantized .onnx. All onnx take 16KHz audio as input and include all parameters, preprocessing and LogMel Spectrogram extraction. Values from Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz.

	Param. (M)	5s audio input		
		Peak RSS (MB)	MAC	Time CPU (ms)
Teacher	483.9	1929	149G	1089
WavLM	318.6	1284	95G	688
Dawn	165.3	697	55G	372
MobileNetV4-L	31.87	257	2.2G	24
MobileNetV4-M	10.38	94	1.7G	13
MobileNetV3-S	3.14	22	400M	11
MobileNetV4-S	3.12	36	417M	5
Wav2Small	0.072	9	416M	9

A need for SER on low resource hardware, drives us to investigate small architectures for A/D/V. Neural Architecture Search has birthed useful architectures for categorical emotions SER [2]. However, Sota A/D/V is dominated by Transformer models, such as Wav2Vec2.0 [1] or WavLM [3], both having a VGG7 input feature extractor. This VGG architecture is chosen because the skip connection of ResNet has high RAM footprint. In this paper we apply distillation to train 5 small student architectures for A/D/V. We train 3 MobileNetV4² [4] (-Large, -Medium, -Small), as well as a MobileNetV3-Small [5]³, as well as our proposed architecture named Wav2Small.

²We use the Top-1 pretrained models from https://huggingface.co/timm/mobilenetv4_conv_aa_large.e230_r448.in12k_ft.in1k
[mobilenetv4_hybrid_medium.ix_e550_r384.in1k](https://huggingface.co/timm/mobilenetv4_hybrid_medium.ix_e550_r384.in1k)
[mobilenetv4_conv_small.e1200_r224.in1k](https://huggingface.co/timm/mobilenetv4_conv_small.e1200_r224.in1k).

³pretrained on Audioset.

```

from torch import nn
from torchlibrosa import
    Spectrogram, LogmelFilterBank

def conv(in=13):
    return nn.Sequential(nn.Conv2d(in, 13, k=3, pad=1,
        bias=False), nn.BatchNorm2d(13), nn.ReLU())

class Wav2Small():
    def __init__():
        self.vgg7 = nn.Sequential(
            Spectrogram(fft=64, hop=32),
            LogmelFilterBank(fft=64, mels=26),
            conv(in=1),
            conv(),
            conv(),
            nn.MaxPool2d(3, stride=2, pad=1),
            conv(),
            conv(),
            conv(),
            conv(),
            conv(),
            nn.Conv2d(13, 13, k=1))
        self.lin = nn.Linear(169, 169)
        self.sof = nn.Linear(169, 169)
        self.adv = nn.Linear(169, 3)

    def forward(x):
        '''x: (batch, time_samples)'''
        x -= x.mean(1)
        variance = (x * x).mean(1) + 1e-7
        x /= variance.sqrt()
        x = self.vgg7(x)
        batch, channel, token, mel = x.shape
        # channel is non contiguous to mel thus
        # reshapes tokens together as attention.
        x = x.reshape(batch, token, channel * mel)
        x = self.sof(x).softmax(1) * self.lin(x)
        x = x.sum(1) # Bayesian pool
        return self.adv(x) # arousal, domin., val.

```

Listing 1: Wav2Small in PyTorch. Note that `x.reshape` vectorises neighbor tokens to a new token before Bayesian pool.

1.1. Wav2Small

The paradigm of a VGG feature extractor followed by transformer layers has shown great performance for Speech Tasks [6]. We notice that MobileNets do not investigate re-purposing of tokens/time-frames as convolution channels. Transformer pretrained architectures have been found superior than LogMel (Spectrogram) for SER, yet LogMel is still superior than time samples for small architectures [7]. We propose Wav2Small: a VGG7 with LogMel stem followed by vectorisation of tokens into the convolution-channels dimension, shown in Listing 1. Wav2Small does not reduce drastically time-frames as MobileNets thus it can be used as inexpensive feature extractor for large transformer architectures, of the Wav2Vec2/WavLM family. Nonetheless Wav2Small has equal computation as MobileNetV4-S albeit only with 72K parameters and less RAM, as shown in Table 1.

2. A / D / V DISTILLATION

Inspired by two publicly available Sota A/D/V models: The 12x Transformer Layer Wav2Vec2.0 [1] named Dawn and the 12x Transformer layer WavLM [3] that won the 2024 MSP Podcast Challenge⁴ for A/D/V. We propose to use them as annotators of A/D/V to train small student models.

2.1. Teacher

We notice that running the WavLM and also the Dawn baselines on the same audio and averaging the output A/D/V we obtain a Teacher model that outperforms both WavLM and Dawn. We open source the weights of Teacher here⁵. To the best of our knowledge this Teacher defines a new Sota on MSP Podcast valence with a ccc = 0.676, as shown in Fig. 2. We use Teacher frozen, as teacher for distillation.

2.2. Data / Augmentation

Distillation for categorical emotions has been used for cross-lingual transfer learning [8] or as a pretrain / finetune paradigm [9]. Here we opt for simultaneous distillation on MSP Podcast and unlabeled / non-speech data. We apply always-on, mixup [10] thus clean MSP Podcast speech is never shown to the models. This enables long trainings without overfitting [11]. Extensive work on the most useful labels for SER [12] has revealed that soft labels as produced by Teacher provide better of human annotations[13], hence for training we use only the Teacher output A/D/V as ground truth and ignore the MSP Podcast annotations.

The distillation of a student runs for 50M steps (~ 2 weeks) with batch = 16, SGD of fixed learning rate (no schedule) = $5E - 5$, weight decay = 0, momentum = 0, on Nvidia RTX A4000 GPU, on PyTorch v2.4.0. The training audio is generated by mixing (on the fly during training): $0.64 \times \text{audio}_1 + 0.41 \times \text{audio}_2$, where audio_1 is a random 0.4s up to 12s excerpt from a audiotrack of 12 action movies (in house dataset contains full movies with music and effects) and audio_2 is drawn from one of three buckets: (either Audioset [14] sound, or MSP Podcast v1.7 train speech, or ambient urban/rural/transportation environmental background sound). The training audio is then passed through cyclic rotation (`np.roll`) and/or drop of random frequency-bands and re-normalising of lost energy to the remaining non-zero frequencies (metallic speech effect) and shout augmentation [15]. This is the final signal given to both Teacher and student. It can overflow the `.wav [-1, 1]` range due to shout.

⁴https://lab-msp.com/MSP-Podcast_Compensation/leaderboard.php

⁵<https://huggingface.co/dkounadis/wav2small>

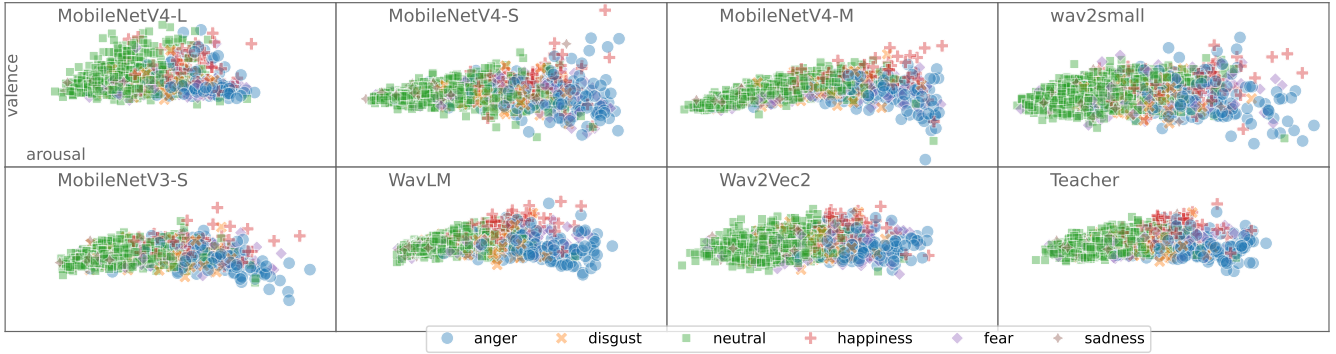


Fig. 1. Arousal-Valence predictions for Crema-d test set, coloring according to Crema-d ground truth categories.

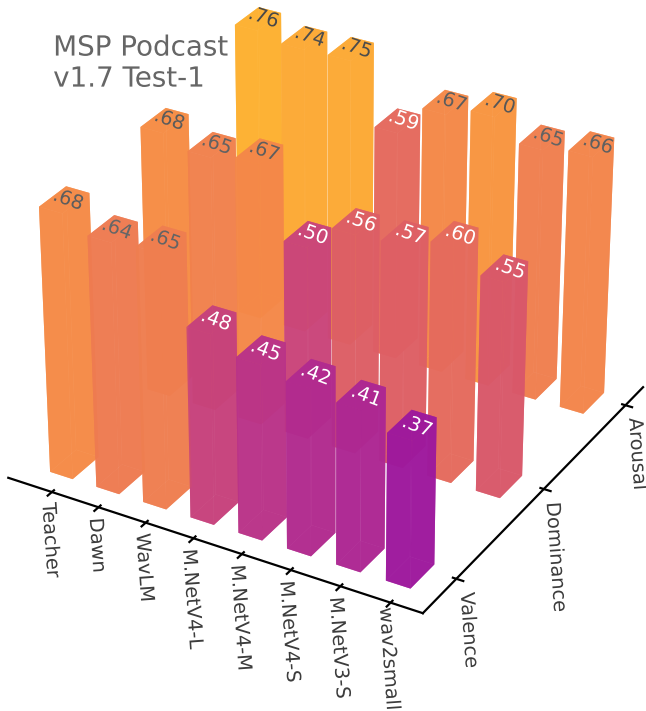


Fig. 2. CCC of Teacher, WavLM and Dawn (baselines), as well as the 5 students, on MSP Podcast v1.7 Test1.

2.3. CCC Loss with Quadrant Correction

A/D/V datasets are annotated using 7-point Likert scale [16]. The odd number of Likert points enhances annotator’s certainty in selecting positive / negative / neutral A/D/V. To leverage this certainty we introduce an auxiliary loss function: If Teacher’s A/D/V output is in different quadrant of the A/D/V 3D space from student’s A/D/V output, we extra-penalise the student via $L1$ loss to output the value of Teacher. This auxiliary loss vanishes if teacher and student A/D/V quadrants agree. In this case only the CCC loss⁶ [17] function applies.

⁶CCC loss is an Expected value summing the batch dimension.

3. EXPERIMENTS

Authors in [1] trained a CNN14 of 4.9M parameters on MSP Podcast v1.7 human annotations. This resulted in very low CCC especially for valence, known as the most difficult dimension to recognize with non transformer models: Their CNN14 achieved only 0.248 valence CCC vs 0.638 achieved by Dawn on MSP Podcast v1.7 test-1 split. Now Fig. 2 shows that our 5 students reach a valence CCC ≥ 0.37 .

From the 5 students, MobileNets were pretrained and score slightly higher than (non pretrained) Wav2Small. Still, Wav2Small reaches high CCC, e.g. arousal CCC= 0.66 in MSP Podcast test-1, and CCC=0.56 in IEMOCAP [18], used as an out of distribution dataset only for evaluation. MobileNetV3-S shows lower CCCs of MobileNetV4-S and also has longer execution: 11ms compared to 5ms as show in Table 1 whose values are measured from .onnx running on Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz. All 5 students have a LogMel layer (incorporated in .onnx via convolution). An extra conv is added to all MobileNets to upscale the 1-channel output of LogMel to 3-channel RGB, needed to feed the pretrained weights.

3.1. Frequency bands of LogMel

We discovered that num FFT bands = 64 leads to the best CCC for MobileNetV4-M/S, MobileNetV3-S and Wav2Small. For MobileNetV4-L we use num FFT bands = 144, because num FFT = 64 provides only 26 mel bins, which causes a highly asymmetric aspect ratio (if we look at LogMel as an image) yielding empty-input for convolutions. The larger num FFT reduces the time resolution and therefore MobileNetV4-L achieves only CCC = 0.59 arousal in Fig. 2

3.2. Vectorisation of Time as Channels

The power of Wav2Small comes from a large time resolution (tokens) having a shallow architecture with 13 channels. The vectorisation of neighboring tokens into the channel di-

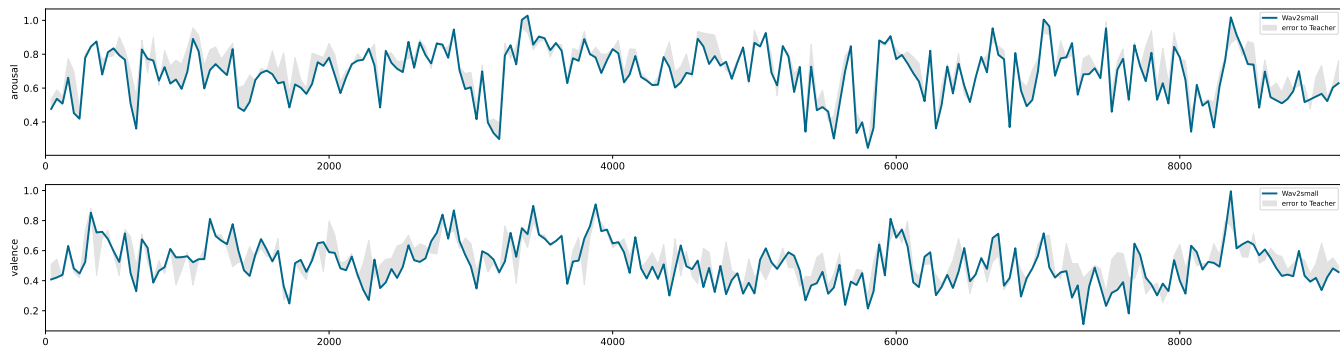


Fig. 3. Wav2Small discrepancy from Teacher for Japanese audio track of Harry Potter vol1. Not included for train.

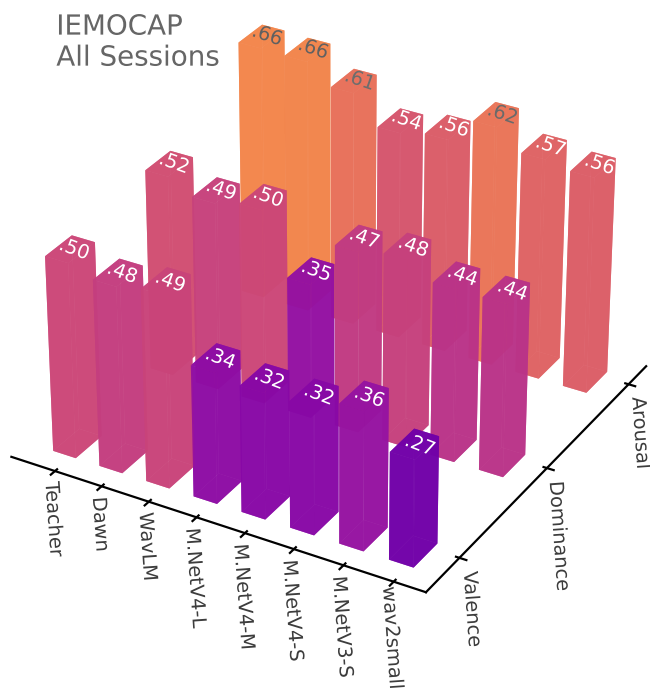


Fig. 4. CCC of all tested models on IEMOCAP (audio of all 5 Sessions has been concatenated to a single dataset), not used for training.

mension creates 169 "channels" for the Bayesian pool. The joint processing of the vectorised tokens by the Bayesian pool / classifier (self.adv(x) in Listing 1), boosts Wav2Small to achieve arousal CCC = 0.66 in MSP Podcast, = 0.56 in IEMOCAP: Fig. 2/4 without pretraining. The valence dimension is the most difficult to recognize: MobileNetV4-S obtains CCC=0.42 and Wav2Small CCC=0.37. Nonetheless, Fig. 3 shows that Wav2Small follows the Teacher arousal and valence faithfully on a language not seen in training.

Thinking of the lower valence achieved by all students compared to the Teacher, [19] has shown that Wav2vec2 family of models as they have ASR pretraining, has learned lin-

guistic cues to solve SER. Our 5 students do not possess linguistic cues thus aiming towards a truly unsupervised A/D/V model that is fair for many languages.

A model equipped with textual features, as the WavLM that won the 2024 SER (categorical) challenge [20] is a future avenue for A/D/V, although under the risk of introducing accent unfairness from focusing at words instead of sound's tonality.

Fig. 1 shows that A/D/V values do separate also the categorical emotions to some extent. One also notices that MobileNetV4-M and Wav2Small obtain an even larger dispersion along the valence axis. Therefore, an auxiliary loss/teacher⁷ should be added to distillation for recognizing also categorical emotions. Perhaps via CCC rather than cross-entropy.

Observer variability and annotator agreement have been investigated across various annotation schemes [21] with findings revealing higher consensus when annotating A/D/V dimensions compared to annotating one out of six emotion categories. Thus we espy A/D/V to become the major avenue for SER [22] in the future.

4. CONCLUSION

We propose a 72K parameter architecture named Wav2Small that reaches high A/D/V CCC scores on both MSP Podcast and IEMOCAP datasets, while using only 9 MB RAM compared to 36 MB RAM used by MobileNetV4-S, while having equal MACs. Mobilenet-V4 and MobileNet-V3 reduce the time resolution to a single: 960-dimensional token / 1s audio, whereas Wav2Small provides 250: 169-dimensional tokens / 1s audio, as its output (before Bayesian pool). Hence Wav2Small is a potential replacement of the expensive input audio extractor of Transformer architectures, such as wav2vec2 and WavLM. We also proposed a Teacher model for distillation that obtains a new Sota on MSP Podcast achieving valence CCC = 0.676.

⁷<https://huggingface.co/3loi/SER-Odyssey-Baseline-WavLM-Categorical>

5. REFERENCES

- [1] J. Wagner, A. Triantafyllopoulos, H. Wierstorf, M. Schmitt, F. Burkhardt, F. Eyben, and B.W. Schuller, “Dawn of the transformer era in speech emotion recognition: Closing the valence gap,” *IEEE Trans. Pattern Anal. Mach. Intell.*, 45 (9), pp. 10745-10759, 2023.
- [2] H. Sun, Z. Lian, B. Liu, Y. Li, L. Sun, C. Cai, J. Tao, M. Wang, and Y. Cheng, “Emotionnas: Two-stream neural architecture search for speech emotion recognition,” in *Proc. INTERSPEECH*, 2023.
- [3] L. Goncalves, A.N. Salman, A.R. Naini, L.M. Velazquez, T. Thebaud, L. Paola Garcia, N. Dehak, B. Sisman, and C. Busso, “Odyssey 2024-speech emotion recognition challenge: Dataset, baseline framework, and results,” in *Odyssey 10* (9,290), 4-54, 2024.
- [4] D. Qin, C. Leichner, M. Delakis, M. Fornoni, S. Luo, F. Yang, W. Wang, C. Banbury, C. Ye, B. Akin, V. Aggarwal, T. Zhu, D. Moro, and A. Howard et.al., “Mobilenv4 - universal models for the mobile ecosystem,” preprint *arXiv:2404.10518*, 2024.
- [5] F. Schmid, K. Koutini, and G. Widmer, “Efficient large-scale audio tagging via transformer-to-cnn knowledge distillation,” in *Proc. ICASSP*, 2023.
- [6] W.N. Hsu, A. Sriram, A. Baevski, T. Likhomanenko, Q. Xu, V. Pratap, J. Kahn, A. Lee, R. Collobert, and G. Synnaeve, “Robust wav2vec 2.0: Analyzing domain shift in self-supervised pre-training,” *arXiv preprint 2104.01027*, 2021.
- [7] B. T. Atmaja and A. Sasou, “Evaluating self-supervised speech representations for speech emotion recognition,” *IEEE Access*, vol. 10, pp. 124396–124407, 2022.
- [8] A. H. Jo and K.C. Kwak, “Speech emotion recognition based on two-stream deep learning model using korean audio information,” *Applied Sciences*, vol. 13, 2023.
- [9] J. Deng, Z. Zhang, E. Marchi, and B. Schuller, “Sparse autoencoder-based feature transfer learning for speech emotion recognition,” in *Proc. of Humaine assoc. conf. on affect. comput. and intelligent interaction*, 2013.
- [10] H. Zhang, M. Cisse, Y.N. Dauphin, and D. Lopez-Paz, “mixup: Beyond empirical risk minimization,” in *Proc. ICLR*, 2018.
- [11] O. Schrüfer, M. Milling, F. Burkhardt, F. Eyben, and B. Schuller, “Are you sure? analysing uncertainty quantification approaches for real-world speech emotion recognition,” in *Proc. INTERSPEECH*, 2024.
- [12] H.C. Chou, L. Goncalves, S.G. Leem, A.N. Salman, C.C. Lee, and C. Busso, “Minority views matter: Evaluating speech emotion classifiers with human subjective annotations by an all-inclusive aggregation rule,” *IEEE Transactions on Affective Computing*, 2024.
- [13] L. Beyer, X. Zhai, A. Royer, L. Markeeva, R. Anil, and A. Kolesnikov, “Knowledge distillation: A good teacher is patient and consistent,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10925–10934, 2022.
- [14] J. F. Gemmeke et al., “Audio set: An ontology and human-labeled dataset for audio events,” in *Proc. ICASSP*, 2017.
- [15] T. Raitio, A. Suni, J. Pohjalainen, M. Airaksinen, M. Vainio, and P. Alku, “Analysis and synthesis of shouted speech,” in *Proc. INTERSPEECH*, 2013.
- [16] R. Lotfian and C. Busso, “Building naturalistic emotionally balanced speech corpus by retrieving emotional speech from existing podcast recordings,” *IEEE Trans. Affective Comput.*, vol. 10, no. 4, pp. 471–483, 2019.
- [17] G. Trigeorgis, F. Ringeval, R. Brueckner, E. Marchi, M.A. Nicolaou, B. Schuller, and S. Zafeiriou, “Adieu features? end-to-end speech emotion recognition using a deep convolutional recurrent network,” in *Proc. ICASSP*, 2016.
- [18] C. Busso, M. Bulut, C. Lee, A. Kazemzadeh, E. Mower, S. Kim, J. N. Chang, S. Lee, and S. Narayanan, “Iemocap: Interactive emotional dyadic motion capture database,” *Language resources and evaluation*, vol. 42, no. 4, pp. 335–359, 2008.
- [19] G. Ioannides, M. Owen, A. Fletcher, V. Rozgic, and C. Wang, “Towards paralinguistic-only speech representations for end-to-end speech emotion recognition,” in *Proc. INTERSPEECH*, 2023, pp. 1853–1857.
- [20] H. Härm and T. Alumäe, “Taltech systems for the odyssey 2024 emotion recognition challenge,” in *Speaker Odyssey*, 2024.
- [21] I.D. Wood, J.P. McCrae, V. Andryushechkin, and P. Buitelaar, “A comparison of emotion annotation approaches for text,” *Information*, 2018, 9(5), 117, <https://doi.org/10.3390/info9050117>.
- [22] S.D. Morgan, “Categorical and dimensional ratings of emotional speech: Behavioral findings from the morgan emotional speech set,” *J. Speech Lang. Hear. Research* 2019, doi: 10.1044/2019JSLHR-S-19-0144.