

UNA: UNIFYING ALIGNMENTS OF RLHF/PPO, DPO AND KTO BY A GENERALIZED IMPLICIT REWARD FUNCTION

Zhichao Wang^{†*}, Bin Bi[†]
Salesforce
{zhichaowang, bin.bi}@salesforce.com

Can Huang
School of Mathematical Sciences
Xiamen University
canhuang@xmu.edu.cn

Shiva Kumar Pentyala, Zixu (James) Zhu, Sitaram Asur, Na (Claire) Cheng
Salesforce
{shivakumar.pentyala, james.zhu, sasur, claire.cheng}@salesforce.com

ABSTRACT

An LLM is pretrained on trillions of tokens, but the pretrained LLM may still generate undesired responses. To solve this problem, alignment techniques such as RLHF, DPO and KTO are proposed. However, these alignment techniques have limitations. For example, RLHF requires training the reward model and policy separately, which is complex, time-consuming, memory intensive and unstable during training processes. DPO proposes a mapping between an optimal policy and a reward, greatly simplifying the training process of RLHF. However, it can not take full advantages of a reward model and it is limited to pairwise preference data.

In this paper, we propose UNified Alignment (UNA) which unifies RLHF/PPO, DPO and KTO. Firstly, we mathematically prove that given the classical RLHF objective, the optimal policy is induced by a generalize implicit reward function. With this novel mapping between a reward model and an optimal policy, UNA can 1. unify RLHF/PPO, DPO and KTO into a supervised learning of minimizing the difference between an implicit reward and an explicit reward; 2. outperform RLHF/PPO while simplify, stabilize, speed up and reduce memory burden of RL fine-tuning process; 3. accommodate different feedback types including pairwise, binary and scalar feedback. Downstream experiments show UNA outperforms DPO, KTO and RLHF.

Keywords: LLM Alignment · Unified Alignment · RLHF · PPO · DPO · KTO

1 INTRODUCTION

LLMs are trained on extensive and diverse corpora, enabling them to develop robust language capabilities and a deep understanding of various contexts OpenAI et al. (2024); Anthropic (2024). However, during inference, LLM can generate undesired responses, which should be avoided. Supervised fine-tuning (SFT) though can improve an LLM on downstream tasks like question answering, it cannot solve these problems. To address these problems, alignment techniques like RLHF Ouyang et al. (2022) and DPO Rafailov et al. (2023) are proposed.

RLHF involves two stages of training from the SFT models as shown in part (b) of Figure 1. Firstly, it trains a reward model (RM) using a preference dataset consisting of tuples (input, desired response, undesired response). Next, during the RL fine-tuning stage, the policy generates responses to given prompts. These responses are evaluated by the reward model and then used to fine-tune the policy with RL through PPO. However, several problems exist in RLHF. First of all, there exists an

*: corresponding author; †: equal contribution

overfitting problem in the training stage of the reward model. In addition, RL fine-tuning stage is inherently unstable due to the nature of RL. Lastly, RL increases memory requirements for elements like the policy, reference policy, reward model and value model.

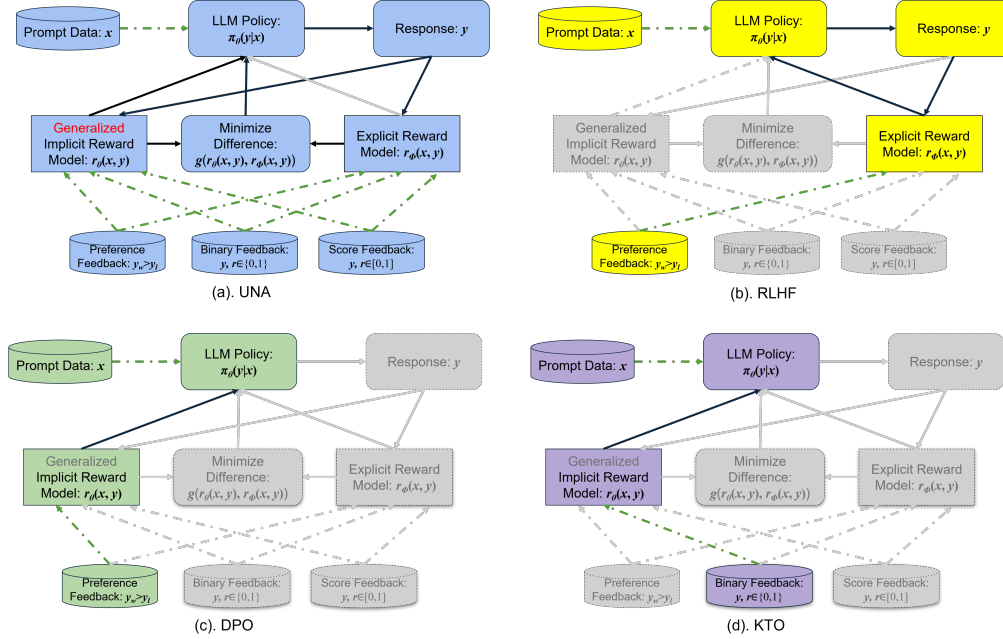


Figure 1: A figure comparison among (a). UNA, (b) RLHF, (c) DPO and (d) KTO. Each subfigure is composed of four types of data: "prompt data", "preference feedback", "binary feedback" and "score feedback", LLM policy, response, two reward models: "generalized implicit reward model" and "explicit reward model" and a module to minimize the difference between implicit and explicit rewards. The connection between data to other modules are utilizing green dash arrow, while others are connected by black solid arrow. All unused modules are grayed out. In part (b), RLHF firstly utilizes preference feedback to train the explicit reward model, and the use the evaluation provided by the explicit reward model to continuous optimize the policy in a online mode. In comparison, in part (c) and (d), DPO and KTO utilize preference feedback and binary feedback respectively to generate implicit reward to align LLM policy. However, in part (a), UNA can utilize different types of data to get generalized implicit and explicit rewards and minimize their differences to align LLM policy in online and offline modes.

DPO addresses these issues by creating a mapping between the reward model and the optimal policy, combining the RM and RL training stages into a single process as shown in part (c) of Figure 1. This approach simplifies the two-stage optimization into one stage, eliminating the need to train an explicit reward model, reducing memory costs, and transforming the unstable RL process into a stable binary classification problem. Given a prompt along with desired and undesired responses, the implicit rewards for both responses are calculated. The differences in these rewards are then used to optimize the policy. However, DPO has its own set of challenges. It cannot produce an explicit reward model and will require more preference data to fine-tune the LLM. Moreover, in RL, the pretrained RM can provide accurate guidance for alignment, which is absent in DPO. In summary, DPO's efficiency in using preference data is lower compared to RLHF/PPO.

KTO extends DPO to handle binary data, such as thumbs up and thumbs down for desired and undesired responses as shown in the part (d) of Figure 1. However, there have not been work on alignment based on prompt, response and corresponding evaluation scores. In addition, there have not been a work that can unify RLHF/PPO, DPO and KTO to accommodate these different types of data. This work will address these problems.

In this work, we propose UNified Alignment (UNA) which unifies RLHF/PPO, DPO and KTO, and combines the benefits of them. Firstly, inspired by the derivation of DPO, we prove that based on the RLHF objective $\pi_{\theta}^*(y|x) = \max_{\pi_{\theta}} \mathbb{E}_{x \sim D} \{ \mathbb{E}_{y \sim \pi_{\theta}(y|x)} [r_{\theta}(x, y)] - \beta D_{\text{KL}}(\pi_{\theta}(y|x) || \pi_{\text{ref}}(y|x)) \}$, the

optimal policy can be induced by $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) + c$. It can be further simplified to $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right)$ when $f(x) = c = 0$. The condition $f(x) = c = 0$ indicates that the difference between implicit and explicit rewards is 0.

Based on the new generalized implicit reward function, UNA unifies RLHF/PPO, DPO and KTO into a supervised learning of minimizing the difference between an implicit reward and an explicit reward, where the explicit reward can come from human labelers, reward functions and LLMs as shown in part (a) of Figure 1. Given a prompt, the trained policy can firstly generate responses, and an implicit reward score can be calculated based on the previous Equation. Then, the pair of prompt and response is evaluated by different evaluation tools to derive an explicit reward score. Provided the implicit and explicit reward score, a supervised learning problem like mean square error (MSE) can be constructed to unify RLHF and DPO. Last but not least, for clarity, the unnormalized evaluation is termed as reward and the normalized evaluation is termed as score in this work.

With UNA, RLHF can be simplified through replacing the original RL fine-tuning stage, which is unstable, slow, and memory-intensive with a stable, efficient and memory friendly supervised learning. In addition, UNA can accommodate different types of data including pairwise feedback, binary feedback, score-based feedback. For pairwise data, we mathematically prove that UNA and DPO are equivalent. For binary data, thumb up (positive feedback) and thumb down (negative feedback) can be regarded as explicit rewards with reward scores of 1 and 0 respectively. With these derived implicit and explicit rewards, UNA can accommodate binary feedback. Lastly, for any types of unpaired data composed of a tuple, i.e., (prompt, response, score), UNA can be applied as well. Given the prompt and response, the implicit reward is firstly calculated, and then a supervised learning process is conducted to minimize the difference between the implicit reward and the explicit reward. In conclusion, UNA is a unified alignment framework for RLHF, DPO and KTO. It does not only simplify RLHF but also accommodates different types of data.

The contributions of this paper are five-fold:

1. Mathematically prove that based on the RLHF objective function, the optimal policy can be induced by the reward function $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) + c$, which can be simplified to $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right)$ when $f(x) = c = 0$.
2. Propose UNA which unifies RLHF/PPO with DPO into a supervised learning of minimizing the difference between implicit reward and explicit reward.
3. Propose UNA that outperforms RLHF/PPO while simplifies, stabilizes, speeds up and reduces memory burden of RL fine-tuning process.
4. Propose UNA that can accommodate different types of data: pairwise feedback, binary feedback, score-based feedback on both online and offline mode from different evaluation methodologies including human labeling, reward models and LLMs.
5. Evaluate the performance of UNA on downstream tasks and compare it with DPO, KTO and RLHF/PPO to show its benefits.

2 METHODOLOGY: UNA

In this section, we will start with some review of RLHF/PPO and DPO. Then, we will introduce UNA and derive a general loss function and its four applications: 1. Equivalence to DPO for pairwise preference dataset; 2. Improvement KTO for binary feedback; 3. RM / LLM distillation using reward from RM / LLM; 4. Simplification of RLHF in RL fine-tuning stage.

2.1 RLHF/PPO

After the SFT phase, the RLHF using PPO consists of two main stages: reward model training and reinforcement learning fine-tuning.

During the reward model training process, an explicit reward model is trained to predict a reward score $r_{\phi}(x, y)$ based on a given prompt x and response y . This training utilizes pairwise preference

data in the form of tuples, specifically (x, y_w, y_l) , where y_w represents the desired response and y_l represents the undesired response. Initially, the probability of y_w being preferred over y_l , denoted as $P_\phi(y_w > y_l|x)$, is calculated based on their respective reward scores $r_\phi(x, y_w)$ and $r_\phi(x, y_l)$ through the Bradley-Terry (BT) model as shown in Equation 1, which provides a probabilistic framework for comparing the preferences between the two responses.

$$P_\phi(y_w > y_l|x) = \frac{e^{r_\phi(x, y_w)}}{e^{r_\phi(x, y_w)} + e^{r_\phi(x, y_l)}} = \sigma(r_\phi(x, y_w) - r_\phi(x, y_l)) \quad (1)$$

Given a pre-collected pairwise dataset where humans have selected the desired and undesired responses from two candidates, we have $P(y_w > y_l|x) = 1$ and $P(y_w < y_l|x) = 0$. To train an effective reward model, we minimize the cross-entropy loss between the predicted probabilities and the human-labeled probabilities as shown in Equation 2. Once the cross-entropy loss is minimized, the training of the reward model is complete.

$$\begin{aligned} L_{\text{RM}}(\pi_\theta) &= -\mathbb{E}_{(x, y_w, y_l) \sim D} [\log(P_\phi(y_w > y_l | x))] \\ &= -\mathbb{E}_{(x, y_w, y_l) \sim D} [\log(\sigma(r_\phi(x, y_w) - r_\phi(x, y_l)))] \end{aligned} \quad (2)$$

The second stage of RL fine-tuning has two primary goals. The first goal is to maximize the pre-trained explicit reward function $r_\phi(x, y)$ to ensure the policy aligns with reward model. To prevent reward hacking, the KL divergence from the initial policy $\pi_{\text{ref}}(y|x)$ is incorporated. The overall objective of RL fine-tuning is detailed in Equation 3.

$$\pi_\theta^*(y|x) = \max_{\pi_\theta} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_\theta(y|x)} [r_\phi(x, y)] - \beta D_{\text{KL}}(\pi_\theta(y|x) \parallel \pi_{\text{ref}}(y|x)) \right\} \quad (3)$$

Several limitations exist in RLHF. To begin with, the reward model may suffer from overfitting during training, which can adversely affect the RL fine-tuning process. Then, unlike traditional supervised learning, RL does not have explicit labels for each prompt and response. To address this, the authors employed PPO to optimize the RL objective. However, even with PPO, RL training can still be unstable. Additionally, RLHF with PPO necessitates the use of a policy, reference policy, reward model, and value model, which significantly increases memory requirements, especially for LLMs. These limitations constrain the practical application of RLHF.

2.2 DPO

In RLHF, the trained reward model can suffer from overfitting, and RL fine-tuning is notorious for its instability and memory intensity. To address these challenges, the authors of DPO discover that the optimal policy is induced by Equation 4, based on the objective function in Equation 3. Here, $Z(x) = \sum_y \pi_{\text{ref}}(y|x) e^{\left(\frac{1}{\beta} r_\theta(x, y)\right)}$, where $r_\theta(x, y)$ represents the implicit reward function.

$$r_\theta(x, y) = \beta \log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right) + \beta \log Z(x) \quad (4)$$

With the derived implicit reward model, it can be plugged into the reward model training process of RLHF in Equation 2 where $Z(x)$ gets cancelled. Eventually, the loss function for DPO is derived as shown in Equation 5.

$$\begin{aligned} L_{\text{DPO}}(\pi_\theta) &= -\mathbb{E}_{(x, y_w, y_l) \sim D} \left\{ \log [\sigma(r_\phi(x, y_w) - r_\phi(x, y_l))] \right\} \\ &= -\mathbb{E}_{(x, y_w, y_l) \sim D} \left\{ \log \left[\sigma \left(\beta \log \left(\frac{\pi_\theta(y_w|x)}{\pi_{\text{ref}}(y_w|x)} \right) - \beta \log \left(\frac{\pi_\theta(y_l|x)}{\pi_{\text{ref}}(y_l|x)} \right) \right) \right] \right\} \end{aligned} \quad (5)$$

By optimizing the loss function in DPO, we can eliminate the need for an explicit reward model and combine the two stages of RLHF into a single, streamlined process, greatly simplifying the RLHF/PPO workflow. However, DPO has several limitations. First, $Z(x)$ cannot be directly estimated, which means only pairwise preference data can be utilized, making single-prompt data

unusable during the RL fine-tuning stage. Additionally, while pairwise preference data are typically used only in the reward model stage, DPO requires them throughout, leading to inefficient use of precollected pairwise data. In comparison, after reward model training, it can be applied to prompt data, which are much easier to obtain compared with pairwise data. Lastly, in the RL stage in RLHF, reward model can provide more detailed evaluations of the generated responses. However, DPO cannot offer this level of granularity during training.

2.3 UNA

Inspired by the idea of DPO, we aim to establish a new relationship between the reward model and the optimal policy for a unified alignment framework including RLHF/PPO, DPO and KTO on different types of data. By adhering to the same objective outlined in RLHF (Equation 3), we can formulate a novel connection between the implicit reward function and the optimal policy, as shown in Equation 6. The derivation can be found in Section 3. In the special case where $f(x) = 0$ and $c = 0$, it is further simplified.

$$\begin{aligned} r_\theta(x, y) &= \beta \log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) + c \\ &= \beta \log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right) \text{ when } f(x) = 0 \text{ and } c = 0 \end{aligned} \quad (6)$$

The optimal implicit reward formulation in Equation 6 implies that we can transform the original unstable, memory-expensive RL training process into a reward function optimization problem, i.e., a stable and memory-efficient supervised learning process. Explicit rewards can be derived from multiple methods including 1. human labeling, 2. pretrained LLMs and 3. reward models. Eventually, the RL fine-tuning process is transformed into a general minimization problem between explicit reward $r_\phi(x, y)$ and implicit reward $r_\theta(x, y)$ as shown in Equation 7 where $g(x, y)$ refers to a general function that measure the difference between x and y like MSE.

$$L_{\text{UNA-reward}}(\pi_\theta) = \mathbb{E}_{x \sim D} \mathbb{E}_{y \sim \pi_\theta(\cdot|x)} [g(r_\phi(x, y), r_\theta(x, y))] \quad (7)$$

When applying an LLM for evaluation, the scores lie within a specific range, such as $[0, 100]$. These scores can be easily normalized to the interval $[0, 1]$. However, the implicit reward function can span from negative to positive infinity. To normalize implicit reward, the implicit score function, denoted as $s_\theta(x, y)$, can be derived as shown in Equation 8. For clarity, the unnormalized evaluation is termed as reward and the normalized evaluation is termed as score.

$$s_\theta(x, y) = \sigma[r_\theta(x, y)] = \sigma \left[\beta \log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right) \right] \quad (8)$$

Given the implicit and explicit score functions, an equivalent general loss for UNA can be shown in Equation 9. The normalized general loss function is more stable and will be used for experiments in this study.

$$L_{\text{UNA-score}}(\pi_\theta) = \mathbb{E}_{x \sim D} \mathbb{E}_{y \sim \pi_\theta(\cdot|x)} [g(s_\phi(x, y), s_\theta(x, y))] \quad (9)$$

Based on this general loss function using the new implicit reward function, UNA can be utilized in multiple conditions: 1. Equivalence to DPO for pairwise preference dataset 2. Improvement over KTO for binary feedback 3. RM / LLM distillation using reward from teacher RM / LLM outperforming DPO and KTO 4. Improvement over RLHF in RL fine-tuning stage: simplify PPO with a supervised learning process. Figure 2 shows how UNA is applied to different types of data and simplifies RLHF.

2.3.1 UNA: EQUIVALENT TO DPO FOR PAIRWISE DATASET

For pairwise dataset, the implicit rewards of desired and undesired responses can be derived as shown in part (a) of Figure 1. Then, LLM policy is aligned by maximizing the difference of implicit

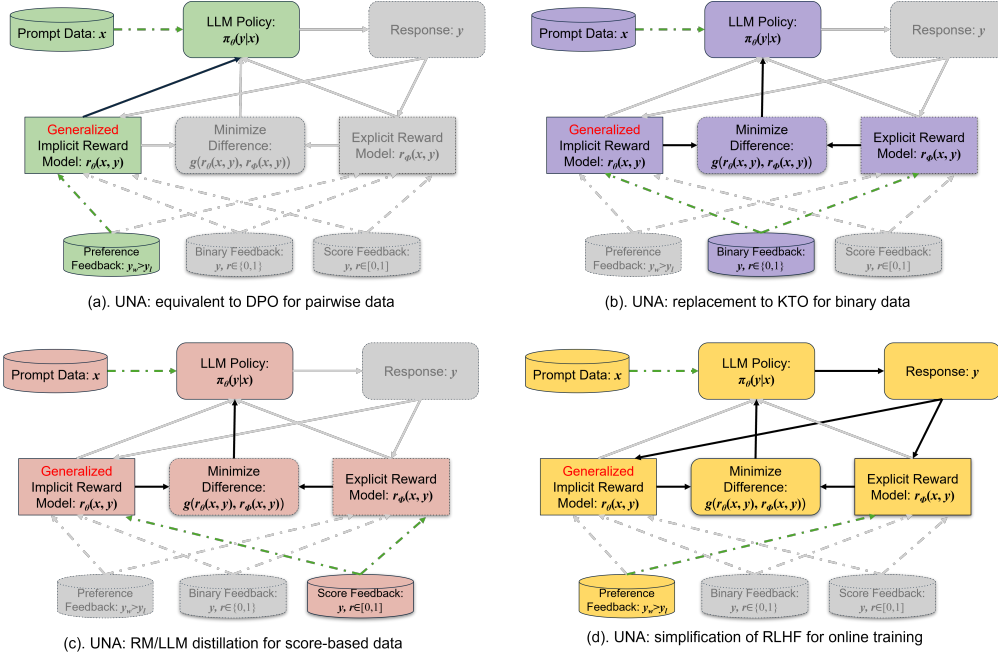


Figure 2: The four applications of UNA: (a). equivalent to DPO for pairwise data, (b). improvement over KTO for binary data, (c). RM/LLM distillation for score-based data, (d). simplification of RLHF for online training. The same modules are utilized as in Figure 1, and unused modules are grayed out. For part (a), the same steps as DPO will be utilized. For part (b), (c), (d), from the different types of data including pairwise, binary and score-based feedback, implicit and explicit rewards are firstly gathered. Then, the difference between implicit and explicit rewards is minimized like MSE loss function to align the LLM policy. More details can be found in Section 2.3.

rewards between desired and undesired responses. The loss function of UNA for pairwise dataset is shown in Equation 10.

$$\begin{aligned}
 L_{\text{UNA-pair}}(\pi_\theta) &= -\mathbb{E}_{(x, y_w, y_l) \sim D} (r_\theta(x, y_w) - r_\theta(x, y_l)) \\
 &= -\mathbb{E}_{(x, y_w, y_l) \sim D} \left[\beta \log \left(\frac{\pi_\theta(y_w|x)}{\pi_{\text{ref}}(y_w|x)} \right) - \beta \log \left(\frac{\pi_\theta(y_l|x)}{\pi_{\text{ref}}(y_l|x)} \right) \right] \quad (10)
 \end{aligned}$$

It is equivalent to DPO as the loss function is the same as long as $f(x) = \log[\sigma(x)]$ is applied to the difference of implicit rewards of desired and undesired responses: $L'_{\text{UNA-pair}}(\pi_\theta) = L_{\text{DPO}}(\pi_\theta) = -\mathbb{E}_{(x, y_w, y_l) \sim D} \{\log[\sigma(r_\phi(x, y_w) - r_\phi(x, y_l))]\}$

2.3.2 UNA: IMPROVEMENT OVER KTO FOR BINARY FEEDBACK

For binary preference, the positive and negative feedback can be transformed to explicit scores. Positive or 'thumb up' data can be assigned an explicit reward score of 1, i.e., $s_\phi(x, y_w) = 1$. In contrast, negative or 'thumb down' data can be assigned an explicit reward score of 0, i.e., $s_\phi(x, y_l) = 0$. After that, similar procedures to DPO will be conducted to estimate implicit reward and minimize the difference between implicit and explicit rewards as shown in part (b) of Figure 2.

Because the explicit feedback is binary, i.e., score rather than reward, implicit score should be utilized. Based on the implicit and explicit scores, multiple loss functions can be designed using mean square error (MSE) in Equation 11 and binary cross entropy (BCE) in Equation 12. As a result, UNA can be utilized to improve KTO for binary feedback data.

$$\begin{aligned} L_{\text{UNA-binary-MSE}}(\pi_\theta) &= -\mathbb{E}_{(x,y)\sim D}[(s_\theta(x,y) - s_\phi(x,y))^2] \\ &= -[\mathbb{E}_{(x,y_w)\sim D}(s_\theta(x,y) - 1)^2 + \mathbb{E}_{(x,y_l)\sim D}(s_\theta(x,y) - 0)^2] \end{aligned} \quad (11)$$

$$\begin{aligned} L_{\text{UNA-binary-BCE}}(\pi_\theta) &= -\mathbb{E}_{(x,y)\sim D}[L_{\text{BCE}}(s_\theta(x,y), s_\phi(x,y))] \\ &= -[\mathbb{E}_{(x,y_w)\sim D}\log(s_\theta(x,y)) + \mathbb{E}_{(x,y_l)\sim D}\log(1 - s_\theta(x,y))] \end{aligned} \quad (12)$$

2.3.3 UNA: LLM / RM DISTILLATION

Researchers have utilized LLM and RM to evaluate responses by outputting scores and rewards according to predefined standards. If the score and reward evaluations are accurate enough, they can be extra information to utilize for alignment. When the tuple type of data (prompt, response, score) is provided, the prompt and response are utilized to calculate implicit reward as shown in Equation 6, and the score is utilized as the explicit reward as shown in part (c) of Figure 2. The last step is the minimization of implicit and explicit rewards. However, the explicit reward and score from reward model and LLM are not binary, and as a result, MSE can be used as the loss function, excluding BCE. After normalization, the loss function for UNA using LLM / RM distillation is shown in Equation 13. When LLMs are utilized for evaluation, it can be regarded as an offline version of RLAIIF.

$$L_{\text{UNA-LLM-distill}}(\pi_\theta) = -\mathbb{E}_{(x,y)\sim D}[(s_\theta(x,y) - s_\phi(x,y))^2] \quad (13)$$

2.3.4 UNA: SIMPLIFICATION OF RLHF

When utilizing reward model for online evaluation, UNA will greatly simplify RL fine-tuning stage of RLHF/PPO with superior performances as shown in part (d) of Figure 2. Assuming the reward model has already been trained, the focus now shifts exclusively to the RL fine-tuning stage. Prompts are firstly sent to an LLM for online response generation and implicit reward estimation. Then, the prompt and response are sent to the reward model for explicit reward estimation. The last step minimize the differences between implicit and explicit rewards to align the LLM policy. Eventually, the original RL objective in Equation 3 can be transformed to difference minimization like MSE of implicit reward and explicit reward or scores as shown in Equation 13

UNA has several benefits over PPO in RL fine-tuning stage. First of all, it transforms the original unstable RL problem into a stable supervised learning problem by minimizing the difference between implicit and explicit rewards. In addition, UNA removes the necessary of value model in PPO, and partially reduce the burden of memory cost. Then, the computation cost of MSE is much lower compared with the multiple terms in PPO to maintain performance, and as a result, UNA will speed up the training process. Lastly, UNA outperforms RLHF/PPO on downstream tasks.

3 MATHEMATICAL PROOF OF UNA

In the section, the mathematical proof of UNA will be provided. For the proof of how to derive the mapping of optimal policy and reward model in DPO can be found in appendix A. Inspired by the proof of DPO, we will **rigorously prove** that $r(x,y) = \beta \log\left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)}\right) + f(x) + c$ will maximize the objective in Equation 3 and $r(x,y) = \beta \log\left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)}\right)$ is the simplest reward with $f(x) = c = 0$.

Proposition 1. Let a_1, \dots, a_n and b_1, \dots, b_n be non-negative numbers. Denote the sum of all a_i by a and the sum of all b_i by b . The log sum inequality states Equation 14 with equality if and only if $\frac{a_i}{b_i}$ are equal for all i , in other words $a_i = \lambda \times b_i$ for all i . The proof could be found in B

$$\sum_{i=1}^n a_i \log \frac{a_i}{b_i} \geq a \log \frac{a}{b} \quad (14)$$

Starting from the same objective in Equation 3, it can be simplified as shown in Equation 15.

$$\begin{aligned}
 \pi_\theta^*(y|x) &= \max_{\pi_\theta} \mathbb{E}_{x \sim D} \left[\mathbb{E}_{y \sim \pi_\theta(y|x)} r_\theta(x, y) - \beta D_{\text{KL}}(\pi_\theta(y|x) \parallel \pi_{\text{ref}}(y|x)) \right] \\
 &= \max_{\pi_\theta} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_\theta(y|x)} \left[r(x, y) - \beta \log \frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right] \right\} \\
 &= \beta \max_{\pi_\theta} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_\theta(y|x)} \left[\frac{1}{\beta} r(x, y) - \log \frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right] \right\} \\
 &= \beta \max_{\pi_\theta} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_\theta(y|x)} \left[-\log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} r(x, y)}} \right) \right] \right\} \\
 &= \beta \max_{\pi_\theta} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_\theta(y|x)} \left[-\log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} (r(x, y) - f(x))}} \right) + \frac{1}{\beta} f(x) \right] \right\} \\
 &= \beta \max_{\pi_\theta} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_\theta(y|x)} \left[-\log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} (r(x, y) - f(x))}} \right) \right] + \frac{1}{\beta} f(x) \right\}
 \end{aligned} \tag{15}$$

Based on the log-sum inequality in Equation 14, the term can be further simplified as shown in Equation 16 because both $\pi_\theta(y|x)$ and $\pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} (r(x, y) - f(x))}$ are non-negative.

$$\begin{aligned}
 &\beta \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_\theta(y|x)} \left[-\log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} (r(x, y) - f(x))}} \right) \right] + \frac{1}{\beta} f(x) \right\} \\
 &= \beta \mathbb{E}_{x \sim D} \left\{ -\sum_y \left[\pi_\theta(y|x) \log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} (r(x, y) - f(x))}} \right) \right] + \frac{1}{\beta} f(x) \right\} \\
 &\leq \beta \mathbb{E}_{x \sim D} \left\{ \left[-\left(\sum_y \pi_\theta(y|x) \right) \log \left(\frac{\sum_y \pi_\theta(y|x)}{\sum_y \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} (r(x, y) - f(x))}} \right) \right] + \frac{1}{\beta} f(x) \right\} \\
 &= \beta \mathbb{E}_{x \sim D} \left\{ \left[-1 \log \left(\frac{1}{\sum_y \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} (r(x, y) - f(x))}} \right) \right] + \frac{1}{\beta} f(x) \right\} \\
 &= \beta \mathbb{E}_{x \sim D} \left\{ \log \left(\mathbb{E}_{y \sim \pi_{\text{ref}}(y|x)} e^{\frac{1}{\beta} (r(x, y) - f(x))} \right) + \frac{1}{\beta} f(x) \right\}
 \end{aligned} \tag{16}$$

As a result, the maximum value of the objective function $\max_{\pi_\theta} \mathbb{E}_{x \sim D} \left[\mathbb{E}_{y \sim \pi_\theta(y|x)} r_\theta(x, y) - \beta D_{\text{KL}}(\pi_\theta(y|x) \parallel \pi_{\text{ref}}(y|x)) \right]$ in eq 15 is $\beta \mathbb{E}_{x \sim D} \left\{ \log \left(\mathbb{E}_{y \sim \pi_{\text{ref}}(y|x)} e^{\frac{1}{\beta} (r(x, y) - f(x))} \right) + \frac{1}{\beta} f(x) \right\}$ in Equation 16, and this inequality reaches the equality condition when Equation 17 is satisfied where λ is a constant.

$$\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} (r(x, y) - f(x))}} = \frac{1}{\lambda} \tag{17}$$

By rewriting this term, we can obtain the reward in term of the policy as shown in Equation 18. In special case, $f(x) = c = 0$, it is simplified to $r(x, y) = \beta \log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right)$. The condition $f(x) = c = 0$ refers that implicit and explicit reward models are exactly the same.

$$\begin{aligned}
 r(x, y) &= \beta \log \left(\frac{\lambda \pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) \\
 &= \beta \log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) + \beta \log(\lambda) \\
 &= \beta \log \left(\frac{\pi_\theta(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) + c \text{ when } c = \beta \log(\lambda)
 \end{aligned} \tag{18}$$

When plugging Equation 17 in Equation 16, the upper bound can be simplified into a constant $\beta \log(\lambda) + \mathbb{E}_{x \sim D}(f(x))$ as shown in Equation 19.

$$\begin{aligned}
 & \beta \mathbb{E}_{x \sim D} \left\{ \log \left(\mathbb{E}_{y \sim \pi_{\text{ref}}(y|x)} e^{\frac{1}{\beta}(r(x,y)-f(x))} \right) + \frac{1}{\beta} f(x) \right\} \\
 &= \beta \mathbb{E}_{x \sim D} \left\{ \log \left(\mathbb{E}_{y \sim \pi_{\text{ref}}(y|x)} \frac{\lambda \pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right) + \frac{1}{\beta} f(x) \right\} \\
 &= \beta \mathbb{E}_{x \sim D} \left\{ \log \left(\mathbb{E}_{y \sim \pi_{\theta}(y|x)} \lambda \right) + \frac{1}{\beta} f(x) \right\} \\
 &= \beta \mathbb{E}_{x \sim D} \left\{ \log(\lambda) + \frac{1}{\beta} f(x) \right\} \\
 &= \beta \log(\lambda) + \mathbb{E}_{x \sim D}(f(x))
 \end{aligned} \tag{19}$$

When desired to generalize this into "infinite dimension", another constraint needs to be added, i.e., $\sum_y \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta}(r(x,y)-f(x))}$ should be finite. Then, $f(x)$ is further restricted to $f(x) > \max[r(x, y)]$ with normalization on $r(x, y)$ in advance. Eventually, $\sum_y \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta}(r(x,y)-f(x))} < \sum_y \pi_{\text{ref}}(y|x) = 1$, which will be finite.

Here is a brief summary of this section, based on this objective $\pi_{\theta}^*(y|x) = \max_{\pi_{\theta}} \mathbb{E}_{x \sim D} [\mathbb{E}_{y \sim \pi_{\theta}(y|x)} r_{\theta}(x, y) - \beta D_{\text{KL}}(\pi_{\theta}(y|x) \parallel \pi_{\text{ref}}(y|x))]$ in Equation 3, we can obtain its upper bound $\beta \mathbb{E}_{x \sim D} \left\{ \log \left(\mathbb{E}_{y \sim \pi_{\text{ref}}(y|x)} e^{\frac{1}{\beta}(r(x,y)-f(x))} \right) + \frac{1}{\beta} f(x) \right\}$ as shown in Equation 16.

The upper bound, i.e., the equality condition is reached when $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) + c$ as shown in Equation 18. It can be further simplified to $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right)$ if $f(x) = c = 0$. In particular, $f(x) = c = 0$ refers the implicit reward equals to explicit rewards. Lastly, when the equality condition is reached, the upper bound would be $\beta \log(\lambda) + \mathbb{E}_{x \sim D}(f(x))$ as shown in Equation 19.

4 EXPERIMENTS

In this section, we will evaluate UNA on three types of experiments: improvements over DPO in pairwise feedback and KTO in binary feedback, RM/LLM distillation for score-based response and simplification to online RLHF. For the first two tests, `mistralai/Mistral-7B-v0.1` Jiang et al. (2023) is utilized as the policy model, and the `HelpSteer2` dataset Nvidia et al. (2024) is utilized as the alignment data, which have a prompt, chosen and rejected responses with corresponding scores. The evaluation scores in `HelpSteer2` are labeled by human from the perspectives of 1. *helpfulness*, 2. *correctness* 3. *coherence* 4. *complexity* and 5. *verbosity*, and the combined score is computed as: $0.65 \times \text{helpfulness} + 0.8 \times \text{correctness} + 0.45 \times \text{coherence}$, following Wang et al. (2024b). Low rank adaptation (LoRA) Hu et al. (2021) is employed during the fine-tuning process with $r = 32$, where r denotes the ranks used in LoRA. For β , UNA-binary utilizes 0.01 and DPO, KTO and UNA-score utilizes 0.03. For learning rate, UNA-score employs $3e-5$ while others utilize $5e-6$.

For the simplification of RLHF experiments, due to the computation availability and LoRA is not supported in PPOv2, `Qwen/Qwen2-1.5B` Yang et al. (2024a) is utilized as the policy model and `Ray2333/GRM-Gemma-2B-rewardmodel-ft` Yang et al. (2024b) is utilized as the reward model. The prompts of the same `Helpsteer2` dataset are utilized excluding the prompts longer than 1000 tokens. These experiments shows that UNA outperforms RLHF. For β , RLHF utilizes 0.05, while UNA uses 0.03, with both approaches employing the same learning rate of $5e-6$.

After alignment, the old and new HuggingFace Open LLM Leaderboards Beeching et al. (2023); Fourier et al. (2024) are both utilized to measure the performance. The new Open LLM Leaderboard contains 6 tasks: `bbh` Suzgun et al. (2022), `gpqa` Rein et al. (2023), `mmlu-pro` Wang et al. (2024a),

musr Sprague et al. (2024), ifeval Zhou et al. (2023) and math-hard Hendrycks et al. (2021b). For all tasks, the average scores of all tasks are reported. On the other hand, the old Open LLM Leaderboard contains other 6 tasks: gsm8k Cobbe et al. (2021), truthful-qa Lin et al. (2022), winograde Sakaguchi et al. (2019), arc-challenge Clark et al. (2018), hellaswag Zellers et al. (2019) and mmlu Hendrycks et al. (2021a). In this work, the average match rate in gsm8k, mc2 in truthful-qa, acc in winograde, acc-norm in arc-challenge, acc-norm in hellaswag and acc in mmlu will be reported. In addition to evaluating the model’s selection capabilities, MT-Bench and Alpaca-eval will also be used to assess the model’s ability to generate text responses, rather than selecting from predefined candidate answers.

4.1 UNA: IMPROVEMENTS OVER DPO & KTO

For binary feedback, borrowing the idea of KTO, the chosen responses are regarded as desired response with score "+1" and rejected response are regarded as undesired response with score "0". In this way, the explicit scores are obtained. The generalized implicit rewards are firstly transformed into implicit reward scores, i.e., $s_{\theta}(x, y) = \sigma[r_{\theta}(x, y)] = \sigma \left[\beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right) \right]$. Then, different loss functions including BCE and MSE are utilized to minimize the differences between implicit and explicit reward scores.

In score-based feedback for HelpSteer2, human annotators assign initial scores to each metric, ranging from 0 to 4. These scores are then normalized to a 0 to 1 scale. The normalized scores are subsequently weighted, and the resulting weighted scores are used as explicit feedback to align the LLM. The same implicit reward scores as before are utilized. Because the explicit reward score is a continuous variable in the interval [0, 1], MSE is utilized as the loss function.

The results are shown in Table 1 for the new Open LLM Leaderboard and Table 2 for the old Open LLM Leaderboard. The highest scores for each metric and average are stressed in bold. For binary data, UNA performs better than all the baselines do on both Leaderboards. Lastly, for score-based feedback, it further improves over UNA-binary on both Leaderboards, as more information is provided. Consequently, when precise score-based information is available, it is recommended to leverage it.

Method	bbh	gpqa	mmlu-pro	musr	ifeval	math-hard	Average
Mistral	44.11	29.53	30.11	41.79	23.22	2.92	28.61
DPO (UNA-pairwise)	44.5	28.48	30.41	39.25	26.3	2.25	28.53
KTO	44.46	29.51	30.43	40.45	24.18	2.34	28.56
UNA-binary (MSE)	44.32	29.86	30.54	39.11	26.1	3.32	28.88
UNA-binary (BCE)	44.43	29.42	30.73	39.51	26.49	2.99	28.93
UNA-score (MSE)	43.53	30.25	29.72	42.01	37.25	2.77	30.92

Table 1: The comparison of UNA with DPO, KTO considering pairwise, binary and score-based data on new Open LLM Leaderboard

Method	gsm8k	truthful-qa	winograde	arc	hellaswag	mmlu	Average
Mistral	38.02	42.58	77.58	61.43	83.44	62.51	60.93
DPO (UNA-pairwise)	40.22	44.75	79.16	62.88	84.42	62.15	62.26
KTO	41.63	47.72	78.14	62.29	84.21	62.46	62.74
UNA-binary (MSE)	40.87	48.23	79.48	63.23	84.57	62.34	63.12
UNA-binary (BCE)	40.41	48.33	79.4	63.14	84.6	62.48	63.06
UNA-score (MSE)	40.41	55.09	80.27	63.23	84.52	62.56	64.35

Table 2: The comparison of UNA with DPO, KTO considering pairwise, binary and score-based data on old Open LLM Leaderboard

We also conducted evaluations on both MT-Bench Zheng et al. (2023) and AlpacaEval Li et al. (2023). UNA-binary (MSE) achieves the highest performance on MT-Bench, while UNA-score (MSE) leads on AlpacaEval, as seen in Table 3. The performance results from LLM Leaderboards, MT-Bench, and AlpacaEval clearly demonstrate the advantages of UNA over DPO and KTO.

Method	MT-Bench	AlpacaEval LC WR
Mistral	3.15	0.31
DPO (UNA-pairwise)	6.1	3.67
KTO	5.99	4.46
UNA-binary (MSE)	6.78	5.54
UNA-binary (BCE)	6.23	7.41
UNA-score (MSE)	6.72	8.78

Table 3: The comparison of UNA with DPO, KTO considering pairwise, binary and score-based data on MT-Bench and AlpacaEval using HelpSteer2 as fine-tuning data

4.2 UNA: IMPROVEMENT AND SIMPLIFICATION ON ONLINE RLHF

For the comparison between RLHF and UNA, only prompts of HelpSteer2 are utilized. In RLHF, the prompts are sent to the policy for response generation, to the reward model for reward estimation and to the policy for update through PPO. In comparison, in UNA, the prompts are sent to the policy for response generation and implicit reward estimation, to the reward model for explicit reward estimation and to the policy for update through difference minimization like MSE between implicit and explicit rewards.

The comparison between RLHF and UNA is shown in Table 4 and Table 5. UNA outperforms RLHF in 12 out of 14 tasks. Overall, UNA beats RLHF in both Open LLM Leaderboards. More comparison of RLHF with UNA on MT-Bench and AlpacaEval can be found in Table 6. The performance results from LLM Leaderboards, MT-Bench, and AlpacaEval clearly demonstrate the superiority of UNA over RLHF.

Method	bbh	gpqa	mmlu-pro	musr	ifeval	math-hard	Average
Qwen2-1.5B	35.46	25.16	25.56	36.85	22.2	5.4	25.11
RLHF	35.57	26.7	25.17	36.84	22.37	5.48	25.36
UNA	36.03	25.62	25.3	38.32	24.78	5.4	25.91

Table 4: The comparison of UNA with RLHF using HelpSteer2 prompts on new Open LLM Leaderboard

Method	gsm8k	truthful-qa	winograde	arc	hellaswag	mmlu	Average
Qwen2-1.5B	57.92	45.93	66.06	43.94	66.72	55.82	56.07
RLHF	57.2	46.93	64.88	42.83	66.56	55.67	55.68
UNA	57.36	47.08	65.27	44.28	66.98	55.78	56.13

Table 5: The comparison of UNA with RLHF using HelpSteer2 prompts on old Open LLM Leaderboard

Last but not the least, because UNA has transformed RLHF from an RL task into a supervised learning problem and got rid of the value model, the memory usage and time cost are greatly reduced for training. The training time for 20,000 steps with 8 80G A100 GPUs is around 8 hours for RLHF and 3.5 hours for UNA with the same batch size. The speed improvement of UNA over RLHF is significant, and these advantages can be amplified with a larger batch for UNA, which is impractical for RLHF due to its higher memory costs. In conclusion, with improved performances, a more stable loss function, memory-efficient and faster training, UNA outperforms RLHF from multiple perspectives.

5 RELATED WORK

The field of LLM has been greatly revolutionized with billions of parameters, trillions of tokens in parallel during the pretraining stage OpenAI et al. (2024); Anthropic (2024); Team et al. (2023). After pretraining, SFT will be applied to enhance its capability on downstream tasks. However, both pretraining and SFT can not solve the bias and ethic problem of LLM as they exist in the pretraining data OpenAI et al. (2024). To solve this problem, RLHF with PPO Ouyang et al. (2022); Bai et al. (2022a) have been proposed, and it is the mostly accepted method to align LLM including GPT and

Method	MT-Bench	AlpacaEval LC WR
Qwen	4.63	1.06
RLHF	2.87	0.66
UNA	5.02	1.63

Table 6: The comparison of UNA with RLHF using `HelpSteer2` prompts on MT-Bench and AlpacaEval

Claude. However, lots of problems exist for RLHF/PPO including large memory burden, instability of RL and multiple stages of training, i.e. RM training and RL fine-tuning Rafailov et al. (2023). To decrease the cost of human labelling, AI feedback can be utilized to replace human feedback, which will be termed as RLAIFF Bai et al. (2022b); Lee et al. (2023). RLOO considers PPO an overkill for LLM alignment as LLM has been pretrained, and RLOO should be good enough Ahmadian et al. (2024).

To simplify RLHF, DPO is proposed to map the optimal policy and reward model, and the two stages can be merged into one step Rafailov et al. (2023). This process transforms the initial unstable RL into a binary cross entropy problem. DPOP Pal et al. (2024) mathematically prove that during DPO, the reward of desired responses will go down and proposed a maximum term to prevent the rewards of desired responses going down. IPO discovered that under nearly deterministic condition between desired and undesired responses, the effectiveness of the KL divergence constraint imposed by β diminished, potentially leading to overfitting, and they proposed a new loss term to prevent this problem Azar et al. (2023). sDPO proposed to divide given dataset into splits and use these splits to sequentially align the model will achieve performance than using all of them at once Kim et al. (2024). Iterative DPO argued that LLM can be both response generator and evaluator so that it can iterate and improve it continuously Yuan et al. (2024); Xu et al. (2024). TDPO provided an idea to provided reward to each token generation Rafailov et al. (2024); Zeng et al. (2024).

There have also been some works on merging SFT with alignment. ORPO proposed a new loss function to increase the ratio of desired responses over undesired responses to realize the goal of both SFT and alignment Hong et al. (2024). PAFT proposed to conduct SFT and alignment in parallel and merge them together afterward Pentylala et al. (2024). Some works, i.e., R-DPO Park et al. (2024) and SimPO Meng et al. (2024) have also discovered the verbose problem of LLM generation, and included some length control methods to reduce the length of generated responses while minimizing the impact of LLM performances.

The previous work focused on pairwise dataset, which was more tough to gather. In comparison, binary feedback like "thumb up" and "thumb down" will be easier to gather. KTO borrowed the idea of human aversion to desired over undesired data and it can handle binary feedback successfully Ethayarajh et al. (2024). DRO focused on binary data by estimating the policy and value functions and optimize each sequentially while maintaining the other fixed Richemond et al. (2024). However, there have not been a work that can unify both pairwise and binary feedback. Nash learning model the LLM improvement as a minmax problem and propose a iterative method to gradually approach the optimal solution Munos et al. (2024). It can solve the intransitivity problem of human preference. SPPO utilized one model as two sides of the competition Wu et al. (2024). Though Nash learning provides some hints, it will increase the time of alignment as it will increase the number of iteration before convergence.

LiPO Liu et al. (2024), RRHF Yuan et al. (2023) and PRO Song et al. (2024) utilized the ranking of a list of responses, and the relative score between these methods were utilized. RPO proposed to utilize KL divergence to minimize the difference between predicted reward and labelled reward by human or AI, which is closer to our idea in this work Nvidia et al. (2024).

Several problems exist on the current stage of alignment of LLM. To begin with, there has not been a work to unify RLHF and DPO. In addition, RLHF and RLAIFF have been known complex, stable and memory intensive, but there have not been a work to revolutize the RL process. Last, though there have been some works on utilizing different types of data like pairwise, binary and list feedback, there have not been a universe method to unify them together. These problems are going to be solved in UNA.

6 CONCLUSION

Despite the trillions of tokens used to pretrain LLMs with billions of parameters, undesired responses persist. RLHF, DPO and KTO can improve the alignment quality. However, RLHF is tough to train due to high memory demands and instability. Though DPO greatly simplify RLHF, DPO cannot fully utilize preference data information and cannot build an explicit reward model for downstream tasks. KTO generalizes DPO to binary feedback. However, RLHF, DPO and KTO each have their own strengths and drawbacks, but they cannot be unified into a single approach. In this work, we propose UNA to integrate the benefits of RLHF, DPO, and KTO into a unified framework. Based on the RLHF objective, the optimal policy is induced by $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) + c$.

When $f(x) = c = 0$, the reward can be simplified to $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right)$. With this derived implicit reward function, it can be utilized to build UNA, which unifies RLHF, DPO and KTO as a task of minimization between implicit and explicit reward functions. As a result, UNA simplifies, stabilizes and reduces memory cost of RLHF. Downstream tasks demonstrate that UNA significantly outperforms RLHF, despite the alignment tax for smaller models. Then, UNA can deal with pairwise, binary and score-based feedback. For pairwise feedback, UNA is mathematically equivalent to DPO. For binary feedback, UNA can improve over KTO. For score-based feedback, UNA outperforms non-score-based methods including DPO and KTO, and it can be regarded as a distillation of RM and LLM or an offline RLHF. In conclusion, UNA has proposed a new approach to LLM alignment.

7 DISCUSSION

Even though UNA has made breakthroughs in 1. propose a general implicit reward function; 2. unify RLHF and DPO through minimization between implicit and explicit reward functions; 3. simplify, stabilize, reduce memory cost and improve performances of RLHF; 4. accommodate different types of data types: pairwise, binary and score-based feedbacks and 5. conduct multiple experiments on downstream tasks. However, several limitations of this works exist and they remain to be explored:

1. Due to the computation limitation, the current UNA experiments to replace RLHF were conducted on 1B-2B parameters policy and reward models, which will face "alignment tax" problem. Further tests on larger-scale policy and reward models are needed to compare UNA and RLHF when the "alignment tax" is reduced in larger models Bai et al. (2022a).
2. The current UNA in replacing RLHF requires two stages. An elegant one-stage training of reward model and alignment should be pursued to further simplify this problem. In addition, the current works require separate reward model, which will cause great memory burden. The memory burden will be further reduced if the reference policy can be utilized to generate reward.
3. The general reward model is $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right) + f(x) + c$. The appropriate construction of $f(x)$ may be able to further improve the performance of UNA. The constant c can be estimated in advance or gradually updated through exponential moving average (EMA). These parameters estimation may further improve the performance of UNA.
4. Currently, only MSE and BCE are utilized to measure the difference between implicit and explicit reward functions. More measure metrics can be utilized to further improve its quality.

8 DEFAULT NOTATION

x : prompt to LLM

y_w : desired response

y_l : undesired response

$P(y_w > y_l|x)$: the probability of desired response over undesired response

$r_{\phi}(x, y)$: the explicit reward

$r_{\theta}(x, y)$: the implicit reward

$s_\phi(x, y)$: the explicit score: normalized explicit reward

$s_\theta(x, y)$: the implicit score: normalized implicit reward

D_{KL} : KL divergence

π_θ : LLM policy to be aligned

π_{ref} : reference policy for LLM alignment

$g(\cdot)$: any function that measures the difference between implicit and explicit reward functions

REFERENCES

- Arash Ahmadian, Chris Cremer, Matthias Gallé, Marzieh Fadaee, Julia Kreutzer, Olivier Pietquin, Ahmet Üstün, and Sara Hooker. Back to basics: Revisiting reinforce style optimization for learning from human feedback in llms, 2024. URL <https://arxiv.org/abs/2402.14740>.
- AI Anthropic. The claude 3 model family: Opus, sonnet, haiku. *Claude-3 Model Card*, 1, 2024.
- Mohammad Gheshlaghi Azar, Mark Rowland, Bilal Piot, Daniel Guo, Daniele Calandriello, Michal Valko, and Rémi Munos. A general theoretical paradigm to understand learning from human preferences, 2023.
- Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, Nicholas Joseph, Saurav Kadavath, Jackson Kernion, Tom Conerly, Sheer El-Showk, Nelson Elhage, Zac Hatfield-Dodds, Danny Hernandez, Tristan Hume, Scott Johnston, Shauna Kravec, Liane Lovitt, Neel Nanda, Catherine Olsson, Dario Amodei, Tom Brown, Jack Clark, Sam McCandlish, Chris Olah, Ben Mann, and Jared Kaplan. Training a helpful and harmless assistant with reinforcement learning from human feedback, 2022a.
- Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, Carol Chen, Catherine Olsson, Christopher Olah, Danny Hernandez, Dawn Drain, Deep Ganguli, Dustin Li, Eli Tran-Johnson, Ethan Perez, Jamie Kerr, Jared Mueller, Jeffrey Ladish, Joshua Landau, Kamal Ndousse, Kamile Lukosuite, Liane Lovitt, Michael Sellitto, Nelson Elhage, Nicholas Schiefer, Noemi Mercado, Nova DasSarma, Robert Lasenby, Robin Larson, Sam Ringer, Scott Johnston, Shauna Kravec, Sheer El Showk, Stanislav Fort, Tamera Lanham, Timothy Telleen-Lawton, Tom Conerly, Tom Henighan, Tristan Hume, Samuel R. Bowman, Zac Hatfield-Dodds, Ben Mann, Dario Amodei, Nicholas Joseph, Sam McCandlish, Tom Brown, and Jared Kaplan. Constitutional ai: Harmlessness from ai feedback, 2022b.
- Edward Beeching, Clémentine Fourrier, Nathan Habib, Sheon Han, Nathan Lambert, Nazneen Rajani, Omar Sanseviero, Lewis Tunstall, and Thomas Wolf. Open llm leaderboard (2023-2024). https://huggingface.co/spaces/open-llm-leaderboard-old/open_llm_leaderboard, 2023.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv:1803.05457v1*, 2018.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Kawin Ethayarajh, Winnie Xu, Niklas Muennighoff, Dan Jurafsky, and Douwe Kiela. Kto: Model alignment as prospect theoretic optimization, 2024.
- Clémentine Fourrier, Nathan Habib, Alina Lozovskaya, Konrad Szafer, and Thomas Wolf. Open llm leaderboard v2. https://huggingface.co/spaces/open-llm-leaderboard/open_llm_leaderboard, 2024.

- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *Proceedings of the International Conference on Learning Representations (ICLR)*, 2021a.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset, 2021b. URL <https://arxiv.org/abs/2103.03874>.
- Jiwoo Hong, Noah Lee, and James Thorne. Orpo: Monolithic preference optimization without reference model, 2024. URL <https://arxiv.org/abs/2403.07691>.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models, 2021. URL <https://arxiv.org/abs/2106.09685>.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. Mistral 7b, 2023. URL <https://arxiv.org/abs/2310.06825>.
- Dahyun Kim, Yungi Kim, Wonho Song, Hyeonwoo Kim, Yunsu Kim, Sanghoon Kim, and Chanjun Park. sdpo: Don't use your data all at once, 2024.
- Harrison Lee, Samrat Phatale, Hassan Mansoor, Thomas Mesnard, Johan Ferret, Kellie Lu, Colton Bishop, Ethan Hall, Victor Carbune, Abhinav Rastogi, and Sushant Prakash. Rlaif: Scaling reinforcement learning from human feedback with ai feedback, 2023.
- Xuechen Li, Tianyi Zhang, Yann Dubois, Rohan Taori, Ishaan Gulrajani, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. AlpacaEval: An automatic evaluator of instruction-following models. https://github.com/tatsu-lab/alpaca_eval, 2023.
- Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods, 2022.
- Tianqi Liu, Zhen Qin, Junru Wu, Jiaming Shen, Misha Khalman, Rishabh Joshi, Yao Zhao, Mohammad Saleh, Simon Baumgartner, Jialu Liu, Peter J. Liu, and Xuanhui Wang. Lipo: Listwise preference optimization through learning-to-rank, 2024. URL <https://arxiv.org/abs/2402.01878>.
- Yu Meng, Mengzhou Xia, and Danqi Chen. Simpo: Simple preference optimization with a reference-free reward, 2024.
- R  mi Munos, Michal Valko, Daniele Calandriello, Mohammad Gheshlaghi Azar, Mark Rowland, Zhaohan Daniel Guo, Yunhao Tang, Matthieu Geist, Thomas Mesnard, Andrea Michi, Marco Selvi, Sertan Girgin, Nikola Momchev, Olivier Bachem, Daniel J. Mankowitz, Doina Precup, and Bilal Piot. Nash learning from human feedback, 2024. URL <https://arxiv.org/abs/2312.00886>.
- Nvidia, :, Bo Adler, Niket Agarwal, Ashwath Aithal, Dong H. Anh, Pallab Bhattacharya, Annika Brundyn, Jared Casper, Bryan Catanzaro, Sharon Clay, Jonathan Cohen, Sirshak Das, Ayush Dattagupta, Olivier Delalleau, Leon Derczynski, Yi Dong, Daniel Egert, Ellie Evans, Aleksander Ficek, Denys Fridman, Shaona Ghosh, Boris Ginsburg, Igor Gitman, Tomasz Grzegorzec, Robert Hero, Jining Huang, Vibhu Jawa, Joseph Jennings, Aastha Jhunjhunwala, John Kamalu, Sadaf Khan, Oleksii Kuchaiev, Patrick LeGresley, Hui Li, Jiwei Liu, Zihan Liu, Eileen Long, Ameya Sunil Mahabaleshwarkar, Somshubra Majumdar, James Maki, Miguel Martinez, Maer Rodrigues de Melo, Ivan Moshkov, Deepak Narayanan, Sean Narenthiran, Jesus Navarro, Phong Nguyen, Osvald Nitski, Vahid Noroozi, Guruprasad Nutheti, Christopher Parisien, Jupinder Parmar, Mostofa Patwary, Krzysztof Pawelec, Wei Ping, Shrimai Prabhunoye, Rajarshi Roy, Trisha Saar, Vasanth Rao Naik Sabavat, Sanjeev Satheesh, Jane Polak Scowcroft, Jason Sewall, Pavel Shamis, Gerald Shen, Mohammad Shoeybi, Dave Sizer, Misha Smelyanskiy, Felipe Soares, Makesh Narsimhan Sreedhar, Dan Su, Sandeep Subramanian, Shengyang Sun, Shubham Toshniwal, Hao Wang, Zhilin Wang, Jiaxuan You, Jiaqi Zeng, Jimmy Zhang, Jing Zhang,

Vivienne Zhang, Yian Zhang, and Chen Zhu. Nemotron-4 340b technical report, 2024. URL <https://arxiv.org/abs/2406.11704>.

OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O’Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Gendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. Gpt-4 technical report, 2024.

Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback, 2022.

Arka Pal, Deep Karkhanis, Samuel Dooley, Manley Roberts, Siddhartha Naidu, and Colin White. Smaug: Fixing failure modes of preference optimisation with dpo-positive, 2024.

Ryan Park, Rafael Rafailov, Stefano Ermon, and Chelsea Finn. Disentangling length from quality in direct preference optimization, 2024.

- Shiva Kumar Pentylala, Zhichao Wang, Bin Bi, Kiran Ramnath, Xiang-Bo Mao, Regunathan Radhakrishnan, Sitaram Asur, Na, and Cheng. Paft: A parallel training paradigm for effective llm fine-tuning, 2024. URL <https://arxiv.org/abs/2406.17923>.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model, 2023.
- Rafael Rafailov, Joey Hejna, Ryan Park, and Chelsea Finn. From r to q^* : Your language model is secretly a q -function, 2024. URL <https://arxiv.org/abs/2404.12358>.
- David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. Gpqa: A graduate-level google-proof q&a benchmark, 2023. URL <https://arxiv.org/abs/2311.12022>.
- Pierre Harvey Richemond, Yunhao Tang, Daniel Guo, Daniele Calandriello, Mohammad Gheshlaghi Azar, Rafael Rafailov, Bernardo Avila Pires, Eugene Tarassov, Lucas Spangher, Will Ellsworth, Aliaksei Severyn, Jonathan Mallinson, Lior Shani, Gil Shamir, Rishabh Joshi, Tianqi Liu, Remi Munos, and Bilal Piot. Offline regularised reinforcement learning for large language models alignment, 2024. URL <https://arxiv.org/abs/2405.19107>.
- Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. Winogrande: An adversarial winograd schema challenge at scale, 2019. URL <https://arxiv.org/abs/1907.10641>.
- Feifan Song, Bowen Yu, Minghao Li, Haiyang Yu, Fei Huang, Yongbin Li, and Houfeng Wang. Preference ranking optimization for human alignment, 2024. URL <https://arxiv.org/abs/2306.17492>.
- Zayne Sprague, Xi Ye, Kaj Bostrom, Swarat Chaudhuri, and Greg Durrett. Musr: Testing the limits of chain-of-thought with multistep soft reasoning, 2024. URL <https://arxiv.org/abs/2310.16049>.
- Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung, Aakanksha Chowdhery, Quoc V Le, Ed H Chi, Denny Zhou, , and Jason Wei. Challenging big-bench tasks and whether chain-of-thought can solve them. *arXiv preprint arXiv:2210.09261*, 2022.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, Tianle Li, Max Ku, Kai Wang, Alex Zhuang, Rongqi Fan, Xiang Yue, and Wenhu Chen. Mmlu-pro: A more robust and challenging multi-task language understanding benchmark, 2024a. URL <https://arxiv.org/abs/2406.01574>.
- Zhilin Wang, Yi Dong, Olivier Delalleau, Jiaqi Zeng, Gerald Shen, Daniel Egert, Jimmy Zhang, Makesh Narsimhan Sreedhar, and Oleksii Kuchaiev. Helpsteer2: Open-source dataset for training top-performing reward models. *ArXiv*, abs/2406.08673, 2024b.
- Yue Wu, Zhiqing Sun, Huizhuo Yuan, Kaixuan Ji, Yiming Yang, and Quanquan Gu. Self-play preference optimization for language model alignment, 2024. URL <https://arxiv.org/abs/2405.00675>.
- Jing Xu, Andrew Lee, Sainbayar Sukhbaatar, and Jason Weston. Some things are more cringe than others: Iterative preference optimization with the pairwise cringe loss, 2024. URL <https://arxiv.org/abs/2312.16682>.
- An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jianxin Yang, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin

- Yang, Mei Li, Mingfeng Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Xuejing Liu, Yang Fan, Yang Yao, Yichang Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, Zhifang Guo, and Zhihao Fan. Qwen2 technical report, 2024a. URL <https://arxiv.org/abs/2407.10671>.
- Rui Yang, Ruomeng Ding, Yong Lin, Huan Zhang, and Tong Zhang. Regularizing hidden states enables learning generalizable reward model for llms, 2024b. URL <https://arxiv.org/abs/2406.10216>.
- Weizhe Yuan, Richard Yuanzhe Pang, Kyunghyun Cho, Xian Li, Sainbayar Sukhbaatar, Jing Xu, and Jason Weston. Self-rewarding language models, 2024. URL <https://arxiv.org/abs/2401.10020>.
- Zheng Yuan, Hongyi Yuan, Chuanqi Tan, Wei Wang, Songfang Huang, and Fei Huang. Rrhf: Rank responses to align language models with human feedback without tears, 2023. URL <https://arxiv.org/abs/2304.05302>.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 2019.
- Yongcheng Zeng, Guoqing Liu, Weiyu Ma, Ning Yang, Haifeng Zhang, and Jun Wang. Token-level direct preference optimization, 2024. URL <https://arxiv.org/abs/2404.11999>.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. Judging llm-as-a-judge with mt-bench and chatbot arena, 2023. URL <https://arxiv.org/abs/2306.05685>.
- Jeffrey Zhou, Tianjian Lu, Swaroop Mishra, Siddhartha Brahma, Sujoy Basu, Yi Luan, Denny Zhou, and Le Hou. Instruction-following evaluation for large language models, 2023. URL <https://arxiv.org/abs/2311.07911>.

A DPO: RELATIONSHIP BETWEEN OPTIMAL POLICY AND REWARD FUNCTION

The objective of RLHF / DPO is shown in Equation 3. From the objective, the relationship between optimal reward and optimal policy can be derived in Equation 4 where $Z(x) = \sum_y \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} r_{\theta}(x,y)}$. The illustration for deriving DPO is shown in Equation 20.

$$\begin{aligned}
 \pi_{\theta}^*(y|x) &= \max_{\pi_{\theta}} \mathbb{E}_{x \sim D} [\mathbb{E}_{y \sim \pi_{\theta}(y|x)} r_{\theta}(x, y) - \beta D_{\text{KL}}(\pi_{\theta}(y|x) \| \pi_{\text{ref}}(y|x))] \\
 &= \max_{\pi_{\theta}} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_{\theta}(y|x)} \left[r(x, y) - \beta \log \frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right] \right\} \\
 &= \min_{\pi_{\theta}} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_{\theta}(y|x)} \left[\log \frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} - \frac{1}{\beta} r(x, y) \right] \right\} \\
 &= \min_{\pi_{\theta}} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_{\theta}(y|x)} \left[\log \left(\frac{\pi_{\theta}(y|x)}{\frac{1}{Z(x)} \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} r(x,y)}} \right) - \log(Z(x)) \right] \right\} \quad (20) \\
 &= \min_{\pi_{\theta}} \mathbb{E}_{x \sim D} \left\{ \mathbb{E}_{y \sim \pi_{\theta}(y|x)} \left[\log \left(\frac{\pi_{\theta}(y|x)}{\frac{1}{Z(x)} \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} r(x,y)}} \right) \right] - \log(Z(x)) \right\} \\
 &= \min_{\pi_{\theta}} \mathbb{E}_{x \sim D} \left\{ D_{\text{KL}} \left(\pi_{\theta}(y|x) \| \frac{1}{Z(x)} \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} r(x,y)} \right) - \log(Z(x)) \right\}
 \end{aligned}$$

The objective function is minimized when $D_{\text{KL}} \left(\pi_{\theta}(y|x) \| \frac{1}{Z(x)} \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} r(x,y)} \right) = 0$, and this is equivalent to $\pi_{\theta}(y|x) = \frac{1}{Z(x)} \pi_{\text{ref}}(y|x) e^{\frac{1}{\beta} r(x,y)}$. By rewriting, the reward model can be expressed in term of the current policy as shown in Equation 4.

However, the term $Z(x)$ cannot be computed as it needed to be computed by summing all candidate responses y . DPO avoids this problem by subtracting the rewards of desired and undesired responses $r(x, y_w) - r(x, y_l) = \beta \left[\log \left(\frac{\pi_{\theta}(y_w|x)}{\pi_{\text{ref}}(y_w|x)} \right) - \log \left(\frac{\pi_{\theta}(y_l|x)}{\pi_{\text{ref}}(y_l|x)} \right) \right]$. In addition, the authors argue "We say that two reward functions $r(x, y)$ and $r'(x, y)$ are equivalent iff $r(x, y) - r'(x, y) = f(x)$ for some function f ". However, rigorous proof cannot be provided and it is only provided that $r(x, y)$ and $r'(x, y)$ induce the same optimal policy. For Lipo, $r(x, y) = \beta \log \left(\frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \right)$ is directly utilized as rewards for listwise responses and KTO estimates $Z(x)$ by averaging over multiple samples.

B DERIVATION OF LOG-SUM INEQUALITY

Jesen inequality. For a real convex function φ , numbers x_1, x_2, \dots, x_n in its domain, and positive weights a_i , Jensen's inequality can be stated as in Equation 21:

$$\frac{\sum_{i=1}^n a_i \varphi(x_i)}{\sum_{i=1}^n a_i} \geq \varphi \left(\frac{\sum_{i=1}^n a_i x_i}{\sum_{i=1}^n a_i} \right) \quad (21)$$

Proof of log-sum inequality. Firstly, define $f(x) = x \log(x)$. Then, $f'(x) = 1 + \log(x)$ and $f''(x) = \frac{1}{x}$. For the domain $x > 0$, $f''(x) > 0$. As a result, $f(x) = x \log(x)$ is a convex function and satisfy Jesen's inequality. Then, the log-sum inequality could be derived in Equation 22.

$$\begin{aligned} \sum_{i=1}^n a_i \log \left(\frac{a_i}{b_i} \right) &= \sum_{i=1}^n b_i f \left(\frac{a_i}{b_i} \right) \\ &= b \sum_{i=1}^n \frac{b_i}{b} f \left(\frac{a_i}{b_i} \right) \\ &= b \frac{\sum_{i=1}^n b_i f \left(\frac{a_i}{b_i} \right)}{\sum_{i=1}^n b_i} \\ &\geq b f \left[\frac{\sum_{i=1}^n b_i \frac{a_i}{b_i}}{\sum_{i=1}^n b_i} \right] \\ &= b f \left(\frac{a}{b} \right) \end{aligned} \quad (22)$$