

Private Electronic Payments with Self-Custody and Zero-Knowledge Verified Reissuance

Daniele Friolo Geoffrey Goodell Dann Toliver Hazem Danny Nakib

Abstract

This article builds upon the protocol for digital transfers described by Goodell, Toliver, and Nakib [10], which combines privacy by design for consumers with strong compliance enforcement for recipients of payments and self-validating assets that carry their own verifiable provenance information. We extend the protocol to allow for the verification that reissued assets were created in accordance with rules prohibiting the creation of new assets by anyone but the issuer, without exposing information about the circumstances in which the assets were created that could be used to identify the payer. The modified protocol combines an audit log with zero-knowledge proofs, so that a consumer spending an asset can demonstrate that there exists a valid entry on the audit log that is associated with the asset, without specifying which entry it is. This property is important as a means to allow money to be reissued within the system without the involvement of system operators within the zone of control of the original issuer. Additionally, we identify a key property of privacy-respecting electronic payments, wherein the payer is not required to retain secrets arising from one transaction until the following transaction, and argue that this property is essential to framing security requirements for storage of digital assets and the risk of blackmail or coercion as a way to exfiltrate information about payment history. We claim that the design of our protocol strongly protects the anonymity of payers with respect to their payment transactions, while preventing the creation of assets by any party other than the original issuer without destroying assets of equal value.

1 Introduction

Privacy and scalability are often at odds in digital payment solutions. We assert that this is largely the result of the involvement of the issuer in the circulation of electronic money. Goodell, Toliver, and Nakib have shown that it is possible to achieve both privacy and scalability imperatives simultaneously by combining a privacy-respecting token issuance process with a model by which assets track their own provenance [10]. Unlike most real and proposed modern retail payment solutions that are currently used in practice (public and private), including interbank payments, cryptocurrency transfers, and centralised e-money, their approach removes the issuer from the transaction channel, allowing transactions to take place at the edge. However, the protocol assumes that before value transferred in one consumer transaction can be spent by a consumer in another transaction, the underlying assets must be recirculated by *minters*, entities authorised and trusted by the original issuer to issue new assets to replace previously spent assets. It is assumed that minters do not produce valid assets without authorisation from the issuer, despite having the technical capacity to do so. Although this assumption mirrors the mechanical control that central banks have over private-sector companies that produce banknotes and coins, such an assumption might be less appropriate for an environment wherein valid assets can be created without the aid of proprietary technology and expensive materials with large fixed costs.

We show that it is possible for a payer to demonstrate that an asset was created in accordance with the rules governing its creation without providing evidence linking the asset to the specific context and

circumstances of its creation. The combination of privacy and resistance to counterfeiting is as important to digital money as it is for physical cash. Users of cash have a reliable way to verify the authenticity of banknotes while also maintaining that they would not expect that the serial numbers of their banknotes would be used to associate the bank account of a payer who had withdrawn the banknotes from her bank to the bank account of the recipient who had deposited the banknotes following a retail transaction.

In this article, we describe a mechanism that combines zero-knowledge proofs with a robust audit log to provide a way for payers to prove that their assets were created during an atomic process wherein assets of equal value were destroyed, without incurring the risk of de-anonymisation or undermining the properties claimed in the design of the original protocol. We show that using this new mechanism allows the process of reissuance of spent tokens to be undertaken by relatively untrusted minters, or by consumer-facing banks instead of minters, thus improving the robustness of the protocol relative to the original design and reducing its attack surface.

This article is organised as follows. In the rest of this section, we provide background to motivate the design of our payment architecture and characterise the requirements that underpin its design. In the following section, we compare related protocols and assess their strengths and weaknesses. In Section 3, we provide an overview of the protocol. In Section 4, we provide background assumptions and definitions that are foundational to our design. In Section 5, we formally define our protocol. In Section 6, we offer a formal security analysis of our protocol, offering proof of a set of claims. In Section 7, we conclude, pointing to next steps and future directions for this line of research.

1.1 Background

New and emerging developments of payment infrastructure is on the rise. There are several considerations driving this exploration. In particular lies the secular decline in the use of cash as a means of payment, particularly in industrialised economies, over the last decade as consumers move to internet payments, including debit and credit cards. The decline of the use of cash is fundamental because the properties of cash, in particular privacy and choice, have been essential and expected by the public. Absent the privacy-preserving properties of cash, users are at constant risk of being profiled by various parties.

The value of retail payment infrastructure relative to other forms of central bank money lies in its suitability for conducting payments. Payments can be broken down into two categories, namely cash and electronic payment systems.

The use cases for cash often require low latency, low transaction overhead, and unlinked transactions (consumer privacy by design). A good mechanism for payments can both meet these requirements and also extend the benefits of digital transfers into the cash domain, so that the beneficial properties of both will become available in the digital realm. As the digital economy continues to expand into more facets of consumers' everyday lives, ensuring the cash-like properties such as efficiency, security and ownership is paramount.

The present paper extends previous work in a category of protocols, which includes the protocol underpinning our article, "A Scalable Architecture for Electronic Payments" [10], that allow assets that had been created via a Chaumian mint [4] to be transferred between independent parties without the involvement of the issuer. Important characteristics of these protocols include privacy, self-custody and compliance enforcement for recipients without relying upon exogenous punishment mechanisms outside of the protocol. Punishment mechanisms are unnecessary and introduce negative externalities, such as reliance upon a panoptical view of the behaviours, transactions, and activities of all participants. In addition, these protocols exhibit *transaction independence* in the sense that do not require a user to retain any secret information that might arise from a transaction. This property is important, because it means that the user can op-

tionally expunge all records of the transaction. Because payers can reasonably be expected to be unable to furnish information about payment history, the de-anonymisation risk posed by the compromise of a device, blackmail, or coercion, is mitigated relative to schemes that require payers to maintain information about previous transactions, for example, to prove, via a zero-knowledge mechanism or otherwise, that the state of a balance within the system was updated in accordance with the rules.

In particular, this new category of protocols is able to achieve the combination of privacy by design, self-custody, and compliance enforcement by using an external mechanism for providing integrity verification of assets, wherein the assets are held outside of the relevant ledger. Rather than managing tokens directly, the ledger instead plays the role of integrity verification for the state of the assets. However, because privacy for consumers depends upon the inability to link an asset to the circumstances of its creation, the integrity of the assets must depend upon the inability of those charged with the task of creating assets to do so against the rules.

This article offers an extension to protocols in this category that allow users to prove that an asset is correctly produced while not needing to establish a specific relationship to its creation. Specifically, the mechanism presented in this article provides a way for a prover to demonstrate that an asset has been correctly created by a party whose task is to recirculate tokens (i.e., to “burn” and “mint” in equal measure) within a system, without revealing information about its creation. Since the assets exist outside the ledger, it is essential for parties receiving assets to be able to establish their security properties. By providing a way for assets to be verified without linking an asset being proved to an asset being created, it becomes possible to allow the recirculation of assets by parties that operate independently of issuers, without compromising an essential privacy characteristic for digital payment infrastructure.

The mechanism presented here is generic, in the sense that it can be applied to a variety of privacy-enhancing payment schemes that rely upon a Chaumian mint. However, the primary value of the mechanism lies in its use in cases in which assets are transferred without the involvement of their creator, so it will be useful to show how to use this mechanism with protocols that allow assets to be held directly and for which verification is based upon proofs of provenance. For this reason, in future work, we intend to prove how the mechanism works with provenance-based transfers that use Merkle trees to ensure the integrity of assets.

1.2 Design requirements

Next, elaborating the set of requirements proposed by Goodell, Toliver, and Nakib [10], we describe the foundational requirements for our design to support the stated characteristics of consumer privacy and system scalability while ensuring that the system can be adopted within the broader socio-technical context of modern retail payments:

- *Consumer privacy by design.* Consumers must be able to verify that, in their spending transactions, they do not disclose any information that can be used, *ex ante* or *ex post*, to link their identities to the transactions.
- *Compatibility with regulatory objectives.* The design of the system must be compatible with the expectation that consumers would be subject to AML/KYC checks at the point in time at which they receive tokens and that merchants would be subject to AML/KYC checks sometime between the point in time that they receive tokens from consumers and the point in time that they deposit the tokens or reuse them in subsequent transactions.
- *Independent transactions.* Importantly, tokens held by consumers within the system must not be associated with accounts. Consumers must not be expected to hold any secrets other than those

related to the set of tokens that they currently hold, so there is no possibility to reconstruct or confirm the prior payment history of an honest consumer even if an adversary takes control of a user’s device.

- *No involvement of the issuer in the circulation of tokens.* In the protocol proposed by Goodell, Toliver, and Nakib [10], it is assumed that the issuer would not participate in transactions. However, the issuer would still implicitly have a role in the reissuance of tokens after they are spent, because it is assumed that they must enforce the responsibility of minters to not create invalid tokens. In this version of the protocol, it must be possible for minters to be untrusted, so that unauthorised tokens can be rejected at the point of sale.
- *Efficient procedure for reissuance of tokens.* Since tokens cannot be rehypothecated, there must be an efficient mechanism for recirculating tokens within the system that avoids requiring banks to hold too many tokens at once.
- *Efficient proof generation.* The zero-knowledge proofs used by our system should be computable efficiently, in both terms of communication and computation, and parallelisable so that they can be efficiently performed at scale.
- *Stateless issuer.* The Central Bank is trusted and generates the secrets at the beginning of the protocol. For the purpose of security, it should be possible for the issuer, after transferring its tokens to commercial banks, should be able to permanently delete all secrets related to the specific tokens that it issues.
- *Modularity.* The overall architecture should rely upon simple components that can be rigorously analysed.
- *Succinct audit log.* Well-known verifiable computation techniques (for example, proofs computed on Merkle trees) can be employed to make the audit log data succinct, so that it can be verified efficiently.

Finally, we believe that the design requirements can be met in two ways: either (a) by having a minter sign blinded tokens and publish the signatures alongside burned tokens on the audit log, as in the design proposed by Goodell, Toliver, and Nakib [10], and then having the payer furnish a zero-knowledge proof that the unblinded token matches some blinded token on the audit log; or (b) by having the payer’s bank publish zero-knowledge commitments to new tokens alongside burned tokens of equal value on the audit log and then having the payer furnish a zero-knowledge proof that the new token manages some zero-knowledge commitment on the audit log. In this article, we shall formally prove claims about the latter approach, although we assert that it is also possible to prove similar claims about the former approach.

2 Related Work

Starting from the very first work of Chaum [4], a lot of attention has been posed from both the industrial and academic perspectives on digital cash. Especially in recent times, due to decentralized public ledgers with high integrity guarantees such as blockchains and due to the recent intention of many governments to implement Central Bank Digital Currencies, a lot of academic effort has been made to introduce new efficient CBDCs with stronger security guarantees.

At ACM CCS in 2022, two blockchain-aided CBDCs system were proposed: Platypus [16] and PEReDI [12]. In terms of the definition of the privacy desiderata, we looked mainly to Platypus for inspiration. In terms of efficiency and privacy guarantees, our design is comparable. However, we recall that the Platypus protocol is account-based, and an important property that we require, transaction independence, cannot be satisfied by Platypus. With account-based designs, users are required to hold long-term secrets that can be

used to establish relationships among transactions. Indeed, users who leak their own secret in the Platypus system, whether by mistake, by theft, or by coercion, expose their entire account histories.

PEReDi is a robust CBDC protocol in which regulation can be strictly enforced by inspecting, in a privacy-preserving way, the payment traces of the users. Its authors prove the security of their protocol in the Universal-Composability framework. However, like Platypus, PEReDi also uses an account-based design, which implies a persistent identity. The PEReDi protocol is complicated, so Dogan and Bicakci responded by proposing KAIME [5], another account-based protocol with a simpler design, relying on a few simple cryptographic primitives. However, although we recognise the value of the improvements, the account-based mechanism is still problematic because of the lack of transaction independence.

In AFT '20, Androulaki et al. [1] proposed a token-based system with auditability features. Dogan and Bicakci considered the scheme of Androulaki et al. to be a “unspent transaction output” (UTxO) token scheme, because new tokens are created from the process of spending previous tokens. The UTxO property holds whether or not the tokens themselves are written to the ledger, as they are in Bitcoin. The design of Androulaki et al. uses zero-knowledge commitments to new tokens during a transaction, with the expectation that such tokens will be spent onward. A UTxO architecture does not in itself imply a requirement for the payer to retain secrets from one payment to the next. So it is possible to create a UTxO scheme that preserves transaction independence. Nevertheless, the trust model of Androulaki et al. violates transaction independence for two reasons. First, auditors are able to see and connect all of the transaction information, including all of the payments, that a payer makes, by design. Second, authorisation for spending is bound to a user’s identity, the credentials for which must be preserved across transactions.

Similarly, the trust model of Wüst et al. [15], another UTxO scheme, violates transaction independence for two reasons. First, the payer must retain a private key corresponding to the certificate issued by the regulator enabling the payer to pay (that is, a long-lived identity). It is assumed that the private key would be used by the payer to receive money when withdrawing it, for example, from a bank, and that the long-lived identity is linked to every transaction that the user makes as payer, even whilst it might not be disclosed. Second, the payer must retain proof that previous transactions during an epoch were sufficiently small that the new payment does not violate a specified transaction limit. These proofs ultimately add an account-like layer to what would otherwise be a UTxO token: A function of this transaction and previous transactions must be shown to meet a certain requirement. Thus, we can argue that the architectures described in both the Androulaki et al. and Wüst et al. proposals are linked to an underlying identity of the payer. Tomescu et al. [14] also proposed a token-based system in the UC setting. As with PEReDi [12], we noticed a high design complexity, and as with the aforementioned UTxO protocols, there is an implicit requirement of a payer identity.

The architecture is not like this. A wallet does not carry any identity credentials at all, and once money is paid, it is assumed to be gone, with nothing remaining that can be used to enforce limits or anything else. Our architecture assumes that limits are enforced at the time at which consumers withdraw tokens, and not when they spend them, drawing into question an expectation anticipated by many designs that the identity of the payer must be linked to every transaction. The mechanism we propose is sufficient to satisfy legitimate regulatory objectives, both because tokens once received must be exchanged via regulated intermediaries for their value to be spent anonymously in the future, and because it is assumed that regulators would require recipients of money to associate their own identities with the money they receive.

3 Protocol Overview

The main idea behind the protocol is to allow a receiver of a token to spend it by posting a fresh and unrelated token onto a bulletin board without requiring any trusted party to verify the legitimacy of the

new token. Since this type of verifiability is unattainable without a trusted party or some relation between the tokens, we rely on non-interactive zero-knowledge proofs to create a relation between a freshly generated token and an older claimed token (which refer to as *burnt*) without disclosing which was the exact token that was claimed in place of the new one. With this approach, an eavesdropper looking at the bulletin board cannot identify which was the claimed token. We call this kind of security against an eavesdropper as *token privacy*.

The main challenge behind this approach is in the generation of the the very first set of tokens, characterizing the overall token balance of the system, in a trusted manner. Since our aim is to realize a Central Bank Digital Currency, we can rely on the power of the Central Bank to generate such a set of tokens. We call such tokens *genesis tokens*. For availability and security reasons, the Central Bank, described in Fig. 3, will be considered an available trusted party only during the protocol setup phase. After the setup phase, we do not have any trust assumption except that the bulletin board, described in Fig. 2, preserves availability and integrity of the posted data.

The recipients of genesis tokens are banks, who are a subset of the users and hence treated exactly as any other user transferring tokens inside the system.

To ensure that an adversary corrupting some subset of users cannot double spend one of his tokens, we introduce the concept of *validity* of a token. A token is roughly composed of two keys, the *sender verification key*, freshly generated by the sender, and the *receiver verification key*, freshly generated by the receiver and sent to the sender to produce a new token. Together with such keys, other cryptographic objects such as signatures and zero-knowledge proofs might be part of the token to guarantee its validity.

A genesis tokens is valid if (i) the sender verification key is a central bank key and (ii) the signature attached to the token verifies the bank verification key w.r.t. the central bank verification key. Those two checks are sufficient to identify valid genesis tokens inside the bulletin board due to the trust assumption of the central bank and the verification keys the central bank has distributed during setup. We further distinguish between *live* tokens and *burnt* tokens. A valid token is burnt if flagged as burnt by the receiver, and alive otherwise. The receiver further authenticates the burning procedure, i.e. the flag has a signature attached that verifies the token and the corresponding flag w.r.t. the receiver verification key.

Any token that is subsequent to a genesis token is considered a valid token when:

- The token is fresh, i.e. the sender verification key was not used in a past valid token.
- The token signature verifies the message composed of the receiver verification key w.r.t the sender verification key.
- The statement of the zero-knowledge proof, that is attached with the proof, is composed of a set of burnt valid tokens.
- The zero-knowledge proof verifies w.r.t to the attached statement.

The receiver, to accept a new payment, verifies that the token posted by the sender onto the bulleting board is a live valid token and that verification key associated is correct, i.e. matches with the one that the receiver provided to the sender.

As it will be explained in more detail in the remainder of the paper, those validity checks ensure that the adversary cannot forge a new valid token without burning a live valid token owned by them, i.e. for which they know the signing key corresponding to their receiver verification key of the burnt token. We refer to this property as *token integrity*. We further require another property that the technique described above satisfy, called *balance invariance*, guaranteeing that the overall number of live valid tokens in the system (in the bulletin board), does not change its cardinality, i.e. matches the number of genesis tokens.

4 Preliminaries

Throughout this paper, we use the abbreviation PPT to denote probabilistic polynomial time. Given a PPT algorithm A , let $A(x)$ be the probability distribution of the output of A when run with x as input. We use $A(x; r)$, instead, to denote the output of A when run on input x and coin tosses r . We denote with $\lambda \in \mathbb{N}$ the security parameter and with $\text{poly}(\cdot)$ an arbitrary positive polynomial. Every algorithm takes as input the security parameter λ (in unary, i.e. 1^λ). When an algorithm takes more than one input, 1^λ is omitted. We say that a function $\nu : \mathbb{N} \rightarrow \mathbb{R}$ is negligible in the security parameter $\lambda \in \mathbb{N}$ if it vanishes faster than the inverse of any polynomial in λ , i.e. $\nu(\lambda) < \frac{1}{\text{poly}(\lambda)}$ for all positive polynomials $\text{poly}(\lambda)$.

We use \leftarrow when the variable on the left side is assigned with the output value of the algorithm on the right side. Similarly, when using \leftarrow^s , we mean that the variable on the left side is assigned a value sampled randomly according to the distribution on the right side.

A *polynomial-time* relation \mathcal{R} is a relation for which membership of (x, w) in \mathcal{R} can be decided in time polynomial in $|x|$. If $(x, w) \in \mathcal{R}$, then we say that w is a *witness* for the *instance* x . A polynomial-time relation \mathcal{R} is naturally associated with

A distribution ensemble $\{X(\lambda)\}_{\lambda \in \mathbb{N}}$ is an infinite sequence of probability distributions, where a distribution $X(\lambda)$ is associated with each value of $\lambda \in \mathbb{N}$. We say that two distribution ensembles $\{X(\lambda)\}_{\lambda \in \mathbb{N}}$ and $\{Y(\lambda)\}_{\lambda \in \mathbb{N}}$ are *computationally indistinguishable* if for every PPT distinguisher D , there exists a negligible function ν such that:

$$\Pr[D(1^\lambda, X(\lambda)) = 1] - \Pr[D(1^\lambda, Y(\lambda)) = 1] \leq \nu(\lambda).$$

$\{X(\lambda)\}_{\lambda \in \mathbb{N}}$ and $\{Y(\lambda)\}_{\lambda \in \mathbb{N}}$ are statistically indistinguishable if the above holds for computationally unbounded D . We use \approx_c and \approx_s to denote that two distributions ensembles are respectively computationally and statistically indistinguishable, \equiv to denote that two distribution ensembles are identical.

4.1 Non-Interactive Commitments

A non-interactive commitment is a PPT algorithm Com taking as input a message $m \in \{0, 1\}^k$ and outputting a value $\gamma = \text{Com}(m; r) \in \{0, 1\}^l$ where $r \in \{0, 1\}^*$ is the randomness used to generate the commitment. The pair (m, r) is also called the *opening*. A non-interactive commitment typically satisfies two properties known as binding and hiding; we review these properties (in the flavor we need them) below.

Definition 1 (Computational binding). *We say that Com satisfies computational binding if, for all PPT adversary A , it holds that*

$$\Pr[\text{Com}(m_0; r_0) = \text{Com}(m_1; r_1) \mid (m_0, m_1, r_0, r_1) \leftarrow^s A(1^\lambda)] \leq \text{negl}(\lambda)$$

Definition 2 (Statistical hiding). *We say that Com satisfies statistical hiding if for all pairs of message $m_0, m_1 \in \{0, 1\}^k$, it holds that*

$$\{\text{Com}(1^\lambda, m_0)\}_{\lambda \in \mathbb{N}} \approx_s \{\text{Com}(1^\lambda, m_1)\}_{\lambda \in \mathbb{N}}.$$

4.2 Non-Interactive Zero-Knowledge Proof-of-Knowledge

In the following, we introduce our NIZK-PoK definition¹. A non-interactive proof system NIZK is composed of a tuple of algorithms described as follows:

¹Since knowledge soundness is defined with a PPT adversary, it should be referred as be Argument-of-Knowledge. Throughout this paper, we keep using the term Proof in place of Argument.

Setup(\mathcal{R}): On input the NP-relation \mathcal{R} returns a common reference string crs and a trapdoor td .

Prove(crs, x, w): Take as input the crs , a statement x and a witness w such that $(x, w) \in \mathcal{R}$ and returns a proof π .

Vrfy(crs, x, π): Takes as input the crs , a statement x and a proof π . Output 1 if π is an accepting proof with respect to the statement x and relation \mathcal{R} , 0 otherwise.

Definition 3 (Non-Interactive Zero-knowledge Proof-of-Knowledge). *Let \mathcal{R} be an NP-relation. A non-interactive proof system $\text{NIZK} = (\text{Setup}, \text{Prove}, \text{Vrfy})$ is a NIZK-PoK for the relation \mathcal{R} if it satisfies completeness, knowledge soundness and statistical zero-knowledge. The properties follow.*

- **Completeness** For each $(x, w) \in \mathcal{R}$, we have that

$$\Pr \left[\text{Vrfy}(x, w, \pi) = 1 \mid \begin{array}{l} (\text{crs}, \text{td}) \leftarrow_s \text{Setup}(\mathcal{R}); \\ \pi \leftarrow_s \text{Prove}(\text{crs}, x, w) \end{array} \right] = 1$$

- **Knowledge Soundness** For all PPT A there exists an extractor Ext_A such that,

$$\Pr \left[\begin{array}{l} \text{Vrfy}(x, \pi) = 1 \wedge \\ (x, w) \notin \mathcal{R} \end{array} \mid \begin{array}{l} (\text{crs}, \text{td}) \leftarrow_s \text{Setup}(\mathcal{R}); \\ ((x, \pi); w) \leftarrow_s A \parallel \text{Ext}_A(\text{crs}) \end{array} \right] \leq \text{negl}(\lambda).$$

- **Statistical Zero-Knowledge** There exists a simulator S such that for all $(x, w) \in \mathcal{R}$ and for all PPT A ,

$$\left\{ \pi \leftarrow_s \text{Prove}(\text{crs}, x, w) : (\text{crs}, \text{td}) \leftarrow_s \text{Setup}(\mathcal{R}) \right\} \approx_s \left\{ \pi \leftarrow_s S(\text{crs}, \text{td}, x) : (\text{crs}, \text{td}) \leftarrow_s \text{Setup}(\mathcal{R}) \right\}$$

Since, for communication efficiency reasons, we aim for short proofs, we further introduce the *succinctness* property. Succinct NIZK-PoKs are called zero-knowledge Succinct Non-Interactive Arguments-of-Knowledge (zk-SNARKs).

Definition 4 (zk-SNARKs). *Let NIZK be a NIZK-PoK for a relation \mathcal{R} . We say that NIZK is a zk-SNARK if it further satisfies succinctness, guaranteeing that for any $(x, w) \in \mathcal{R}$, given π be the output of $\text{Prove}(x, w)$, we have that $|\pi| = \text{poly}(\lambda)$ and the verifier, on input x and π , runs in $\text{poly}(\lambda + |x|)$.*

5 Our protocol

In the following, we first introduce some notation that will make the protocol easier to describe. Then, we introduce the the NP-relation that must be proven by our NIZK-PoK system and finally we formally describe our protocol.

5.1 Auxiliary Notation and Useful Algorithms.

As it can be seen in the description of BB in Fig. 2, each time a new message is posted, a set M is updated. Since BB , when receiving a new message, automatically notifies the parties with the new message, we assume that the set M of bulletin board messages is always updated by any involved party in the system. We indicate as $M[j]$ as the j -th token in M . Moreover, we indicate as M_{live} as the set M restricted to live valid tokens and M_{burnt} as the M restricted to burnt valid tokens. Let \mathcal{I} be a set of indexes, we indicate $M^{\mathcal{I}}$ as the valid tokens in M restricted to the ones indexed by \mathcal{I} , i.e. the subset of M composed by the the tokens (j, \cdot) for each $j \in \mathcal{I}$. When we are referring to the token with index j in M , we indicate it as M^j . We indicate a live token with sender S and receiver R with $F = (j, \text{vk}^S, \text{vk}^R, \sigma^S, \mathcal{I}, \pi)$, where

- j is the index of the token in the bulletin board,
- vk^S is the fresh verification key of the sender,
- vk^R is the fresh verification key of the receiver,
- σ^S certifies that the sender owning vk^S authorizes the transfer to vk^R , i.e. σ^S verifies the message vk^R w.r.t. the key vk^S ,
- the proof π shows that vk^S is associated to one of the burning factors in the set of tokens $M_{burnt}^{\mathcal{I}}$.

We indicate the genesis live token as $F = \{j, \text{vk}^S, \text{vk}^R, \sigma^S\}$.

A burnt token F_{burnt} is additionally composed of a burning factor β^R and the receiver signature certifying that the receiver acknowledged the token possession and burned it by using the burning factor β^R , i.e. σ^R verifies the message (vk^S, β^R) w.r.t. the key vk^R . The burning factor β^R is a committed freshly generated sender verification key that will be used by R to spend such token.

To extract valid burnt tokens M_{burnt} from M_{valid} the user run an algorithm `GetBurnt` outputting all the tokens in M_{valid} in which the sender verification key and the burning factor β associated with the token are certified by the receiver, i.e. such that the signature σ^R attached to the burnt token verifies the message (vk^S, β) w.r.t. the key vk^R .

As an auxiliary useful algorithm, we use a validity predicate `IsValid`. The algorithm `IsValid` takes as input the set of central bank verification keys VK valid tokens M_{valid} , a token F as above, computes $M_{burnt} = \text{GetBurnt}(M_{valid})$ and, if F is a standard token, outputs 1 if

- There is no token in M_{burnt} with the same sender verification key.
- σ^S verifies the message vk^R w.r.t. the key vk^S ,
- the size of $M_{burnt}^{\mathcal{I}}$ is the same of \mathcal{I} and the proof π verifies w.r.t the burning factors in $M_{burnt}^{\mathcal{I}}$.

Otherwise, if F is a genesis token, output 1 if

- $\text{vk}^S \in VK$
- σ^S verifies the message vk^R w.r.t. the key vk^S

As we will see in the formal description, this algorithm will be used by each user when a new token appears on the bulletin board to locally construct the set of valid tokens M_{valid} .

5.2 Our NIZK-PoK Relation

Let `Com` be a commitment scheme. Our non-interactive zero-knowledge proof of knowledge (NIZK-PoK) shows that the sender verification key of the new token is associated to a burnt valid token inside a bucket of burning factors. Burning factor are, in practice, committed verification keys. Let take the n burning factors β_1, \dots, β_n . The relation must show that the sender verification key vk freshly generated by the receiver of a burnt token is committed in one of the burning factors, i.e. $\text{Com}(\text{vk}; r) = \beta_i$ for some i and some randomness r , without exposing in which burning factor was committed, i.e. the index i is hidden. Hence, the randomness r and the index i must be part of the witness. Formally, the relation to be proven is:

$$\mathcal{R}_{\text{DC}}^{\text{Com}} = \{((\beta_1, \dots, \beta_n, \text{vk}), (r, i)) : \text{Com}(\text{vk}; r) = \beta_i\}. \quad (1)$$

On the efficiency of the proof generation. Notice that a proof for the relation proposed is fairly simple to implement in an efficient manner. In fact, this relation can be cast as a 1-out-of- n Proof-of-Partial Knowledge (PPK), where the prover proves knowledge of a witness out of n statements without revealing for which of the n statements the prover knows the witness. Indeed, the statement above can be re-casted as a 1-out-of- n proof where $x_i = (\beta_i, \text{vk})$ and $w = (r, i)$. As shown by [9], given a Σ -protocol for a certain language, it is possible to construct a communication-efficient 1-out-of- n PPK where each x_i is an instance of the base Σ -protocol. The resulting PPK has size $O(\log n)$ if the underlying Σ protocol has constant size proofs. By instantiating Com with a Pedersen commitment [13], it would be sufficient to use a Σ -protocol for Discrete Log equality to check $\text{Com}(\text{vk}; r) = \beta_i$. Between the possible improvements of our protocol, we might make the honest user to spend t tokens all at once and provide a cumulative NIZK-PoK showing that t previous tokens have been previously burned. This can be done via the t -out-of- n PPKs, ensuring that the prover knows the witness of at least t out of n statements. The size of the 1-out-of- k PPK of [2] for DL-like languages (such as DL equality) is only of $O(\log n)$.

We notice that even general-purpose zk-SNARKs [11, 3], usually requiring prohibitive computational costs for large circuits, would not be totally impractical for the circuit describing $\mathcal{R}_{\text{DC}}^{\text{Com}}$, especially when using ZK-proofs friendly commitments such as the Pedersen commitment. The proof size of zk-SNARKs would be constant.

5.3 Protocol Description

The formal description of our protocol π_{DC} is given in Fig. 1. The protocol is initialized with a central bank CB , described in Fig. 3, a bulletin board BB described in Fig. 2, a set of users \mathcal{U} and a subset $\mathcal{B} \subseteq \mathcal{U}$ of banks. Let Com be a commitment scheme with message space $\mathcal{M} = \{0, 1\}^\psi$, and commitment space $\mathcal{C} = \{0, 1\}^\ell$ for some $\ell, \psi \in \text{poly}(\lambda)$. Let $\text{SIG} = (\text{Gen}, \text{Sign}, \text{Vrfy})$ be a signature scheme with message space $\mathcal{M} = \{0, 1\}^*$, signature space $\mathcal{S} = \{0, 1\}^\kappa$ and verification key space $\mathcal{VK} = \{0, 1\}^\psi$ for some $\kappa \in \text{poly}(\lambda)$ and $\text{NIZK} = (\text{Setup}, \text{Prove}, \text{Vrfy})$ be a NIZK-PoK for the relation $\mathcal{R}_{\text{DC}}^{\text{Com}}$.

The protocol is divided into 3 main phases: Setup, Burning, and Spending. In the setup phase, which is run only once at the beginning, genesis tokens, composed of a freshly generated verification key of the central bank $\text{vk}_{CB}^{(i,B)}$ and a freshly generated verification key vk_B^i from a bank $B \in \mathcal{U}$, are created by the central bank CB and posted to BB in a signed fashion (the signature $\sigma_{CB}^{(B,i)}$ verifies the message $M = \text{vk}_B^i$ verifies under the key $\text{vk}_{CB}^{(i,B)}$). Notice that we assume that each central bank's verification key $\text{vk}^{(i,B)}$ is trusted and certified by the central bank.

As soon as the genesis tokens are added into BB , each user U (that are banks in the case of genesis token) verifies their validity and adds them into their validity set M_{valid}^U . Since we are considering genesis tokens, which are trusted by assumption, it is sufficient that the validity algorithm checks their signature $\sigma_{CB}^{(B,i)}$ against $M = (\text{vk}_B^i)$ and key $\text{vk}_{CB}^{(i,B)}$.

When an honest user R_0 receives a token, they immediately burn it. Notice that each time a new token, live or burnt, is posted into BB , each honest user U verifies its validity and adds it to its local set of valid tokens M_{valid}^U (auxiliary Token Validation phase). Hence, if the new live token is part of the receiver's validity set $M_{\text{valid}}^{R_0}$, R_0 can safely burn and lately spend it.

In the burning phase, R_0 , which will be a future sender S_1 , first creates a fresh verification key vk^{S_1}

(Create sub-phase). Then augments its live token with a burning factor (commitment) β^{S_1} , embedding the freshly generated verification key vk^{S_1} , together with a signature σ^{R_0} certifying its authorization to burn such token (Burn sub-phase). This signature verifies the message $M = (\text{vk}^{S_0}, \beta^{S_1})$, where vk^{S_0} is the verification key of the sender of such burnt token, under the verification key vk^{R_0} that the receiver used for that token.

When $R_0 = S_1$ decides to spend their token after interacting with the future receiver R_1 , first waits to receive a verification key vk^{R_1} from R_1 (Token Gene sub-phase). Then, R_1 generates a NIZK-PoK showing that they own one of the verification keys embedded into one of the elements of a randomly chosen set of burning factors inside the burnt tokens set (Proof Gen sub-phase). During proof generation, S_0 further generates a signature σ^{S_1} certifying that they can spend such token with the receiver verification key vk^{R_1} (the signature verifies $M = \text{vk}^{R_1}$ under the verification key vk^{S_1}). Finally, S_1 through their bank, which performs some regulation check, posts the live token into BB (Token Post sub-phase).

To recap, a live token F is composed of a sender verification key vk^{S_1} , a receiver verification key vk^{R_1} , a signature σ^{R_1} and a proof π with a set of indexes \mathcal{I} connecting such proof with a set of burning factors together the sender verification key vk^{S_1} .

The knowledge soundness property of π , in conjunction with the validity requirement that no sender verification key can be re-used across the tokens (checked by the honest users during the Token Validation phase through the algorithm `IsValid`) and by the computational binding property of the committed verification keys (burning factors), ensures that no adversary can create a new token from scratch or double-spend an already owned one. The zero-knowledge property of π , coupled with the hiding property of the committed verification keys, avoids the disclosure of the burning factors embedding the sender verification key of the token, ensuring privacy. Formal details will be given in the next section.

Efficiency Improvements. In terms of communication complexity, notice that each user has to download each token posted on the bulletin board and keep a set of indices related to valid tokens. In practice, each user has to download $O(\#\text{tokens})$ tokens and keep them in storage $O(\#\text{tokens})$ indexes to keep track of the validity of such tokens.

Other than the communication burden, we notice a computational burden. Indeed, each player has to verify a NIZK-PoK each time a new token is posted, and when spending, a NIZK-PoK proof must be generated. However, an external party might take all the NIZK-PoKs posted until that moment and produce a succinct aggregated proof that can be verified faster than verifying every single proof (for aggregation, see, for example, [7]). This incurs both communication and computational savings for each user.

Regarding the problem of generating a NIZK-PoK each time a token must be spent, we notice that several privacy-preserving proof outsourcing mechanisms have been developed, e.g. [8].

Regarding the huge size of the token set in the bulletin board, we notice that it is possible to use common verifiable computation techniques, such as recursive snarks on hashed data, to make the user download just a succinct representation of data together with a proof certifying its correctness. This idea has been adopted in the context of blockchain protocols by MINA [6].

6 Security Analysis

In the following, we introduce the main security properties we require for our system and show that it satisfies them.

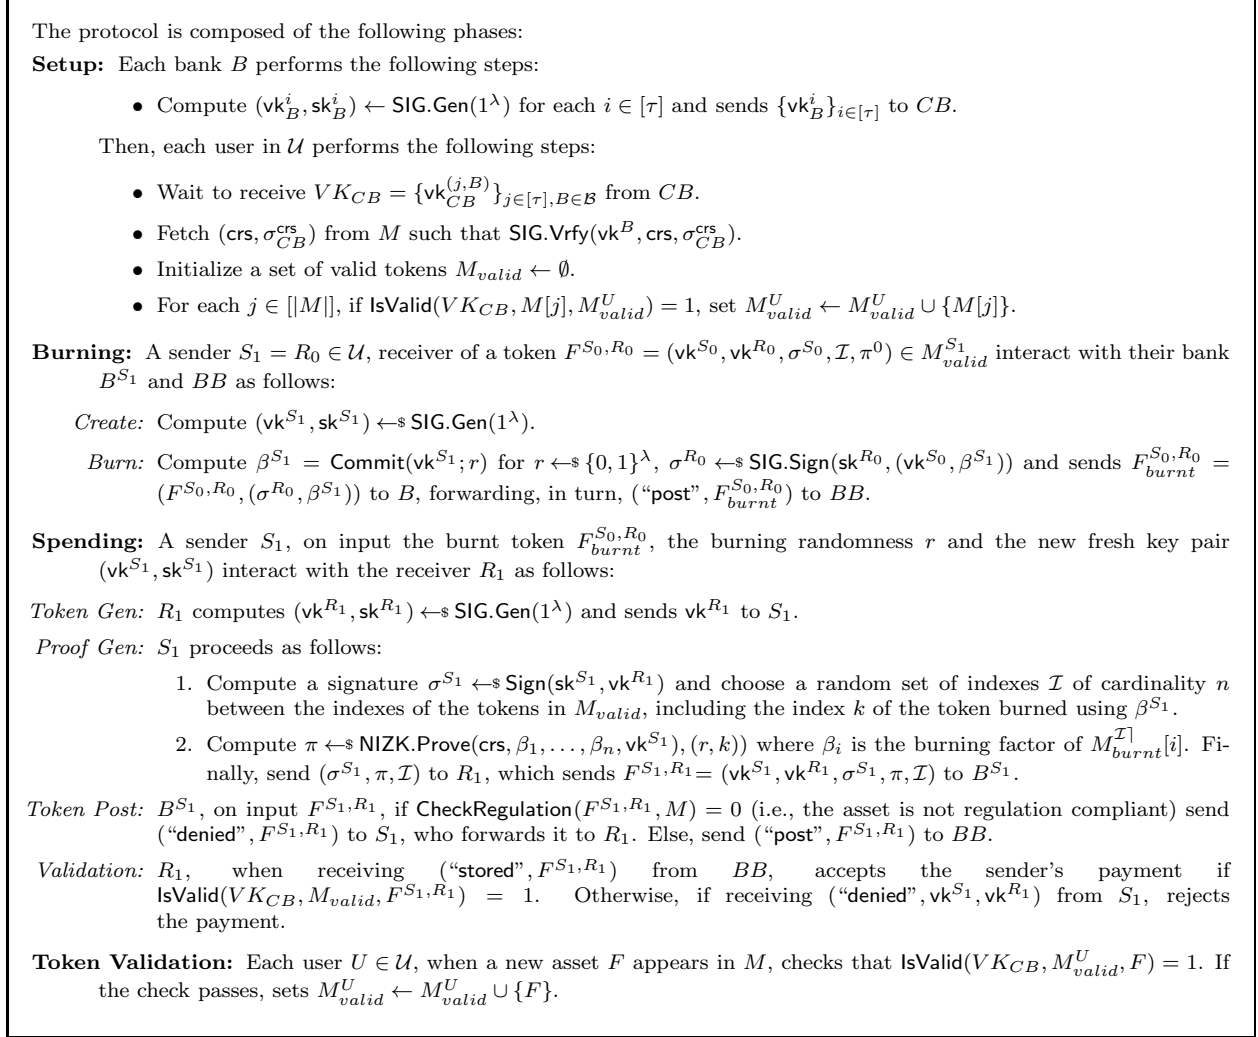


Figure 1: Our protocol π_{DC} .

6.1 Token integrity

Definition 5 (Token forgery game). *Given our system and users \mathcal{U} , the game consists of an interaction between an adversary \mathcal{A} and a challenger \mathcal{C} with access to an oracle \mathcal{O} that simulates honest parties in the system. The game proceeds as follows:*

1. \mathcal{C} initializes the system with the security parameter λ . \mathcal{C} instantiates all the needed setup values, such as the CRS of the NIZK proof-of-knowledge system. \mathcal{C} further initializes the oracle \mathcal{O} creating tokens and controlling honest parties.
2. \mathcal{A} communicates to the challenger a subset of users $\mathcal{I} \subset \mathcal{U}$ he wishes to corrupt and tells \mathcal{O} how many tokens must be assigned to each user in \mathcal{U} .
3. \mathcal{O} sends to \mathcal{A} the secrets related to the tokens meant for users in \mathcal{I} .

Takes as inputs a set of users \mathcal{U} , banks $\mathcal{B} \subseteq \mathcal{U}$, and the central bank CB . Let $\mathcal{M} = \{0, 1\}^*$ be the space of the messages accepted by the bulletin board. BB initializes a set of messages $M \leftarrow \emptyset$ and an index $j = 0$. It behaves as follows:

- When receiving the command (“post”, m) where $m \in \mathcal{M}$ from a bank $B \in \mathcal{B}$ or from CB , set $M \leftarrow M \cup \{j, m\}$, set $j = j + 1$ and send (“stored”, m) to each $U \in \mathcal{U}$.
- When receiving the command (“read”) from a user $U \in \mathcal{U}$, send M to U .

Figure 2: Bulletin Board BB

Takes as inputs a set of users \mathcal{U} and a subset of users $\mathcal{B} \subseteq \mathcal{U}$ and a value τ indicating the number of assets each bank should receive and hold. The setup works as follows:

Token generation: The following steps are performed:

- Compute $(\text{vk}_{CB}^{(B,i)}, \text{sk}_{CB}^{(B,i)}) \leftarrow \text{SIG.Gen}(1^\lambda)$ for each $i \in [\tau]$ and each $B \in \mathcal{B}$.
- Wait to receive $\{\text{vk}_i^B\}_{i \in [\tau]}$ from each $B \in \mathcal{B}$.
- Finally, compute $\sigma_{CB}^{(B,i)} \leftarrow \text{SIG.Sign}(\text{sk}_{CB}^{(B,i)}, \text{vk}_i^B)$ for each $i \in [\tau]$ and send

CRS generation: Compute $(\text{vk}_{\text{crs}}, \text{sk}_{\text{crs}}) \leftarrow \text{SIG.Gen}(1^\lambda)$, $\text{crs} \leftarrow \text{NIZK.Setup}(1^\lambda)$ and $\sigma_{CB}^{\text{crs}} \leftarrow \text{SIG.Sign}(\text{sk}_{\text{crs}}, \text{crs})$.

Token distribution: Distribute central bank verification keys $\{\text{vk}_{CB}^{(B,i)}\}_{i \in [\tau], B \in \mathcal{B}}$ and the CRS key vk_{crs} to each $U \in \mathcal{U}$ in an authenticated fashion. Send (“post”, $(\text{crs}, \sigma_{CB}^{\text{crs}})$) to BB , and send (“post”, $(\text{vk}_{CB}^{(B,i)}, \text{vk}_i^B, \sigma_{CB}^{(B,i)})$) to BB for each $i \in [\tau]$ and each $B \in \mathcal{B}$.

Figure 3: Central Bank Setup Protocol

4. A can receive tokens from the parties controlled by \mathcal{O} and transfer tokens² to parties controlled by \mathcal{O} . Furthermore, A can ask the oracle to transfer tokens between parties controlled by \mathcal{O} . All tokens transferred from an interaction with \mathcal{C} are inserted into a query set \mathcal{Q} .
5. A wins the game if he can create a token not existing in \mathcal{Q} accepted by \mathcal{O} , in which A does not control the sender nor recipient, or an asset in which A controls the recipient, but not the sender and no asset with the and the same value exists in \mathcal{Q} .

Claim 1 (Token Unforgeability). *No PPT A without access to the extraction trapdoor of the zero-knowledge proof system can win the token forgery game with non-negligible probability w.r.t. protocol π_{DC} .*

Proof. Recall that the common random string is generated honestly by the challenger (acting as a central bank) during setup. Also, recall that the honest players signing keys as well as the secrets of the genesis tokens VK_{CB} are generated by the challenger/oracle but kept oblivious to the adversary.

The adversary, to forge a new token maliciously, shall be able to generate a new valid token F without redeeming a live token they own, i.e. for which they own the signing key corresponding to the receiver verification key of such a live token. In particular, given the most updated value M_{valid} , the output $\text{IsValid}(VK_{CB}, M_{\text{valid}}, F)$ shall be 1. We distinguish between the following cases:

1. Generate new proof for a token the adversary does not own, i.e. for which he does not know the signing key related to the receiver verification key.
2. Re-use the same proof of another token (could be an adversarial or an honest one)
3. Generate a new proof related to a token that has been already burnt and then redeemed by the adversary (double-spending).

Regarding case 1, we distinguish three sub-cases.

First, the adversary might try to burn a live token for which he does not know the signing key corresponding to the receiver verification key and then use the commitment randomness used to produce the burning factor of such burnt token as a witness for the ZK-PoK π that will be attached to the new token F . However, we recall that each burnt token must be accompanied by a signature σ^R of a message containing the sender verification key vk^S together the burning factor β^R and the signature should verify verifying under the receiver verification key vk^R , i.e. $\text{SIG.Vrfy}(\text{vk}^R, (\text{vk}^S, \beta^R), \sigma^R) = 1$. Such a token will not be ever added by any honest receiver to its set of valid token M_{valid} if the signature is incorrect (*Setup* and *Token Validation* phases of Fig. 1) since this check is performed when running $\text{IsValid}(VK_{CB}, M_{\text{valid}}, F)$. Thanks to the EUF-CMA property of SIG, an adversary cannot forge a valid signature σ^R such that $\text{SIG.Vrfy}(\text{vk}^R, (\text{vk}^S, \beta^R), \sigma^R) = 1$ with non-negligible probability.

Alternatively, the adversary, given any adversarially chosen subset of valid tokens in M_{valid} , might try to find an opening (vk, r) for one of such burning factors, allowing him to produce an accepting ZK-PoK with vk as part of the statement r as part of the witness. However, this would break the binding property of the underlying commitment scheme with non-negligible probability.

Finally, the adversary might try to forge an accepting proof π for the relation $\mathcal{R}_{\text{DC}}^{\text{Com}}$ and statement $(\beta_1, \dots, \beta_n, \text{vk})$ where β_1, \dots, β_n is the set of burning factors. However, for the Knowledge Soundness of NIZK, we would be able to invoke the underlying extractor $\text{Ext}(\text{crs})$ to extract the index i and the opening randomness r from the adversary

²We recall that, in our protocol, transferring is done by creating a fresh token and burning and old one in a verifiable and private fashion.

Regarding case 2, notice that the verification key is part of the statement. The `IsValid` algorithm forbids the re-use of a sender verification key. Hence, no accepting ZK proof for a re-used sender verification key will ever be accepted.

Regarding case 3, similarly to case 2, if the adversary had already spent their burnt token, the verification key embedded inside the burning factor of the adversary's burnt token had already appeared in M_{valid} . Hence, since the adversary must produce a proof having as a statement, an already appeared verification key and since the `IsValid` algorithm forbids the re-use of a sender verification key, such a new token will not be ever accepted or added into M_{valid} by the honest players. \square

To conclude the proof, we argue that the genesis tokens generation cannot be performed by the adversary since the sender verification keys of the central bank are generated and certified by the central key itself (impersonated by the challenger at the beginning). Due to the EUF-CMA property of SIG, the adversary cannot generate genesis tokens and certify them with a signature verifiable under the central bank verification key vk_{CB} .

Claim 2 (Balance Invariance). *No PPT \mathcal{A} without access to the simulation trapdoor of the zero-knowledge the proof system can create an asset that increases the available funds in the system, i.e., each freshly created token must be bound to exactly one burnt token.*

Proof. Balance invariance follows straightforwardly from token unforgeability. Indeed, no adversary is eable to modify the overall balance of the system, initially fixed by the central bank through the distribution fo the genesis tokens. \square

6.2 Token Privacy

Definition 6 (Token indistinguishability game). *Given our system and users \mathcal{U} , the game consists of an interaction between an adversary \mathcal{A} and a challenger \mathcal{C} with access to an oracle \mathcal{O} that simulates honest parties in the system. The game proceeds as follows:*

1. \mathcal{C} initializes the system with the security parameter λ . \mathcal{C} instantiates all used primitives, such as the signature schemes or the NIZK proof-of-knowledge system. \mathcal{C} further initializes the oracle \mathcal{O} creating assets and managing token exchange with and between honest parties.
2. \mathcal{A} communicates to the challenger a subset of users $\mathcal{I} \subset \mathcal{U}$ he wishes to corrupt and tells \mathcal{O} how many tokens must be assigned to each user in \mathcal{U} .
3. \mathcal{O} sends to \mathcal{A} the secrets related to the tokens meant for users in \mathcal{I} . \mathcal{A} can ask to receive tokens from the parties controlled by \mathcal{O} tokens³ to parties controlled by \mathcal{O} (using their secrets). Furthermore, \mathcal{A} can ask the oracle to transfer tokens between honest parties controlled by \mathcal{O} using two oracles \mathcal{O}_1 and \mathcal{O}_2 . The adversary shall produce, through interaction with such oracles, two different valid payment traces of the same size where only token transfers between honest players can differ.

This operation is done statically, i.e. the adversary determines all the token transfers in a single query, i.e. a single shot interaction with \mathcal{O} , \mathcal{O}_1 and \mathcal{O}_2 .

4. \mathcal{C} chooses a bit $b \leftarrow_{\$} \{0, 1\}$ and sends the payment trace (the set of token transfers) produced by \mathcal{O} and \mathcal{O}_b to \mathcal{A} .

³We recall that, in our protocol, transferring is done by creating a fresh token and burning and old one in a verifiable and private fashion.

5. A outputs a bit b' and wins the game if $b = b'$.

Claim 3 (Token Indistinguishability). *No PPT A without access to the trapdoor can win the token indistinguishability game w.r.t. protocol π_{DC} with non-negligible probability.*

Proof. Notice that an adversary is not able guess the correct bit if the game in which the challenger's choice is fixed to b is indistinguishable, in the eyes of the adversary, from the game in which the challenger's choice is fixed to $1 - b$.

Let M_{burnt} be the set of burnt tokens with honest receiver. Let M_{burnt}^* be the set of burnt tokens with honest sender and receiver.

Let us consider a sequence of hybrid arguments as follows. Let $\gamma = |M_{burnt}^*|$ and $\tau = |M_{burnt}|$.

- **Hyb $_0^b$** : Identical to the original game, except that the challenger's bit choice is fixed to b .
- **Hyb $_0^{1-b}$** : Identical to the original game, except that the challenger's bit choice is fixed to $1 - b$.
- **Hyb $_i^b$** , $0 \leq i \leq \gamma$: Identical to the original game, except that, in the first i live tokens whose sender and receiver are honest, NIZK proofs are replaced with simulated proofs, i.e. in each $F_k = (\mathbf{vk}_k^S, \mathbf{vk}_k^R, \sigma_k^S, \mathcal{I}_k, \pi_k) \in M^*$ with $k \leq i$ of **Hyb $_0^b$** , π_k is replaced with $S(\mathbf{td}, (\beta_1, \dots, \beta_n, \mathbf{vk}^S))$, where β_j is the burning factor of $M_{burnt}^{\mathcal{I}}[j]$.
- **Hyb $_{\gamma+\ell}^b$** , $0 \leq \ell \leq \tau$: Identical to **Hyb $_{\gamma}^b$** , except that the first ℓ burning factors in $M_{burnt}[\ell]$ are replaced with $\text{Commit}(0; r)$ for a random $r \leftarrow \{0, 1\}^\lambda$.
- **Hyb $_{\gamma+\ell}^{1-b}$** , $0 \leq \ell \leq \tau$: Identical to **Hyb $_{\gamma}^{1-b}$** , except that the first ℓ burning factors in $M_{burnt}[\ell]$ are replaced with $\text{Commit}(0; r)$ for a random $r \leftarrow \{0, 1\}^\lambda$.
- **Hyb $_i^{1-b}$** , $0 \leq i \leq \gamma$: Identical to the original game, except that, in the first i live tokens whose sender is an honest user, NIZK proofs are replaced with simulated proofs, i.e. in each $F_k = (\mathbf{vk}_k^S, \mathbf{vk}_k^R, \sigma_k^S, \mathcal{I}_k, \pi_k) \in M_{send}$ with $k \leq i$ of **Hyb $_0^{1-b}$** , π_k is replaced by $S(\mathbf{td}, (\beta_1, \dots, \beta_n, \mathbf{vk}^S))$, where β_j is the burning factor of $M_{burnt}^{\mathcal{I}}[j]$.

Our aim is to show that **Hyb $_0^b \approx_s \text{Hyb}_0^{1-b}$** . Let us show the following:

- **Hyb $_i^b \approx_s \text{Hyb}_{i+1}^b$** for $0 \leq i < \gamma$: The two hybrids are indistinguishable thanks to a straightforward reduction to statistical zero-knowledge of NIZK. Indeed, the only difference is that in **Hyb $_i^b$** the i -th proof is simulated whereas in **Hyb $_{i+1}^b$** the proof is honestly generated. Since the sender is honest, the adversary does not have knowledge of the random coins used to generate such proofs in order to distinguish.
- **Hyb $_{\gamma+\ell}^b \approx_s \text{Hyb}_{\gamma+\ell+1}^b$** for $0 \leq \ell < \tau$: The two hybrids are statistically close thanks to the static hiding property of γ . Indeed, the only difference is that in **Hyb $_{\gamma+\ell}^b$** the ℓ -th burning factor of M_{burnt} is a commitment of a verification key, whereas in **Hyb $_{\gamma+\ell+1}^b$** it is a commitment that is independent of such verification key (commitment of 0). Since the receiver is honest, the adversary does not have knowledge of the random coins used to generate such commitments in order to distinguish.
- **Hyb $_i^{1-b} \approx_s \text{Hyb}_{i+1}^{1-b}$** for $0 \leq i < \gamma$ and **Hyb $_{\gamma+\ell}^{1-b} \approx_s \text{Hyb}_{\gamma+\ell+1}^{1-b}$** for $0 \leq \ell < \tau$: Same reasons used for **Hyb $_i^b$** and **Hyb $_{\gamma+\ell}^b$** apply.

- $\mathbf{Hyb}_{\gamma+\tau}^b \equiv \mathbf{Hyb}_{\gamma+\tau}^{1-b}$: The difference lies in the two hybrids lies in its payment trace between honest users and in the burning factors of token in which the sender is adversarial. Notice that proofs and burning factors of the honest trace are replaced with simulated proofs and commitment of 0, respectively. Also, the burning factors of honest receivers in the adversarial trace are replaced with the commitment of 0. Hence, due two hybrids have the same distribution.

The proof follows since $\mathbf{Hyb}^b \approx_s \dots \approx_s \mathbf{Hyb}_i^b \approx_s \dots \approx_s \mathbf{Hyb}_\gamma^b \approx_s \dots \approx_s \mathbf{Hyb}_{\gamma+\ell}^b \approx_s \dots \mathbf{Hyb}_{\gamma+\tau}^b \equiv \mathbf{Hyb}_{\gamma+\tau}^{1-b} \approx_s \dots \approx_s \mathbf{Hyb}_{\gamma+\ell}^{1-b} \approx_s \dots \approx_s \mathbf{Hyb}_\gamma^{1-b} \approx_s \dots \approx_s \mathbf{Hyb}_i^b \approx_s \dots \approx_s \mathbf{Hyb}^{1-b}$.

□

Transaction Independency. We further introduce another property, which we call *transaction independency*, stating that, if an adversary corrupts an honest user U during the system execution, cannot learn more than the information corresponding to received tokens the user has not spent.

This implies that the payment history of the user is kept secret even if the user is corrupted.

Claim 4. *No PPT adversary A without knowledge of the trapdoor can break transaction independency of π_{DC} .*

Proof. In our protocol π_{DC} , transaction independency is satisfied since each user, after burning a received token, keeps in their storage the signing key of the corresponding receiver verification key R_0 , the commitment opening values (\mathbf{vk}^{S_1}, r) and the secret \mathbf{sk}^{S_1} .

After spending the token, the user does not need to hold such values, which can be safely eliminated from their local storage.

□

We are now able to prove the security of our protocol π_{DC} .

Theorem 1. *Let SIG be a Signature Scheme and NIZK be a NIZK-PoK for the relation \mathcal{R} defined above. Then, π_{DC} satisfies transaction unforgeability, balance invariance, transaction privacy and transaction independency.*

Proof. The proof follows by combining [Claim 1](#) to [Claim 4](#).

□

7 Conclusions and future directions

We proposed a novel protocol allowing private electronic payments with self-custody and zero-knowledge verified assurance. Our protocol ensures consumer privacy, compatibility with regulatory objectives, independent transactions in the sense that secrets related to a specific transaction do not leak any information about the sender or receiver transaction history, and no involvement of the issuer in the circulation of tokens. The issuer (central bank) is further stateless in the sense that after the issuer distributes the public values connected with the secret it had locally generated, the issuer can eliminate such secrets and disappear from the equation.

In terms of efficiency guarantees, re-issuance of tokens can be performed in an efficient manner, as well as for proof generation.

The bulletin board size, as well as the communication complexity and the storage consumption of the users, might be prohibitive with the system growing. As pointed out, proof aggregation and verifiable computation techniques, coupled with the aid of external parties whose task is to produce computationally intensive recursive proofs, could help solve the issue.

As a future work, we aim to provide a second protocol with weaker but reasonable security guarantees about the validity of assets, with enhanced efficiency that maintains a simple design and relies on simple cryptographic objects, such as blind signatures, but relaxing the requirement for all end-user devices to produce and verify zero-knowledge proofs. In particular, we rely on an external semi-trusted entity, a minter, taking the burden of minting new tokens. Since such minters might be corrupted, we would employ a fail-safe mechanism based on a mixture of zero-knowledge proofs and a law-enforced auditing mechanism to pinpoint and kick out dishonest miners from the system. This would be accompanied by a mechanism accounting for eventual currency loss due to the minter’s misbehaviour.

References

- [1] Elli Androulaki, Jan Camenisch, Angelo De Caro, Maria Dubovitskaya, Kaoutar Elkhiyaoui, and Björn Tackmann. Privacy-preserving auditable token payments in a permissioned blockchain system. In *AFT '20: 2nd ACM Conference on Advances in Financial Technologies, New York, NY, USA, October 21-23, 2020*, pages 255–267. ACM, 2020.
- [2] Thomas Attema, Ronald Cramer, and Serge Fehr. Compressing proofs of k-out-of-n partial knowledge. In Tal Malkin and Chris Peikert, editors, *Advances in Cryptology - CRYPTO 2021 - 41st Annual International Cryptology Conference, CRYPTO 2021, Virtual Event, August 16-20, 2021, Proceedings, Part IV*, volume 12828 of *Lecture Notes in Computer Science*, pages 65–91. Springer, 2021.
- [3] Nir Bitansky, Alessandro Chiesa, Yuval Ishai, Rafail Ostrovsky, and Omer Paneth. Erratum: Succinct non-interactive arguments via linear interactive proofs. In Amit Sahai, editor, *Theory of Cryptography - 10th Theory of Cryptography Conference, TCC 2013, Tokyo, Japan, March 3-6, 2013. Proceedings*, volume 7785 of *Lecture Notes in Computer Science*. Springer, 2013.
- [4] David Chaum. Blind signatures for untraceable payments. In David Chaum, Ronald L. Rivest, and Alan T. Sherman, editors, *Advances in Cryptology: Proceedings of CRYPTO '82, Santa Barbara, California, USA, August 23-25, 1982*, pages 199–203. Plenum Press, New York, 1982.
- [5] Ali Dogan and Kemal Bicakci. KAIME: central bank digital currency with realistic and modular privacy. In Gabriele Lenzini, Paolo Mori, and Steven Furnell, editors, *Proceedings of the 10th International Conference on Information Systems Security and Privacy, ICISSP 2024, Rome, Italy, February 26-28, 2024*, pages 672–681. SCITEPRESS, 2024.
- [6] MINA Foundation. Mina protocol. <https://minaprotocol.com/>.
- [7] Nicolas Gailly, Mary Maller, and Anca Nitulescu. Snarkpack: Practical SNARK aggregation. In Ittay Eyal and Juan A. Garay, editors, *Financial Cryptography and Data Security - 26th International Conference, FC 2022, Grenada, May 2-6, 2022, Revised Selected Papers*, volume 13411 of *Lecture Notes in Computer Science*, pages 203–229. Springer, 2022.
- [8] Sanjam Garg, Aarushi Goel, Abhishek Jain, Guru-Vamsi Policharla, and Sruthi Sekar. zkSaas: Zero-knowledge snarks as a service. In Joseph A. Calandrino and Carmela Troncoso, editors, *32nd USENIX*

Security Symposium, USENIX Security 2023, Anaheim, CA, USA, August 9-11, 2023, pages 4427–4444. USENIX Association, 2023.

- [9] Aarushi Goel, Matthew Green, Mathias Hall-Andersen, and Gabriel Kaptchuk. Stacking sigmas: A framework to compose Σ -protocols for disjunctions. In Orr Dunkelman and Stefan Dziembowski, editors, *Advances in Cryptology - EUROCRYPT 2022 - 41st Annual International Conference on the Theory and Applications of Cryptographic Techniques, Trondheim, Norway, May 30 - June 3, 2022, Proceedings, Part II*, volume 13276 of *Lecture Notes in Computer Science*, pages 458–487. Springer, 2022.
- [10] Geoffrey Goodell, D. R. Toliver, and Hazem Danny Al-Nakib. A scalable architecture for electronic payments. In Shin'ichiro Matsuo, Lewis Gudgeon, Arian Klages-Mundt, Daniel Perez Hernandez, Sam Werner, Thomas Haines, Aleksander Essex, Andrea Bracciali, and Massimiliano Sala, editors, *Financial Cryptography and Data Security. FC 2022 International Workshops - CoDecFin, DeFi, Voting, WTSC, Grenada, May 6, 2022, Revised Selected Papers*, volume 13412 of *Lecture Notes in Computer Science*, pages 645–678. Springer, 2022.
- [11] Jens Groth. On the size of pairing-based non-interactive arguments. In Marc Fischlin and Jean-Sébastien Coron, editors, *Advances in Cryptology - EUROCRYPT 2016 - 35th Annual International Conference on the Theory and Applications of Cryptographic Techniques, Vienna, Austria, May 8-12, 2016, Proceedings, Part II*, volume 9666 of *Lecture Notes in Computer Science*, pages 305–326. Springer, 2016.
- [12] Aggelos Kiayias, Markulf Kohlweiss, and Amirreza Sarencheh. Peredi: Privacy-enhanced, regulated and distributed central bank digital currencies. In Heng Yin, Angelos Stavrou, Cas Cremers, and Elaine Shi, editors, *Proceedings of the 2022 ACM SIGSAC Conference on Computer and Communications Security, CCS 2022, Los Angeles, CA, USA, November 7-11, 2022*, pages 1739–1752. ACM, 2022.
- [13] Torben P. Pedersen. Non-interactive and information-theoretic secure verifiable secret sharing. In Joan Feigenbaum, editor, *Advances in Cryptology - CRYPTO '91, 11th Annual International Cryptology Conference, Santa Barbara, California, USA, August 11-15, 1991, Proceedings*, volume 576 of *Lecture Notes in Computer Science*, pages 129–140. Springer, 1991.
- [14] Alin Tomescu, Adithya Bhat, Benny Applebaum, Ittai Abraham, Guy Gueta, Benny Pinkas, and Avishay Yanai. UTT: decentralized ecash with accountable privacy. *IACR Cryptol. ePrint Arch.*, page 452, 2022.
- [15] Karl Wüst, Kari Kostiainen, Vedran Capkun, and Srdjan Capkun. Prcash: Fast, private and regulated transactions for digital currencies. In Ian Goldberg and Tyler Moore, editors, *Financial Cryptography and Data Security - 23rd International Conference, FC 2019, Frigate Bay, St. Kitts and Nevis, February 18-22, 2019, Revised Selected Papers*, volume 11598 of *Lecture Notes in Computer Science*, pages 158–178. Springer, 2019.
- [16] Karl Wüst, Kari Kostiainen, Noah Delius, and Srdjan Capkun. Platypus: A central bank digital currency with unlinkable transactions and privacy-preserving regulation. In Heng Yin, Angelos Stavrou, Cas Cremers, and Elaine Shi, editors, *Proceedings of the 2022 ACM SIGSAC Conference on Computer and Communications Security, CCS 2022, Los Angeles, CA, USA, November 7-11, 2022*, pages 2947–2960. ACM, 2022.