

# Cat-and-Mouse Satellite Dynamics: Divergent Adversarial Reinforcement Learning for Contested Multi-Agent Space Operations

Cameron Mehlman<sup>†</sup>, Joseph Abramov<sup>†</sup>, Gregory Falco<sup>†</sup>

**Abstract**—As space becomes increasingly crowded and contested, robust autonomous capabilities for multi-agent environments are gaining critical importance. Current autonomous systems in space primarily rely on optimization-based path planning or long-range orbital maneuvers, which have not yet proven effective in adversarial scenarios where one satellite is actively pursuing another. We introduce Divergent Adversarial Reinforcement Learning (DARL), a two-stage Multi-Agent Reinforcement Learning (MARL) approach designed to train autonomous evasion strategies for satellites engaged with multiple adversarial spacecraft. Our method enhances exploration during training by promoting diverse adversarial strategies, leading to more robust and adaptable evader models. We validate DARL through a cat-and-mouse satellite scenario, modeled as a partially observable multi-agent capture the flag game where two adversarial ‘cat’ spacecraft pursue a single ‘mouse’ evader. DARL’s performance is compared against several benchmarks, including an optimization-based satellite path planner, demonstrating its ability to produce highly robust models for adversarial multi-agent space environments.

**Index Terms**—Autonomous Satellites, Multi-Agent Reinforcement Learning, Adversarial Training, Zero-Sum Games, Space Domain

## I. INTRODUCTION

The exponential growth in satellites occupying specific orbital regimes necessitate robust satellite control schemes designed for contested environments. Threats such as space detritus, and non-cooperative spacecraft have long been motivation for satellite path planning algorithms. In previous works, the authors have presented EVADE – a low size, weight, power and cost (SWaP-C) path planning algorithm for 6 degree-of-freedom (DOF) satellites operating in non-cooperative space [1] – and demonstrated its ability to perform on the edge using an autonomous UAVs [2]. However, like other optimization-based autonomous methods for space, EVADE makes the assumption that at any state there is a safe path that can be computed, and provides no method for incorporating sequential decision making. Thus, in the presence of a strategically proficient adversary where certain actions can lead to ‘no-win’ states, existing path planning algorithms do not provide sufficient behavioral awareness to persistently resist an adversary in pursuit, despite the reality of such a scenario.

Adjacent to spacecraft routing, certain strategic multi-agent scenarios in the space domain such as Pursuit-Evasion have long been of interest to the space community [3]. Traditionally, research in this area focuses on longer range

engagement, allowing satellite movement to be described by orbital maneuvers and greatly restricting mobility of agents. However, this approach is not practical for close range engagement which opens the door for a much wider range of behavioral tactics. Furthermore, if we are to produce robust generalizable behavior capable of interacting with non-cooperative agents operating beyond assumed boundaries, new approaches to how adversaries are modeled must be developed.

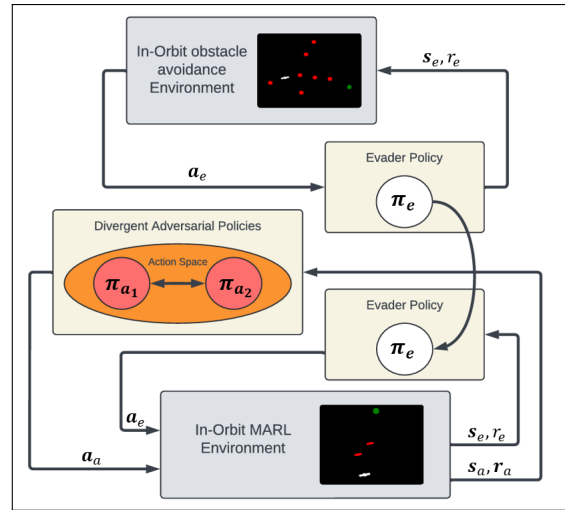


Fig. 1: A depiction of the training scheme we propose. The evader policy  $\pi_e$  is initially trained in a static-obstacle avoidance environment. The resulting policy is then retrained in a MARL environment with multiple adversarial policies that are encouraged to produce dissimilar behaviors through a divergent loss term.

The problem statement we explore is an in-orbit cat-and-mouse dynamic where an asset pursues another, which we represent as a rule-based game of capture the flag. An evader spacecraft is tasked with the goal of visiting a randomly chosen area in space, and then returning to its starting point. During this, two adversarial spacecraft attempt to ‘chase’ the evader with an aim to stop it from reaching either goal by blocking or colliding with the spacecraft. We codify the cat-and-mouse dynamic in the capture the flag game because it is a highly complex and strategic task with a wide range of potentially successful adversarial behaviors. Thus, a crucial step to discovering a robust evader ‘mouse’ policy is sufficiently exploring potential adversarial ‘cat’ behaviors.

We propose Divergent Adversarial Reinforcement Learning (DARL): a Multi-Agent Reinforcement Learning (MARL) framework for learning a generalizable evader policy capable of competing with adversarial agents not seen

<sup>†</sup>Dept. of Mechanical and Aerospace Engineering  
Cornell University, Ithaca, NY 14850, USA  
Corresponding email: cpm222@cornell.edu

during training. Our multi-staged method leverages several divergent adversarial policies in order to ensure evader exploration of the state space during training for more robust behavior. The evader policy first learns to guide a satellite around stationary obstacles, and is then used to train multiple adversaries in a capture the flag environment before further training on the learned adversaries. The generalizability of our model is validated by testing in simulation with expert adversarial policies not seen during training. Our key contributions are

- We present a novel MARL framework for developing evasive satellite policies for close-proximity multi-agent scenarios.
- We present a novel method for learning divergent adversarial policies to be leveraged later in training for improved exploration of an evader policy during training.
- We demonstrate the ability of the resulting evader model to outperform several benchmarks, including a satellite path planning algorithm developed in previous works demonstrated on a hardware-in-the-loop testbed environment.

## II. RELATED WORKS

Although efforts in path planning fall short of solving multi-agent games in space, a range of solutions have been proposed in past works mainly focused on solving zero-sum long range Pursuit-Evasion (PE) games. Blasch et. al. proposes a two step orbital maneuver pursuer strategy coupled with a trust-based sensor management policy in order to frame a satellite PE game [4], while Zhang et. al. proposes a dynamic programming approach for computing a Nash Equilibrium [5]. Others have employed RL in order to develop optimal policies [6, 7]. However, the PE games proposed often provide data-rich and fully observable environments where agents’ actions directly impact the performance of other agents; a considerably less complex task than two-on-one capture the flag. Furthermore, it is common that the general policy for either one or both agents is assumed in order to restrict the optimization problem [8, 9], which greatly reduces the ability of solutions to perform in environments where agents act outside of their expected behavior.

Developing policies that demonstrate robust behavior for multi-agent scenarios is a complex task, and proven to be a major hurdle in the RL community due to disparities in training and test data [10]. However, recent advances in MARL have shown substantial promise towards developing more generalizable behavior. Qui et. al. propose a method for generalizable MARL by storing a caches of behavioral policies in order to ensure diversity of multi-agent interactions [11]. Gupta et. al. provides a different approach by demonstrating the ability to generalize coordination between cooperative MARL agents by improving joint exploration during training [12]. However, few methods attempt to tackle adversarial scenarios with learned adversaries. Some have explored this for learning optimal communications policies,

but these problem statements often greatly restrict the potential behavior of an adversary [13, 14]. Numerous other MARL methods for zero-sum games such as exploiting known posteriors [15], identifying Nash equilibriums [16], and curriculum learning [17] have been proposed in the past, but do not focus on learning generalizable policies.

Outside of the RL community, Adversarial Training and Generative Adversarial Networks (GANs) are popular methods that leverage adversarial models in order to improve model robustness [18, 19]. While these technologies show significant progress in improving robustness of image classifiers neither have been applied to control of dynamical systems, and both have shown to fall victim to over-fitting [20, 21]. However, these methods have proven that adversarial networks possess the ability to produce training data that can be used to improve robustness and general performance of models.

## III. METHOD

We demonstrate DARL: a method for leveraging divergent adversarial policies to improve exploration and train robust policies capable of performing in non-cooperative, partially observable, multi-agent environments. We exhibit this by training an evader policy to compete in a zero-sum cat-and-mouse game, similar to capture the flag. In this scenario, an evading ‘mouse’ spacecraft is given a goal point  $\sim 40\text{m}$  away, and must visit the goal and return to its initial starting point within the maximum episode length. Competing with the evader spacecraft are two adversarial or ‘cat’ spacecraft, tasked with the goal of stopping the evader from reaching either goal point by colliding with or blocking the evader from reaching either goal.

The proposed game provides a complex 3 DOF environment with a continuous state space and partial observations for the evader, which cannot be successfully navigated by standard path planning algorithms developed in previous work. Furthermore, because we do not know a nash-optimal policy for either evader or adversary our MARL framework is entirely exploration based. DARL works in two tiers: first, a base evader policy is trained to reach a desired goal point while avoiding stationary obstacles, second, multiple divergent adversarial policies are learned in a multi-agent cat-and-mouse environment with the base evader policy, which are later leveraged to further train and refine the evader policies.

### A. Evader Problem Definition

As previously stated, the evader policy must reach a desired goal point and return to its initial position while evading multiple adversaries. Our reward policy is a combination of a continuous reward scheme which is the negative normalized distance to the current goal, and a sparse reward scheme which penalizes the evader in event of collision or episode truncation and rewards the evader if it reaches a goal.

In order to emulate the nature of a spacecraft operating in an non-cooperative environment with limited sensing capabilities the evader is assumed to have omnidirectional

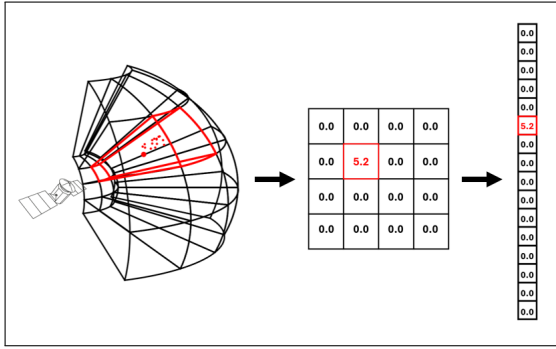


Fig. 2: A description of how the voxelized state space (left) is represented as a flattened matrix  $\mathbf{H}_f$  (right).

sensing capabilities within a limited range (10m). Sensor data within this range is represented in a polar histogram which voxelizes the space within a fixed radius from the evader into a series of bins where each bin records the closest distance to any obstacle data point within said bin. The histogram is represented as a flattened  $m \times m$  matrix  $\mathbf{H}_f$  as shown in Figure 2. The state of the evader is then described by  $\mathbf{H}_f$  and the current goal point relative to the evader spacecraft’s current position  $\mathbf{p}_e$  which are concatenated in evaders observation  $\mathbf{s}_e$ :

$$\mathbf{s} = [\mathbf{H}_f, \mathbf{g}_e^E] \quad (1)$$

Additionally, the action space for the evader is comprised of the thrusts in the  $x, y, z$  directions:

$$\mathbf{a} = [T_x, T_y, T_z] \quad (2)$$

Due to the fact that the evader’s observation  $\mathbf{s}_e$  only provides the state of the environment within a short distance of its location, the environment is partially-observable, and thus the evader policy must learn a Partially Observable Markov Decision Process (POMDP) during training.

### B. Adversary Problem Definition

The adversary is tasked with preventing the evader from reaching either goal point. Thus, its reward policy is a combination of a continuous reward equal to the normalized distance between the evader and its goal, and a sparse reward which includes a punishment if the evader reaches its goal, and a reward if the episode ends early. Each adversary state includes the position of the evader relative to the adversary’s position  $\mathbf{p}_{a_i}$ , and the evader’s goal position also relative to  $\mathbf{p}_{a_i}$  which is provided in its observation  $\mathbf{s}_{a_i}$ :

$$\mathbf{s}_{a_i} = [\mathbf{p}_{a_i}^{A_i}, \mathbf{g}_e^{A_i}, \mathbf{p}_{a_j}^{A_i}] \quad (3)$$

### C. Training Scheme

As mentioned earlier in this section, training occurs in two stages: learning a base evader policy, and learning multiple divergent adversarial policies and a refined evader policy in a multi-agent environment. All policies are trained using Soft

Actor-Critic (SAC) with low target entropy. An off-policy RL algorithm was chosen because off-policy algorithms possess separate actor networks. This allows us to influence the state-action pairs sampled during training without directly manipulating the policy learning algorithm when encouraging divergent adversarial behavior.

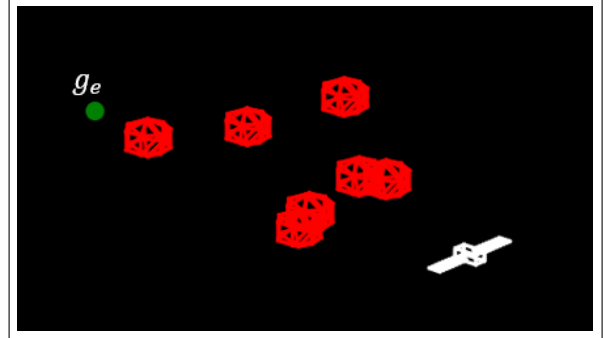


Fig. 3: An image of the obstacle evasion environment used to train the base evader policy, where the evader (white), must reach  $\mathbf{g}_e$ , without colliding with any of the obstacles (red).

1) *Stage I: Learning a Base Evader Policy:* The base evader is trained on the same single-agent obstacle avoidance environment EVADE was developed on. The evader is tasked with reaching a goal point approximately 40m in the distance with several randomly initialized obstacles in its path. The evader receives the same observation and follows the same reward scheme as previously defined. However, the base evader policy is only tasked with reaching a single goal point. In order to train a successful policy, a curriculum learning strategy is employed by increasing the number of obstacles initialized at the beginning of each episode as training progresses. The number of obstacles initialized begins with 1, and increases linearly to a predetermined number before training ends. An image of an episode starting with 7 obstacles initialized can be seen in Figure 3.

2) *Stage II: Learning from Divergent Adversaries:* During Stage II we propose a multi-stage training regiment in which we train both multiple divergent adversarial policies and a refined evader policy in a cat and mouse environment. First, multiple adversarial policies learn to prevent the base evader policy from reaching either goal. Then, after a predetermined number of training steps the base evader policy begins retraining in the same environment in order to learn to evade the adversarial policies. Once the evader begins retraining, the adversaries stop network updates to prevent non-stationarity of the environment. The final evader policy demonstrates improved generalizable behavior by performing in an environment with expert adversarial policies not seen during training.

In order to ensure that the evader learns a robust and generalizable policy, multiple adversarial policies are learned. However, this does not mitigate how the adversarial policies are prone to converging upon sub-optimal policies which do not challenge the evader, leading to over-fitting and a lack of robustness. In order to combat this, we implement a divergent loss term which encourages each actor to explore different

---

**Algorithm 1** Learning Divergent Adversarial Policies

---

```

1: Initialize adversarial policies  $\pi_{\theta_a} = [\pi_{\theta_{a_0}}, \dots, \pi_{\theta_{a_n}}]$ ,
    $Q_{\phi_a} = [Q_{\phi_{a_0}}, \dots, Q_{\phi_{a_n}}]$  and off-policy RL algorithm
   with replay buffers  $\mathcal{D}_a = [\mathcal{D}_{a_0}, \dots, \mathcal{D}_{a_n}]$ 
2: Initialize evader policy  $\pi_{\theta_e}$ ,  $Q_{\phi_e}$  and off-policy RL
   algorithm with replay buffer  $\mathcal{D}_e$ 
3: for each iteration do
4:   if Episode reset then
5:     pick random policy from  $\pi_{\theta_a}, Q_{\phi_a}$ 
6:   execute sampled actions and record observations
7:   if update adversary then
8:     for policy  $\pi_{\theta_{a_i}}$  in  $\pi_{\theta_a}$  do
9:       sample batch  $B = \{s, a, r, s', d\}$  from  $\mathcal{D}_{a_i}$ 
10:      compute  $\pi_{\theta_{a_i}}(\cdot|s)$ 
11:      for policy  $\pi_{\theta_{a_j}}$  in  $\pi_{\theta_a}$  do
12:        if  $j \neq i$  then
13:          compute  $\pi_{\theta_{a_j}}(\cdot|s)$ 
14:           $\theta \leftarrow \theta - \nabla_{\theta} \mathcal{L}_{RL}(\theta)$ 
15:           $\theta \leftarrow \theta - \nabla_{\theta} \mathcal{L}_{KL_i}(\theta)$ 

```

---

subspaces of the action space, and prevents adversaries from converging upon similar sub-optimal policies early-on during training. In turn, this promotes exploration of the evader and leads to more robust behavior.

The divergent loss term implemented  $\mathcal{L}_{KL}$  is the weighted average MSE between the Kullback–Leibler divergence of the actions taken from two networks given the same observations and a predetermined constant  $c_{KL}$ .

$$\mathcal{L}_{KL_i} = \frac{\alpha}{n-1} \sum_{\substack{j=0, \\ j \neq i}}^{n-1} (c_{KL} - D_{KL}(\pi_{\theta_{a_i}}(\cdot|s_{a_i}) || \pi_{\theta_{a_j}}(\cdot|s_{a_i})))^2 \quad (4)$$

where  $n$  is the number of divergent adversarial policies, and  $\alpha$  is a predetermined weight which follows a linear decay schedule during training.  $\mathcal{L}_{KL}$  used when updating the actor network of each adversarial policy.

Algorithm 1 describes our divergent adversarial learning algorithm, where there are two main differences between our method, and a baseline MARL algorithm. The first is lines 4 and 5, where at the beginning of each episode we randomly assign one of the  $n$  adversarial models to both of the two adversarial agents in the environment. The second is in lines 8 through 15, where we compute  $\mathcal{L}_{KL_i}$  for each adversarial model in order to ensure dissimilar policies.

Additionally, encouraging divergence between models can cause exploding gradients early-on in training; hindering the adversary’s ability to learn. In order to prevent this, the output layer of the actor network must be bounded by a non-monotonic activation function. Thus, we find a periodic activation function is necessary in order to allow the network to optimize both loss parameters.

---

**Algorithm 2** Adversary Heuristic Policy

---

```

1: Initialize adversary at  $p_a$ 
2: for every timestep do
3:   collect observation  $s_a$ 
4:   for every  $N$  steps do
5:      $g_a \leftarrow h(s_a)$ 
6:      $a_a \leftarrow c(g_a, s_a)$ 
7:   take action  $a_a$ 

```

---

## IV. EXPERIMENT AND RESULTS

### A. Experimental Setup

In simulation, the dynamics of the evader and adversary spacecrafts can be described using the Clohessy Wiltshire (CW) Equations, which model the behavior of a spacecraft in relation to a single point moving on a near circular orbit:

$$\ddot{x} = 3n^2x + 2ny + \frac{T_x}{m} \quad (5)$$

$$\ddot{y} = -2nx + \frac{T_y}{m} \quad (6)$$

$$\ddot{z} = -n^2z + \frac{T_z}{m} \quad (7)$$

Where  $x, y$ , and  $z$  are the Cartesian coordinates of the spacecraft relative to the single moving point, which is treated as the origin of our localized coordinate frame.

The cat and mouse training prompt is described in previous sections. During testing, both adversary and evader spacecrafts are given the same physical parameters (mass, inertia, etc.). Adversaries are modeled as a ball with a  $1m$  radius, and represented as a point cloud. The evader must successfully come within  $3m$  of a goal point, and return to its starting position without coming within  $1m$  of an adversary for the episode to be considered successful. If the evader is capable of reaching the first goal but not returning to its starting position the episode is considered a partial success. And, if the evader does not reach either goal the episode is considered a failure.

In order to provide an impartial and standardized comparison of model performance, all models are tested in an environment with hand designed heuristic adversarial policies which receive expert knowledge of the nature of the cat and mouse game. Two expert adversarial policies are implemented, one that attempts to collide with the evader, and a second that attempts to block any path from the evader to the goal point. In every test episode, one of each heuristic policy is designated to a single adversary. The heuristic policy implemented is shown in Algorithm 2, where  $h()$  is a function that determines the point the adversary should travel to, and  $c()$  computes the desired action input.

### B. Evaluation Benchmarks

Several methods are used as bench marks in order to demonstrate our methods robustness, and ability to successfully evade intelligent adversaries, the several benchmarks are listed below.

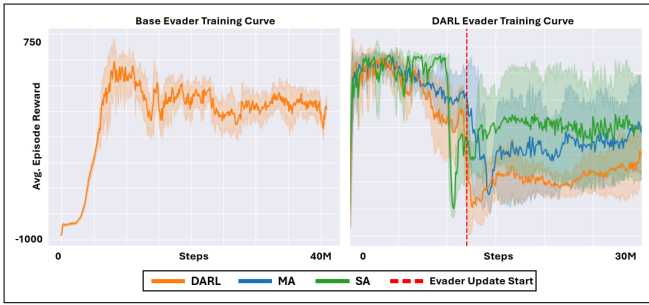


Fig. 4: Base evader training curve (left), and DARL, MA, and BA Evader training curves (right). The dotted red line marks the beginning of the evader policy’s network updates.

TABLE I: Average performance of models trained using benchmark methods listed in Section IV-B.

Method	Failure (%)	Success (%)
EVADE	100%	0%
BE	58.7%	7.32%
SA	40%	26%
MA	35.5%	36.5%
<b>DARL</b>	<b>29%</b>	<b>48.5%</b>
NSA	32%	40%

1) *EVADE*: EVADE is a optimization based path planner designed specifically for spacecraft operating in non-cooperative space environments with passive obstruction [1].

2) *Base Evader Policy (BE)*: This is the resulting policy of Stage I of training before it is retrained in Stage II.

3) *Single Adversary (SA)*: This method entails a single adversarial policy, thus no  $\mathcal{L}_{KL_i}$  term and a standard linear activation.

4) *Base Multi-Adversary (MA)*: This method entails multiple adversarial policies, however, uses a standard linear activation and no  $\mathcal{L}_{KL_i}$  term.

5) *DARL*: This is our full method discussed in Section III. The model is trained with 2 divergent adversarial policies.

6) *No Sine Activation (NSA)*: As a brief ablation demonstration, this implementation of our method uses a standard linear activation layer for the actor network.

Methods 3-6 are all trained using the two stage training scheme discussed in Section III. Methods which include multiple adversaries entail training 2 separate policies.

### C. Results and Discussion

Training curves for the baseline, DARL, MA, and SA evader can be seen in Figure 4. Table I shows the test performance of each method where a failure or success is defined by the requirements stated earlier. In Table I it can be clearly seen that DARL outperforms all benchmarks both in maximizing successful episodes, and minimizing failures. It should also be noted that our two staged method clearly demonstrates the ability to produce policies for satellite autonomy that can perform in highly contested environments that standard satellite path-planning algorithms (EVADE) fail in. Although EVADE and the base evader are intended for partially-observable non-cooperative environments, neither

were designed to protect a spacecraft in a strategic multi-agent game. Additionally, Table I shows that the top 3 performing models all involve training on multiple adversarial models, emphasizing the value gained from training in environments that force the learning policy to widen their exploration of the state space.

In addition to comparing the testing performance of the models trained, Figure 5 shows the average test performance of several methods throughout training. The Figure compares the average test performance of the policies trained through the Single-Adversary (SA), Multi-Adversary (MA), and DARL methods starting once the evader model begins updates. It should be noted that a base evader trained on multiple divergent adversaries both learns faster, and consistently learns more robust behavior for cat and mouse games.

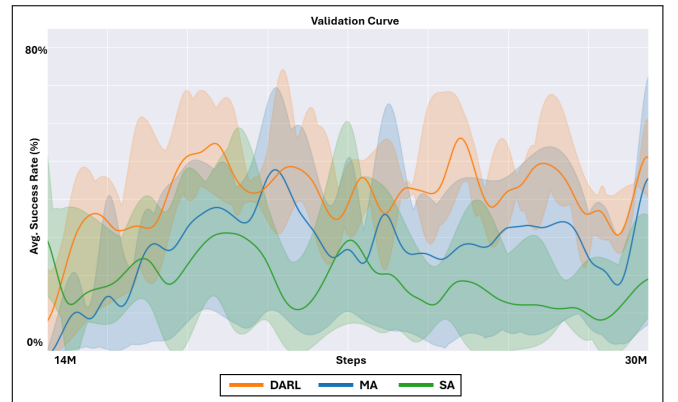


Fig. 5: Validation curve comparing the average test performance of the DARL, MA, and SA models trained at different timesteps.

### D. Sim-to-real Feasibility and Applications

Although we do not attempt sim-to-real transfer, we believe with a series of adjustments to our simulation environment the resulting DARL models can be integrated into our UAV testbed via the MAGPIE System which is designed to emulate spacecraft architecture and behavior [2]. Primarily, this would entail modifying the environment to emulate UAV that take positional commands rather than spacecraft. Although training a model to provide positional commands rather than force control would simplify the problem at hand, it would allow for integration of additional safety features often employed in UAV sim-to-real transfer [22]. Additionally, as shown by previous works with sufficient domain randomization successful sim-to-real on UAVs is feasible [23].

Outside of hardware test-beds, RL policies have yet to be implemented on spacecraft in operational environments. However, space provides an appealing setting for autonomous applications due to communications-denied environments, and risks inherent to human-in-the-loop space-flight operations [24]. Furthermore, modern satellites possess compute capable of running standard RL models, which are generally smaller than models trained using other ML methods. Reduced launch cost and the associated increase



in launch frequency of small satellites provides potential for running DARL on a satellite in coming year, an effort our team is actively seeking with potential sponsors. Future work concerning sim-to-real should also include developing safety measures and assurances around the cat-and-mouse interaction.

## V. CONCLUSION

Our work proposes a new method for leveraging multiple divergent adversarial policies in order to train a robust and generalizable RL policy for satellite control in non-cooperative multi-agent environments known as DARL. We demonstrate this method by training an RL model to compete in a partially-observable game of capture the flag. The game is meant to emulate a multi agent cat-and-mouse satellite dynamic with 2 intelligent adversarial ‘cat’ agents pursuing an evading ‘mouse’ agent. During testing, we demonstrate not only that training with diverse adversarial policies consistently leads to more robust behavior, but also highlight the critical need for POMDP-based policies by showing the failure of standard satellite routing algorithms to safeguard spacecraft in complex, strategic multi-agent environments. DARL, deployed on a spacecraft, will enable the successful evasion of adversarial space vehicles so that the mouse can complete its mission.

## REFERENCES

- [1] Cameron Mehlman and Gregory Falco. “An Autonomous Satellite Collision Avoidance and Adversary Evasion Path Planning Algorithm for the Space Environment”. In: *2024 American Control Conference (ACC)*. 2024, pp. 3055–3061.
- [2] Cameron Mehlman, Kounios, Lai, Prasad, Brown, Hughes, Chalamalasetty, Distler, Dilone, Palomino, Goel, and Gregory Falco. “The MAGPIE: Satellite Autonomy for Uncooperative Environments”. In: *Hawaii International Conference on System Sciences 2025 (HICSS-57)*. 2025.
- [3] Isaac E Weintraub, Meir Pachter, and Eloy Garcia. “An Introduction to Pursuit-evasion Differential Games”. In: *2020 American Control Conference (ACC)*. 2020, pp. 1049–1066.
- [4] Erik P Blasch, Khanh Pham, and Dan Shen. “Orbital satellite pursuit-evasion game-theoretical control”. In: *2012 11th International Conference on Information Science, Signal Processing and their Applications (ISSPA)*. 2012.
- [5] Zhixuan Zhang, Kun Zhang, Xiangpeng Xie, and Jiayue Sun. “Fixed-Time Zero-Sum Pursuit–Evasion Game Control of Multisatellite via Adaptive Dynamic Programming”. In: *IEEE Transactions on Aerospace and Electronic Systems* 60 (2 2024).
- [6] Rui Jiang, Dong Ye, Yan Xiao, Zhaowei Sun, and Zeming Zhang. “Orbital Interception Pursuit Strategy for Random Evasion Using Deep Reinforcement Learning”. In: *Space: Science & Technology* 3 (2023), p. 0086.
- [7] Yusuf Kartal, Kamesh Subbarao, Atila Dogan, and Frank Lewis. “Optimal game theoretic solution of the pursuit-evasion intercept problem using on-policy reinforcement learning”. In: *International Journal of Robust and Nonlinear Control* 31 (16 2021), pp. 7886–7903.
- [8] Bogdan Vlahov, Eric Squires, Laura Strickland, and Charles Pippin. “On Developing a UAV Pursuit-Evasion Policy Using Reinforcement Learning”. In: *2018 17th IEEE International Conference on Machine Learning and Applications (ICMLA)*. 2018, pp. 859–864.
- [9] Jingrui Zhang, Kunpeng Zhang, Yao Zhang, Heng Shi, Liang Tang, and Mou Li. “Near-optimal interception strategy for orbital pursuit-evasion using deep reinforcement learning”. In: *Acta Astronautica* 198 (2022), pp. 9–25.
- [10] Dhruv Malik, Yuanzhi Li, and Pradeep Ravikumar. *When Is Generalizable Reinforcement Learning Tractable?* 2021.
- [11] Wei Qiu, Xiao Ma, Bo An, Svetlana Obraztsova, Shuicheng Yan, and Zhongwen Xu. *RPM: Generalizable Behaviors for Multi-Agent Reinforcement Learning*. 2022.
- [12] Tarun Gupta, Anuj Mahajan, Bei Peng, Wendelin Böhmer, and Shimon Whiteson. *UneVEN: Universal Value Exploration for Multi-Agent Reinforcement Learning*. 2021.
- [13] Yanchao Sun, Ruijie Zheng, Parisa Hassanzadeh, Yongyuan Liang, Soheil Feizi, Sumitra Ganesh, and Furong Huang. “Certifiably Robust Policy Learning against Adversarial Multi-Agent Communication”. In: *The Eleventh International Conference on Learning Representations*. 2023.
- [14] Aowabin Rahman, Arnab Bhattacharya, Thiagarajan Ramachandran, Sayak Mukherjee, Himanshu Sharma, Ted Fujimoto, and Samrat Chatterjee. *Adversarial Search and Rescue via Multi-Agent Reinforcement Learning*. 2022.
- [15] Wei Xiong, Han Zhong, Chengshuai Shi, Cong Shen, and Tong Zhang. *A Self-Play Posterior Sampling Algorithm for Zero-Sum Markov Games*. 2022.
- [16] Muhammed O Sayin, Kaiqing Zhang, David S Leslie, Tamer Basar, and Asuman Ozdaglar. *Decentralized Q-Learning in Zero-sum Markov Games*. 2021.
- [17] Jiayu Chen, Zelai Xu, Yunfei Li, Chao Yu, Jiaming Song, Huazhong Yang, Fei Fang, Yu Wang, and Yi Wu. *Accelerate Multi-Agent Reinforcement Learning in Zero-Sum Games with Subgame Curriculum Learning*. 2023.
- [18] Tao Bai, Jinqi Luo, Jun Zhao, Bihan Wen, and Qian Wang. *Recent Advances in Adversarial Training for Adversarial Robustness*. 2021.
- [19] Antonia Creswell, Tom White, Vincent Dumoulin, Kai Arulkumaran, Biswa Sengupta, and Anil A Bharath. “Generative Adversarial Networks: An Overview”. In: *IEEE Signal Processing Magazine* 35 (1 2018), pp. 53–65.
- [20] Yasin Yazici, Chuan-Sheng Foo, Stefan Winkler, Kim-Hui Yap, and Vijay Chandrasekhar. *Empirical Analysis of Overfitting and Mode Drop in GAN Training*. 2020.
- [21] Chaojian Yu, Bo Han, Li Shen, Jun Yu, Chen Gong, Mingming Gong, and Tongliang Liu. *Understanding Robust Overfitting of Adversarial Training and Beyond*. 2022.
- [22] Halil Ibrahim Ugurlu, Xuan Huy Pham, and Erdal Kayacan. “Sim-to-Real Deep Reinforcement Learning for Safe End-to-End Planning of Aerial Robots”. In: *Robotics* 11 (5 2022).
- [23] Antonio Loquercio, Elia Kaufmann, René Ranftl, Alexey Dosovitskiy, Vladlen Koltun, and Davide Scaramuzza. “Deep Drone Racing: From Simulation to Reality With Domain Randomization”. In: *IEEE Transactions on Robotics* 36 (1 2020), pp. 1–14.
- [24] Massimo Tibaldi, Raffaele Iervolino, and Paolo Roberto Massenio. “Reinforcement learning in spacecraft control applications: Advances, prospects, and challenges”. In: *Annual Reviews in Control* 54 (2022), pp. 1–23.