

CURSORCORE: ASSIST PROGRAMMING THROUGH ALIGNING ANYTHING

Hao Jiang¹, Qi Liu¹, Rui Li¹, Shengyu Ye¹, Shijin Wang²

¹State Key Laboratory of Cognitive Intelligence, University of Science and Technology of China

²IFLYTEK AI Research (Central China)

jianghao0728@mail.ustc.edu.cn

ABSTRACT

Large language models have been successfully applied to programming assistance tasks, such as code completion, code insertion, and instructional code editing. However, these applications remain insufficiently automated and struggle to effectively integrate various types of information during the programming process, including coding history, current code, and user instructions. In this work, we propose a new conversational framework that comprehensively integrates these information sources, collect data to train our models and evaluate their performance. Firstly, to thoroughly evaluate how well models align with different types of information and the quality of their outputs, we introduce a new benchmark, APEval (Assist Programming Eval), to comprehensively assess the performance of models in programming assistance tasks. Then, for data collection, we develop a data generation pipeline, Programming-Instruct, which synthesizes training data from diverse sources, such as GitHub and online judge platforms. This pipeline can automatically generate various types of messages throughout the programming process. Finally, using this pipeline, we generate 219K samples, fine-tune multiple models, and develop the CursorCore series. We show that CursorCore outperforms other models of comparable size. This framework unifies applications such as inline chat and automated editing, contributes to the advancement of coding assistants. Code, models and data are freely available at <https://github.com/TechxGenus/CursorCore>.

1 INTRODUCTION

Since the rise of large language models (LLMs), AI-assisted programming technology has developed rapidly, with many powerful LLMs being applied in this field Zan et al. (2022); Liang et al. (2024); Yang et al. (2024). The technology mainly takes two forms. One form involves completing a specified code snippet at the end or inserting corresponding code at a designated position, typically

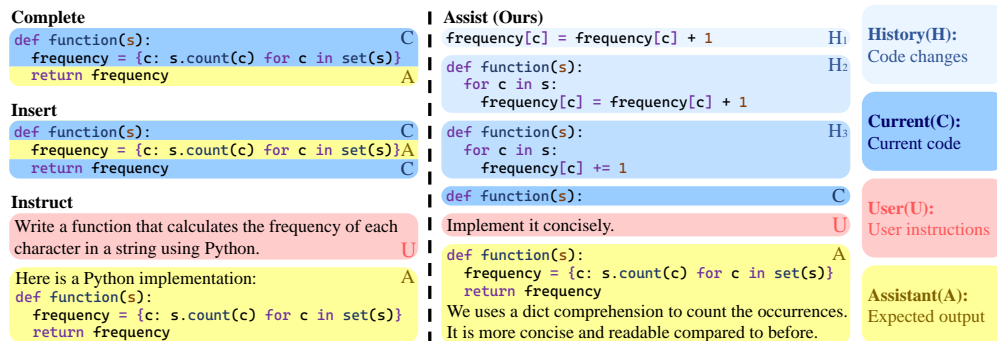


Figure 1: Different forms of programming assistance. The common uses of current LLMs are shown on the left. Our framework is shown on the right.

accomplished by foundation models that support relevant input formats Chen et al. (2021); Bavarian et al. (2022). The other form involves generating or editing code snippets based on natural language instructions or reflections through interaction with the environment, usually carried out by instruction models that have been further aligned Shinn et al. (2023); Cassano et al. (2023b); Muennighoff et al. (2024); Paul-Gauthier (2024). Figure 1 shows simple examples of these forms.

However, in practical applications, neither the completion or insertion mode nor the instruction-based mode is perfect. The completion or insertion mode generates based on the current code context, but in actual coding, we are continuously editing the code rather than just completing and inserting. We prefer that the model predicts the upcoming edits, as neither completion nor insertion accurately reflects the coding process, and requires programmers to perform additional operations. The instruction-based mode allows for code editing, but it also has drawbacks, such as writing prompts for specific tasks may be slower or challenging. The process is not automated enough, programmers would prefer a model that can proactively predict future changes without needing extra prompts. In our view, the core issue lies in the limitations of the input and output in both forms of programming assistance. These forms either just align the output with the current code context, limiting completion or insertion instead of editing, or align the output with the user’s natural language instructions. However, to effectively assist with programming, an AI programming assistant needs to utilize anything throughout the programming process. It should be capable of aligning with the history of code changes, the current content of the code, and any instructions provided by the user, predicting the required responses and corresponding changes, reducing any actions required by users.

To solve these issues, in this paper, we introduce a new framework of AI-assisted programming task: Assistant-Conversation to align anything during programming process. To comprehensively evaluate the alignment of models with different information in the programming process and the quality of the corresponding outputs, we propose a new benchmark, APEval (Assist Programming Eval), to comprehensively assess the performance of models in assisting programming. For the Assistant-Conversation framework, we build a data generation pipeline, Programming-Instruct, to synthesize corresponding training data from various data sources. This data generation method can produce any types of messages throughout the programming process, without any additional human annotation and does not rely on specific models. We use this pipeline to generate 219K data points and use them to fine-tune multiple models, resulting in the CursorCore series. These models achieve state-of-the-art results when compared with other models of comparable size.

In conclusion, our main contributions are:

- Assistant-Conversation: A new framework to align anything during programming process.
- Programming-Instruct: Data synthesis pipeline to produce any types of messages throughout the programming process, and 219K data collected using it.
- APEval: A benchmark for assessing the ability to utilize various types of information to assist programming.
- CursorCore: One of the best model series with the same number of parameters for AI-assisted programming tasks.

2 ASSISTANT-CONVERSATION: NEW CONVERSATION FRAMEWORK FOR PROGRAMMING ASSISTANTS

In this section, we introduce a new conversational framework, Assistant-Conversation, aimed at simplifying the programming process. The framework leverages all available information during programming to streamline work for programmers.

2.1 FRAMEWORK FORMULATION

We introduce the constituent elements of Assistant-Conversation: System (S), History (H), Current (C), User (U), and Assistant (A). The Assistant (A) represents the output of the model, while the inputs consist of the System (S), History (H), Current (C), and User (U). Figures 1 and 2 shows several examples of them. These definitions will be referenced throughout the rest of this work.

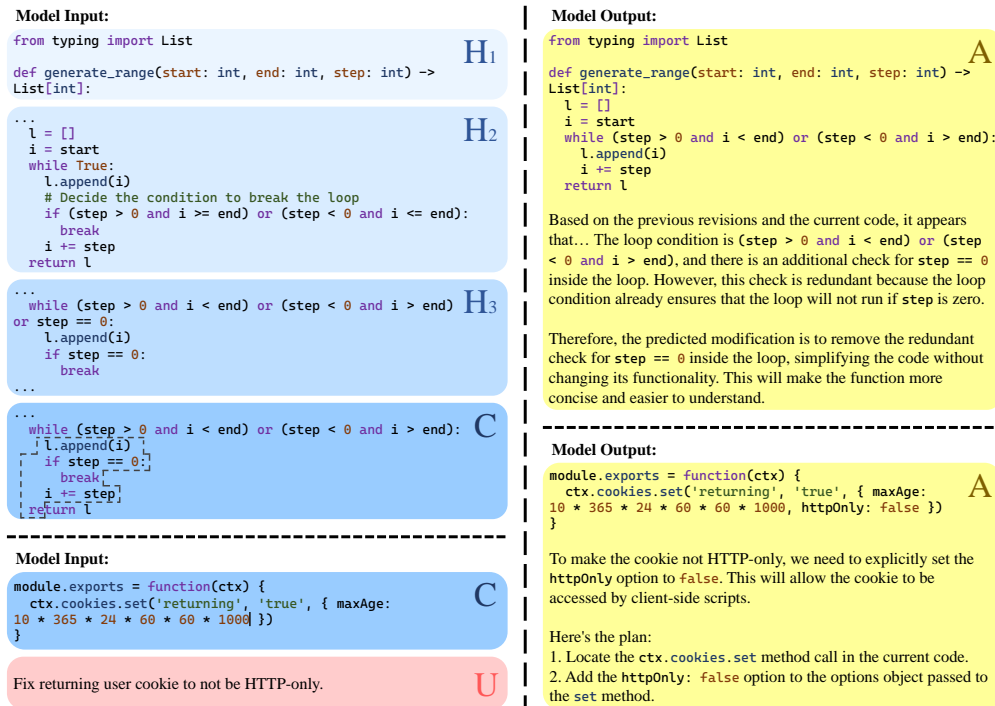


Figure 2: Examples of Assistant-Conversation from our training data.

System S (Optional) The system instruction provided to the model at the beginning, which configures the answering style, overall task description and other behaviors. In this work, we fix it to a simple “You are a helpful programming assistant.” and omit it from the subsequent discussion.

History H (Optional) The program’s editing history, consisting of multiple pieces of code. These may include several snippets or may not be present at all. We refer to them as H_1, \dots, H_n .

Current C The code currently being processed, along with temporary information like cursor position or selected code area.

User U (Optional) User instructions related to the code, either written by the programmer or generated as feedback based on interactions with external environments (such as a code interpreter).

Assistant A The output of the model, consists of modified code and chat-style interaction with the programmer. In this work, we mainly focus on the prediction of modified code.

2.2 COMPARISONS OF ASSISTANT-CONVERSATION

Completion and insertion modes face challenges when modeling both C and H Although they can utilize C , they fail to capture H , limiting the modeling of future changes in C , and are incapable of deleting or editing code. Although user instructions and reflection information can be used through comments and assert statements, this capability is weak and unstable.

Chat models are not ideal for all programming assistance tasks These models focus on user input rather than the code content, while the input should primarily be centered on C instead of just user instructions. In traditional conversational frameworks, the sole input source is U , which works for chatbots but not for application assistants. Input sources should include C , H , and U , as both H and U are related to C . Although instruction models can represent the interaction history between users and assistants, they struggle to capture the historical changes in the application’s content. Prompt engineering can integrate some of this information into existing models, but the

impact is limited. Constructing prompts with numerous tokens increases cost and reduces efficiency, and models may also lack alignment and proper training for such inputs.

Our framework addresses these issues We use multiple input sources to harness all relevant information from the programming process. For the output, we divide it into two parts: modified code and chat-style communication with the programmer, aligning with the common practices of users. When the user only requires responses based on U , similar to instruction models, we can omit H and C , suppress code modifications, and provide only chat output to ensure compatibility with past chat modes.

2.3 SPECIFICATIONS AND IMPLEMENTATION

To represent a piece of code like C , we can either use it directly or wrap it in a markdown code block. However, representing code changes, such as H or changes in A , is more complex. We can either use the whole code, patches that alter the code, or records of both the modification locations and the specific changes. Some methods work well but experience issues when handling longer texts, such as outputting the entire modified code, which can be slow. Other methods output minimal content, like providing only the modification locations and changes. These are faster but still not optimal in terms of performance. We represent code changes in the experiments of the main body using the whole code format, and we investigate different ways to represent these modifications, as detailed in Appendix B. Additionally, we explore methods for compressing historical code changes in Appendix F.

In some cases, programmers assign assistants to focus on specific areas of code. They might use the cursor to mark a general location or directly select a range of code, as shown in Figure 2. We handle this by treating them as special tokens (see Appendix D for further details).

We structure conversations in the order of $S-H-C-U-A$ to match the actual workflow. This mirrors the chronological sequence in which information is generated during the programming process. By doing so, we maximize prefix overlap across multiple requests, utilizing prefix caching to reduce redundant kv-cache computations and improve efficiency Zheng et al. (2023a). A is organized in code-chat order, prioritizing code edits due to their importance in real-time applications where speed is crucial.

3 APEVAL: BENCHMARK FOR ASSISTED PROGRAMMING

3.1 BENCHMARK OVERVIEW

Past benchmarks assessing LLM code capabilities have effectively evaluated tasks like program synthesis Chen et al. (2021); Austin et al. (2021), code repair Muennighoff et al. (2024); Jimenez et al. (2024), and instructional code editing Cassano et al. (2023b); Paul-Gauthier (2024); Guo et al. (2024b). However, they fall short in fully assessing how models use various types of information to assist in programming. This gap calls for a new benchmark.

As discussed in Section 2.1, programming assistance can involve different types of information, with H and U being optional. Thus, there are four possible combinations of information: $H, C, U; H, C; C, U$; and only C . HumanEval Chen et al. (2021) is a well-known benchmark for evaluating code completion. It has been extended to assess other tasks such as code insertion Bavarian et al. (2022), instruction-based tasks CodeParrot (2023); Muennighoff et al. (2024), and multilingual generation Zheng et al. (2023b); Cassano et al. (2023a). We refer to these works and further extend it to comprehensively evaluate the model’s ability to assist programming. We randomly categorize each task into one of the four types, then manually implement the functions and simulate the potential instructions that programmers might give to an LLM during the process, collecting all interactions. We invite programmers with varying levels

Table 1: APEval Statistics.

Statistics	Sample Num
Total	164
Each type	41 / 41 / 41 / 41
H Statistics	Mean / Max
Num (Snippets)	2.8 / 10
Num (Lines)	21.7 / 139
Num (Chars)	0.6K / 5.1K
C Statistics	Mean / Max
Num (Lines)	8.4 / 31
Num (Chars)	0.3K / 1.4K
U Statistics	Mean / Max
Num (Lines)	3.2 / 19
Num (Chars)	0.2K / 1.2K

of experience to annotate the data. After processing, we get the new benchmark, Assist Programming Eval (APEval). Detailed statistics are shown in Table 1.

3.2 EVALUATION PROCESS AND METRICS

In all tasks, we use the classic Pass@1 metric to execute the generated code, which is the simplest version of the Pass@k metric Chen et al. (2021). Since APEval is an extension of HumanEval, we use the test set created by EvalPlus Liu et al. (2023). We report the results from both the basic and extra tests. We provide the model with relevant information during the programming process, and the model immediately returns the modified code. Some methods may improve performance by increasing the number of output tokens to model the thinking process; we discuss this further in Appendix E.

4 PROGRAMMING-INSTRUCT: COLLECT ANY DATA DURING PROGRAMMING

To align models with programming-related data, relevant training data must be collected. While large amounts of unsupervised code Kocetkov et al. (2023) and instruction data Wei et al. (2023b); Luo et al. (2024b) have been gathered, there remains a significant lack of data on the coding process. Manually annotating the coding process is expensive, so we propose Programming-Instruct, a method to automate this data collection.

4.1 DATA SOURCES

To ensure both quality and diversity in the coding process data, we collect information from three different sources: AIprogrammer, Git commit, and Online Submit.

AIprogrammer For each code snippet, we use LLMs to generate the corresponding coding history. Since human coding approaches vary widely, we utilize several LLMs, each guided by three distinct prompts, representing novice, intermediate, and expert programmers. The LLMs then return their version of the coding process. Prompts used are shown in Appendix K.

Git Commit Some software can automatically track changes, such as Git. We use Git commit data from Github, which captures users’ code edits and modification histories.

Online Submit Many online coding platforms like Leetcode allow users to submit code for execution and receive feedback. During this process, users continuously modify their code until it is finalized. We also make use of this data.

Through these sources, we obtain a large number of samples, each consisting of multiple code snippets. The last snippet in each sample is referred to as the final snippet (F). Examples of data sources are shown in Figure 3.

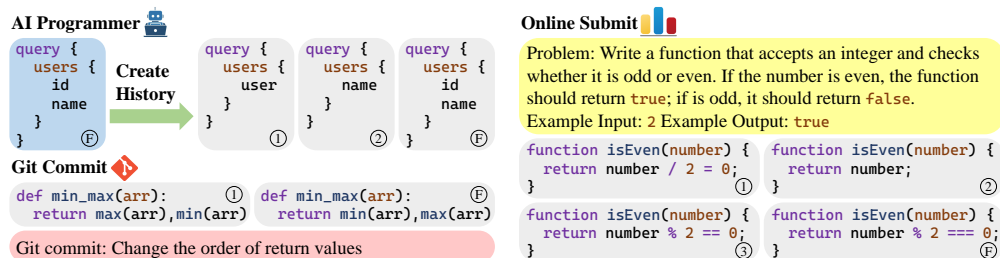


Figure 3: Samples from AIprogrammer, Git Commit and Online Submit.

4.2 DATA PROCESSING

After collecting a large number of coding processes, we process them to meet the requirements of Assistant-Conversation. Figure 4 shows the steps of data processing. First, we randomly select a time

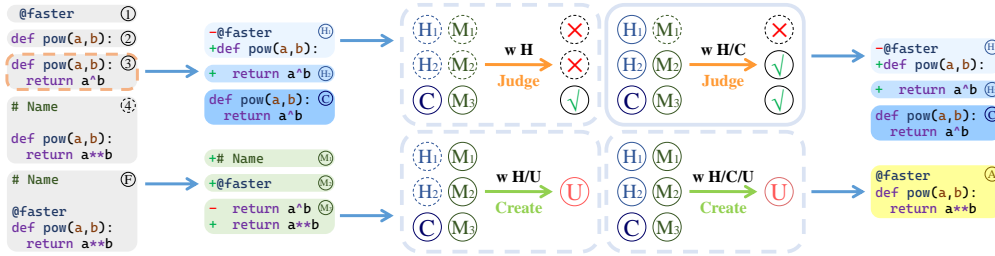


Figure 4: Data processing pipeline. The randomly selected time point is the third, and the randomly selected data type is H and C .

point in the coding process, referred to as C . As mentioned in Section 2.1, H and U are optional, we need to collect four types of data distinguished according to input data types: $H, C, U; H, C, U$; and only C . For each sample, we randomly designate one type. If the selected type includes H , We use the preceding edits of C as the historical records H .

We then handle each type of data based on whether U is available. For cases without U , we segment the changes from C to F based on continuity, referring to them as M , and let LLMs judge whether each segment of M aligns with user’s purpose through principle-driven approaches Bai et al. (2022); Sun et al. (2023); Lin et al. (2024). This approach accounts for ambiguity in user intent when inferring from H or C . For example, if a programmer actively adds some private information at the beginning of the code without it being mentioned in the previous records, LLMs should not predict this change. We discard segments deemed irrelevant, and merge the remaining ones as outputs that models need to learn to predict. For cases with U , we follow the instruction generation series methods Wang et al. (2023); Wei et al. (2023b); Luo et al. (2024b) by inputting both the historical edits and current code into the LLM, prompting it to generate corresponding instructions.

In addition to the above, we model selected code regions, cursor positions, and make LLMs create chat-style interactions with users. Further details are provided in Appendix C.

5 CURSORCORE: FINE-TUNE LLMs TO ALIGN ANYTHING

5.1 BASE MODELS

We fine-tune existing base LLMs to assist with programming tasks. Over the past few years, many open-source foundation models have been trained on large code corpora sourced from GitHub and other platforms, demonstrating strong performance in coding. We choose Deepseek-Coder Guo et al. (2024a), Yi-Coder AI et al. (2024) and Qwen2.5-Coder Hui et al. (2024) series, which we refer to as CursorCore-DS, CursorCore-Yi and CursorCore-QW2.5 series after training. Deepseek-Coder has achieved state-of-the-art performance on numerous coding-related benchmarks over the past year, gaining wide recognition. Yi-Coder and Qwen2.5-Coder are the most recently released models at the start of our experiments and show the best performance on many benchmarks for code now. These models are widely supported by the community, offering a good balance between size and performance, making them suitable for efficient experimentation. For ablation experiments, we use the smallest version, Deepseek-Coder-1.3B, to accelerate the process. We use a chat template adapted from ChatML OpenAI (2023) to model Assistant-Conversation during training, as detailed in Appendix I.

5.2 TRAINING DATA

We use Programming-Instruct to collect data. For AIprogrammer, we gather code snippets from datasets such as the stack Kocetkov et al. (2023) and oss-instruct Wei et al. (2023b), then prompt LLMs to generate the programming process. For Git commit data, we collect relevant information from editpackft Cassano et al. (2023b) (a filtered version of commitpackft Muennighoff et al. (2024)) and further refine it through post-processing and filtering. Regarding online submission data, we source the programming process from the Codenet dataset Puri et al. (2021). First, we group all submissions by user for each problem, then exclude invalid groups without correct submissions to

Table 2: Statistics of our training data.

	Sample Num	Language Num	History Snippets Mean / Max	Input Length Mean / Max	Output Length Mean / Max
AIprogrammer	70.9K	-	2.0 / 17	0.6K / 25K	1.0K / 5.2K
Git Commit	88.0K	14	1.5 / 15	1.5K / 19.9K	1.4K / 5.2K
Online Submit	60.5K	44	3.8 / 96	4.8K / 357.2K	1.9K / 35.1K

obtain complete programming processes. These are then fed into the processing pipeline to generate the final training data. In total, we accumulate 219K samples, with detailed statistics and distributions shown in Tables 2 and 3 and Figures 5 to 8. To ensure compatibility with previous chatbot-style interactions and further improve model performance, we also incorporate the evol-instruct dataset ISE-UIUC (2023) collected using the GPT series Ouyang et al. (2022), which has been widely recognized for its high quality during training. Following StarCoder’s data processing approach Li et al. (2023), we decontaminate our training data.

During data collection, we randomly utilize two powerful open-source LLMs: Mistral-Large-Instruct Mistral-AI (2024b) and Deepseek-Coder-V2-Instruct DeepSeek-AI et al. (2024). These models have demonstrated performance comparable to strong closed-source models like GPT-4o across many tasks, and are currently the only two open-source models scoring over 90% on the classic HumanEval benchmark at the start of our experiment. Additionally, they are more cost-effective and offer easier reproducibility than GPT-4o. For Mistral-Large-Instruct, we quantize the model using the GPTQ Frantar et al. (2022) algorithm and deploy it locally with sglang Zheng et al. (2023a) and marlin kernel Frantar et al. (2024) on 4 Nvidia RTX 4090 GPUs. For Deepseek-Coder-V2-Instruct, we use the official API for integration.

Table 3: The proportion of four combinations of information during programming in our training data.

	C	H, C	C, U	H, C, U
AIprogrammer	24.1	22.2	25.4	28.3
Git Commit	25.9	20.0	28.0	26.1
Online Submit	27.5	19.7	29.4	23.4

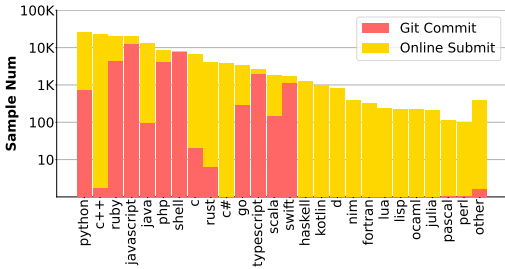


Figure 5: The distribution of programming language in the training data.

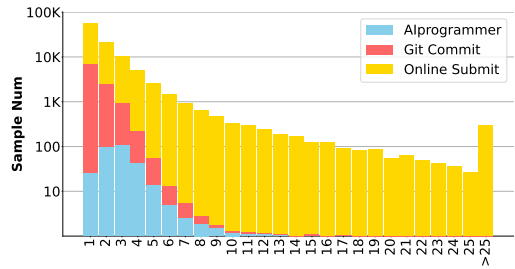


Figure 6: The distribution of history snippets in the training data.

5.3 TRAINING DETAILS

Our models are trained for 2 epochs using the Transformers library Wolf et al. (2020). We enhance memory efficiency and speed with techniques such as Deepspeed ZeRO3 Rajbhandari et al. (2019), ZeRO Offload Ren et al. (2021), FlashAttention2 Dao (2024), and triton kernels Hsu et al. (2024). We calculate the maximum sequence length that can be processed per batch based on the available VRAM. Using the First-Fit Decreasing algorithm Kundu et al. (2024), we pack training samples to ensure that each batch reaches its maximum sequence length, thereby optimizing training speed. The training process employs the Adafactor optimizer Shazeer & Stern (2018) with a learning rate of 5e-5, coupled with a cosine scheduler featuring 15 warm-up steps.

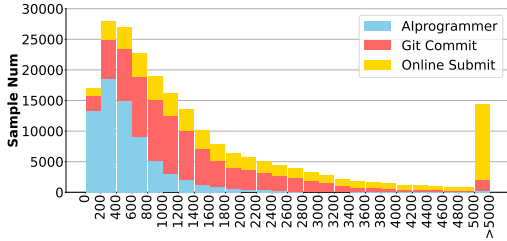


Figure 7: The distribution of input lengths in the training data.

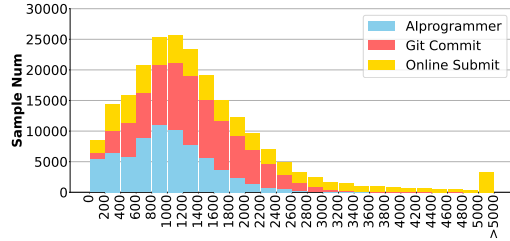


Figure 8: The distribution of output lengths in the training data.

6 EVALUATION AND RESULTS

In this section, we evaluate the CursorCore models. We begin by describing the experimental setup and then present and analyze the results.

6.1 EXPERIMENTAL SETUP

We conduct the data selection ablation and primary evaluation on our APEval benchmark, and provide results on well-known benchmarks such as Python program synthesis, automated program repair, and instructional code editing, which are detailed in Appendix G. We choose prominent open-source and closed-source LLMs as our baselines. For all benchmarks, we use greedy decoding to generate evaluation results. CursorCore natively supports various inputs in APEval, whereas base and instruction LLMs require additional prompts for effective evaluation. We design few-shot prompts separately for base and instruction models, as detailed in Appendix J.

6.2 DATA SELECTION ABLATION

We train the smallest model Deepseek-Coder-1.3B on different combinations of datasets to determine the optimal data mix. The results of the ablation study are shown in Figure 9.

AIprogrammer has the highest data quality

Among the various data sources, the model trained on the AIprogrammer dataset achieve the best performance on APEval. We believe this is primarily because the data aligns well with the required format of APEval. Moreover, unlike other data sources such as Git Commit, the AIprogrammer data is almost entirely synthesized by LLMs, except for the initial code. As LLMs have advanced, the quality of their generated data has generally surpassed that of data collected and filtered from human-created sources.

Importance of mixing data with different information types

We find that using high-quality chat-style data alone, such as the Evol-Instruct dataset, does not achieve the desired performance; it underperforms compared to the AIprogrammer dataset. However, when combining both datasets, the model shows a notable improvement. This indicates that to better align the model with a variety of data and information, it is necessary to use datasets containing diverse types of information.

Our final selection We combine data from all sources for training. Since our focus is on Python, and training on multilingual data leads to a decrease in APEval scores, we use only the Python part of the Git Commit and Online Submit datasets. As a result, we get CursorCore series models.

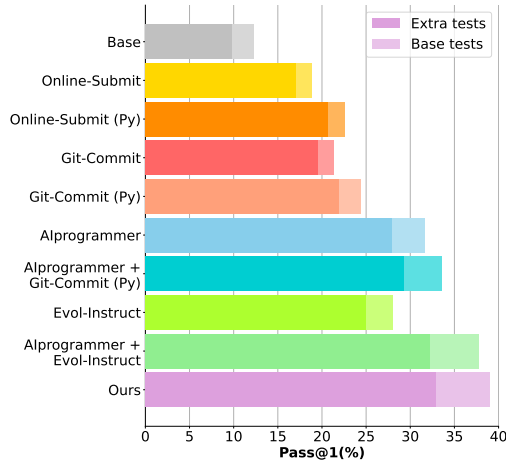


Figure 9: Data Selection Ablation on APEval.

Table 4: Evaluation results of LLMs on APEval.

Model	C	H, C	C, U	H, C, U	Avg.
Closed Models					
GPT-4o-Mini	17.1 (17.1)	36.6 (31.7)	<u>78.0</u> (70.7)	53.7 (43.9)	46.3 (40.9)
GPT-4o	68.3 (63.4)	<u>61.0</u> (56.1)	75.6 (75.6)	<u>56.1</u> (53.7)	<u>65.2</u> (62.2)
10B+ Models					
Codestral-V0.1-22B	68.3 (56.1)	41.5 (41.5)	75.6 (73.2)	48.8 (46.3)	58.5 (54.3)
DS-Coder-33B-Base	31.7 (31.7)	26.8 (22.0)	43.9 (36.6)	24.4 (24.4)	31.7 (28.7)
DS-Coder-33B-Inst	63.4 (56.1)	56.1 (48.8)	70.7 (63.4)	51.2 (48.8)	60.4 (54.3)
Qwen2.5-72B	63.4 (61.0)	36.6 (34.1)	75.6 (63.4)	39.0 (34.1)	53.7 (48.2)
Qwen2.5-72B-Inst	73.2 (68.3)	53.7 (51.2)	<u>78.0</u> (70.7)	<u>56.1</u> (<u>56.1</u>)	<u>65.2</u> (61.6)
Mistral-Large-123B-Inst	65.9 (58.5)	56.1 (46.3)	73.2 (68.3)	48.8 (48.8)	61.0 (55.5)
DS-Coder-V2-236B-Base	41.5 (39.0)	36.6 (31.7)	58.5 (56.1)	36.6 (34.1)	43.3 (40.2)
DS-Coder-V2-236B-Inst	<u>78.0</u> (65.9)	48.8 (43.9)	68.3 (61.0)	53.7 (48.8)	62.2 (54.9)
6B+ Models					
Llama-3.1-8B	12.2 (12.2)	17.1 (14.6)	19.5 (19.5)	22.0 (17.1)	17.7 (15.9)
Llama-3.1-8B-Inst	24.4 (24.4)	31.7 (29.3)	53.7 (51.2)	39.0 (34.1)	37.2 (34.8)
Gemma-2-9B	22.0 (22.0)	19.5 (17.1)	17.1 (19.5)	22.0 (17.1)	20.1 (18.9)
Gemma-2-9B-It	56.1 (53.7)	41.5 (36.6)	51.2 (46.3)	36.6 (29.3)	46.3 (41.5)
Codegeex4-All-9B	43.9 (41.5)	34.1 (31.7)	73.2 (61.0)	34.1 (34.1)	46.3 (42.1)
DS-Coder-6.7B-Base	29.3 (24.4)	26.8 (22.0)	41.5 (31.7)	22.0 (19.5)	29.9 (24.4)
DS-Coder-6.7B-Inst	56.1 (53.7)	41.5 (36.6)	70.7 (61.0)	34.1 (29.3)	50.6 (45.1)
Yi-Coder-9B	29.3 (26.8)	26.8 (22.0)	17.1 (17.1)	29.3 (26.8)	25.6 (23.2)
Yi-Coder-9B-Chat	56.1 (51.2)	39.0 (36.6)	73.2 (70.7)	36.6 (36.6)	51.2 (48.8)
Qwen2.5-Coder-7B	56.1 (53.7)	41.5 (36.6)	65.9 (56.1)	31.7 (29.3)	48.8 (43.9)
Qwen2.5-Coder-7B-Inst	22.0 (19.5)	46.3 (39.0)	<u>75.6</u> (65.9)	41.5 (39.0)	46.3 (40.9)
CursorCore-DS-6.7B	68.3 (63.4)	41.5 (39.0)	68.3 (63.4)	36.6 (31.7)	53.7 (49.4)
CursorCore-Yi-9B	53.7 (53.7)	46.3 (43.9)	75.6 (68.3)	43.9 (36.6)	54.9 (50.6)
CursorCore-QW2.5-7B	65.9 (61.0)	41.5 (39.0)	65.9 (63.4)	48.8 (43.9)	55.5 (51.8)
1B+ Models					
Llama-3.2-1B	0.0 (0.0)	14.6 (12.2)	2.4 (4.9)	14.6 (12.2)	7.9 (7.3)
Llama-3.2-1B-Instruct	7.3 (7.3)	14.6 (14.6)	19.5 (19.5)	22.0 (19.5)	15.9 (15.2)
Llama-3.2-3B	14.6 (14.6)	12.2 (9.8)	26.8 (19.5)	22.0 (17.1)	18.9 (15.2)
Llama-3.2-3B-Instruct	14.6 (14.6)	22.0 (19.5)	29.3 (26.8)	34.1 (31.7)	25.0 (23.2)
Gemma-2-2B	7.3 (7.3)	4.9 (2.4)	12.2 (12.2)	14.6 (9.8)	9.8 (7.9)
Gemma-2-2B-It	14.6 (14.6)	22.0 (19.5)	29.3 (26.8)	34.1 (31.7)	25.0 (23.2)
Phi-3.5-3.8B-Inst	24.4 (22.0)	19.5 (14.6)	34.1 (34.1)	<u>39.0</u> (34.1)	29.3 (26.2)
DS-Coder-1.3B-Base	0.0 (0.0)	12.2 (12.2)	17.1 (12.2)	19.5 (14.6)	12.2 (9.8)
DS-Coder-1.3B-Inst	39.9 (36.6)	39.0 (36.6)	39.0 (29.3)	34.1 (34.1)	37.8 (34.1)
Yi-Coder-1.5B	2.4 (0.0)	2.4 (2.4)	14.6 (14.6)	12.2 (7.3)	7.9 (6.1)
Yi-Coder-1.5B-Chat	31.7 (31.7)	4.9 (4.9)	51.2 (41.5)	26.8 (22.0)	28.7 (25.0)
Qwen2.5-Coder-1.5B	43.9 (36.6)	26.8 (26.8)	51.2 (41.5)	36.6 (34.1)	39.6 (34.8)
Qwen2.5-Coder-1.5B-Inst	14.6 (14.6)	17.1 (14.6)	43.9 (34.1)	31.7 (29.3)	26.8 (23.2)
CursorCore-DS-1.3B	36.6 (31.7)	39.0 (31.7)	53.7 (46.3)	26.8 (22.0)	39.0 (32.9)
CursorCore-Yi-1.5B	46.3 (39.0)	34.1 (29.3)	68.3 (58.5)	36.6 (34.1)	46.3 (40.2)
CursorCore-QW2.5-1.5B	46.3 (43.9)	48.8 (43.9)	65.9 (61.0)	39.0 (36.6)	50.0 (46.3)

6.3 EVALUATION RESULTS ON APEVAL

In Table 4, we present the results of evaluating CursorCore series models and other LLMs on APEval. It includes both the average results and the results across four different types of information within the benchmark, each item in the table is the score resulting from running the base tests and extra tests. We also report the evaluation results of other well-known models on APEval, which can be found in Appendix H.

CursorCore outperforms other models of comparable size CursorCore consistently outperforms other models in both the 1B+ and 6B+ parameter sizes. It achieves the highest average score, with the best 1B+ model surpassing the top scores of other models by 10.4%, and even by 11.5% when running extra tests. Similarly, the best 6B+ model exceeds by 4.3%, and by 3.0% in the case of extra tests. Additionally, across various information types, CursorCore consistently demonstrates optimal performance among all similarly sized models.

Instruction models mostly outperform base models For most model series, instruction-tuned models outperform their corresponding base models, as instruction fine-tuning generally enhances model capabilities Ouyang et al. (2022); Longpre et al. (2023). The only exception observed in our experiments is the latest model, Qwen2.5-Coder. Its base model achieves a very high score, while the instruction-tuned model performs worse. We attribute the base model’s high performance to its extensive pre-training, which involved significantly more tokens than previous models Hui et al. (2024). This training on a wide range of high-quality data grants it strong generalization abilities, enabling it to effectively handle the newly defined APEval task format. In contrast, the instruction-tuned model is not specifically aligned with this task, leading to a decrease in its APEval score. This highlights the challenges of aligning models with numerous diverse tasks, especially small models.

Performance difference between general and code LLMs is strongly related to model size In 1B+ parameter models, general LLMs significantly underperform code LLMs. Even the best-performing general model scores over 10% lower on APEval compared to the best-performing code model, despite having more parameters. For models with 6B+ parameters, while general LLMs still lag behind code LLMs, the performance gap narrows considerably, with general LLMs even surpassing in certain cases involving specific information types. When it comes to 10B+ models, the performance difference between general and code LLMs becomes negligible. We think that smaller models, due to their limited parameter capacity, tend to focus on a single domain, such as programming assistance, while larger models can encompass multiple domains without compromising generalizability.

Gap between closed models and the best open models is smaller Historically, open-source models significantly lag behind closed-source models, like those in the GPT series, leading to a preference for closed-source models in synthetic data generation and other applications Taori et al. (2023); Xu et al. (2023). However, with the continuous advancement of open-source LLMs, increasingly powerful models have emerged. On APEval, the best open-source models—such as Qwen2.5-72B-Instruct, Mistral-Large-Instruct, and Deepseek-Coder-V2-Instruct—demonstrate performance that closely approaches that of the leading GPT series model, GPT-4o. This indicates that the performance gap between open-source and closed-source LLMs has considerably narrowed, encouraging the development of more interesting applications based on open-source LLMs. Despite this progress, GPT-4o remains more comprehensive than open-source LLMs. It utilizes H far more effectively than any other model, demonstrating its strong capability to process and align with various types of information. This is an area where open-source LLMs still need to improve.

7 CONCLUSION

This work explores how LLMs can maximize the use of any available information during programming process to assist coding. We introduce Assistant-Conversation to model the diverse types of information involved in programming. We present APEval, a new benchmark that includes various historical edits and instructions, providing a comprehensive evaluation of the model’s programming assistance capabilities. Additionally, we propose Programming-Instruct, which is designed to collect data for training LLMs to assist programming, along with their corresponding data sources. Furthermore, we train CursorCore, which demonstrate outstanding performance in assisting programming tasks while achieving a good balance between efficiency and cost. We also conduct extensive ablation experiments and analyzes. Beyond enhancing traditional approaches of programming assistance, we plan to extend this approach to support models capable of assisting with repository-level development as well as other applications.

REFERENCES

01. AI, :, Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, Kaidong Yu, Peng Liu, Qiang Liu, Shawn Yue, Senbin Yang, Shiming Yang, Tao Yu, Wen Xie, Wenhao Huang, Xiaohui Hu, Xiaoyi Ren, Xinyao Niu, Pengcheng Nie, Yuchi Xu, Yudong Liu, Yue Wang, Yuxuan Cai, Zhenyu Gu, Zhiyuan Liu, and Zonghong Dai. Yi: Open foundation models by 01.ai. *arXiv preprint arXiv: 2403.04652*, 2024.
- Jacob Austin, Augustus Odena, Maxwell Nye, Maarten Bosma, Henryk Michalewski, David Dohan, Ellen Jiang, Carrie Cai, Michael Terry, Quoc Le, and Charles Sutton. Program synthesis with large language models. *arXiv preprint arXiv: 2108.07732*, 2021.
- Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, Carol Chen, Catherine Olsson, Christopher Olah, Danny Hernandez, Dawn Drain, Deep Ganguli, Dustin Li, Eli Tran-Johnson, Ethan Perez, Jamie Kerr, Jared Mueller, Jeffrey Ladish, Joshua Landau, Kamal Ndousse, Kamile Lukosuite, Liane Lovitt, Michael Sellitto, Nelson Elhage, Nicholas Schiefer, Noemi Mercado, Nova DasSarma, Robert Lasenby, Robin Larson, Sam Ringer, Scott Johnston, Shauna Kravec, Sheer El Showk, Stanislav Fort, Tamera Lanham, Timothy Telleen-Lawton, Tom Conerly, Tom Henighan, Tristan Hume, Samuel R. Bowman, Zac Hatfield-Dodds, Ben Mann, Dario Amodei, Nicholas Joseph, Sam McCandlish, Tom Brown, and Jared Kaplan. Constitutional ai: Harmlessness from ai feedback. *arXiv preprint arXiv: 2212.08073*, 2022.
- Mohammad Bavarian, Heewoo Jun, Nikolas Tezak, John Schulman, Christine McLeavey, Jerry Tworek, and Mark Chen. Efficient training of language models to fill in the middle. *arXiv preprint arXiv: 2207.14255*, 2022.
- Federico Cassano, John Gouwar, Daniel Nguyen, Sydney Nguyen, Luna Phipps-Costin, Donald Pinckney, Ming-Ho Yee, Yangtian Zi, Carolyn Jane Anderson, Molly Q. Feldman, Arjun Guha, Michael Greenberg, and Abhinav Jangda. Multipl-e: A scalable and polyglot approach to benchmarking neural code generation. *IEEE Trans. Software Eng.*, 49(7):3675–3691, 2023a. doi: 10.1109/TSE.2023.3267446. URL <https://doi.org/10.1109/TSE.2023.3267446>.
- Federico Cassano, Luisa Li, Akul Sethi, Noah Shinn, Abby Brennan-Jones, Anton Lozhkov, Carolyn Jane Anderson, and Arjun Guha. Can it edit? evaluating the ability of large language models to follow code editing instructions. *arXiv preprint arXiv: 2312.12450*, 2023b.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Josh Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code. *arXiv preprint arXiv: 2107.03374*, 2021.
- CodeParrot. Instruct humaneval, 2023. URL <https://huggingface.co/datasets/codeparrot/instructhumaneval>. Accessed: 2023-11-02.
- Continue-Dev. Continue, 2024. URL <https://github.com/continuedev/continue>. Accessed: 2024-3-18.
- Cursor-AI. Cursor, 2023. URL <https://www.cursor.com/>. Accessed: 2023-12-24.
- Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024. URL <https://openreview.net/forum?id=mZn2Xyh9Ec>.

- DeepSeek-AI, Qihao Zhu, Daya Guo, Zhihong Shao, Dejian Yang, Peiyi Wang, Runxin Xu, Y. Wu, Yukun Li, Huazuo Gao, Shirong Ma, Wangding Zeng, Xiao Bi, Zihui Gu, Hanwei Xu, Damai Dai, Kai Dong, Liyue Zhang, Yishi Piao, Zhibin Gou, Zhenda Xie, Zhewen Hao, Bingxuan Wang, Junxiao Song, Deli Chen, Xin Xie, Kang Guan, Yuxiang You, Aixin Liu, Qiushi Du, Wenjun Gao, Xuan Lu, Qinyu Chen, Yaohui Wang, Chengqi Deng, Jiashi Li, Chenggang Zhao, Chong Ruan, Fuli Luo, and Wenfeng Liang. Deepseek-coder-v2: Breaking the barrier of closed-source models in code intelligence. *arXiv preprint arXiv: 2406.11931*, 2024.
- Yanguibo Ding, Zijian Wang, Wasi Uddin Ahmad, Hantian Ding, Ming Tan, Nihal Jain, M. K. Ramanathan, Ramesh Nallapati, Parminder Bhatia, Dan Roth, and Bing Xiang. Crosscodeeval: A diverse and multilingual benchmark for cross-file code completion. *Neural Information Processing Systems*, 2023. doi: 10.48550/arXiv.2310.11248.
- Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv: 2210.17323*, 2022.
- Elias Frantar, Roberto L Castro, Jiale Chen, Torsten Hoefler, and Dan Alistarh. Marlin: Mixed-precision auto-regressive parallel inference on large language models. *arXiv preprint arXiv:2408.11743*, 2024.
- Github-Copilot. Github copilot your ai pair programmer, 2022. URL <https://github.com/features/copilot>. Accessed: 2022-1-22.
- Alex Gu, Baptiste Rozière, Hugh James Leather, Armando Solar-Lezama, Gabriel Synnaeve, and Sida Wang. Cruxeval: A benchmark for code reasoning, understanding and execution. In *Forty-first International Conference on Machine Learning, ICML 2024, Vienna, Austria, July 21-27, 2024*. OpenReview.net, 2024. URL <https://openreview.net/forum?id=Ffpg52swvg>.
- Sumit Gulwani, Ivan Radicek, and Florian Zuleger. Automated clustering and program repair for introductory programming assignments. *ACM-SIGPLAN Symposium on Programming Language Design and Implementation*, 2016. doi: 10.1145/3296979.3192387.
- Daya Guo, Qihao Zhu, Dejian Yang, Zhenda Xie, Kai Dong, Wentao Zhang, Guanting Chen, Xiao Bi, Y. Wu, Y. K. Li, Fuli Luo, Yingfei Xiong, and Wenfeng Liang. Deepseek-coder: When the large language model meets programming - the rise of code intelligence. *arXiv preprint arXiv: 2401.14196*, 2024a.
- Jiawei Guo, Ziming Li, Xueling Liu, Kaijing Ma, Tianyu Zheng, Zhouliang Yu, Ding Pan, Yizhi LI, Ruibo Liu, Yue Wang, Shuyue Guo, Xingwei Qu, Xiang Yue, Ge Zhang, Wenhui Chen, and Jie Fu. Codeeditorbench: Evaluating code editing capability of large language models. *arXiv preprint arXiv: 2404.03543*, 2024b.
- Zhenyu He, Zexuan Zhong, Tianle Cai, Jason D. Lee, and Di He. REST: retrieval-based speculative decoding. In Kevin Duh, Helena Gómez-Adorno, and Steven Bethard (eds.), *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers), NAACL 2024, Mexico City, Mexico, June 16-21, 2024*, pp. 1582–1595. Association for Computational Linguistics, 2024. doi: 10.18653/V1/2024.NAACL-LONG.88. URL <https://doi.org/10.18653/v1/2024.naacl-long.88>.
- Pin-Lun Hsu, Yun Dai, Vignesh Kothapalli, Qingquan Song, Shao Tang, and Siyu Zhu. Liger-kernel: Efficient triton kernels for llm training, 2024. URL <https://github.com/linkedin/Liger-Kernel>.
- Dong Huang, Yuhao Qing, Weiye Shang, Heming Cui, and Jie M. Zhang. Effibench: Benchmarking the efficiency of automatically generated code. *arXiv preprint arXiv: 2402.02037*, 2024.
- Binyuan Hui, Jian Yang, Zeyu Cui, Jiayi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Kai Dang, An Yang, Rui Men, Fei Huang, Xingzhang Ren, Xuancheng Ren, Jingren Zhou, and Junyang Lin. Qwen2.5-coder technical report. *arXiv preprint arXiv: 2409.12186*, 2024.
- ISE-UIUC, 2023. URL <https://huggingface.co/datasets/ise-uiuc/Magicoder-Evol-Instruct-110K>. Accessed: 2023-11-01.

- Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. Livecodebench: Holistic and contamination free evaluation of large language models for code. *arXiv preprint arXiv: 2403.07974*, 2024.
- Huiqiang Jiang, Qianhui Wu, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. Lmlingua: Compressing prompts for accelerated inference of large language models. *arXiv preprint arXiv: 2310.05736*, 2023.
- Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik R. Narasimhan. Swe-bench: Can language models resolve real-world github issues? In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024. URL <https://openreview.net/forum?id=VTF8yNQm66>.
- Denis Kocetkov, Raymond Li, Loubna Ben allal, Jia LI, Chenghao Mou, Yacine Jernite, Margaret Mitchell, Carlos Muñoz Ferrandis, Sean Hughes, Thomas Wolf, Dzmitry Bahdanau, Leandro Von Werra, and Harm de Vries. The stack: 3 TB of permissively licensed source code. *Transactions on Machine Learning Research*, 2023. ISSN 2835-8856. URL <https://openreview.net/forum?id=pxpbTdUEpD>.
- Achintya Kundu, Rhui Dih Lee, Laura Wynter, Raghu Kiran Ganti, and Mayank Mishra. Enhancing training efficiency using packing with flash attention. *arXiv preprint arXiv: 2407.09105*, 2024.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Haoteng Zhang, and I. Stoica. Efficient memory management for large language model serving with pagedattention. *Symposium on Operating Systems Principles*, 2023. doi: 10.1145/3600006.3613165.
- Yuhang Lai, Chengxi Li, Yiming Wang, Tianyi Zhang, Ruiqi Zhong, Luke Zettlemoyer, S. Yih, Daniel Fried, Si yi Wang, and Tao Yu. Ds-1000: A natural and reliable benchmark for data science code generation. *International Conference on Machine Learning*, 2022. doi: 10.48550/arXiv.2211.11501.
- Jia Li, Ge Li, Xuanming Zhang, Yihong Dong, and Zhi Jin. Evocodebench: An evolving code generation benchmark aligned with real-world code repositories. *arXiv preprint arXiv: 2404.00599*, 2024.
- Raymond Li, Loubna Ben allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia LI, Jenny Chim, Qian Liu, Evgenii Zheltonozhskii, Terry Yue Zhuo, Thomas Wang, Olivier Dehaene, Joel Lamy-Poirier, Joao Monteiro, Nicolas Gontier, Ming-Ho Yee, Logesh Kumar Umaphathi, Jian Zhu, Ben Lipkin, Muhtasham Oblokulov, Zhiruo Wang, Rudra Murthy, Jason T Stillerman, Siva Sankalp Patel, Dmitry Abulkhanov, Marco Zocca, Manan Dey, Zhihan Zhang, Urvashi Bhattacharyya, Wenhao Yu, Sasha Luccioni, Paulo Villegas, Fedor Zhdanov, Tony Lee, Nadav Timor, Jennifer Ding, Claire S Schlesinger, Hailey Schoelkopf, Jan Ebert, Tri Dao, Mayank Mishra, Alex Gu, Carolyn Jane Anderson, Brendan Dolan-Gavitt, Danish Contractor, Siva Reddy, Daniel Fried, Dzmitry Bahdanau, Yacine Jernite, Carlos Muñoz Ferrandis, Sean Hughes, Thomas Wolf, Arjun Guha, Leandro Von Werra, and Harm de Vries. Starcoder: may the source be with you! *Transactions on Machine Learning Research*, 2023. ISSN 2835-8856. URL <https://openreview.net/forum?id=KoFOg4lhaE>. Reproducibility Certification.
- Jenny T Liang, Chenyang Yang, and Brad A Myers. A large-scale survey on the usability of ai programming assistants: Successes and challenges. In *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering*, pp. 1–13, 2024.
- Zhenghao Lin, Zhibin Gou, Yeyun Gong, Xiao Liu, Yelong Shen, Ruo Chen Xu, Chen Lin, Yujiu Yang, Jian Jiao, Nan Duan, and Weizhu Chen. Rho-1: Not all tokens are what you need. *arXiv preprint arXiv: 2404.07965*, 2024.
- Jiawei Liu, Chun Xia, Yuyao Wang, and Lingming Zhang. Is your code generated by chatgpt really correct? rigorous evaluation of large language models for code generation. *Neural Information Processing Systems*, 2023. doi: 10.48550/arXiv.2305.01210.

- S. Longpre, Le Hou, Tu Vu, Albert Webson, Hyung Won Chung, Yi Tay, Denny Zhou, Quoc V. Le, Barret Zoph, Jason Wei, and Adam Roberts. The flan collection: Designing data and methods for effective instruction tuning. *International Conference on Machine Learning*, 2023. doi: 10.48550/arXiv.2301.13688.
- Anton Lozhkov, Raymond Li, Loubna Ben Allal, Federico Cassano, Joel Lamy-Poirier, Nouamane Tazi, Ao Tang, Dmytro Pykhtar, Jiawei Liu, Yuxiang Wei, Tianyang Liu, Max Tian, Denis Kocetkov, Arthur Zucker, Younes Belkada, Zijian Wang, Qian Liu, Dmitry Abulkhanov, Indraneil Paul, Zhuang Li, Wen-Ding Li, Megan Risdal, Jia Li, Jian Zhu, Terry Yue Zhuo, Evgenii Zheltonozhskii, Nii Osa Osa Dade, Wenhao Yu, Lucas Krauß, Naman Jain, Yixuan Su, Xuanli He, Manan Dey, Edoardo Abati, Yekun Chai, Niklas Muennighoff, Xiangru Tang, Muhtasham Oblokulov, Christopher Akiki, Marc Marone, Chenghao Mou, Mayank Mishra, Alex Gu, Binyuan Hui, Tri Dao, Armel Zebaze, Olivier Dehaene, Nicolas Patry, Canwen Xu, Julian McAuley, Han Hu, Torsten Scholak, Sebastien Paquet, Jennifer Robinson, Carolyn Jane Anderson, Nicolas Chapados, Mostofa Patwary, Nima Tajbakhsh, Yacine Jernite, Carlos Muñoz Ferrandis, Lingming Zhang, Sean Hughes, Thomas Wolf, Arjun Guha, Leandro von Werra, and Harm de Vries. Starcoder 2 and the stack v2: The next generation. *arXiv preprint arXiv: 2402.19173*, 2024.
- Shuai Lu, Daya Guo, Shuo Ren, Junjie Huang, Alexey Svyatkovskiy, Ambrosio Blanco, Colin B. Clement, Dawn Drain, Daxin Jiang, Duyu Tang, Ge Li, Lidong Zhou, Linjun Shou, Long Zhou, Michele Tufano, Ming Gong, Ming Zhou, Nan Duan, Neel Sundaresan, Shao Kun Deng, Shengyu Fu, and Shujie Liu. Codexglue: A machine learning benchmark dataset for code understanding and generation. *NeurIPS Datasets and Benchmarks*, 2021.
- Qinyu Luo, Yining Ye, Shihao Liang, Zhong Zhang, Yujia Qin, Yaxi Lu, Yesai Wu, Xin Cong, Yankai Lin, Yingli Zhang, Xiaoyin Che, Zhiyuan Liu, and Maosong Sun. Repoagent: An llm-powered open-source framework for repository-level code documentation generation. *arXiv preprint arXiv: 2402.16667*, 2024a.
- Ziyang Luo, Can Xu, Pu Zhao, Qingfeng Sun, Xiubo Geng, Wenxiang Hu, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. Wizardcoder: Empowering code large language models with evol-instruct. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024b. URL <https://openreview.net/forum?id=UnUwSIgK5W>.
- Mistral-AI. Codestral, 2024a. URL <https://huggingface.co/mistralai/Codestral-22B-v0.1>. Accessed: 2024-4-02.
- Mistral-AI, 2024b. URL <https://huggingface.co/mistralai/Mistral-Large-Instruct-2407>. Accessed: 2024-8-01.
- Niklas Muennighoff, Qian Liu, Armel Randy Zebaze, Qinkai Zheng, Binyuan Hui, Terry Yue Zhuo, Swayam Singh, Xiangru Tang, Leandro von Werra, and Shayne Longpre. Octopack: Instruction tuning code large language models. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024. URL <https://openreview.net/forum?id=mw1PWNSWZP>.
- OpenAI. Chat markup language, 2023. URL <https://github.com/openai/openai-python/blob/release-v0.28.0/chatml.md>. Accessed: 2023-8-29.
- OpenAI. Learning to reason with llms, 2024. URL <https://openai.com/index/learning-to-reason-with-llms/>. Accessed: 2024-9-12.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul F Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information Processing Systems*, volume 35, pp. 27730–27744. Curran Associates, Inc., 2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/file/b1efde53be364a73914f58805a001731-Paper-Conference.pdf.

- Charles Packer, Sarah Wooders, Kevin Lin, Vivian Fang, Shishir G. Patil, Ion Stoica, and Joseph E. Gonzalez. Memgpt: Towards llms as operating systems. *arXiv preprint arXiv: 2310.08560*, 2023.
- Shishir G. Patil, Tianjun Zhang, Xin Wang, and Joseph E. Gonzalez. Gorilla: Large language model connected with massive apis. *arXiv preprint arXiv: 2305.15334*, 2023.
- Paul-Gauthier. Aider is ai pair programming in your terminal, 2024. URL <https://github.com/paul-gauthier/aider>. Accessed: 2024-1-19.
- H. Pearce, Baleegh Ahmad, Benjamin Tan, Brendan Dolan-Gavitt, and R. Karri. Asleep at the keyboard? assessing the security of github copilot’s code contributions. *IEEE Symposium on Security and Privacy*, 2021. doi: 10.1109/sp46214.2022.9833571.
- Ruchir Puri, David S. Kung, Geert Janssen, Wei Zhang, Giacomo Domeniconi, Vladimir Zolotov, Julian Dolby, Jie Chen, Mihir R. Choudhury, Lindsey Decker, Veronika Thost, Luca Buratti, Saurabh Pujar, Shyam Ramji, Ulrich Finkler, Susan Malaika, and Frederick Reiss. Codenet: A large-scale AI for code dataset for learning a diversity of coding tasks. In Joaquin Vanschoren and Sai-Kit Yeung (eds.), *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks 1, NeurIPS Datasets and Benchmarks 2021, December 2021, virtual*, 2021. URL <https://datasets-benchmarks-proceedings.neurips.cc/paper/2021/hash/a5bfc9e07964f8dddeb95fc584cd965d-Abstract-round2.html>.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *NEURIPS*, 2023.
- Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. Zero: Memory optimizations toward training trillion parameter models. *International Conference for High Performance Computing, Networking, Storage and Analysis*, 2019. doi: 10.1109/SC41405.2020.00024.
- Jie Ren, Samyam Rajbhandari, Reza Yazdani Aminabadi, Olatunji Ruwase, Shuangyan Yang, Minjia Zhang, Dong Li, and Yuxiong He. Zero-offload: Democratizing billion-scale model training. In Irina Calciu and Geoff Kuenning (eds.), *Proceedings of the 2021 USENIX Annual Technical Conference, USENIX ATC 2021, July 14-16, 2021*, pp. 551–564. USENIX Association, 2021. URL <https://www.usenix.org/conference/atc21/presentation/ren-jie>.
- Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton Ferrer, Aaron Grattafiori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. Code llama: Open foundation models for code. *arXiv preprint arXiv: 2308.12950*, 2023.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv: 1707.06347*, 2017.
- Noam M. Shazeer and Mitchell Stern. Adafactor: Adaptive learning rates with sublinear memory cost. *International Conference on Machine Learning*, 2018.
- Noah Shinn, Federico Cassano, Edward Berman, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *NEURIPS*, 2023.
- Alexander Shypula, Aman Madaan, Yimeng Zeng, Uri Alon, Jacob R. Gardner, Yiming Yang, Milad Hashemi, Graham Neubig, Parthasarathy Ranganathan, Osbert Bastani, and Amir Yazdanbakhsh. Learning performance-improving code edits. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024. URL <https://openreview.net/forum?id=ix7rLVHXY>.
- Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. Scaling llm test-time compute optimally can be more effective than scaling model parameters. *arXiv preprint arXiv: 2408.03314*, 2024.
- Weisong Sun, Yun Miao, Yuekang Li, Hongyu Zhang, Chunrong Fang, Yi Liu, Gelei Deng, Yang Liu, and Zhenyu Chen. Source code summarization in the era of large language models. *arXiv preprint arXiv: 2407.07959*, 2024.

Zhiqing Sun, Yikang Shen, Qinhong Zhou, Hongxin Zhang, Zhenfang Chen, David Cox, Yiming Yang, and Chuang Gan. Principle-driven self-alignment of language models from scratch with minimal human supervision. *NEURIPS*, 2023.

Sweep-AI. Why getting gpt-4 to modify files is hard, 2024. URL <https://docs.sweep.dev/blogs/gpt-4-modification>. Accessed: 2024-1-24.

Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca, 2023.

CodeGemma Team, Heri Zhao, Jeffrey Hui, Joshua Howland, Nam Nguyen, Siqi Zuo, Andrea Hu, Christopher A. Choquette-Choo, Jingyue Shen, Joe Kelley, Kshitij Bansal, Luke Vilnis, Mateo Wirth, Paul Michel, Peter Choy, Pratik Joshi, Ravin Kumar, Sarmad Hashmi, Shubham Agrawal, Zhitao Gong, Jane Fine, Tris Warkentin, Ale Jakse Hartman, Bin Ni, Kathy Korevec, Kelly Schaefer, and Scott Huffman. Codegemma: Open code models based on gemma. *arXiv preprint arXiv: 2406.11409*, 2024.

Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models. *arXiv preprint arXiv: 2302.13971*, 2023.

Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A. Smith, Daniel Khashabi, and Hannaneh Hajishirzi. Self-instruct: Aligning language models with self-generated instructions. In Anna Rogers, Jordan L. Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, pp. 13484–13508. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.ACL-LONG.754. URL <https://doi.org/10.18653/v1/2023.acl-long.754>.

Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In Sanmi Koyejo, S. Mohamed, A. Agarwal, Danielle Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022*, 2022. URL http://papers.nips.cc/paper_files/paper/2022/hash/9d5609613524ecf4f15af0f7b31abca4-Abstract-Conference.html.

Jiayi Wei, Greg Durrett, and Isil Dillig. Coeditor: Leveraging contextual changes for multi-round code auto-editing. *arXiv preprint arXiv: 2305.18584*, 2023a.

Yuxiang Wei, Zhe Wang, Jiawei Liu, Yifeng Ding, and Lingming Zhang. Magicoder: Source code is all you need. *arXiv preprint arXiv: 2312.02120*, 2023b.

Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. Transformers: State-of-the-art natural language processing. In Qun Liu and David Schlangen (eds.), *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 38–45, Online, October 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-demos.6. URL <https://aclanthology.org/2020.emnlp-demos.6>.

Canwen Xu, Daya Guo, Nan Duan, and Julian J. McAuley. Baize: An open-source chat model with parameter-efficient tuning on self-chat data. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pp. 6268–6278. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.EMNLP-MAIN.385. URL <https://doi.org/10.18653/v1/2023.emnlp-main.385>.

- Ke Yang, Jiateng Liu, John Wu, Chaoqi Yang, Yi R. Fung, Sha Li, Zixuan Huang, Xu Cao, Xingyao Wang, Yiquan Wang, Heng Ji, and Chengxiang Zhai. If ILM is the wizard, then code is the wand: A survey on how code empowers large language models to serve as intelligent agents. *arXiv preprint arXiv: 2401.00812*, 2024.
- Nan Yang, Tao Ge, Liang Wang, Binxing Jiao, Daxin Jiang, Linjun Yang, Rangan Majumder, and Furu Wei. Inference with reference: Lossless acceleration of large language models. *arXiv preprint arXiv: 2304.04487*, 2023.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik R. Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net, 2023. URL https://openreview.net/pdf?id=WE_vluYUL-X.
- Fanghua Ye, Meng Fang, Shenghui Li, and Emine Yilmaz. Enhancing conversational search: Large language model-aided informative query rewriting. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Findings of the Association for Computational Linguistics: EMNLP 2023*, pp. 5985–6006, Singapore, dec 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-emnlp.398. URL <https://aclanthology.org/2023.findings-emnlp.398>.
- Daoguang Zan, B. Chen, Fengji Zhang, Di Lu, Bingchao Wu, Bei Guan, Yongji Wang, and Jian-Guang Lou. Large language models meet n2code: A survey. *Annual Meeting of the Association for Computational Linguistics*, 2022. doi: 10.18653/v1/2023.acl-long.411.
- E. Zelikman, Yuhuai Wu, Jesse Mu, and Noah D. Goodman. Star: Bootstrapping reasoning with reasoning. *Neural Information Processing Systems*, 2022.
- Fengji Zhang, B. Chen, Yue Zhang, Jin Liu, Daoguang Zan, Yi Mao, Jian-Guang Lou, and Weizhu Chen. Repocoder: Repository-level code completion through iterative retrieval and generation. *Conference on Empirical Methods in Natural Language Processing*, 2023. doi: 10.48550/arXiv.2303.12570.
- Quanjun Zhang, Chunrong Fang, Yuxiang Ma, Weisong Sun, and Zhenyu Chen. A survey of learning-based automated program repair. *ACM Trans. Softw. Eng. Methodol.*, 33(2):55:1–55:69, 2024a. doi: 10.1145/3631974. URL <https://doi.org/10.1145/3631974>.
- Shudan Zhang, Hanlin Zhao, Xiao Liu, Qinkai Zheng, Zehan Qi, Xiaotao Gu, Xiaohan Zhang, Yuxiao Dong, and Jie Tang. Naturalcodebench: Examining coding performance mismatch on humaneval and natural user prompts. *arXiv preprint arXiv: 2405.04520*, 2024b.
- Lianmin Zheng, Liangsheng Yin, Zhiqiang Xie, Jeff Huang, Chuyue Sun, Cody Hao Yu, Shiyi Cao, Christos Kozyrakis, Ion Stoica, Joseph E. Gonzalez, Clark Barrett, and Ying Sheng. Efficiently programming large language models using slang. *arXiv preprint arXiv: 2312.07104*, 2023a.
- Qinkai Zheng, Xiao Xia, Xu Zou, Yuxiao Dong, Shan Wang, Yufei Xue, Lei Shen, Zihan Wang, Andi Wang, Yang Li, Teng Su, Zhilin Yang, and Jie Tang. Codegeex: A pre-trained model for code generation with multilingual benchmarking on humaneval-x. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, KDD 2023, Long Beach, CA, USA, August 6-10, 2023*, pp. 5673–5684. ACM, 2023b. doi: 10.1145/3580305.3599790. URL <https://doi.org/10.1145/3580305.3599790>.
- Terry Yue Zhuo, Minh Chien Vu, Jenny Chim, Han Hu, Wenhao Yu, Ratnadira Widayarsi, Imam Nur Bani Yusuf, Haolan Zhan, Junda He, Indraneil Paul, Simon Brunner, Chen Gong, Thong Hoang, Armel Randy Zebaze, Xiaoheng Hong, Wen-Ding Li, Jean Kaddour, Ming Xu, Zhihan Zhang, Prateek Yadav, Naman Jain, Alex Gu, Zhoujun Cheng, Jiawei Liu, Qian Liu, Zijian Wang, David Lo, Binyuan Hui, Niklas Muennighoff, Daniel Fried, Xiaoning Du, Harm de Vries, and Leandro Von Werra. Bigcodebench: Benchmarking code generation with diverse function calls and complex instructions. *arXiv preprint arXiv: 2406.15877*, 2024.

A RELATED WORK

A.1 AI-ASSISTED PROGRAMMING

AI-assisted programming has a long history, encompassing various tasks such as clone detection Lu et al. (2021), code summarization Sun et al. (2024), program synthesis Chen et al. (2021); Austin et al. (2021), automatic program repair Gulwani et al. (2016), code editing Wei et al. (2023a), and code optimization Shypula et al. (2024). In the past, these tasks were typically addressed by custom-built models, which were difficult to scale across different tasks. With the rise of LLMs, AI-assisted programming increasingly leverages LLMs to handle multiple types of tasks simultaneously. Numerous high-quality open-source and closed-source products, such as Continue Continue-Dev (2024), Aider Paul-Gauthier (2024), Copilot Github-Copilot (2022) and Cursor Cursor-AI (2023), are based on this approach.

A.2 CODE MODELS

Recently, LLMs have attracted significant attention in the research community for their impact on enhancing various aspects of code intelligence. Open-source code LLMs like CodeLlama Rozière et al. (2023); Touvron et al. (2023), Deepseek-Coder Guo et al. (2024a); DeepSeek-AI et al. (2024), StarCoder Li et al. (2023); Lozhkov et al. (2024), CodeGemma Team et al. (2024), Codestral Mistral-AI (2024a), Codegeex Zheng et al. (2023b), Yi-Coder AI et al. (2024), and Qwen-Coder Hui et al. (2024) have made substantial contributions by utilizing large code corpora during training. Some models, such as WizardCoder Luo et al. (2024b), OctoCoder Muennighoff et al. (2024), CodeLlama-Instruct, Deepseek-Coder-Instruct, MagiCoder Wei et al. (2023b), Yi-Coder-Chat, and Qwen-Coder-Instruct, have been fine-tuned using instruction data collected through methods like Self-Instruct Wang et al. (2023); Taori et al. (2023), Evol-Instruct, and OSS-Instruct. These models are specifically trained on code-related instructions, improving their ability to follow coding instructions. They have made significant breakthroughs in tasks like code completion and editing.

A.3 CODE BENCHMARKS

HumanEval Chen et al. (2021) is one of the most well-known benchmarks in the code domain, featuring several variants that extend it to different programming languages, extra tests, and broader application scenarios. Other notable benchmarks include MBPP Austin et al. (2021) for program synthesis, DS1000 Lai et al. (2022) for data science tasks, SWE-Bench Jimenez et al. (2024) for real-world software engineering problems, and CanItEdit / CodeEditorBench Cassano et al. (2023b); Guo et al. (2024b) for code editing. Additionally, LiveCodeBench Jain et al. (2024) focuses on contamination-free evaluations, while Bigcodebench Zhuo et al. (2024) and Naturecodebench Zhang et al. (2024b) provide comprehensive program synthesis assessments. CRUXEval Gu et al. (2024) targets reasoning, CrossCodeEval Ding et al. (2023) focuses on repository-level code completion, and Needle in the code Hui et al. (2024) is designed for long-context evaluations.

B CODE MODIFICATION REPRESENTATION

As discussed in Section 2.3, there are various ways to represent code modifications. Many previous works have explored techniques for instruction-based code editing Wei et al. (2023a); Muennighoff et al. (2024); Paul-Gauthier (2024); Sweep-AI (2024). We build upon these works with the following formats, as shown in Figure 10:

Whole file format (WF) We use the entire code, allows for a straightforward representation of the modifications. However, when only small parts of the code are changed, this method leads to redundancy, especially for long code files. Certain mitigation can be achieved through technologies such as retrieval-based speculative decoding Yang et al. (2023); He et al. (2024).

Unified diff format (UD) The diff format is a common way to represent code changes, widely adopted for its efficiency and readability. Among various diff formats, unified diff is one of the most popular, as it efficiently shows code changes while reducing redundancy. It is commonly used in software tools such as git and patch.

Location-and-change format (LC) To further reduce redundancy, we consider further simplify the diff formats by showing only the location and content of the changes. The location is based on line numbers. Some reports indicate that LLMs often struggle with localization, so we insert line numbers into the code to assist them.

Search-and-replace format (SR) Another option is to eliminate the need for localization altogether by simply displaying the part to be modified alongside the updated version. This format eliminates the need for line numbers.

We conduct experiments using Deepseek-Coder-1.3B with these formats. For quick experiments, we train the model on data generated by AIprogrammer. We then evaluate their performance on APEval, with results shown in Figure 11. In programming assistance tasks, where real-time performance is critical, such as in tasks like auto completion or editing, the generation speed becomes particularly important. The number of tokens in both input and output directly affects the model’s speed, and the editing format greatly impacts the token count. Therefore, we also report the average input-output token count for each format in Figure 12.

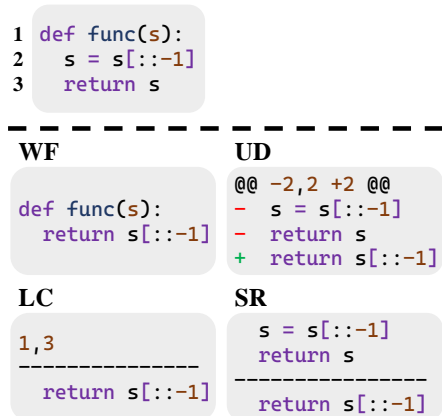


Figure 10: Different formats for representing code modifications.

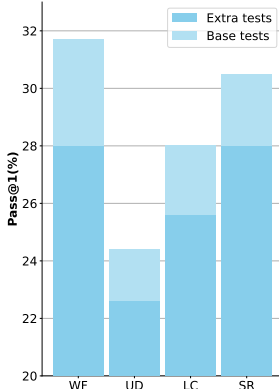


Figure 11: Performance of models using different formats on APEval.

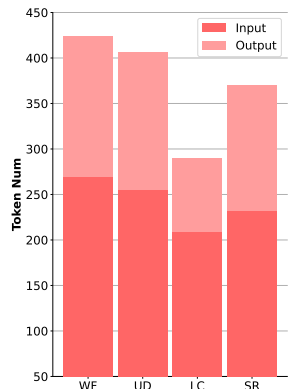


Figure 12: Context length for models using different formats on APEval.

The results show that using WF yields the best performance, followed by SR and LC, with UD performing the worst. In terms of token usage, LC uses the fewest tokens, followed by SR and UD, while WF uses the most. The average token count for SR and UD is only slightly lower than that of WF, as they are more concise for small code changes, when a large portion needs modification, they must include both versions, making them less efficient than using WF instead.

Recent research has pointed out correlations and scaling laws between model input and output length, as well as performance OpenAI (2024); Snell et al. (2024). Our results align with these findings. As the length increases, performance improves consistently across LC, SR, and WF. UD performs poorly in both token usage and performance, likely because it contains redundant information, such as both line numbers and content for the modified sections, where only one would suffice. This redundancy reduces the format’s efficiency compared to the other three formats.

C ADDITIONAL DETAILS ABOUT PROGRAMMING-INSTRUCT

In our code editing records, we place no limits on the granularity or number of edits. Changes between two code versions may involve anything from a single character to multiple extensive modifications. However, data collected from various sources may be compressed, resulting in incomplete records. This compression can lead to a higher proportion of large-scale edits, particularly in Git Commit data. To address this issue, we propose a decomposition strategy: when there are multiple changes between versions, we break them down into single-step modifications, with the steps ordered randomly. For Git Commit data, we apply this decomposition strategy with a 90% probability, while for AIprogrammer and Online Submit data, we apply it with a 50% probability.

We randomly select a time point from the records to represent C . In practice, we prefer the model to provide assistance at earlier stages. Thus, we implement a simple rule where the random selection follows an exponential distribution, with the probability of selecting each time point decreasing by 10% with each subsequent step. This biases the model toward choosing earlier time points.

In addition to generating H and U , as discussed in Section 4.2, we also simulate the programmer’s specification of the target area and model interactions in a chat-style format. The target modification area is created using a random algorithm, as described in Appendix D, while the chat-style interaction is generated using LLMs which is similar to the generation of instructions. Prompts used for it are provided in Appendix K.

D TARGET AREA REPRESENTATION

To modify code, programmers often specify the parts requiring changes, typically in one of two ways: either by clicking with the cursor to indicate a general area or by selecting a specific text range with defined start and end points. We model both cases using special tokens: “< | target | >” for cursor positions, and “< | target_start | >” and “< | target_end | >” to mark the selected region’s boundaries. While collecting training data, we determine modification locations based on the code differences before and after changes. In real-world applications, the decision to provide explicit locations—and their granularity—varies among programmers. To account for this variability, we introduce randomized choices for determining the form and location, integrating this approach into the Programming-Instruct pipeline.

We evaluate CursorCore-DS-1.3B on APEval both with and without location information to assess its impact on performance. The results in Figure 13 show that including location information has minimal effect, likely because most APEval examples are relatively short, enabling LLMs to easily infer modification locations, much like humans do without a cursor. Previous works, such as those on automated program repair Zhang et al. (2024a), have emphasized the importance of identifying the modification location. We believe this emphasis stems from traditional code completion and insertion paradigms, as well as the natural alignment of specifying modification points with human thought processes. However, with the advancement of LLMs, the benefit of providing location information diminishes when generating code at the function or file level. This may need further exploration in longer contexts, such as repository-level editing tasks.

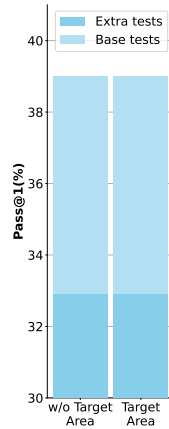


Figure 13: With and without the use of location information on APEval.

E DISCUSSION ABOUT THOUGHT PROCESS

Incorporating reasoning processes in prompts has been shown to improve model performance, as demonstrated in various works like CoT Wei et al. (2022) and ReACT Yao et al. (2023). Some studies have even integrated these processes into the training phase to further enhance effectiveness Zelikman et al. (2022). In this work, we also explore a self-taught approach, where we prompt LLMs to reverse-generate the reasoning process from outputs and incorporate them into the model’s output during training. Our model and data setup follow the same configuration as described in Appendix B to enable quick experiments. The evaluation results are shown in Figure 14.

After incorporating reasoning into training, the model shows slight performance improvements, but the output length increases significantly. The tokens used for reasoning often exceed those in the modified code. Since many programming-assist applications require real-time responses, longer reasoning times may be impractical, so we do not integrate this process into CursorCore. We believe that the decision to use reasoning processes should be

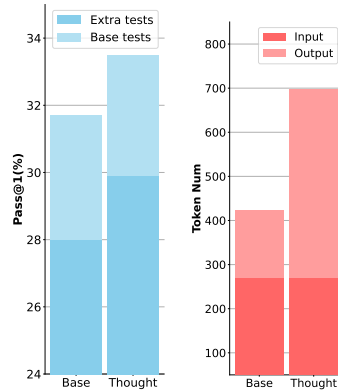


Figure 14: Performance of models using thought process or not on APEval.

based on a combination of factors, such as performance, latency, model size, and specific application requirements.

F CONVERSATION RETRIEVAL FOR ASSISTANT-CONVERSATION

Not all code editing records are necessary for inferring user intent and predicting output. Some past modifications, such as simple typos corrected shortly after, offer little value to future predictions, and thus can be safely removed. Additionally, if a programmer continuously interacts with the model without deleting these records, the editing history will accumulate and grow until it exceeds the model’s maximum context length. This could negatively affect performance and speed.

To address this, it is essential to compress the editing history or retrieve only the relevant portions. Similar to how many conversation retrieval techniques, such as memory modules Packer et al. (2023), prompt compression Jiang et al. (2023) and query rewriting Ye et al. (2023), are used to manage dialogues for chatbots, these methods can be adapted for handling code editing records. In this work, we explore a basic approach, sliding window, to investigate possible solutions. When the number of historical editing records surpasses a predefined threshold, the model automatically discards the oldest entries.

We evaluate this method on APEval, as shown in Figure 15. The impact of setting a sliding window of a certain size on the results is minimal, indicating that compressing the historical records effectively balances performance and efficiency.

G EVALUATION RESULTS OF OTHER BENCHMARKS

We also evaluate CursorCore on other well-known benchmarks. We use HumanEval+ and MBPP+ Liu et al. (2023) to evaluate Python program synthesis, CanItEdit Cassano et al. (2023b) for instructional code editing, and the Python subset of HumanEvalFix from OctoPack Muennighoff et al. (2024) for automated program repair. All benchmarks are based on their latest versions, and HumanEvalFix uses the test-based repair version as described in the original paper. To generate results, we consistently use vLLM Kwon et al. (2023) due to its versatility and support for customized conversation formats. Evaluations are conducted within each benchmark’s execution environment.

Unlike previous LLMs, CursorCore supports multiple input formats, and different formats may produce different results. To comprehensively showcase this, we categorize input formats based on specific assisted programming scenarios into three cases:

- **Chat:** Similar to the chat format of ChatGPT Ouyang et al. (2022), we wrap the query before passing it to the model, which returns a response in a chat style. The final result is obtained after post-processing.
- **Inline:** Similar to Copilot Inline Chat Github-Copilot (2022) and Cursor Command K Cursor-AI (2023) scenarios, corresponding to the combination of *C* and *U* in Assistant-Conversation. Compared to the Chat mode, it is more tightly integrated with the IDE and returns less additional content.
- **Tab:** Similar to the use case of Copilot++ Cursor-AI (2023), it is the most automated of all scenarios. We provide only the *C* to the model. For instructional code editing and automated code repair, no explicit instructions are passed.

Evaluation results are shown in Table 5. Our model outperforms the corresponding instruction-tuned and base models across several benchmarks. However, the performance of the 6B+ model, when compared to its corresponding models, is not as strong as that of the 1B+ model. Notably, with the recent release of Qwen2.5-Coder-7B at the start of our experiments, we outperform it on only one

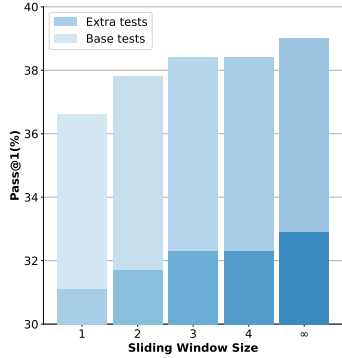


Figure 15: Performance of models using different sliding window sizes on APEval.

Table 5: Evaluation results on EvalPlus, CanItEdit and OctoPack.

Model	EvalPlus		CanItEdit		OctoPack
	HE (+)	MBPP (+)	Desc.	Lazy	HE Fix
DS-Coder-6.7B-Base	47.6 (39.6)	70.2 (56.6)	34.3	27.6	23.8
DS-Coder-6.7B-Inst	74.4 (71.3)	75.1 (66.1)	41.9	31.4	42.1
CursorCore-DS-6.7B (Chat)	78.0 (73.2)	74.1 (63.8)	45.7	31.4	43.3
CursorCore-DS-6.7B (Inline)	73.8 (67.1)	71.2 (59.8)	38.1	32.4	32.3
CursorCore-DS-6.7B (Tab)	72.0 (65.9)	74.3 (63.0)	6.7	6.7	25.6
Yi-Coder-9B	55.5 (47.0)	69.6 (56.9)	47.6	34.3	32.3
Yi-Coder-9B-Chat	83.5 (76.8)	84.4 (71.4)	58.1	45.7	54.3
CursorCore-Yi-9B (Chat)	84.1 (79.3)	84.4 (73.5)	56.2	41.0	56.1
CursorCore-Yi-9B (Inline)	79.9 (72.0)	83.6 (69.6)	48.6	35.2	33.5
CursorCore-Yi-9B (Tab)	79.3 (71.3)	83.9 (72.5)	10.5	10.5	25.6
Qwen2.5-Coder-7B	61.6 (53.0)	76.7 (63.0)	49.5	40.0	17.1
Qwen2.5-Coder-7B-Inst	<u>87.2 (83.5)</u>	<u>83.5 (71.7)</u>	53.3	<u>44.8</u>	<u>54.3</u>
CursorCore-QW2.5-7B (Chat)	80.5 (75.6)	77.0 (64.3)	51.4	44.8	50.6
CursorCore-QW2.5-7B (Inline)	79.9 (73.2)	77.0 (64.0)	57.1	39.0	41.5
CursorCore-QW2.5-7B (Tab)	79.9 (74.4)	75.1 (64.3)	5.7	5.7	27.4
DS-Coder-1.3B-Base	34.8 (26.8)	55.6 (46.9)	13.3	8.6	1.2
DS-Coder-1.3B-Inst	65.2 (59.8)	61.6 (52.6)	<u>26.7</u>	<u>17.1</u>	29.3
CursorCore-DS-1.3B (Chat)	68.9 (63.4)	61.9 (49.7)	21.9	14.3	30.4
CursorCore-DS-1.3B (Inline)	57.9 (53.7)	60.1 (51.1)	25.7	17.1	17.1
CursorCore-DS-1.3B (Tab)	63.4 (57.3)	65.6 (54.8)	2.9	2.9	8.5
Yi-Coder-1.5B	40.6 (34.8)	59.0 (50.0)	21.0	12.4	3.7
Yi-Coder-1.5B-Chat	67.7 (64.0)	<u>66.9 (56.6)</u>	21.0	<u>23.8</u>	37.2
CursorCore-Yi-1.5B (Chat)	68.9 (65.2)	65.6 (54.8)	27.6	24.8	38.4
CursorCore-Yi-1.5B (Inline)	60.4 (54.3)	65.6 (55.0)	28.6	24.8	22.6
CursorCore-Yi-1.5B (Tab)	67.1 (59.1)	66.1 (56.6)	4.8	4.8	20.1
Qwen2.5-Coder-1.5B	43.9 (36.6)	<u>69.3 (58.5)</u>	31.4	<u>22.9</u>	4.9
Qwen2.5-Coder-1.5B-Inst	70.7 (66.5)	<u>69.3 (59.4)</u>	28.6	21.0	32.9
CursorCore-QW2.5-1.5B (Chat)	71.3 (65.9)	69.3 (58.5)	31.4	22.9	36.6
CursorCore-QW2.5-1.5B (Inline)	66.5 (60.4)	68.5 (58.2)	23.8	20.0	36.6
CursorCore-QW2.5-1.5B (Tab)	64.0 (58.5)	67.2 (56.6)	1.0	1.0	13.4

benchmark, while other models achieve better performance across more benchmarks. We attribute it to the quantity of high-quality data: larger models require more high-quality data for training. While the current dataset is sufficient to train a highly effective 1B+ model, additional data is needed to train a more competitive 6B+ model.

We analyze the evaluation results of various input types defined in real-world assisted programming scenarios. The results of the Chat and Inline modes are comparable, with Chat mode showing a slight advantage. We attribute this to the flexibility of the Chat format, which allows the model to output its thought process and thus enhances output accuracy. The Tab mode shows comparable results on EvalPlus but underperforms on HumanEvalFix and struggles with CanItEdit, likely due to variations in the informational content of task instructions. For program synthesis based on docstrings, instructions like “complete this function” provide minimal additional context. In contrast, program repair tasks provide crucial information by indicating the presence of errors. When only code is available, the model must first determine correctness independently. Instructional code editing tasks clearly state objectives, such as implementing a new feature, requiring the model to fully understand the given information, as accurate predictions based solely on code are nearly impossible.

H ADDITIONAL EVALUATION RESULTS ON APEVAL

We also report the evaluation results of various versions of other well-known models on APEval, as shown in Table 6.

Table 6: Additional evaluation results of LLMs on APEval.

Model	C	H, C	C, U	H, C, U	Total
StarCoder2-3B	19.5 (19.5)	19.5 (17.1)	22.0 (19.5)	22.0 (17.1)	20.7 (18.3)
StarCoder2-7B	7.3 (7.3)	14.6 (12.2)	19.5 (14.6)	22.0 (17.1)	15.9 (12.8)
StarCoder2-15B	26.8 (24.4)	24.4 (22.0)	43.9 (36.6)	29.3 (24.4)	31.1 (26.8)
DS-Coder-V2-16B-Base	24.4 (24.4)	22.0 (19.5)	31.7 (26.8)	22.0 (17.1)	25.0 (22.0)
DS-Coder-V2-16B-Inst	43.9 (41.5)	41.5 (31.7)	68.3 (63.4)	36.6 (31.7)	47.6 (42.1)
Gemma-2-27B	36.6 (36.6)	24.4 (22.0)	56.1 (46.3)	26.8 (24.4)	36.0 (32.3)
Gemma-2-27B-It	63.4 (56.1)	48.8 (41.5)	68.3 (63.4)	41.5 (39.0)	55.5 (50.0)
Llama-3.1-70B	24.4 (24.4)	24.4 (22.0)	46.3 (39.0)	29.3 (24.4)	31.1 (27.4)
Llama-3.1-70B-Inst	61.0 (56.1)	46.3 (46.3)	65.9 (58.5)	56.1 (51.2)	57.3 (53.0)

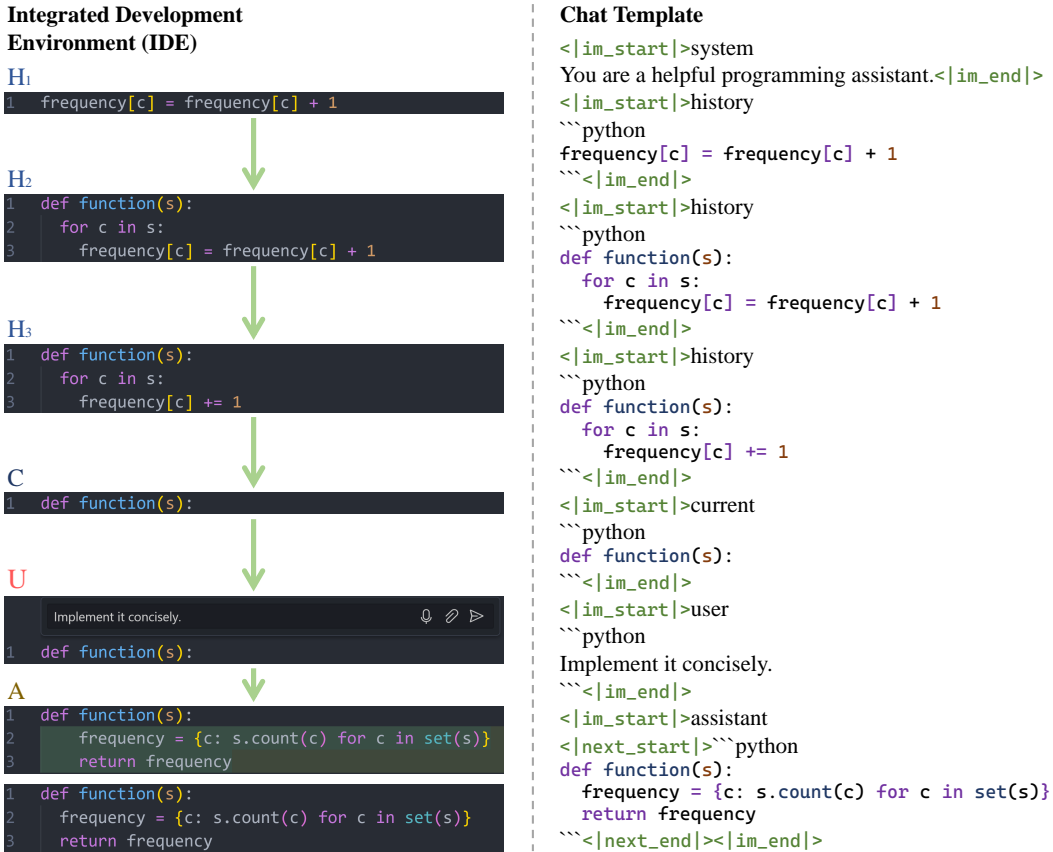


Figure 16: Example of chat template and its corresponding demonstration in the IDE scenario.

I CHAT TEMPLATE

Our model’s chat template OpenAI (2023) is adapted from the ChatML template, where each message in the conversation is restricted to one of the following roles: system, history, current, user, or assistant. The assistant’s output includes both code modifications and chat interaction with the user. To indicate code changes, we use two special tokens “`<|next_start|>`” and “`<|next_end|>`” to wrap the code modification parts. This approach models Assistant-Conversation effectively and is compatible with standard ChatML templates and chatbot applications. Figure 16 illustrates an example of our chat template, while Figure 17 presents examples of the chat template when using the LC and SR modes described in Appendix B.

Chat Template (LC)

```

<|im_start|>system
You are a helpful programming assistant.<|im_end|>
<|im_start|>history
0,3
```python
frequency[c] = frequency[c] + 1
```<|im_end|>
<|im_start|>history
2,3
```python
 frequency[c] = frequency[c] + 1
```<|im_end|>
<|im_start|>history
1,1
```python
 for c in s:
 frequency[c] += 1
```<|im_end|>
<|im_start|>current
```python
1 def function(s):
```<|im_end|>
<|im_start|>user
```python
Implement it concisely.
```<|im_end|>
<|im_start|>assistant
<|next_start|>1,1
```python
 frequency = {c: s.count(c) for c in set(s)}
 return frequency
```<|next_end|>
We uses a dict comprehension to count the
occurrences. It is more concise and readable
compared to before.<|im_end|>

```

Chat Template (SR)

```

<|im_start|>system
You are a helpful programming assistant.<|im_end|>
<|im_start|>history
```python
frequency[c] = frequency[c] + 1
<|search_and_replace|>
def function(s):
 for c in s:
 frequency[c] = frequency[c] + 1
```<|im_end|>
<|im_start|>history
```python
 frequency[c] = frequency[c] + 1
<|search_and_replace|>
 frequency[c] += 1
```<|im_end|>
<|im_start|>history
```python
def function(s):
 for c in s:
 frequency[c] += 1
<|search_and_replace|>
def function(s):
```<|im_end|>
<|im_start|>current
```python
def function(s):
```<|im_end|>
<|im_start|>user
```python
Implement it concisely.
```<|im_end|>
<|im_start|>assistant
<|next_start|>```python
def function(s):
<|search_and_replace|>
def function(s):
    frequency = {c: s.count(c) for c in set(s)}
    return frequency
```<|next_end|>
We uses a dict comprehension to count the
occurrences. It is more concise and readable
compared to before.<|im_end|>

```

Figure 17: Example of chat templates in LC and SR modes.

**J PROMPTS FOR EVALUATION**

We report the prompts used to evaluate base LLMs on APEval in Table 13, while the prompts used for evaluating instruct LLMs are presented in Table 14.

**K PROMPTS FOR DATA COLLECTION**

We design specific system prompts and few-shot examples to collect high-quality training data, as we find that many examples are very difficult to complete with current LLMs, and only a few of them can be successfully completed using rough prompts. For AIprogrammer, we utilize LLMs to simulate programmers at three different skill levels, with each level using a distinct set of prompts as shown in Tables 7 to 9. Additionally, prompts used for evaluating whether the outputs align with user intent, generating user instructions, and facilitating chat interactions between models and users are outlined in Tables 10 to 12. Partial few-shot examples are shown in Figures 18 to 23.



## L LIMITATIONS AND FUTURE WORK

**Repo-level development assistance** In this work, we focus on supporting the development of single files or function-level code. However, real-world development operates at the repository level, involving multiple files and greater interaction with IDEs. Previous research has made notable advances in repository-level tasks such as code completion Zhang et al. (2023), issue fixing Jimenez et al. (2024), and documentation generation Luo et al. (2024a). Repository-level code assistance deals with larger datasets, and achieving optimal performance and speed will require more effort. We leave the exploration of multi-file repository-level programming assistance and leveraging additional IDE interactions for future work.

**More scenarios and criteria for evaluation** We have only tested our models' code assistance capabilities on Python-specific benchmarks. While multi-language program synthesis benchmarks like Multipl-E Cassano et al. (2023a) can evaluate coding abilities across languages, dedicated benchmarks are still needed to assess programming assistance for each language. Additionally, our benchmark is relatively small and based on an extension of HumanEval, making it insufficient to cover all development scenarios. Beyond using the classic Pass@k metric to evaluate accuracy, other criteria should also be considered, such as evaluating the model's efficiency, security, and redundancy Huang et al. (2024); Pearce et al. (2021); Li et al. (2024).

**Preference-based optimization** Methods like PPO Schulman et al. (2017) and DPO Rafailov et al. (2023), which optimize models based on human preferences, have been widely used in LLMs. In programming assistance, programmers can provide feedback on predicted outputs for identical or similar coding processes, further optimizing the model Shinn et al. (2023). To enable this, a significant amount of feedback data from programmers using AI-assisted tools should be collected or synthesized.

**Enhance performance with API calls** We aim to integrate function calls Patil et al. (2023) into the model to further enhance its capabilities. One potential application is incorporating function calls into the thinking process, such as retrieving information or executing partial code for feedback. Although our final models excludes this thinking step due to performance and speed considerations, we are exploring hybrid approaches to introduce this process while maintaining speed and combine it with other strategies for searching how to edit. Another application is leveraging function calls in output, where calling a Python script for tasks like variable replacement might be more efficient than manually generating code blocks or search-and-replace strategies. For repository-level changes, using terminal commands or IDE APIs could sometimes be a more convenient solution.

**Expand to other applications** Our framework is designed for programming assistance applications, but the alignment approach can also be applied to other types of AI assistants. For example, in designing an art assistant, it should be able to predict the next drawing step based on the artist's previous drawing patterns, the current state of the canvas, and the artist's instructions. Extending this approach to design assistants for other applications is an interesting research direction.

Table 7: Prompt designed to leverage LLMs for simulating the behavior of a novice programmer.

---

Please play the role of a novice programmer. You are required to write a piece of code. Simulate the real process of repeatedly adding, deleting, and modifying the code. Please return the code block after each step of editing. While writing the code, make some mistakes, such as incorrect logic or syntax errors, etc.

---

Table 8: Prompt designed to leverage LLMs for simulating the behavior of an ordinary programmer.

---

Please act as an ordinary programmer. Now, you need to write a piece of code. Please simulate the process of repeatedly adding, deleting, and modifying the code during the actual coding process. Please return the code block after each editing step. Try to simulate the coding process of an ordinary programmer as much as possible.

---

Table 9: Prompt designed to leverage LLMs for simulating the behavior of an expert programmer.

---

Please play the role of an expert programmer. You are now required to write a piece of code. Please simulate the process of repeatedly adding, deleting, and modifying code during the real coding process. Please return the code block after each step of editing. During the coding process, you should be as professional as possible.

---

Table 10: Prompt designed to generate user instructions.

---

You are a programming assistant. The following content includes information related to your programming assistance, which may contain the record of the programming process, the current code, the git commit after all changes, relevant details about the problem, and your predicted modifications. Please generate an instruction for you to make the corresponding modifications, ensuring it resembles instructions typically given by a human programmer. The instruction may be detailed or concise and may or may not specify the location of the modification. Return the generated instruction in the following format:

```
```  
**instruction:**  
{instruction}  
```
```

---

Table 11: Prompt designed to generate chat-style interactions between models and users.

---

You are a programming assistant. The following content includes information related to your programming assistance, which may contain the record of the programming process, the current code, the user instruction, and your predicted modifications. Please provide the chat conversation for making the prediction. This may include analyzing the past programming process, speculating on the user's intent, and explaining the planning and ideas for modifying the code. Return your chat conversation in the following format:

```
```  
**chat:**  
{chat}  
```
```

---

Table 12: Prompt designed to evaluate whether the outputs align with user intent.

---

You are tasked with assisting a programmer by maintaining a record of the programming process, including potential future changes. Your role is to discern which changes the programmer desires you to propose proactively. These should align with their actual intentions and be helpful. To determine which changes align with a programmer’s intentions, consider the following principles:

1. **Understand the Context**: Assess the overall goal of the programming project. Ensure that any proposed change aligns with the project’s objectives and the programmer’s current focus.
2. **Maintain Clear Communication**: Before proposing changes, ensure that your suggestions are clear and concise. This helps the programmer quickly understand the potential impact of each change.
3. **Prioritize Stability**: Avoid proposing changes that could introduce instability or significant complexity unless there is a clear benefit. Stability is often more valued than optimization in the early stages of development.
4. **Respect the Programmer’s Preferences**: Pay attention to the programmer’s coding style and preferences. Propose changes that enhance their style rather than contradict it.
5. **Incremental Improvements**: Suggest changes that offer incremental improvements rather than drastic overhauls, unless specifically requested. This approach is less disruptive and easier for the programmer to integrate.
6. **Consider Long-Term Maintenance**: Propose changes that improve code maintainability and readability. This includes refactoring for clarity, reducing redundancy, and enhancing documentation.
7. **Balance Proactivity and Reactivity**: Be proactive in suggesting improvements that are likely to be universally beneficial (e.g., bug fixes, performance enhancements). However, be reactive, not proactive, in areas where the programmer’s specific intentions are unclear or where personal preference plays a significant role.

For each potential change, return ‘True’ if suggesting this change would be beneficial to the programmer, return ‘False’ if the change does not align with the programmer’s intentions or if they do not want you to predict this change. Give your decision after analyzing each change. Provide your response in the following format:

```

\ \ \
Analysis of change 1:

Your analysis here.

Decision: ‘True’ or ‘False’

Analysis of change 2:

Your analysis here.

Decision: ‘True’ or ‘False’

...
\ \ \

```

---

Table 13: Prompt used to evaluate base LLMs.

---

Read the following messages during programming and return the modified code in this format:

```
< |next_start| >{modified code}< |next_end| >
```

```
< |messages_start| >Programming process 1:
```

```
```\python  
a = 1  
b = 2  
c = a + b  
```
```

Current code:

```
```\python  
i = 1  
b = 2  
c = a + b  
```
```

User instruction:

```
Please change variable names.< |messages_end| >
```

```
< |next_start| >```\python
i = 1
j = 2
k = i + j
```< |next_end| >
```

Read the following messages during programming and return the modified code in this format:

```
< |next_start| >{modified code}< |next_end| >
```

```
< |messages_start| >Programming process 1:
```

```
{Programming process 1}
```

...

Programming process n:

```
{Programming process n}
```

Current code:

```
{Current code}
```

User instruction:

```
{User instruction}< |messages_end| >
```

Table 14: Prompt used to evaluate instruct LLMs.

<p>user Read the following messages during programming and return the modified code in this format:</p> <p>< next_start >{modified code}< next_end ></p> <p>Programming process 1: ``python a = 1 b = 2 c = a + b ``</p> <p>Current code: ``python i = 1 b = 2 c = a + b ``</p> <p>User instruction: Please change variable names.</p> <p>assistant < next_start >``python i = 1 j = 2 k = i + j ``< next_end ></p> <p>user Read the following messages during programming and return the modified code in this format:</p> <p>< next_start >{modified code}< next_end ></p> <p>Programming process 1: {Programming process 1}</p> <p>...</p> <p>Programming process n: {Programming process n}</p> <p>Current code: {Current code}</p> <p>User instruction: {User instruction}</p> <p>assistant</p>

```

user:
**The final code:**
...
def if_continuous_modify(code1, code2, code3):
    """
    Check if code3 is a continuous modification of
    code1 and code2.

    Args:
        code1 (str): The first code string.
        code2 (str): The second code string.
        code3 (str): The third code string.

    Returns:
        bool: True if code3 is a continuous
        modification of code1 and code2, False otherwise.
    """
    # Calculate the Levenshtein distance between
    code1 and code2
    dist1 = Levenshtein.distance(code1, code2)
    # Calculate the Levenshtein distance between
    code2 and code3
    dist2 = Levenshtein.distance(code2, code3)
    # Calculate the Levenshtein distance between
    code1 and code3
    dist3 = Levenshtein.distance(code1, code3)

    # Check if code3 is a continuous modification of
    code1 and code2
    if dist3 == dist1 + dist2:
        return True
    else:
        return False
...

assistant:
Alright, let's simulate the development process of this code,
including typical errors and revisions. I'll start from the initial
attempt and evolve the code step by step to reach the final version
you provided.

### Step 1: Initial Attempt
The initial attempt might be a rough structure without importing
necessary libraries and possible syntax errors.

```python
def is_continuous_modify(code1, code2, code3):
 """
 Checks if code3 is a continuation of
 modifications from code1 through code2
 """
 dist1 = levenstein.distance(code1, code2)
 dist2 = levenstein.distance(code2, code3)
 dist3 = levenstein.distance(code1, code3)

 if dist3 == dist1 + dist2
 return true
 else:
 return False
...
Issues:
- Misspelling of the function name (`Levenshtein` as
`levenstein`).
- Syntax error with missing colon at the end of the `if` statement.
- Incorrect capitalization of `true`.

Step 2: Syntax Corrections
Addressing the syntax errors and some spelling issues.

```python
def is_continuous_modify(code1, code2, code3):
    """
    Checks if code3 is a continuation of
    modifications from code1 through code2
    """
    dist1 = Levenshtein.distance(code1, code2)
    dist2 = Levenshtein.distance(code2, code3)
    dist3 = Levenshtein.distance(code1, code3)

    if dist3 == dist1 + dist2:
        return True
    else:
        return False
...
**Issues:**
- The `Levenshtein` library is not imported.

### Step 3: Importing the Necessary Library
Adding the import statement for the Levenshtein library.

```python
import Levenshtein

def is_continuous_modify(code1, code2, code3):
 """
 Checks if code3 is a continuation of
 modifications from code1 through code2
 """
 dist1 = Levenshtein.distance(code1, code2)
 dist2 = Levenshtein.distance(code2, code3)
 dist3 = Levenshtein.distance(code1, code3)

 if dist3 == dist1 + dist2:
 return True
 else:
 return False
...
Issues:
- Could improve naming and documentation clarity.

Step 4: Renaming Function and Improving Documentation
Final adjustments include renaming the function and enhancing the
docstring for better clarity.

```python
import Levenshtein

def if_continuous_modify(code1, code2, code3):
    """
    Check if code3 is a continuous modification of
    code1 and code2.

    Args:
        code1 (str): The first code string.
        code2 (str): The second code string.
        code3 (str): The third code string.

    Returns:
        bool: True if code3 is a continuous
        modification of code1 and code2, False otherwise.
    """
    dist1 = Levenshtein.distance(code1, code2)
    dist2 = Levenshtein.distance(code2, code3)
    dist3 = Levenshtein.distance(code1, code3)

    if dist3 == dist1 + dist2:
        return True
    else:
        return False
...
This demonstrates a typical progression in coding, from an initial
rough draft with errors, through corrections and improvements, to a
final, refined code block.

```

Figure 18: Few-shot prompts designed to leverage LLMs for simulating the behavior of a novice programmer.

```

user:
**The final code:**
...
def apply_rotary_pos_emb(q, k, cos, sin,
    position_ids, unsqueeze_dim=1):
    cos = cos[position_ids].unsqueeze(unsqueeze_dim)
    sin = sin[position_ids].unsqueeze(unsqueeze_dim)

    b, h, s, d = q.shape
    q = q.view(b, h, s, d // 2, 2).transpose(4,
3).reshape(b, h, s, d)

    b, h, s, d = k.shape
    k = k.view(b, h, s, d // 2, 2).transpose(4,
3).reshape(b, h, s, d)

    q_embed = (q * cos) + (rotate_half(q) * sin)
    k_embed = (k * cos) + (rotate_half(k) * sin)
    return q_embed, k_embed
...

assistant:
Let's simulate the coding process to reach the final version of
the `apply_rotary_pos_emb` function.

### Step 1: Initial Function Setup
Initially, the programmer might start by defining the function
and setting up the parameters they know they need to work
with.

```python
def apply_rotary_pos_emb(q, k, cos, sin,
 position_ids):
 # Initial setup
 pass
```

### Step 2: Add Basic Operations
Next, they'll add the basic operations that are essential for
the function, such as selecting the cosine and sine values based on
position IDs.

```python
def apply_rotary_pos_emb(q, k, cos, sin,
 position_ids):
 cos = cos[position_ids]
 sin = sin[position_ids]
```

### Step 3: Introduce Unsqueeze Operation
Then, realizing they need to match the dimensions, they add
the `unsqueeze` operation.

```python
def apply_rotary_pos_emb(q, k, cos, sin,
 position_ids):
 cos = cos[position_ids].unsqueeze(1)
 sin = sin[position_ids].unsqueeze(1)
```

### Step 4: Reshape and Process q and k
After ensuring the dimensions of `cos` and `sin`, the
programmer starts processing `q` and `k`. They need to
reshape these tensors to work with the embeddings correctly.

```python
def apply_rotary_pos_emb(q, k, cos, sin,
 position_ids):
 cos = cos[position_ids].unsqueeze(1)
 sin = sin[position_ids].unsqueeze(1)

 b, h, s, d = q.shape
 q = q.view(b, h, s, d // 2, 2).transpose(4,
3).reshape(b, h, s, d)

 b, h, s, d = k.shape
 k = k.view(b, h, s, d // 2, 2).transpose(4,
3).reshape(b, h, s, d)

 q_embed = (q * cos) + (rotate_half(q) * sin)
 k_embed = (k * cos) + (rotate_half(k) * sin)
 return q_embed, k_embed
```

### Step 5: Define `rotate_half` and Compute Embeddings
Next, they realize they need a helper function `rotate_half`
and compute the final embeddings for `q` and `k`.

```python
def rotate_half(x):
 return torch.cat([-x[... , 1::2], x[... , ::2]],
dim=-1)

def apply_rotary_pos_emb(q, k, cos, sin,
 position_ids):
 cos = cos[position_ids].unsqueeze(1)
 sin = sin[position_ids].unsqueeze(1)

 b, h, s, d = q.shape
 q = q.view(b, h, s, d // 2, 2).transpose(4,
3).reshape(b, h, s, d)

 b, h, s, d = k.shape
 k = k.view(b, h, s, d // 2, 2).transpose(4,
3).reshape(b, h, s, d)

 q_embed = (q * cos) + (rotate_half(q) * sin)
 k_embed = (k * cos) + (rotate_half(k) * sin)
 return q_embed, k_embed
```

### Step 6: Final Adjustments for Flexibility
Lastly, realizing the need for more flexibility, they introduce
the `unsqueeze_dim` parameter.

```python
def apply_rotary_pos_emb(q, k, cos, sin,
 position_ids, unsqueeze_dim=1):
 cos = cos[position_ids].unsqueeze(unsqueeze_dim)
 sin = sin[position_ids].unsqueeze(unsqueeze_dim)

 b, h, s, d = q.shape
 q = q.view(b, h, s, d // 2, 2).transpose(4,
3).reshape(b, h, s, d)

 b, h, s, d = k.shape
 k = k.view(b, h, s, d // 2, 2).transpose(4,
3).reshape(b, h, s, d)

 q_embed = (q * cos) + (rotate_half(q) * sin)
 k_embed = (k * cos) + (rotate_half(k) * sin)
 return q_embed, k_embed
```

This completes the journey to the final version of the
`apply_rotary_pos_emb` function.

```

Figure 19: Few-shot prompts designed to leverage LLMs for simulating the behavior of an ordinary programmer.

```

user:
**The final code:**
...
static void replace_all(std::string & s, const
std::string & search, const std::string & replace) {
    std::string result;
    for (size_t pos = 0; ; pos += search.length()) {
        auto new_pos = s.find(search, pos);
        if (new_pos == std::string::npos) {
            result += s.substr(pos, s.size() - pos);
            break;
        }
        result += s.substr(pos, new_pos - pos) +
replace;
        pos = new_pos;
    }
    s = std::move(result);
}
...

assistant:
Let's simulate the development process of the `replace_all`
function in C++ step by step, showing how a programmer might
iteratively refine and improve the code.

### Step 1: Basic Function Structure
Initially, I might start with the simplest possible structure to
replace occurrences of a substring with another substring in a
given string.

```cpp
void replace_all(std::string & s, const std::string
& search, const std::string & replace) {
 // Initial approach to find and replace
 size_t pos = s.find(search);
 while (pos != std::string::npos) {
 s.replace(pos, search.length(), replace);
 pos = s.find(search, pos + replace.length());
 }
}
```

### Step 2: Consider Performance and Correctness
I realize the initial approach can be inefficient due to modifying
the string in place. Also, it doesn't handle overlapping substrings
well. Let's use a buffer to build the result.

```cpp
void replace_all(std::string & s, const std::string
& search, const std::string & replace) {
 std::string result;
 size_t pos = 0;
 size_t new_pos;
 while ((new_pos = s.find(search, pos)) !=
std::string::npos) {
 result += s.substr(pos, new_pos - pos);
 result += replace;
 pos = new_pos + search.length();
 }
 result += s.substr(pos);
 s = result;
}
```

### Step 3: Optimize with `std::move`
I notice that the final assignment to `s` can benefit from
`std::move` to avoid unnecessary copying.

```cpp
void replace_all(std::string & s, const std::string
& search, const std::string & replace) {
 std::string result;
 size_t pos = 0;
 size_t new_pos;
 while ((new_pos = s.find(search, pos)) !=
std::string::npos) {
 result += s.substr(pos, new_pos - pos);
 result += replace;
 pos = new_pos + search.length();
 }
 result += s.substr(pos);
 s = std::move(result);
 }
}
...

Step 4: Refine and Transition to Static Function
To ensure encapsulation and promote reusability, I decide to make
the function `static`.

```cpp
static void replace_all(std::string & s, const
std::string & search, const std::string & replace) {
    std::string result;
    size_t pos = 0;
    size_t new_pos;
    while ((new_pos = s.find(search, pos)) !=
std::string::npos) {
        result += s.substr(pos, new_pos - pos);
        result += replace;
        pos = new_pos + search.length();
    }
    result += s.substr(pos);
    s = std::move(result);
}
...

### Step 5: Final Refinements
Finally, I realize the for loop structure can be more concise and
less error-prone, integrating the position updates right into the
loop structure.

```cpp
static void replace_all(std::string & s, const
std::string & search, const std::string & replace) {
 std::string result;
 for (size_t pos = 0; ; pos += search.length()) {
 auto new_pos = s.find(search, pos);
 if (new_pos == std::string::npos) {
 result += s.substr(pos, s.size() - pos);
 break;
 }
 result += s.substr(pos, new_pos - pos) +
replace;
 pos = new_pos;
 }
 s = std::move(result);
}
```

This final version improves readability and maintains the
optimized performance by constructing the result string in a single
pass.

```

Figure 20: Few-shot prompts designed to leverage LLMs for simulating the behavior of an expert programmer.


```

user:
**record:**
Revised code changes:
```diff
@@ -1,5 @@
+/**
+ * magical invsqrt function from Quake III code
+ * see: http://www.codemaestro.com/reviews/9
+ */
...

Current code:
```c
1 /**
2 * magical invsqrt function from Quake III code
3 * see: http://www.codemaestro.com/reviews/9
4 */
5
...

**change 1:**
```diff
@@ -3,3 +3,19 @@
 * see: http://www.codemaestro.com/reviews/9
 */

+float InvSqrt(float x)
+{
+ float xhalf = 0.5f*x;
+ int i = *(int*)&x;
+ i = 0x5f3759df - (i>>1);
+ x = *(float*)&i;
+ x = x*(1.5f-xhalf*x*x);
+ return x;
+}
+
+int main(void) {
+ int result = InvSqrt(0.00056);
+ printf("Result: %d (should be 42)", result);
+ return result != 42;
+}
+
...

assistant:
Analysis of change 1:

The change introduces the `InvSqrt` function implementation and a basic test case within the `main` function. This change is appropriate and beneficial. The primary goal is to implement and test the `InvSqrt` function, a well-known algorithm from the Quake III code. Adding the function and a basic test case aligns directly with this goal. The implementation is clear and concise, following common C coding practices. The function's logic is straightforward and well-documented, making it easy to understand. Overall, the proposed change is a logical next step in developing the `InvSqrt` function and ensuring it works correctly.

Decision: `True`

user:
record:
Revised code changes:
```diff
@@ -1,21 @@

+package com.google.gwtjsonrpc.client;
+
+public class VoidResult_JsonSerializer extends
JsonSerializer<VoidResult> {
+    public static final VoidResult_JsonSerializer
INSTANCE =
+        new VoidResult_JsonSerializer();
+
+    private VoidResult_JsonSerializer() {
+    }
+}
...

Current code:
```java
1
2
3 package com.google.gwtjsonrpc.client;
4
5 public class VoidResult_JsonSerializer extends
JsonSerializer<VoidResult> {
6 public static final VoidResult_JsonSerializer
INSTANCE =
7 new VoidResult_JsonSerializer();
8
9 private VoidResult_JsonSerializer() {
10 }
11
12 @Override
13 public void toJson(final StringBuffer sb, final
VoidResult o) {
14 sb.append("{}");
15 }
16
17 @Override
18 public VoidResult fromJson(final Object o) {
19 return VoidResult.INSTANCE;
20 }
21 }
22
...

change 1:
```diff@@ -1,3 +1,16 @@
+// Copyright 2008 Google Inc.
+//
+// Licensed under the Apache License, Version 2.0 (the
"License");
+// you may not use this file except in compliance with
the License.
+// You may obtain a copy of the License at
+//
+// http://www.apache.org/licenses/LICENSE-2.0
+//
+// Unless required by applicable law or agreed to in
writing, software
+// distributed under the License is distributed on an
"AS IS" BASIS,
+// WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND,
either express or implied.
+// See the License for the specific language governing
permissions and
+// limitations under the License.

package com.google.gwtjsonrpc.client;
...

assistant:
**Analysis of change 1:**

Without enough information to confirm the use of the Apache License, predicting this change may not align with the programmer's intentions or the project's actual licensing requirements.

**Decision:** `False`

```

Figure 21: Few-shot prompts designed to evaluate whether the outputs align with user intent.


```

user:
Revised code changes:
```diff
@@ -14,3 +14,30 @@
 if (row == n) {
 vector<string> board = generateBoard(queens, n);
 solutions.push_back(board);
 } else {
 for (int i = 0; i < n; i++) {
 if (columns.find(i) != columns.end()) {
 continue;
 }
 int diagonal1 = row - i;
 if (diagonals1.find(diagonal1) !=
diagonals1.end()) {
 continue;
 }
 int diagonal2 = row + i;
 if (diagonals2.find(diagonal2) !=
diagonals2.end()) {
 continue;
 }
 queens[row] = i;
 columns.insert(i);
 diagonals1.insert(diagonal1);
 diagonals2.insert(diagonal2);
 backtrack(solutions, queens, n, row + 1,
columns, diagonals1, diagonals2);
 queens[row] = -1;
 columns.erase(i);
 diagonals1.erase(diagonal1);
 diagonals2.erase(diagonal2);
 }
 }
 }
 }
 vector<string> generateBoard(vector<int> &queens, int n)
 ...

Revised code changes:
```diff
@@ -3,41 +3,3 @@
     vector<vector<string>> solveNQueens(int n) {
         auto solutions = vector<vector<string>>();
         auto queens = vector<int>(n, -1);
         auto columns = unordered_set<int>();
         auto diagonals1 = unordered_set<int>();
         auto diagonals2 = unordered_set<int>();
         backtrack(solutions, queens, n, 0, columns,
diagonals1, diagonals2);
         return solutions;
     }

     void backtrack(vector<vector<string>> &solutions,
vector<int> &queens, int n, int row, unordered_set<int>
&columns, unordered_set<int> &diagonals1, unordered_set<int>
&diagonals2) {
         if (row == n) {
             vector<string> board = generateBoard(queens, n);
             solutions.push_back(board);
         } else {
             for (int i = 0; i < n; i++) {
                 if (columns.find(i) != columns.end()) {
                     continue;
                 }
                 int diagonal1 = row - i;
                 if (diagonals1.find(diagonal1) !=
diagonals1.end()) {
                     continue;
                 }
                 int diagonal2 = row + i;
                 if (diagonals2.find(diagonal2) !=
diagonals2.end()) {
                     continue;
                 }
                 queens[row] = i;
                 columns.insert(i);
                 diagonals1.insert(diagonal1);
                 diagonals2.insert(diagonal2);
                 backtrack(solutions, queens, n, row + 1,
columns, diagonals1, diagonals2);
                 queens[row] = -1;
                 columns.erase(i);
                 diagonals1.erase(diagonal1);
                 diagonals2.erase(diagonal2);
             }
         }
     }
 }
 vector<string> generateBoard(vector<int> &queens, int n)
 ...

assistant:
**chat:**
The revised code transitions from using sets to bitwise operations for solving the
N-Queens problem, aiming to optimize the algorithm by reducing dynamic
memory allocations and improving speed. Initially, the original code utilized sets
('unordered_set<int>') to track columns and diagonals. The user likely seeks
to enhance efficiency, prompting the replacement of these sets with integer bit
masks. To achieve this, the 'solve' function is adjusted to use bitwise
operations for conflict checks, calculating 'availablePositions' using
bitwise AND and NOT operations to identify valid queen placements. The
'__builtin_ctz' function finds the least significant bit set to 1, corresponding
to a valid column, and the recursive 'solve' call updates bit masks for columns
and diagonals after placing a queen. This maintains the backtracking logic while
leveraging bitwise operations for performance. The 'generateBoard' function
remains unchanged, as it simply formats the result. This approach ensures
efficient, streamlined code for the N-Queens problem.

Current code:
```cpp
1 class Solution {
2 public:
3 vector<vector<string>> solveNQueens(int n) {
4 auto solutions = vector<vector<string>>();
5 auto queens = vector<int>(n, -1);
6 solve(solutions, queens, n, 0, 0, 0, 0);
7 return solutions;
8 }
9
10 vector<string> generateBoard(vector<int> &queens, int
n) {
11 auto board = vector<string>();
12 for (int i = 0; i < n; i++) {
13 string row = string(n, '.');
14 row[queens[i]] = 'Q';
15 board.push_back(row);
16 }
17 return board;
18 }
19 };
```

Predicted modifications:
```diff
@@ -5,6 +5,23 @@
 auto queens = vector<int>(n, -1);
 solve(solutions, queens, n, 0, 0, 0, 0);
 return solutions;
 }

 void solve(vector<vector<string>> &solutions,
vector<int> &queens, int n, int row, int columns, int
diagonals1, int diagonals2) {
 if (row == n) {
 auto board = generateBoard(queens, n);
 solutions.push_back(board);
 } else {
 int availablePositions = ((1 << n) - 1) &
~((columns | diagonals1 | diagonals2));
 while (availablePositions != 0) {
 int position = availablePositions & (~
availablePositions);
 availablePositions = availablePositions &
(availablePositions - 1);
 int column = __builtin_ctz(position);
 queens[row] = column;
 solve(solutions, queens, n, row + 1, columns
| position, (diagonals1 | position) >> 1, (diagonals2 |
position) << 1);
 queens[row] = -1;
 }
 }
 }

 vector<string> generateBoard(vector<int> &queens, int n)
 {
 ...

```

Figure 23: Few-shot prompts designed to generate chat-style interactions between models and users.