THE COMPUTATIONAL COMPLEXITY OF CIRCUIT DISCOVERY FOR INNER INTERPRETABILITY

Federico Adolfi

University of Bristol, UK & ESI, Max-Planck Society Frankfurt, Germany fede.adolfi@bristol.ac.uk

Todd Wareham

Department of Computer Science Memorial University of Newfoundland Newfoundland, Canada harold@mun.ca

Martina G. Vilas

Department of Computer Science Goethe University Frankfurt, Germany martina.vilas@esi-frankfurt.de

ABSTRACT

Many proposed applications of neural networks in machine learning, cognitive/brain science, and society hinge on the feasibility of inner interpretability via circuit discovery. This calls for empirical and theoretical explorations of viable algorithmic options. Despite advances in the design and testing of heuristics, there are concerns about their scalability and faithfulness at a time when we lack understanding of the complexity properties of the problems they are deployed to solve. To address this, we study circuit discovery with classical and parameterized computational complexity theory: (1) we describe a conceptual scaffolding to reason about circuit finding queries in terms of affordances for description, explanation, prediction and control; (2) we formalize a comprehensive set of queries that capture mechanistic explanation, and propose a formal framework for their analysis; (3) we use it to settle the complexity of many query variants and relaxations of practical interest on multi-layer perceptrons (part of, e.g., transformers). Our findings reveal a challenging complexity landscape. Many queries are intractable (NPhard, Σ_2^p -hard), remain fixed-parameter intractable (W[1]-hard) when constraining model/circuit features (e.g., depth), and are inapproximable under additive, multiplicative, and probabilistic approximation schemes. To navigate this landscape, we prove there exist transformations to tackle some of these hard problems (NP- vs. Σ_2^p -complete) with better-understood heuristics, and prove the tractability (PTIME) or fixed-parameter tractability (FPT) of more modest queries which retain useful affordances. This framework allows us to understand the scope and limits of interpretability queries, explore viable options, and compare their resource demands among existing and future architectures.

1 INTRODUCTION

As artificial neural networks (ANNs) grow in size and capabilities, *Inner Interpretability* — an emerging field tasked with explaining their inner workings (Räuker et al., 2023; Vilas et al., 2024a) — attempts to devise scalable, automated procedures to understand systems mechanistically. Many proposed applications of neural networks in machine learning, cognitive and brain sciences, and society, hinge on the feasibility of inner interpretability. For instance, we might have to rely on interpretability methods to improve system safety (Bereska & Gavves, 2024), detect and control vulnerabilities (García-Carrasco et al., 2024), prune for efficiency (Hooker et al., 2021), find and use task subnetworks (Zhang et al., 2024), explain internal concepts underlying decisions (Lee et al., 2023), experiment with neuro-cognitive models of language, vision, etc. (Lindsay, 2024; Lindsay & Bau, 2023; Pavlick, 2023), describe determinants of ANN-brain alignment (Feghhi et al., 2024). We

will have to solve different instances of these interpretability problems, ideally automatically, for increasingly large models. We therefore need efficient interpretability procedures, and this requires empirical and theoretical explorations of viable algorithmic options.

Circuit discovery and its challenges. Since top-down approaches to inner interpretability (see Vilas et al., 2024a) work their way down from high-level concepts or algorithmic hypotheses (Lieberum et al., 2023), there is interest in a complementary bottom-up methodology: *circuit discovery* (see Shi et al., 2024; Tigges et al., 2024). It centers around neuron- and circuit-level isolation or description (e.g., Hoang-Xuan et al., 2024; Lepori et al., 2023) and attempts to build up higher-level abstractions from this low-level foundation. The motivation is the *circuit hypothesis*: that models implement their capabilities via small subnetworks (Shi et al., 2024). Advances in the design and testing of interpretability heuristics (see Shi et al., 2024; Tigges et al., 2024) come alongside interest in the automation of circuit discovery (e.g., Conmy et al., 2023; Ferrando & Voita, 2024; Syed et al., 2023) and at the same time concerns about its feasibility (Voss et al., 2021; Räuker et al., 2023). One issue is the challenge of scaling up methods to larger networks, more naturalistic datasets, and more complex tasks (e.g., Lieberum et al., 2023; Marks et al., 2024), given their search over large search spaces involving some manual-intensive steps (Voss et al., 2021). A related issue is that current heuristics, though sometimes promising (e.g., Merullo et al., 2024), often yield discrepant results (see e.g., Shi et al., 2024; Niu et al., 2023; Zhang & Nanda, 2023). They often find circuits that are not functionally faithful (Yu et al., 2024a), or that lack the expected affordances (e.g., effects on behavior; Shi et al., 2024). This questions whether certain localization methods yield results that inform editing (Hase et al., 2023), and vice versa (Wang & Veitch, 2024). More broadly, we run into 'interpretability illusions' (Friedman et al., 2024) when our simplifications (e.g., circuits) mimic the local input-output behavior of the system but lack global faithfulness (Jacovi & Goldberg, 2020).

Exploring viable algorithmic options. These challenges come at a time when, despite emerging theoretical frameworks (e.g., Vilas et al., 2024a; Geiger et al., 2024), there are notable gaps in the formalization and analysis of the computational problems that interpretability heuristics attempt to solve (see e.g., Wang & Veitch, 2024, §8). Issues around scalability of circuit discovery and faithfulness have a natural formulation in the language of Computational Complexity Theory (Arora & Barak, 2009; Downey & Fellows, 2013). A fundamental source of breakdown of scalability — which lack of faithfulness is one manifestation of — is the intrinsic resource demands of interpretability problems. In order to design efficient and effective solutions, we need to understand the complexity properties of circuit discovery queries and the constraints that might be leveraged to yield the desired results. Though a decade of experimental efforts has made promising inroads, the complexity-theoretic properties that naturally impact scalability and faithfulness remain open questions (see e.g., Subercaseaux, 2020, §6C). We settle them here by complementing these efforts with a systematic study of the computational complexity of circuit discovery for inner interpretability. We present a framework that allows us to (a) understand the scope and limits of interpretability queries for description/explanation and prediction/control, (b) explore viable options, and (c) compare their resource demands among existing and future architectures.

- 1.1 CONTRIBUTIONS
 - We present a conceptual scaffolding to reason about circuit finding queries in terms of affordances for description, explanation, prediction and control.
 - We formalize a comprehensive set of queries that capture mechanistic explanation, and propose a formal framework for their analysis.
 - We use this framework to settle the complexity of many query variants, parameterizations, approximation schemes and relaxations of practical interest on multi-layer perceptrons, relevant to various architectures such as transformers.
 - We demonstrate how our proof techniques can also be useful to draw links between interpretability and explainability by using them to improve existing results on the latter.
- 1.2 OVERVIEW OF RESULTS
 - We uncover a challenging complexity landscape (see Table 4) where many queries are intractable (NP-hard, Σ_2^p -hard), remain fixed-parameter intractable (W[1]-hard) when con-

straining model/circuit features (e.g., depth), and are inapproximable under additive, multiplicative, and probabilistic approximation schemes.

- We prove there exist transformations to tackle some of these hard problems (NP- vs. Σ₂^p-complete) with better-understood heuristics, and prove the tractability (PTIME) or fixed-parameter tractability (FPT) of other queries of interest, and identify open problems.
- We describe a quasi-minimality property of ANN circuits and exploit it to generate tractable queries which retain useful affordances, and efficient algorithms to compute them.
- We establish a separation between local and global query complexity. Together with quasiminimality, they explain interpretability illusions of faithfulness observed in experiments.

1.3 RELATED WORK

This paper gives the first systematic exploration of the computational complexity of *inner inter-pretability* problems. An adjacent area is the complexity analysis of *explainability* problems (Bassan & Katz, 2023; Ordyniak et al., 2023). It differs from our work in its focus on *input queries* — aspects of the input that explain model decisions — whereas we look at the inner workings of neural networks via *circuit queries*. Barceló et al. (2020) study the explainability of multi-layer perceptrons compared to simpler models through a set of input queries. Bassan et al. (2024) extend this idea with a comparison between *local* and *global* explainability. None of these works formalize or analyze circuit queries (although Subercaseaux, 2020, identifies it as an open problem); we adapt the local versus global distinction in our framework and show how our proof techniques can tighten some results on explainability queries. Ramaswamy (2019) explores a small set of circuit queries and only on abstract biological networks modeled as general graphs, which cannot inform circuit discovery in ANNs. More generally, we join efforts to build a solid theoretical foundation for interpretability (Bassan & Katz, 2023; Geiger et al., 2024; Vilas et al., 2024a).

2 MECHANISTIC UNDERSTANDING OF NEURAL NETWORKS

Mechanistic understanding is a contentious topic (Ross & Bassett, 2024), but for our purposes it will suffice to adopt a pragmatic perspective. In many cases of practical interest, we want our interpretability methods to output objects that allow us to, in some limited sense, (1) describe or explain succinctly, and (2) control or predict precisely. Such objects (e.g., circuits) should be 'efficiently queriable'; they are often referred to as "a way of making an explanation tractable" (Cao & Yamins, 2023). Roughly, this means that we would like short descriptions (e.g., small circuits) with useful affordances (e.g., to readily answer questions and perform interventions of interest). Circuits have the potential to fulfill these criteria (Olah et al., 2020). Here we preview some special circuits with useful properties which we formalize and analyze later on. Table 1 maps the main circuits we study to their corresponding affordances for description, explanation, prediction and control. Formal definitions of circuit queries are given alongside results in Section 4 (see also Appendix).

Circuit	Affordance			
	Description / Explanation	Prediction / Control		
Sufficient Circuit	Which neurons suffice in isolation to cause a behavior? <i>Minimum:</i> shortest description possible in the model.	Inference in isolation. <i>Minimal:</i> ablating any neuron breaks behavior of the circuit.		
Quasi-minimal Sufficient Circuit	Which neurons suffice in isolation to cause a behavior and which is a breaking point?	Ablating the breaking point breaks behavior of the circuit.		
Necessary Circuit	Which neurons are part of all circuits for a behavior? Key subcomputations?	Ablating the neurons breaks behavior of any sufficient circuit in the network.		
Circuit Ablation & Clamping	Which neurons are necessary in the current configuration of the network?	Ablating/Clamping the neurons breaks behavior of the network.		
Circuit Robustness	How much redundancy supports a behavior? How resilient is it to perturbations?	Ablating any set of neurons of size below threshold does not break behavior.		
Patched Circuit	Which neurons drive a behavior in a given input context? Control nodes?	Patching neurons changes network behavior for inputs of interest. Steering; Editing.		
Quasi-minimal Patched Circuit	Which neurons can drive a behavior in a given input context and which neuron is a breaking point?	Patching neurons causes target behavior for inputs of interest; Unpatching breaking point breaks target behavior.		
Gnostic Neurons	Which neurons respond preferentially to a certain concept?	Concept editing; guided synthesis.		

Table 1: Circuit affordances for description, explanation, prediction, and control.

3 INNER INTERPRETABILITY QUERIES AS COMPUTATIONAL PROBLEMS

We model post-hoc interpretability queries on neural networks as computational problems in order to analyze their intrinsic complexity properties. These *circuit queries* also formalize criteria for desired circuits, including those appearing in the literature, such as 'faithfulness', 'completeness', and 'minimality' (Wang et al., 2022; Yu et al., 2024a).

3.1 QUERY VARIANTS: COVERAGE, SIZE AND MINIMALITY

The *coverage* of a circuit refers to the domain over which it behaves in a certain way (e.g., faithful to the model's prediction). *Local* circuits do so over a restricted set of inputs. *Global* circuits do so over all possible inputs. The *size* of a circuit is measured in number of neurons. Some circuit queries will require circuits of *bounded* size whereas others leave the size *unbounded*. A circuit with a certain property (e.g., local sufficiency) is *minimal* if there is no subset of its neurons that also has that property (not to be confused with *minimum* size among all such circuits present in the network). To fit our comprehensive suite of problems, we explain how to generate problem variants and later on only present one representative definition of each. (We simplify without loss of generality).

Problem 0. PROBLEMNAME (PN)

Input: a multi-layer perceptron \mathcal{M} , CoverageIN, SizeIN. *Output*: a Property circuit \mathcal{C} in \mathcal{M} of SizeOUT, such that CoverageOUT $\mathcal{C}(\mathbf{x}) = \mathcal{M}(\mathbf{x})$, Suffix.

Problem 0 and **Table 2** illustrate how to generate problem variants using a template, and **ProblemName = SUFFICIENT CIRCUIT** as an example. Problem definitions will be given for *search* (return specified circuits) or *decision* (answer yes/no circuit queries) versions. Others, including *optimization* (return maximum/minimum-size circuits), can be generated by assigning variables. Problems presented later on are obtained similarly. We also explore various parameterizations, approximation schemes, and relaxations that we explain in the following sections as needed.

Description	Query variants						
variables	Local				Global		
	Bounded	Unbounded	Optimal	Bounded	Unbounded	Optimal	
CoverageIN	an input \mathbf{x}	an input \mathbf{x}	an input \mathbf{x}	" "	"	""	
CoverageOUT	۰۰ ،،	** **	,,	$\forall_{\mathbf{x}}$	$\forall_{\mathbf{x}}$	$\forall_{\mathbf{x}}$	
SizeIN	int. $u \leq \mathcal{M} $	۰۰ ۲۲	۰۰ »	int. $u \leq \mathcal{M} $,,	٠٠ ،,	
SizeOUT	size $ \mathcal{C} \leq u$	"	min. size	size $ \mathcal{C} \leq u$	۰۰ ۲۲	min. size	
Property	minimal / " "	minimal / " "	۰۰ »	minimal / ""	minimal / " "	٠٠ ،,	
Suffix	if it exists, otherwise \perp	cc ??	" "	if it exists, otherwise \perp	cc ??	" "	

Table 2:	Generating	query	variants	from	problem	templates.

3.2 CLASSICAL AND PARAMETERIZED COMPLEXITY

We prove theorems about interpretability queries building on techniques from classical (Garey & Johnson, 1979) and parameterized complexity (Downey & Fellows, 2013). Here we give a brief, informal overview of the main concepts underlying our analyses (see Appendix for extensive formal definitions). We will explore beyond classical polynomial-time tractability (PTIME) by studying fixed-parameter tractability (FPT). This allows a more fine-grained look at the *sources of complex-ity* of problems. NP-hard queries are considered intractable because they cannot be computed by polynomial-time algorithms. However, a relaxation of interest is to allow unreasonable resource demands as long as they are contained in problem parameters that can be kept small in practice. Parameterizing a given neural network and requested circuit leads to parameterized problems (see Table 3 for problem parameters we study later). Parameterized queries in FPT admit fixed-parameter tractable algorithms. W-hard queries, however, do not. We study counting problems via analogous classes #P and #W[1]. We also investigate completeness for NP and classes higher up the polynomial hierarchy such as Σ_2^p and Π_2^p to explore the possibility to tackle hard interpretability problems with better-understood methods for well-known NP-complete problems (de Haan & Szeider, 2017). Most proof techniques involve various kinds of reductions between computational problems.

Parameter description	Notation			
	Model (given)	Circuit (requested)		
Number of layers (depth)	\hat{L}	Î		
Maximum layer width	\hat{L}_w	\hat{l}_w		
Total number of units ¹	$\hat{U} = \mathcal{M} \le \hat{L} \cdot \hat{L}_w$	$ \mathcal{C} = \hat{u}$		
Number of input units	\hat{U}_I	\hat{u}_I		
Number of output units	\hat{U}_O	\hat{u}_O		
Maximum weight	\hat{W}	\hat{w}		
Maximum bias	\hat{B}	\hat{b}		

Table 3: Model and circuit parameterizations.

3.3 APPROXIMATION

Although sometimes computing optimal solutions is intractable, it is conceivable we could devise tractable interpretability procedures to obtain *approximate* solutions that are useful in practice. We consider 5 notions of approximation: additive, multiplicative, and three probabilistic schemes (see Appendix for formal definitions). *Additive approximation* algorithms return solutions at most a fixed distance c away from optimal (e.g., from the minimum-sized circuit), ensuring that errors

¹Note the colored parameters bound the input size if bounded (hence vacuously making problems tractable). We avoid this in analyses.

cannot get impractically large (*c*-approximability). *Multiplicative approximation* returns solutions at most a factor of optimal away. Some hard problems allow for polynomial-time multiplicative approximation schemes (PTAS) where we can get arbitrarily close to optimal solutions as long as we expend increasing compute time (Ausiello et al., 1999). Finally, consider three other types of *probabilistic polynomial-time approximability* (henceforth 3PA) that may be acceptable in situations where always getting the correct output for an input is not required: (1) algorithms that always run in polynomial time and produce the correct output for a given input in all but a small number of cases (Hemaspaandra & Williams, 2012); (2) algorithms that always run in polynomial time and produce the correct output for a given input with high probability (Motwani & Raghavan, 1995); and (3) algorithms that run in polynomial time with high probability but are always correct (Gill, 1977).

3.4 MODEL ARCHITECTURE

The Multi-Layer Perceptron (MLP) is a natural first step in our exploration because (a) it is proving useful as a stepping stone in current experimental (e.g., Lampinen et al., 2024) and theoretical work (e.g., Rossem & Saxe, 2024; McInerney & Burke, 2023); (b) it exist as a leading standalone architecture (Yu et al., 2024b), as the central element of all-MLP architectures (Tolstikhin et al., 2021), and as a key component of state-of-the-art models such as transformers (Vaswani et al., 2017); (c) they are of active interest to the interpretability community (e.g., Geva et al., 2022; 2021; Dai et al., 2022; Meng et al., 2024; 2022; Niu et al., 2023; Vilas et al., 2024b; Hanna et al., 2023); and (d) we can relate our findings on the complexity of inner interpretability to those of explainability which also begins with MLPs (e.g., Barceló et al., 2020; Bassan et al., 2024). Although MLP blocks can be taken as a unit to simplify search, it is recommended to investigate MLPs by treating each neuron as a unit (e.g., Gurnee et al., 2023; Cammarata et al., 2020; Olah et al., 2017), as it better reflects the semantics of computations in neural networks (Lieberum et al., 2023, sec. 2.3.1). We adopt this perspective in our analyses. We write \mathcal{M} for an MLP model and $\mathcal{M}(x)$ for its output on input vector x. Its size $|\mathcal{M}|$ is the number of neurons. A circuit \mathcal{C} is a subset of neurons which induce a (possibly end-to-end) subgraph of \mathcal{M} (see Appendix for formal definitions).

4 RESULTS & DISCUSSION: THE COMPLEXITY OF CIRCUIT DISCOVERY

In this section we present each circuit query with its computational problem and a discussion of the complexity profile we obtain across variants, relaxations, and parameterizations. For an overview of the results for all queries, see Table 4. Proofs of the theorems can be found in the Appendix.

4.1 SUFFICIENT CIRCUIT

Sufficient circuits (SCs) are sets of neurons connected end-to-end that suffice, in isolation, to reproduce some model behavior over an input domain. Therefore, they are conceptually related to the desired outcome of masking components that do not contribute to the behavior of interest (small, parameter-efficient subnetworks). SCs remain relevant as, despite valid criticisms of zero-ablation (e.g., Conmy et al., 2023), circuit discovery through pruning might be justified (Yu et al., 2024a).

Problem 1. BOUNDED LOCALLY SUFFICIENT CIRCUIT (BLSC)

Input: a multi-layer perceptron \mathcal{M} , an input vector \mathbf{x} , and an integer $u \leq |\mathcal{M}|$. *Output:* a circuit \mathcal{C} in \mathcal{M} of size $|\mathcal{C}| \leq u$, such that $\mathcal{C}(\mathbf{x}) = \mathcal{M}(\mathbf{x})$, if it exists, otherwise \perp .

We find that many variants of SC are NP-hard (see Table 4). Counterintuitively, this intractability does not depend straightfowardly on parameters such as network depth (W[1]-hard relative to \mathcal{P}). Therefore, hardness is not mitigated by keeping models shallow. Given this barrier, we explore the possibility of obtaining approximate solutions but find that hard SC variants are inapproximable relative to all schemes in Section 3.3. An alternative is to consider the membership of these problems in a well-studied class whose solvers are better understood than interpretability heuristics (de Haan & Szeider, 2017). We prove that local versions of SC are NP-complete. This implies there exist efficient transformations from instances of SC to those of the satisfiability problem (SAT), opening up the possibility to borrow techniques that work reasonably well in practice for SAT (Biere et al., 2021). Interestingly, this is not possible for the global version, which we prove is complete for a

class higher up the complexity hierarchy (Σ_2^p -complete). This result establishes a formal separation between local and global query complexity that partly explains 'interpretability illusions' (Friedman et al., 2024; Yu et al., 2024a) arising in practice due to local but not global faithfulness.

Next we explore the following alternative scenario. Given a model and a target behavior, if we knew that SCs with some desired property (e.g., minimality) are abundant, this would provide some confidence in the ability of heuristic search to stumble upon one of them. To explore this, we analyze various queries where the output is a count of the number of SCs (i.e., counting problems). We find that both local and global, bounded and unbounded variants are #P-complete and remain intractable (#W[1]-hard) when parameterized by many network features including depth (Table 3).

The hardness profile of SC over all these variants calls for exploring more substantial relaxations. We introduce the notion of *quasi-minimality* of SCs for this purpose and later demonstrate its usefulness beyond this particular problem. Any neuron in a *minimal/minimum* SC is a breaking point in the sense that removing it will break the target behavior. In *quasi-minimal* SCs we are guaranteed to know at least one neuron that causes this breakdown, though there may be other neurons that do not.

Problem 2. UNBOUNDED QUASI-MINIMAL LOCALLY SUFFICIENT CIRCUIT (UQLSC)

Input: a multi-layer perceptron \mathcal{M} , and an input vector \mathbf{x} . *Output*: a circuit \mathcal{C} in \mathcal{M} and a neuron $v \in \mathcal{C}$ such that $\mathcal{C}(\mathbf{x}) = \mathcal{M}(\mathbf{x})$ and $[\mathcal{C} \setminus \{v\}](\mathbf{x}) \neq \mathcal{M}(\mathbf{x})$.

By introducing this relaxation, which gives up some affordances but retains others of interest, we get a feasible interpretability query. UQLSC is in PTIME. We describe an efficient algorithm to compute it which can be heuristically biased towards finding smaller circuits and combined with techniques that exploit weights and gradients (see Appendix).

4.2 GNOSTIC NEURON

Gnostic neurons, sometimes called 'grandmother neurons' in neuroscience (Gale et al., 2020) and 'concept neurons' or 'object detectors' in AI (e.g., Bau et al., 2020), are one of the oldest and still current interpretability queries of interest (see also 'knowledge neurons'; Niu et al., 2023).

Problem 3. BOUNDED GNOSTIC NEURONS (BGN)

- *Input*: A multi-layer perceptron \mathcal{M} and two sets of input vectors \mathcal{X} and \mathcal{Y} , an integer k, and an activation threshold t.
- *Output*: A set of neurons V in \mathcal{M} of size $|V| \ge k$ such that $\forall_{v \in V}$ it is the case that $\forall_{\mathbf{x} \in \mathcal{X}}$ computing $\mathcal{M}(\mathbf{x})$ produces activations $A^v_{\mathbf{x}} \ge t$ and $\forall_{\mathbf{y} \in \mathcal{Y}} : A^v_{\mathbf{y}} < t$, if it exists, otherwise \perp .

It is probably not a coincidence that (i) the idea and search for such neurons has emerged early and remained popular, and (ii) it is a tractable problem. BGN is in PTIME. Alternatives might require GNs to have some behavioral effect when intervened; such variants would remain tractable.

4.3 CIRCUIT ABLATION AND CLAMPING

The idea that some neurons perform key subcomputations for certain tasks naturally leads to the hypothesis that ablating them should have downstream effects on the corresponding model behaviors. Searching for neuron sets with this property has been one strategy (i.e., *zero-ablation*) to get at important circuits (Wang & Veitch, 2024). The circuit ablation (CA) problem formalizes this idea.

Problem 4. BOUNDED LOCAL CIRCUIT ABLATION (BLCA)

Input: a multi-layer perceptron \mathcal{M} , an input vector \mathbf{x} , and an integer $u \leq |\mathcal{M}|$. Output: a subset of neurons \mathcal{C} in \mathcal{M} of size $|\mathcal{C}| \leq u$, such that $[\mathcal{M} \setminus \mathcal{C}](\mathbf{x}) \neq \mathcal{M}(\mathbf{x})$, if it exists, otherwise \perp . A difference between CAs and minimal SCs is that the former can be interpreted as a possibly nonminimal breaking set in the context of the whole network whereas the latter is by default a minimal breaking set when the SC is taken in isolation. In this sense, CA can be seen as a less stringent criterion for circuit affordances. A related idea is circuit clamping (CC): fixing the activations of certain neurons to a level that produces a change in the behavior of interest.

Problem 5. BOUNDED LOCAL CIRCUIT CLAMPING (BLCC)

- Input: a multi-layer perceptron \mathcal{M} , an input vector x, a value r, and an integer u with $1 < u \leq |\mathcal{M}|$.
- *Output*: a subset of neurons C in \mathcal{M} of size $|C| \leq u$, such that for the \mathcal{M}^* induced by clamping all $c \in C$ to value $r, \mathcal{M}^*(\mathbf{x}) \neq \mathcal{M}(\mathbf{x})$, if it exists, otherwise \perp .

Despite these more modest criteria, we find that both the local and global variants of CA and CC are NP-hard, fixed-parameter intractable W[1]-hard relative to various parameters, and inapproximable in all 5 senses studied. However, we prove these problems are in NP-complete, which opens up practical options not available for other problems we study (see remarks in Section 4.1).

4.4 CIRCUIT PATCHING

A critique of zero-ablation is the arbitrariness of the value, leading to alternatives such as meanablation (e.g., Wang et al., 2022). A related contrast is studying circuits in isolation versus embedded in surrounding subnetworks. Activation patching (Ghandeharioun et al., 2024; Zhang & Nanda, 2023) and path patching (Goldowsky-Dill et al., 2023) try to pinpoint which activations play an in-context role in model behavior over a domain, which inspires the circuit patching (CP) problem.

Problem 6. BOUNDED LOCAL CIRCUIT PATCHING (BLCP)

- *Input*: a multi-layer perceptron \mathcal{M} , an integer k, an input vector y, and a set \mathcal{X} of input vectors.
- *Output*: a subset C in \mathcal{M} of size $|C| \leq k$, such that for the \mathcal{M}^* induced by patching C with activations from $\mathcal{M}(\mathbf{y})$ and $\mathcal{M} \setminus C$ with activations from $\mathcal{M}(\mathbf{x})$, $\mathcal{M}^*(\mathbf{x}) = \mathcal{M}(\mathbf{y})$ for all $\mathbf{x} \in \mathcal{X}$, if it exists, otherwise \perp .

We find that local/global variants are intractable (NP-hard) in a way that does not depend on parameters such as network depth or size of the patched circuit (W[1]-hard), and are inapproximable ($\{c, PTAS, 3PA\}$ -inapprox.). Although we also prove the local variant of CP is NP-complete and therefore approachable in practice with solvers for hard problems not available for the global variants (see remarks in Section 4.1), these complexity barriers motivate exploring further relaxations. With some modifications the idea of *quasi-minimality* can be repurposed to do useful work here.

Problem 7. UNBOUNDED QUASI-MINIMAL LOCAL CIRCUIT PATCHING (UQLCP)

Input: a multi-layer perceptron \mathcal{M} , an input vector \mathbf{y} , and a set \mathcal{X} of input vectors. *Output*: a subset \mathcal{C} in \mathcal{M} and a neuron $v \in \mathcal{C}$, such that for the \mathcal{M}^* induced by patching \mathcal{C} with activations from $\mathcal{M}(\mathbf{y})$ and $\mathcal{M} \setminus \mathcal{C}$ with activations from $\mathcal{M}(\mathbf{x})$, $\forall_{\mathbf{x} \in \mathcal{X}} : \mathcal{M}^*(\mathbf{x}) = \mathcal{M}(\mathbf{y})$, and for \mathcal{M}' induced by patching identically except for $v \in \mathcal{C}$, $\exists_{\mathbf{x} \in \mathcal{X}} : \mathcal{M}'(\mathbf{x}) \neq \mathcal{M}(\mathbf{y})$.

In this way we obtain a tractable query (PTIME) for quasi-minimal patching, sidestepping barriers while retaining some useful affordances (see Table 1). We present an algorithm to compute UQLCP efficiently that can be combined with strategies exploiting weights and gradients (see Appendix).

Classical &	Problem variants				
parameterized problems ² $\mathcal{P}_{\mathcal{M}} = \{\hat{L}, \hat{U}_{I}, \hat{U}_{O}, \hat{W}, \hat{B}\}$	Lo	ocal	Global		
$\frac{\mathcal{P}_{C} = \{\hat{l}, \hat{l}_{w}, \hat{u}, \hat{u}_{I}, \hat{u}_{O}, \hat{w}, \hat{b}\}}{\mathcal{P}_{C} = \{\hat{l}, \hat{l}_{w}, \hat{u}, \hat{u}_{I}, \hat{u}_{O}, \hat{w}, \hat{b}\}}$	Decision/Search	Optimization	Decision/Search	Optimization	
SUFFICIENT CIRCUIT (SC)	NP-complete	{ <i>c</i> , PTAS, 3PA}- inapproximable	Σ_2^p -complete	{ <i>c</i> , PTAS, 3PA}- inapproximable	
$(\mathcal{P} = \mathcal{P}_{\mathcal{M}} \cup \mathcal{P}_{\mathcal{C}})$ $\mathcal{P}\text{-SC}$	W[1]-hard	{ <i>c</i> , PTAS, 3PA}- inapproximable	W[1]-hard	$\{c, PTAS, 3PA\}$ - inapproximable	
Minimal SC	NP-complete	?	$\in \Sigma_2^p$ NP-hard	?	
\mathcal{P} -Minimal SC	W[1]-hard	?	W[1]-hard	?	
Unbounded Minimal SC	?	N	$\in \Sigma_2^p$ NP-hard	N	
\mathcal{P} -Unbounded Minimal SC	?	/ A	?	/ A	
Unbounded Quasi-Minimal SC	PTIME		?		
Count SC	#P-complete		#P-hard		
\mathcal{P} -Count SC	#W[1]-hard	N /	#W[1]-hard	N	
Count Minimal SC	#P-complete	NA	#P-hard	A	
\mathcal{P} -Count Minimal SC	#W[1]-hard	/	#W[1]-hard	/	
Count Unbounded Minimal SC	#P-complete	-	#P-hard		
GNOSTIC NEURON (GN)	PTIME	N/A	?	N/A	
CIRCUIT ABLATION (CA)	NP-complete	{ <i>c</i> , PTAS, 3PA}- inapproximable	$\in \Sigma_2^p$ NP-hard	{ <i>c</i> , PTAS, 3PA}- inapproximable	
$\{\hat{L}, \hat{U}_{I}, \hat{U}_{O}, \hat{W}, \hat{B}, \hat{u}\}$ -CA	W[1]-hard	$\{c, PTAS, 3PA\}$ -	W[1]-hard	$\{c, PTAS, 3PA\}$ -	
	()[I] hard	inapproximable	, [1] hara	inapproximable	
CIRCUIT CLAMPING (CC)	NP-complete	{ <i>c</i> , PTAS, 3PA}- inapproximable	$\in \Sigma_2^p$ NP-hard	{ <i>c</i> , PTAS, 3PA}- inapproximable	
$\{\hat{L}, \hat{U}_O, \hat{W}, \hat{B}, \hat{u}\}$ -CC	W[1]-hard				
$\{L, UO, W, D, u\}$ -CC	w[1]-naru	{ <i>c</i> , PTAS, 3PA}- inapproximable	W[1]-hard	{ <i>c</i> , PTAS, 3PA}- inapproximable	
CIRCUIT PATCHING (CP)	NP-complete	{ <i>c</i> , PTAS, 3PA}-	$\in \Sigma_2^p$ NP-hard	{ <i>c</i> , PTAS, 3PA}-	
$\{\hat{L}, \hat{U}_O, \hat{W}, \hat{B}, \hat{u}\}$ -CP	W[2]-hard	inapproximable { <i>c</i> , PTAS, 3PA}-	W[2]-hard	inapproximable { <i>c</i> , PTAS, 3PA}-	
$\{L, UO, W, D, u\}$ -CI	w [2]-naru	inapproximable	w [2]-naru	inapproximable	
Unbounded Quasi-Minimal CP	PTIME	N/A	?	N/A	
NECESSARY CIRCUIT (NC)	$\in \Sigma_2^p$ NP-hard	{ <i>c</i> , PTAS, 3PA}- inapproximable	$\in \Sigma_2^p$ NP-hard	$\{c, PTAS, 3PA\}$ - inapproximable	
$\{\hat{L}, \hat{U}_I, \hat{U}_O, \hat{W}, \hat{u}\}$ -NC	W[1]-hard	{ <i>c</i> , PTAS, 3PA}- inapproximable	W[1]-hard	$\{c, PTAS, 3PA\}$ - inapproximable	
Count NC	?	?	?	?	
CIRCUIT ROBUSTNESS (CR)	coNP-complete	?	$\in \Pi^p_2$ coNP-hard	?	
$\{\hat{L}, \hat{U}_{I}, \hat{U}_{O}, \hat{W}, \hat{B}, \hat{u}\}$ -CR	coW[1]-hard	?	coW[1]-hard	?	
{ <i>H</i> }-CR	FPT	FPT	?	?	
$\{ H , \hat{U}_I\}$ -CR	FPT	FPT	FPT	FPT	
SUFFICIENT REASONS (SR)	$\in \Sigma_2^p$ NP-hard	{3PA}- inapproximable		/	
$\{\hat{L}, \hat{U}_O, \hat{W}, \hat{B}, \hat{u}\}$ -SR	W[1]-hard	{3PA}-		Δ	
$[\mathbf{L}, \mathbf{C}, \mathbf{r}, \mathbf{L}, \mathbf{u}]^{-\mathbf{D}\mathbf{K}}$,, [1] nuru	inapproximable		Л	

Table 4: Classical and	parameterized con	nplexity resu	lts by	problem variant.

4.5 NECESSARY CIRCUIT

The criterion of *necessity* is a stringent one, and consequently necessary circuits (NCs) carry powerful affordances (see Table 1). Since neurons in NCs collectively interact with all possible sufficient circuits for a target behavior, they are candidates to describe key task subcomputations and intervening on them is guaranteed to have effects even in the presence of high redundance.

Problem 8. BOUNDED GLOBALLY NECESSARY CIRCUIT (BGNC)

- *Input*: A multi-layer perceptron \mathcal{M} , and an integer k.
- *Output*: A subset S of neurons in \mathcal{M} of size $|S| \leq k$, such that $S \cap C \neq \emptyset$ for every circuit C in \mathcal{M} that is sufficient relative to all possible input vectors, if it exists, otherwise \bot .

Unfortunately both local and global versions of NC are NP-hard (in Σ_2^p ; Table 4), remain intractable even when keeping parameters such as network depth, number of input and output neurons, and others small (Table 3), and does not admit any of the available approximation schemes (Section 3.3). Tractable versions of NC are unlikely unless substantial restrictions or relaxations are introduced.

4.6 CIRCUIT ROBUSTNESS

A behavior of interest might be over-determined or resilient in the sense that many circuits in the model implement it and one can take over when the other breaks down. This is related to the notion of *redundancy* used in neuroscience (e.g., Nanda et al., 2023). Intuitively, when a model implements a task in this way, the behavior should be more robust to a number of perturbations. The possibility of verifying it experimentally motivates the circuit robustness (CR) problem.

Problem 9. BOUNDED LOCAL CIRCUIT ROBUSTNESS (BLCR)

- *Input*: A multi-layer perceptron \mathcal{M} , a subset H of \mathcal{M} , an input vector \mathbf{x} , and an integer k with $1 \le k \le |H|$.
- *Output:* $\langle \text{YES} \rangle$ if for each subset $H' \subseteq H$, with $|H'| \leq k$, $\mathcal{M}(\mathbf{x}) = [\mathcal{M} \setminus H'](\mathbf{x})$, otherwise $\langle \text{NO} \rangle$.

We find that Local CR is coNP-complete while Global CR is in Π_2^p and coNP-hard. It remains fixed-parameter intractable (coW[1]-hard) relative to model parameters (Table 3). Pushing further, we explore parameterizing CR by $\{|H|\}$ and prove fixed-parameter tractability of $\{|H|\}$ -CR which holds both for the local and global versions. There exist algorithms for CR that scale well as long as |H| is reasonable; a scenario that might be useful to probe robustness in practice. This wraps up our results for circuit queries. We briefly digress into *explainability* before discussing some implications.

4.7 SUFFICIENT REASONS

Understanding the sufficient reasons (SR) for a model decision in terms of input features consists of knowledge of values of the input components that are enough to determine the output. Given a model decision on an input, the most interesting reasons are those with the least components.

Problem 10. BOUNDED LOCAL SUFFICIENT REASONS (BLSR)

- *Input*: a multi-layer perceptron \mathcal{M} , an input vector \mathbf{x} of length $|\mathbf{x}| = \hat{u}_I$, and an integer k with $1 \le k \le \hat{u}_I$.
- *Output*: a subset \mathbf{x}^s of \mathbf{x} of size $|\mathbf{x}^s| = k$, such that for every possible completion \mathbf{x}^c of \mathbf{x}^s $\mathcal{M}(\mathbf{x}^c) = \mathcal{M}(\mathbf{x})$, if it exists, otherwise \perp .

To demonstrate the usefulness of our framework beyond inner interpretability, we show how it links to explainability. Using our techniques for circuit queries, we significantly tighten existing results

²Problem versions are for bounded size circuits unless otherwise stated. Each cell contains the complexity of the problem variant in terms of classical and FP (in)tractability, membership in complexity classes, and various approximation schemes. '?' marks potentially fruitful open problems. 'N/A' stands for not applicable.

for SR (Barceló et al., 2020; Wäldchen et al., 2021) by proving that hardness (NP-hard, W[1]-hard, 3PA-inapprox.) holds even when the model has only one hidden layer.

5 IMPLICATIONS, LIMITATIONS, AND FUTURE DIRECTIONS

We presented a framework based on parameterized complexity to accompany experiments on inner interpretability with theoretical explorations of viable algorithms. With this grasp of circuit query complexity, we can understand the challenges of scalability and the mixed outcomes of experiments with heuristics for circuit discovery. We can explain 'interpretability illusions' (Friedman et al., 2024) due to lack of faithfulness, minimality (e.g., Shi et al., 2024; Yu et al., 2024a) and other affordances (Wang & Veitch, 2024; Hase et al., 2023), in terms of the kinds of circuits that our current heuristics are well-equipped to discover. For instance, consider the algorithm for automated circuit discovery proposed by Conmy et al. (2023), which eliminates one network component at a time if the consequence on behavior is reasonably small. Since this algorithm runs in polynomial time, it is not likely to solve the problems proven hard here, such as MINIMAL SUFFICIENT CIRCUIT. However, one reason we observe interesting results in some cases is because it is well-equipped to solve QUASI-MINIMAL CIRCUIT problems. As our conceptual and formal analyses show, quasiminimal circuits can mimic various desirable aspects of sufficient circuits (Table 1), and the former can be found tractably (results for Problem 2 and Problem 7). Indeed, from our proof of tractability of QMSC (see Appendix) we get a hint on how to improve the running time of the algorithm in Conmy et al. (2023) while retaining guarantees of quasi-minimality; namely, by using a variant of binary search to cut the number of forward passes from n to $\log_2(n)$. At the same time, understanding these properties of circuit discovery heuristics helps us explain observed discrepancies: why we often see (1) lack of faithfulness (i.e., global coverage is out of reach for QMC algorithms), (2) non-minimality (i.e., QM circuits can have many non-breaking points), and (3) large variability in performance across tasks and analysis parameters (e.g., Shi et al., 2024; Conmy et al., 2023).

Our results for inner interpretability complement those of explainability (e.g., Barceló et al., 2020; Bassan et al., 2024; Wäldchen et al., 2021). These two complexity aspects can be studied together for different architectures to assess their intrinsic interpretability. As in explainability, our findings suggest interpretability methods can be sought relative to additional query restrictions or relaxations. We have explored many and some yield tractability while retaining affordances of practical interest.

One possibly fruitful avenue we have not explored is to conduct an empirical and formal characterization of learned weights in search of structure that could potentially distinguish conditions of (in)tractability. Another avenue is to design queries that partially rely on mid-level abstractions (Vilas et al., 2024a) to bridge the gap between circuits and human-intelligible algorithms (e.g., keyvalue mechanisms; Geva et al., 2022; Vilas et al., 2024b).

ACKNOWLEDGMENTS

We thank Ronald de Haan for comments on proving membership using alternating quantifier formulas.

REFERENCES

- Sanjeev Arora and Boaz Barak. *Computational Complexity: A Modern Approach*. Cambridge University Press, Cambridge ; New York, 2009. ISBN 978-0-521-42426-4.
- Sanjeev Arora, Carsten Lund, Rajeev Motwani, Madhu Sudan, and Mario Szegedy. Proof verification and the hardness of approximation problems. *Journal of the ACM (JACM)*, 45(3):501–555, 1998.
- Giorgio Ausiello, Alberto Marchetti-Spaccamela, Pierluigi Crescenzi, Giorgio Gambosi, Marco Protasi, and Viggo Kann. *Complexity and Approximation*. Springer Berlin Heidelberg, Berlin, Heidelberg, 1999. ISBN 978-3-642-63581-6 978-3-642-58412-1.
- Pablo Barceló, Mikaël Monet, Jorge Pérez, and Bernardo Subercaseaux. Model Interpretability through the lens of Computational Complexity. In *Advances in Neural Information Processing Systems*, volume 33, pp. 15487–15498. Curran Associates, Inc., 2020.

- Shahaf Bassan and Guy Katz. Towards Formal XAI: Formally Approximate Minimal Explanations of Neural Networks, 2023.
- Shahaf Bassan, Guy Amir, and Guy Katz. Local vs. Global Interpretability: A Computational Complexity Perspective. In Proceedings of the 41st International Conference on Machine Learning, pp. 3133–3167. PMLR, 2024.
- David Bau, Jun-Yan Zhu, Hendrik Strobelt, Agata Lapedriza, Bolei Zhou, and Antonio Torralba. Understanding the role of individual units in a deep neural network. *Proceedings of the National Academy of Sciences*, 117(48):30071–30078, 2020.
- Leonard Bereska and Stratis Gavves. Mechanistic interpretability for AI safety a review. *Transactions on Machine Learning Research*, 2024. ISSN 2835-8856. URL https://openreview. net/forum?id=ePUVetPKu6. Survey Certification, Expert Certification.
- Armin Biere, Marijn J. H. Heule, Hans van Maaren, and Toby Walsh (eds.). Handbook of Satisfiability. Number Volume 336,1 in Frontiers in Artificial Intelligence and Applications. IOS Press, Amsterdam Berlin Washington, DC, second edition edition, 2021. ISBN 978-1-64368-160-3.
- Nick Cammarata, Shan Carter, Gabriel Goh, Chris Olah, Michael Petrov, Ludwig Schubert, Chelsea Voss, Ben Egan, and Swee Kiat Lim. Thread: Circuits. *Distill*, 5(3):e24, 2020.
- Rosa Cao and Daniel Yamins. Explanatory models in neuroscience, Part 2: Functional intelligibility and the contravariance principle. *Cognitive Systems Research*, pp. 101200, 2023.
- Yijia Chen and Bingkai Lin. The Constant Inapproximability of the Parameterized Dominating Set Problem. SIAM Journal on Computing, 48(2):513–533, 2019.
- Arthur Conmy, Augustine Mavor-Parker, Aengus Lynch, Stefan Heimersheim, and Adrià Garriga-Alonso. Towards Automated Circuit Discovery for Mechanistic Interpretability. Advances in Neural Information Processing Systems, 36:16318–16352, 2023.
- Damai Dai, Li Dong, Yaru Hao, Zhifang Sui, Baobao Chang, and Furu Wei. Knowledge Neurons in Pretrained Transformers. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio (eds.), *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 8493–8502, Dublin, Ireland, 2022. Association for Computational Linguistics.
- Ronald de Haan and Stefan Szeider. Parameterized complexity classes beyond para-NP. *Journal of Computer and System Sciences*, 87:16–57, 2017.
- R. G. Downey and M. R. Fellows. *Parameterized Complexity*. Monographs in Computer Science. Springer New York, New York, NY, 1999. ISBN 978-1-4612-6798-0 978-1-4612-0515-9.
- Rod G. Downey and Michael R. Fellows. *Fundamentals of Parameterized Complexity*. Texts in Computer Science. Springer, London [u.a.], 2013. ISBN 978-1-4471-5559-1.
- Ebrahim Feghhi, Nima Hadidi, Bryan Song, Idan A. Blank, and Jonathan C. Kao. What Are Large Language Models Mapping to in the Brain? A Case Against Over-Reliance on Brain Scores, 2024.
- Javier Ferrando and Elena Voita. Information Flow Routes: Automatically Interpreting Language Models at Scale, 2024.
- Jörg Flum and Martin Grohe. *Parameterized Complexity Theory*. Texts in Theoretical Computer Science. Springer, Berlin Heidelberg New York, 2006. ISBN 978-3-540-29953-0.
- Lance Fortnow. The status of the P versus NP problem. *Communications of the ACM*, 52(9):78–86, 2009.
- Dan Friedman, Andrew Lampinen, Lucas Dixon, Danqi Chen, and Asma Ghandeharioun. Interpretability Illusions in the Generalization of Simplified Models, 2024.

- Ella M. Gale, Nicholas Martin, Ryan Blything, Anh Nguyen, and Jeffrey S. Bowers. Are there any 'object detectors' in the hidden layers of CNNs trained to identify objects or scenes? *Vision Research*, 176:60–71, 2020.
- Jorge García-Carrasco, Alejandro Maté, and Juan Trujillo. Detecting and Understanding Vulnerabilities in Language Models via Mechanistic Interpretability. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence*, pp. 385–393, 2024.

Michael R Garey and David S Johnson. Computers and intractability. W.H. Freeman, 1979.

- William I. Gasarch, Mark W. Krentel, and Kevin J. Rappoport. OptP as the normal behavior of NP-complete problems. *Mathematical Systems Theory*, 28(6):487–514, 1995.
- Atticus Geiger, Duligur Ibeling, Amir Zur, Maheep Chaudhary, Sonakshi Chauhan, Jing Huang, Aryaman Arora, Zhengxuan Wu, Noah Goodman, Christopher Potts, and Thomas Icard. Causal Abstraction: A Theoretical Foundation for Mechanistic Interpretability, 2024.
- Mor Geva, Roei Schuster, Jonathan Berant, and Omer Levy. Transformer Feed-Forward Layers Are Key-Value Memories. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wentau Yih (eds.), *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 5484–5495, Online and Punta Cana, Dominican Republic, 2021. Association for Computational Linguistics.
- Mor Geva, Avi Caciularu, Kevin Wang, and Yoav Goldberg. Transformer Feed-Forward Layers Build Predictions by Promoting Concepts in the Vocabulary Space. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang (eds.), *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pp. 30–45, Abu Dhabi, United Arab Emirates, 2022. Association for Computational Linguistics.
- Asma Ghandeharioun, Avi Caciularu, Adam Pearce, Lucas Dixon, and Mor Geva. Patchscopes: A Unifying Framework for Inspecting Hidden Representations of Language Models. In *Proceedings* of the 41st International Conference on Machine Learning, pp. 15466–15490. PMLR, 2024.
- John Gill. Computational Complexity of Probabilistic Turing Machines. SIAM Journal on Computing, 6(4):675–695, 1977.
- Nicholas Goldowsky-Dill, Chris MacLeod, Lucas Sato, and Aryaman Arora. Localizing Model Behavior with Path Patching, 2023.
- Wes Gurnee, Neel Nanda, Matthew Pauly, Katherine Harvey, Dmitrii Troitskii, and Dimitris Bertsimas. Finding Neurons in a Haystack: Case Studies with Sparse Probing. *Transactions on Machine Learning Research*, 2023.
- Michael Hanna, Ollie Liu, and Alexandre Variengien. How does GPT-2 compute greater-than?: Interpreting mathematical abilities in a pre-trained language model. In *Thirty-Seventh Conference* on Neural Information Processing Systems, 2023.
- Peter Hase, Mohit Bansal, Been Kim, and Asma Ghandeharioun. Does Localization Inform Editing? Surprising Differences in Causality-Based Localization vs. Knowledge Editing in Language Models. Advances in Neural Information Processing Systems, 36:17643–17668, 2023.
- Lane A. Hemaspaandra and Ryan Williams. SIGACT News Complexity Theory Column 76: An atypical survey of typical-case heuristic algorithms. *ACM SIGACT News*, 43(4):70–89, 2012.
- Nhat Hoang-Xuan, Minh Vu, and My T. Thai. LLM-assisted Concept Discovery: Automatically Identifying and Explaining Neuron Functions, 2024.
- Sara Hooker, Aaron Courville, Gregory Clark, Yann Dauphin, and Andrea Frome. What Do Compressed Deep Neural Networks Forget?, 2021.
- Alon Jacovi and Yoav Goldberg. Towards Faithfully Interpretable NLP Systems: How Should We Define and Evaluate Faithfulness? In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 4198–4205, Online, 2020. Association for Computational Linguistics.

- MW Krentel. The complexity of optimization functions. *Journal of Computer and System Sciences*, 36(3):490–509, 1988.
- Andrew Kyle Lampinen, Stephanie C. Y. Chan, and Katherine Hermann. Learned feature representations are biased by complexity, learning order, position, and more. *Transactions on Machine Learning Research*, 2024.
- Jae Hee Lee, Sergio Lanza, and Stefan Wermter. From Neural Activations to Concepts: A Survey on Explaining Concepts in Neural Networks, 2023.
- Michael A. Lepori, Thomas Serre, and Ellie Pavlick. Uncovering Causal Variables in Transformers using Circuit Probing, 2023.
- Tom Lieberum, Matthew Rahtz, János Kramár, Neel Nanda, Geoffrey Irving, Rohin Shah, and Vladimir Mikulik. Does Circuit Analysis Interpretability Scale? Evidence from Multiple Choice Capabilities in Chinchilla, 2023.
- Grace W Lindsay. Grounding neuroscience in behavioral changes using artificial neural networks. *Current Opinion in Neurobiology*, 2024.
- Grace W. Lindsay and David Bau. Testing methods of neural systems understanding. *Cognitive Systems Research*, 82:101156, 2023.
- Samuel Marks, Can Rager, Eric J. Michaud, Yonatan Belinkov, David Bau, and Aaron Mueller. Sparse Feature Circuits: Discovering and Editing Interpretable Causal Graphs in Language Models, 2024.
- Andrew McInerney and Kevin Burke. Feedforward neural networks as statistical models: Improving interpretability through uncertainty quantification, 2023.
- Kevin Meng, Arnab Sen Sharma, Alex J. Andonian, Yonatan Belinkov, and David Bau. Mass-Editing Memory in a Transformer. In *The Eleventh International Conference on Learning Repre*sentations, 2022.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in GPT. In *Proceedings of the 36th International Conference on Neural Information Processing Systems*, NIPS '22, pp. 17359–17372, Red Hook, NY, USA, 2024. Curran Associates Inc. ISBN 978-1-71387-108-8.
- Jack Merullo, Carsten Eickhoff, and Ellie Pavlick. Circuit Component Reuse Across Tasks in Transformer Language Models. In *The Twelfth International Conference on Learning Representations*, 2024.
- Rajeev Motwani and Prabhakar Raghavan. Randomized Algorithms. Cambridge University Press, Cambridge ; New York, 1995. ISBN 978-0-521-47465-8.
- Vedant Nanda, Till Speicher, John Dickerson, Krishna Gummadi, Soheil Feizi, and Adrian Weller. Diffused redundancy in pre-trained representations. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine (eds.), Advances in Neural Information Processing Systems, volume 36, pp. 4055–4079. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/ file/0c86142265c5e2c900613dd1d031cb90-Paper-Conference.pdf.
- Jingcheng Niu, Andrew Liu, Zining Zhu, and Gerald Penn. What does the Knowledge Neuron Thesis Have to do with Knowledge? In *The Twelfth International Conference on Learning Representations*, 2023.
- Chris Olah, Alexander Mordvintsev, and Ludwig Schubert. Feature Visualization. *Distill*, 2(11):e7, 2017.
- Chris Olah, Nick Cammarata, Ludwig Schubert, Gabriel Goh, Michael Petrov, and Shan Carter. Zoom In: An Introduction to Circuits. *Distill*, 5(3):e00024.001, 2020.

- Subba Reddy Oota, Emin Çelik, Fatma Deniz, and Mariya Toneva. Speech language models lack important brain-relevant semantics, 2023.
- Sebastian Ordyniak, Giacomo Paesani, and Stefan Szeider. The Parameterized Complexity of Finding Concise Local Explanations. In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence*, pp. 3312–3320, Macau, SAR China, 2023. International Joint Conferences on Artificial Intelligence Organization. ISBN 978-1-956792-03-4.
- C.H. Papadimitriou and M. Yannakakis. Optimization, approximation, and complexity classes. Journal of Computer and System Sciences, 43:425–440, 1991.
- Ellie Pavlick. Symbols and grounding in large language models. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 381(2251):20220041, 2023.
- J. Scott Provan and Michael O. Ball. The Complexity of Counting Cuts and of Computing the Probability that a Graph is Connected. *SIAM Journal on Computing*, 12(4):777–788, 1983.
- Venkatakrishnan Ramaswamy. An Algorithmic Barrier to Neural Circuit Understanding, 2019.
- Tilman Räuker, Anson Ho, Stephen Casper, and Dylan Hadfield-Menell. Toward Transparent AI: A Survey on Interpreting the Inner Structures of Deep Neural Networks. In 2023 IEEE Conference on Secure and Trustworthy Machine Learning (SaTML), pp. 464–483. IEEE Computer Society, 2023. ISBN 978-1-66546-299-0.
- Lauren N. Ross and Dani S. Bassett. Causation in neuroscience: Keeping mechanism meaningful. *Nature Reviews Neuroscience*, 25(2):81–90, 2024.
- Loek Van Rossem and Andrew M. Saxe. When Representations Align: Universality in Representation Learning Dynamics. In *Proceedings of the 41st International Conference on Machine Learning*, pp. 49098–49121. PMLR, 2024.
- Marcus Schaefer and Christopher Umans. Completeness in the polynomial-time hierarchy: A compendium. *SIGACT News*, 33(3):32–49, 2002.
- Claudia Shi, Nicolas Beltran-Velez, Achille Nazaret, Carolina Zheng, Adrià Garriga-Alonso, Andrew Jesson, Maggie Makar, and David Blei. Hypothesis Testing the Circuit Hypothesis in LLMs. In ICML 2024 Workshop on Mechanistic Interpretability, 2024.
- Bernardo Aníbal Subercaseaux. Model Interpretability through the Lens of Computational Complexity. PhD thesis, Universidad de Chile, 2020.
- Aaquib Syed, Can Rager, and Arthur Conmy. Attribution Patching Outperforms Automated Circuit Discovery. In NeurIPS Workshop on Attributing Model Behavior at Scale, 2023.
- Curt Tigges, Michael Hanna, Qinan Yu, and Stella Biderman. LLM Circuit Analyses Are Consistent Across Training and Scale, 2024.
- Seinosuke Toda. PP is as Hard as the Polynomial-Time Hierarchy. *SIAM Journal on Computing*, 20 (5):865–877, 1991.
- Ilya O Tolstikhin, Neil Houlsby, Alexander Kolesnikov, Lucas Beyer, Xiaohua Zhai, Thomas Unterthiner, Jessica Yung, Andreas Steiner, Daniel Keysers, Jakob Uszkoreit, Mario Lucic, and Alexey Dosovitskiy. MLP-Mixer: An all-MLP Architecture for Vision. In 35th Conference on Neural Information Processing Systems (NeurIPS 2021), volume 34, pp. 24261–24272. Curran Associates, Inc., 2021.
- Leslie G. Valiant. The Complexity of Enumeration and Reliability Problems. *SIAM Journal on Computing*, 8(3):410–421, 1979.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Ł ukasz Kaiser, and Illia Polosukhin. Attention is All you Need. In Advances in Neural Information Processing Systems, volume 30. Curran Associates, Inc., 2017.

- Martina G. Vilas, Federico Adolfi, David Poeppel, and Gemma Roig. Position: An Inner Interpretability Framework for AI Inspired by Lessons from Cognitive Neuroscience. In *Proceedings* of the 41st International Conference on Machine Learning, pp. 49506–49522. PMLR, 2024a.
- Martina G. Vilas, Timothy Schaumlöffel, and Gemma Roig. Analyzing vision transformers for image classification in class embedding space. In *Proceedings of the 37th International Conference* on Neural Information Processing Systems, NIPS '23, pp. 40030–40041, Red Hook, NY, USA, 2024b. Curran Associates Inc.
- Chelsea Voss, Nick Cammarata, Gabriel Goh, Michael Petrov, Ludwig Schubert, Ben Egan, Swee Kiat Lim, and Chris Olah. Visualizing Weights. *Distill*, 6(2):e00024.007, 2021.
- Stephan Wäldchen, Jan Macdonald, Sascha Hauch, and Gitta Kutyniok. The computational complexity of understanding binary classifier decisions. *Journal of Artificial Intelligence Research*, 70:351–387, 2021.
- Kevin Ro Wang, Alexandre Variengien, Arthur Conmy, Buck Shlegeris, and Jacob Steinhardt. Interpretability in the Wild: A Circuit for Indirect Object Identification in GPT-2 Small. In *The Eleventh International Conference on Learning Representations*, 2022.
- Zihao Wang and Victor Veitch. Does Editing Provide Evidence for Localization? In *ICML* 2024 Workshop on Mechanistic Interpretability, 2024.
- Harold T. Wareham. *Systematic Parameterized Complexity Analysis in Computational Phonology*. PhD thesis, University of Victoria, Canada, 1999.
- Todd Wareham. Creating teams of simple agents for specified tasks: A computational complexity perspective. *arXiv preprint arXiv:2205.02061*, 2022.
- Lei Yu, Jingcheng Niu, Zining Zhu, and Gerald Penn. Functional Faithfulness in the Wild: Circuit Discovery with Differentiable Computation Graph Pruning, 2024a.
- Runpeng Yu, Weihao Yu, and Xinchao Wang. KAN or MLP: A Fairer Comparison, 2024b.
- Enyan Zhang, Michael A. Lepori, and Ellie Pavlick. Instilling Inductive Biases with Subnetworks, 2024.
- Fred Zhang and Neel Nanda. Towards Best Practices of Activation Patching in Language Models: Metrics and Methods. In *The Twelfth International Conference on Learning Representations*, 2023.

Appendix: Definitions, Theorems and Proofs

Table of Contents

Α	Preliminaries	17
	A.1 Computational problems of known complexity	18
	A.2 Classical and parameterized complexity	18
	A.3 Hardness and reductions	18
	A.4 Approximation	19
	A.5 Model architecture	20
В	Local and Global Sufficient Circuit	20
	B.1 Results for MLSC	21
	B.2 Results for MGSC	26
С	Sufficient Circuit Search and Counting Problems	31
	C.1 Results for Sufficient Circuit Problems	33
D	Global Sufficient Circuit Problem (sigma completeness)	37
E	Quasi-Minimal Sufficient Circuit Problem	39
F	Gnostic Neurons Problem	39
C		40
G	Necessary Circuit Problem G.1 Results for MLNC	40 41
	G.2 Results for MGNC	43
		15
Η	Circuit Ablation and Clamping Problems	44
	H.1 Results for Minimal Circuit Ablation	45
	H.2 Results for Minimal Circuit Clamping	50
Ι	Circuit Patching Problem	54
	I.1 Results for MLCP	55
	I.2 Results for MGCP	57
J	Quasi-Minimal Circuit Patching Problem	58
17		7 0
K	Circuit Robustness Problem	58 61
	K.1Results for MLCR-special and MLCRK.2Results for MGCR-special and MGCR	65
		05
L	Sufficient Reasons Problem	68
	L.1 Results for MSR	68
м	Probabilistic approximation schemes	72
141	r roomonistie upproximution senemes	, 4

A PRELIMINARIES

Each section of this appendix is self-contained except for the following definitions. We re-state interpretability query definitions in a more detailed form in each section for convenience. To err here on the side of rigor, here we will use more cumbersome notation that we avoided in the main manuscript for succinctness.

A.1 COMPUTATIONAL PROBLEMS OF KNOWN COMPLEXITY

Some of our proofs construct reductions from the following computational problems.

CLIQUE (Garey & Johnson, 1979, Problem GT19) *Input*: An undirected graph G = (V, E) and a positive integer k. *Question*: Does G have a clique of size at least k, i.e., a subset $V' \subseteq V$, $|V'| \ge k$, such that for all pairs $v, v' \in V'$, $(v, v') \in E$?

VERTEX COVER (VC) (Garey & Johnson, 1979, Problem GT1) *Input*: An undirected graph G = (V, E) and a positive integer k. *Question*: Does G contain a vertex cover of size at most k, i.e., a subset $V' \subseteq V$, $|V'| \leq k$, such that for all $(u, v) \in E$, at least one of u or v is in V'?

DOMINATING SET (DS) (Garey & Johnson, 1979, Problem GT2) Input: An undirected graph G = (V, E) and a positive integer k. Question: Does G contain a dominating set of size at most k, i.e., a subset $V' \subseteq V$, $|V'| \leq k$, such that for all $v \in V$, either $v \in V'$ or there is at least one $v' \in V'$ such that $(v, v') \in E$?

HITTING SET (HS) (Garey & Johnson, 1979, Problem SP8) *Input*: A collection of subsets C of a finite set S and a positive integer k. *Question*: Is there a subset S' of S, $|S'| \le k$, such that S' has a non-empty intersection with each set in C?

MINIMUM DNF TAUTOLOGY (3DT) (Schaefer & Umans, 2002, Problem L7) Input: A 3-DNF tautology ϕ with T terms over a set of variables V and a positive integer k. Question: Is there a 3-DNF formula ϕ' made up of $\leq k$ of the terms in ϕ that is a also a tautology?

A.2 CLASSICAL AND PARAMETERIZED COMPLEXITY

Definition 1 (Polynomial-time tractability). An algorithm is said to run in *polynomial-time* if the number of steps it performs is $O(n^c)$, where n is a measure of the input size and c is some constant. A problem II is said to be *tractable* if it has a *polynomial-time algorithm*. P denotes the class of such problems.

Consider a more fine-grained look at the *sources of complexity* of problems. The following is a relaxation of the notion of tractability, where unreasonable resource demands are allowed as long as they are constrained to a set of problem parameters.

Definition 2 (Fixed-parameter tractability). Let \mathcal{P} be a set of problem parameters. A problem \mathcal{P} - Π is *fixed-parameter tractable* relative to \mathcal{P} if there exists an algorithm that computes solutions to instances of \mathcal{P} - Π of any size n in time $f(\mathcal{P}) \cdot n^c$, where c is a constant and $f(\cdot)$ some computable function. FPT denotes the class of such problems and includes all problems in P.

A.3 HARDNESS AND REDUCTIONS

Most proof techniques in this work involve reductions between computational problems.

Definition 3 (Reducibility). A problem Π_1 is *polynomial-time reducible* to Π_2 if there exists a polynomial-time algorithm (*reduction*) that transforms instances of Π_1 into instances of Π_2 such that solutions for Π_2 can be transformed in polynomial-time into solutions for Π_1 . This implies that if a tractable algorithm for Π_2 exists, it can be used to solve Π_1 tractably. *Fptreductions* transform an instance (x, k) of some problem parameterized by k into an instance (x', k') of another problem, with $k' \leq g(k)$, in time $f(k) \cdot p(|x|)$ where p is a polynomial. These reductions analogously transfer fixed-parameter tractability results between problems.

Hardness results are generally conditional on two conjectures with extensive theoretical and empirical support. Intractability statements build on these as follows.

Conjecture 1. $P \neq NP$.

Definition 4 (Polynomial-time intractability). The class NP contains all problems in P and more. Assuming Conjecture 1, NP-hard problems lie outside P. These problems are considered *intractable* because they cannot be solved in polynomial-time (unless Conjecture 1 is false; see Fortnow, 2009).

Conjecture 2. FPT \neq W[1].

Definition 5 (Fixed-parameter intractability). The class W[1] contains all problems in the class FPT and more. Assuming Conjecture 2, W[1]-hard parameterized problems lie outside FPT. These problems are considered *fixed-parameter intractable*, relative to a given parameter set, because no fixed-parameter tractable algorithm can exist to solve them (unless Conjecture 2 is false; see Downey & Fellows, 2013).

The following two easily-proven lemmas will be useful in our parameterized complexity proofs.

Lemma 1. (Wareham, 1999, Lemma 2.1.30) If problem Π is fp-tractable relative to aspectset K then Π is fp-tractable for any aspect-set K' such that $K \subset K'$.

Lemma 2. (Wareham, 1999, Lemma 2.1.31) If problem Π is fp-intractable relative to aspect-set K then Π is fp-intractable for any aspect-set K' such that $K' \subset K$.

A.4 APPROXIMATION

Although sometimes computing optimal solutions might be intractable, it is still conceivable that we could devise tractable procedures to obtain *approximate* solutions that are useful in practice. We consider two natural notions of additive and multiplicative approximation and three probabilistic schemes.

A.4.1 MULTIPLICATIVE APPROXIMATION

For a minimization problem Π , let $OPT_{\Pi}(I)$ be an optimal solution for Π , $A_{\Pi}(I)$ be a solution for Π returned by an algorithm A, and $m(OPT_{\Pi}(I))$ and $m(A_{\Pi}(I))$ be the values of these solutions.

Definition 6 (Multiplicative approximation algorithm). [Ausiello et al. 1999, Def. 3.5]. Given a minimization problem Π , an algorithm A is a *multiplicative* ϵ -approximation algorithm for Π if for each instance I of Π , $m(A_{\Pi}(I)) - m(OPT_{\Pi}(I)) \leq \epsilon \times m(OPT_{\Pi}(I))$.

It would be ideal if one could obtain approximate solutions for a problem Π that are arbitrarily close to optimal if one is willing to allow extra algorithm runtime.

Definition 7 (Multiplicative approximation scheme). [Adapted from Ausiello et al., 1999, Def. 3.10]. Given a minimization problem Π , a *polynomial-time approximation scheme* (PTAS) for Π is a set \mathcal{A} of algorithms such that for each integer k > 0, there is a $\frac{1}{k}$ -approximation algorithm $A_{\Pi}^k \in \mathcal{A}$ that runs in time polynomial in |I|.

A.4.2 ADDITIVE APPROXIMATION

It would be useful to have guarantees that an approximation algorithm for our problems returns solutions at most a fixed distance away from optimal. This would ensure errors cannot get impractically large.

Definition 8 (Additive approximation algorithm). [Adapted from Ausiello et al., 1999, Def. 3.3]. An algorithm A_{Π} for a problem Π is a *d*-additive approximation algorithm (*d*-AAA) if there exists a constant *d* such that for all instances *x* of Π the error between the value $m(\cdot)$ of an optimal solution optsol(x) and the output $A_{\Pi}(x)$ is such that $| m(optsol(x)) - m(A_{\Pi}(x)) | \leq d$.

A.4.3 PROBABILISTIC APPROXIMATION

Finally, consider three other types of probabilistic polynomial-time approximability (henceforth 3PA) that may be acceptable in situations where always getting the correct output for an input is not required: (1) algorithms that always run in polynomial time and produce the correct output for a

given input in all but a small number of cases (Hemaspaandra & Williams, 2012); (2) algorithms that always run in polynomial time and produce the correct output for a given input with high probability (Motwani & Raghavan, 1995); and (3) algorithms that run in polynomial time with high probability but are always correct (Gill, 1977).

A.5 MODEL ARCHITECTURE

Definition 9 (Multi-Layer Perceptron). [Adapted from Barceló et al. 2020]. A multi-layer perceptron (MLP) is a neural network model \mathcal{M} , with \hat{L} layers, defined by sequences of weight matrices $(\mathbf{W}_1, \mathbf{W}_2, \dots, \mathbf{W}_{\hat{L}}), \mathbf{W}_i \in \mathbb{Q}^{d_{i-1} \times d_i}$, bias vectors $(\mathbf{b}_1, \mathbf{b}_2, \dots, \mathbf{b}_{\hat{L}}), \mathbf{b}_i \in \mathbb{Q}^{d_i}$, and (element-wise) ReLU functions $(f_1, f_2, \dots, f_{\hat{L}-1}), f_i(x) := \max(0, x)$. The final function is, without loss of generality, the binary step function $f_{\hat{L}}(x) := 1$ if $x \ge 0$, otherwise 0. The computation rules for \mathcal{M} are given by $\mathbf{h}_i := f_i(\mathbf{h}_{i-1}\mathbf{W} + \mathbf{b}_i), \mathbf{h}_0 := \mathbf{x}$, where \mathbf{x} is the input. The output of \mathcal{M} on \mathbf{x} is defined as $\mathcal{M}(\mathbf{x}) := \mathbf{h}_{\hat{L}}$. The graph $G_{\mathcal{M}} = (V, E)$ of \mathcal{M} has a vertex for each component of each \mathbf{h}_i . All vertices in layer i are connected by edges to all vertices of layer i + 1, with no intra-layer connections. Edges carry weights according to \mathbf{W}_i , and vertices carry the components of \mathbf{b}_i as biases. The size of \mathcal{M} is defined as $|\mathcal{M}| := |V|$.

B LOCAL AND GLOBAL SUFFICIENT CIRCUIT

MINIMUM LOCALLY SUFFICIENT CIRCUIT (MLSC)

Input: A multi-layer perceptron M of depth cd_g with $\#n_{tot,g}$ neurons and maximum layer width cw_g , connection-value matrices $W_1, W_2, \ldots, W_{cd_g}$, neuron bias vector B, a Boolean input vector I of length $\#n_{g,in}$, and integers d, w, and #n such that $1 \leq d \leq cd_g$, $1 \leq w \leq cw_g$, and $1 \leq \#n \leq \#n_{tot,g}$.

Question: Is there a subcircuit C of M of depth $cd_r \leq d$ with $\#n_{tot,r} \leq \#n$ neurons and maximum layer width $cw_r \leq w$ that produces the same output on input I as M?

MINIMUM GLOBALLY SUFFICIENT CIRCUIT (MGSC)

Input: A multi-layer perceptron M of depth cd_g with $\#n_{tot,g}$ neurons and maximum layer width cw_g , connection-value matrices $W_1, W_2, \ldots, W_{cd_g}$, neuron bias vector B, and integers d, w, and #n such that $1 \le d \le cd_g$, $1 \le w \le cw_g$, and $1 \le \#n \le \#n_{tot,g}$.

Question: Is there a subcircuit C of M of depth $cd_r \leq d$ with $\#n_{tot,r} \leq \#n$ neurons and maximum layer width $cw_r \leq w$ that produces the same output as M on every possible Boolean input vector of length $\#_{in,g}$?

Given a subset x of the neurons in M, the subcircuit C of M based on x has the neurons in x and all connections in M among these neurons. Note that in order for the output of C to be equal to the output of M on input I, the numbers $\#n_{in,g}$ and $\#n_{out,g}$ of input and output neurons in M must exactly equal the numbers $\#n_{in,r}$ and $\#n_{out,r}$ of input and output neurons in C; hence, no input or output neurons can be deleted from M in creating C. Following Barceló et al. 2020, page 4, all neurons in M use the ReLU activation function and the output x of each output neuron is stepped as necessary to be Boolean, i.e, step(x) = 0 if $x \le 0$ and is 1 otherwise.

For a graph G = (V, E), we shall assume an ordering on the vertices and edges in V and E, respectively. For each vertex $v \in V$, let the complete neighbourhood $N_C(v)$ of v be the set composed of v and the set of all vertices in G that are adjacent to v by a single edge, i.e., $v \cup \{u \mid u \in V \text{ and } (u, v) \in E\}$. Finally, let VC_B be the version of VC in which each vertex in G has degree at most B.

We will prove various classical and parameterized results for MLSC and MGSC using reductions from CLIQUE (Theorem 1 and 7). These reductions are summarized in Figure 1 and the parameterized results are proved relative to the parameters in Table 5. Additional reductions from VC and DS (Theorems 5 and 103) use specialized ReLU logic gates described in Barceló et al. 2020, Lemma 13. These gates assume Boolean neuron input and output values of 0 and 1 and are structured as follows:

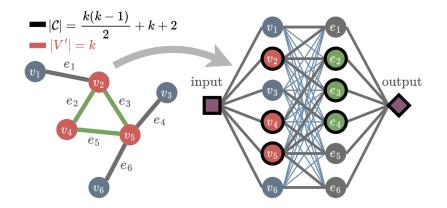


Figure 1: This figure summarizes the reduction from CLIQUE.

Parameter	Description	
cd_g	# layers in given MLP	All
cw_g	max # neurons in layer in given MLP	All
$\#n_{tot,g}$	total # neurons in given MLP	All
$\#n_{in,g}$	# input neurons in given MLP	All
$\#n_{out,g}$	# output neurons in given MLP	All
$B_{\max,g}$	max neuron bias in given MLP	All
$W_{\max,g}$	max connection weight in given MLP	All
cd_r	# layers in requested subcircuit	M{L,G}SC
cw_r	max # neurons in layer in requested subcircuit	M{L,G}SC
$\#n_{tot,r}$	total # neurons in requested subcircuit	M{L,G}SC
$\#n_{in,r}$	# input neurons in requested subcircuit	M{L,G}SC
$\#n_{out,r}$	# output neurons in requested subcircuit	M{L,G}SC
$B_{\max,r}$	max neuron bias in requested subcircuit	M{L,G}SC
$W_{\max,r}$	max connection weight in requested subcircuit	M{L,G}SC
k	Size of requested subset of input vector	MSR

Table 5: Parameters for the minimum sufficient subcircuit and reason problems.

- 1. NOT ReLU gate: A ReLU gate with one input connection weight of value -1 and a bias of 1. This gate has output 1 if the input is 0 and 0 otherwise.
- 2. *n*-way AND ReLU gate: A ReLU gate with *n* input connection weights of value 1 and a bias of -(n-1). This gate has output 1 if all inputs have value 1 and 0 otherwise.
- 3. *n*-way OR ReLU gate: A combination of an *n*-way AND ReLU gate with NOT ReLU gates on all of its inputs and a NOT ReLU gate on its output that uses DeMorgan's Second Law to implement $(x_1 \lor x_2 \lor \ldots x_n)$ as $\neg(\neg x_1 \land \neg x_2 \land \ldots \neg x_n)$. This gate has output 1 if any input has value 1 and 0 otherwise.

B.1 RESULTS FOR MLSC

Towards proving NP-completeness, we first prove membership and then follow up with hardness. Membership of MLSC in NP can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

$$\exists [\mathcal{C} \subseteq \mathcal{M}] : \mathcal{C}(\mathbf{x}) = \mathcal{M}(\mathbf{x})$$

Theorem 1. If MLSC is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from CLIQUE to MLSC. Given an instance $\langle G = (V, E), k \rangle$ of CLIQUE, construct the following instance $\langle M, I, d, w, \#n \rangle$ of MLSC: Let M be an MLP based on $\#n_{tot,g} = |V| + |E| + 2$ neurons spread across four layers:

- 1. Input layer: The single input neuron n_{in} (bias 0).
- 2. Hidden vertex layer: The vertex neurons $nv_1, nv_2, \dots nv_{|V|}$ (all with bias 0).
- 3. Hidden edge layer: The edge neurons $ne_1, ne_2, \ldots ne_{|E|}$ (all with bias -1).
- 4. Output layer: The single output neuron n_{out} (bias -(k(k-1)/2 1)).

The non-zero weight connections between adjacent layers are as follows:

- The input neuron n_{in} is connected to each vertex neuron with weight 1.
- Each vertex neuron nv_i , $1 \le i \le |V|$, is connected to each edge neuron whose corresponding edge has an endpoint v_i with weight 1.
- Each edge neuron ne_i , $1 \le i \le |E|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I = (1), d = 4, w = k(k-1)/2, and #n = k(k-1)/2 + k + 2. Observe that this instance of MLSC can be created in time polynomial in the size of the given instance of CLIQUE. Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	_
1	$n_{in}(1)$
2	$nv_1(1), nv_2(1), \dots nv_{ V }(1)$
3	$ne_1(1), ne_2(1), \dots ne_{ E }(1)$
4	$n_{out}(E - (k(k-1)/2 - 1))$

Note that it is the stepped output of n_{out} in timestep 4 that yields output 1.

We now need to show the correctness of this reduction by proving that the answer for the given instance of CLIQUE is "Yes" if and only if the answer for the constructed instance of MLSC is "Yes". We prove the two directions of this if and only if separately as follows:

⇒ : Let $V' = \{v'_1, v'_2, \dots, v'_k\} \subseteq V$ be a clique in *G* of size *k*. Consider the subcircuit *C* based on neurons $n_{in}, n_{out}, \{nv' | v' \in V'\}$, and $\{ne' | e' = (x, y) \text{ and } vx, vy \in V'\}$. Observe that in this subcircuit, $cd_r = d = 4, cw_r = r = k(k-1)/2$, and $\#n_{tot,r} = \#n = k(k-1)/2 + k + 2$. The output behaviour of the neurons in *C* from the presentation of input *I* until the output is generated is as follows:

timestep	neurons (outputs)
0	<u> </u>
1	$n_{in}(1)$
2	$nv'_1(1), nv'_2(1), \dots nv'_{ V' }(1)$
3	$ne'_1(1), ne'_2(1), \dots ne'_{k(k-1)/2}(1)$
4	$n_{out}(1)$

The output of n_{out} in timestep 4 is stepped to 1, which means that C is behaviorally equivalent to M on I.

 $\leftarrow : \text{Let } C \text{ be a subcircuit of } M \text{ that is behaviorally equivalent to } M \text{ on input } I \text{ and has } \#n_{tot,r} \leq \\ \#n = k(k-1)/2 + k + 2 \text{ neurons. As neurons in all four layers in } M \text{ must be present in } \\ C \text{ to produce the required output, } cd_r = d = cd_g \text{ and both } n_{in} \text{ and } n_{out} \text{ are in } C. \text{ In order } \\ \text{ for } n_{out} \text{ to produce a non-zero output, there must be at least } k(k-1)/2 \text{ edge neurons in } \\ C, \text{ each of which must be activated by the inclusion of the vertex neurons corresponding to both of their endpoint vertices. This requires the inclusion of at least k vertex neurons in C, as a set V'' of vertices in graph can have at most <math>|V''|(|V''| - 1)/2 \text{ distinct edges between them (with this maximum occurring if all pairs of vertices in V'' have an edge between them). As <math>\#n_{tot,r} \leq k(k-1)/2 + k + 2$, all of the above implies that there must be exactly k(k-1)/2 edge neurons and exactly k vertex neurons in C. and the vertices in G.

As CLIQUE is *NP*-hard (Garey & Johnson, 1979), the reduction above establishes that MLSC is also *NP*-hard. The result follows from the definition of *NP*-hardness.

Theorem 2. If $\langle cd_g, \#n_{in,g}, \#n_{out,g}, B_{\max,g}, W_{\max,g}, cd_r, cw_r, \#n_{in,r}, \#n_{out,r}, \#n_{tot,r}, B_{\max,r}, W_{\max,r} \rangle$ -MLSC is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MLSC constructed in the reduction in the proof of Theorem 1, $cd_g = cd_r = 4$, $\#n_{in,g} = \#n_{in,r} = \#n_{out,r} = \#n_{out,r} = W_{\max,g} = W_{\max,r} = 1$, and $B_{\max,g}, B_{\max,r}, \#n_{tot,r}$, and cw_r are all functions of k in the given instance of CLIQUE. The result then follows from the fact that $\langle k \rangle$ -CLIQUE is W[1]-hard (Downey & Fellows, 1999).

Theorem 3. $\langle \#n_{tot,g} \rangle$ -MLSC is fixed-parameter tractable.

Proof. Consider the algorithm that generates each possible subcircuit of M and checks if that subcircuit is behaviorally equivalent to M on input I. If such a subcircuit is found, return "Yes"; otherwise, return "No". As each such subcircuit can be run on I in time polynomial in the size of the given instance of MLSC and the total number of subcircuits that need to be checked is at most $2^{\#n_{tot,g}}$, the above is a fixed-parameter tractable algorithm for MLSC relative to parameter-set $\{\#n_{tot,g}\}$.

Theorem 4. $\langle cd_q, cw_q \rangle$ -MLSC is fixed-parameter tractable.

Proof. Follows from the observation that $\#n_{tot,g} \leq cd_g \times cw_g$ and the algorithm in the proof of Theorem 3.

Though we have already proved the polynomial-time intractability of MLSC in Theorem 1, the reduction in the proof of the following theorem will be useful in proving a certain type of polynomial-time inapproximability for MLSC (see Figure 2).

Theorem 5. If MLSC is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from VC to MLSC. Given an instance $\langle G = (V, E), k \rangle$ of VC, construct the following instance $\langle M, I, d, w, \#n \rangle$ of MLSC: Let M be an MLP based on $\#n_{tot,g} = |V| + 2|E| + 2$ neurons spread across five layers:

- 1. **Input layer**: The single input neuron n_{in} (bias 0).
- 2. Hidden vertex layer: The vertex neurons $nvN_1, nvN_2, \dots nvN_{|V|}$, all of which are NOT ReLU gates.
- 3. Hidden edge layer I: The edge AND neurons $neA_1, neA_2, \dots neA_{|E|}$, all of which are 2-way AND ReLU gates.
- 4. Hidden edge layer II: The edge NOT neurons $neN_1, neN_2, \dots neN_{|E|}$, all of which are NOT ReLU gates.
- 5. Output layer: The single output neuron n_{out} , which is an |E|-way AND ReLU gate.

The non-zero weight connections between adjacent layers are as follows:

- The input neuron n_{in} is connected to each vertex NOT neuron with weight 1.
- Each vertex NOT neuron nvN_i , $1 \le i \le |V|$, is connected to each edge AND neuron whose corresponding edge has an endpoint v_i with weight 1.
- Each edge AND neuron neA_i, 1 ≤ i ≤ |E|, is connected to its corresponding edge NOT neuron neN_i with weight 1.
- Each edge NOT neuron neN_i , $1 \le i \le |E|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I = (1), d = 5, w = |E|, and #n = 2|E| + k + 2. Observe that this instance of MLSC can be created in time polynomial in the size of the given instance of VC, Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$n_{in}(1)$
2	$nvN_1(0), nvN_2(0), \dots nvN_{ V }(0)$
3	$neA_1(0), neA_2(0), \dots neA_{ E }(0)$
4	$neN_1(1), neN_2(1), \dots neN_{ E }(1)$
5	$n_{out}(1)$

We now need to show the correctness of this reduction by proving that the answer for the given instance of VC is "Yes" if and only if the answer for the constructed instance of MLSC is "Yes". We prove the two directions of this if and only if separately as follows:

⇒ : Let $V' = \{v'_1, v'_2, \dots, v'_k\} \subseteq V$ be a vertex cover in *G* of size *k*. Consider the subcircuit *C* based on neurons n_{in} , n_{out} , $\{nv'N \mid v' \in V'\}$, $\{neA_1, neA_2, \dots, neA_{|E|}\}$, and $\{neN_1, neN_2, \dots, neN_{|E|}\}$. Observe that in this subcircuit, $cd_r = d = 5$, $cw_r = w = |E|$, and $\#n_{tot,r} = \#n = 2|E| + k + 2$. The output behaviour of the neurons in *C* from the presentation of input *I* until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$n_{in}(1)$
2	$nvN'_1(0), nvN'_2(0), \dots nvN'_{ V' }(0)$
3	$neA_1(0), neA_2(0), \dots neA_{ E }(0)$
4	$neN_1(1), neN_2(1), \dots neN_{ E }(1)$
5	$n_{out}(1)$

This means that C is behaviorally equivalent to M on I.

 $\Leftarrow: \text{Let } C \text{ be a subcircuit of } M \text{ that is behaviorally equivalent to } M \text{ on input } I \text{ and has } \#n_{tot,r} \leq \\ \#n = 2|E| + k + 2 \text{ neurons. As neurons in all five layers in } M \text{ must be present in } C \text{ to} \\ \text{produce the required output, } cd_r = cd_g \text{ and both } n_{in} \text{ and } n_{out} \text{ are in } C. \text{ In order for } n_{out} \\ \text{to produce a non-zero output, there must be at least } |E| \text{ edge NOT neurons and } |E| \text{ AND} \\ \text{neurons in } C, \text{ and each of the latter must be connected to at least one of the vertex NOT \\ \text{neurons corresponding to their endpoint vertices. As } \#n_{tot,r} \leq 2|E| + k + 2, \text{ there must } \\ \text{be exactly } |E| \text{ edge NOT neurons, } |E| \text{ edge AND neurons, and } k \text{ vertex NOT neurons in } C \\ \text{ and the vertices in } G \text{ corresponding to these vertex NOT neurons must form a vertex cover } \\ \text{of size } k \text{ in } G. \end{cases}$

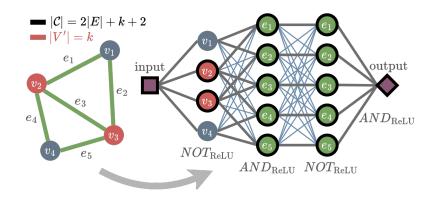


Figure 2: This figure summarizes the reduction from VERTEX COVER

As VC is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MLSC is also NP-hard. The result follows from the definition of NP-hardness.

We now define our two notions of polynomial-time approximation. For a minimization problem Π , let $OPT_{\Pi}(I)$ be an optimal solution for Π , $A_{\Pi}(I)$ be a solution for Π returned by an algorithm A, and $m(OPT_{\Pi}(I))$ and $m(A_{\Pi}(I))$ be the values of these solutions. Consider the following alternative to approximation algorithms that give solutions that are within an additive factor of optimal.

Definition 10. (Ausiello et al., 1999, Definition 3.5) Given a minimization problem Π , an algorithm A is a (**multiplicative**) ϵ -approximation algorithm for Π if for each instance I of Π , $m(A_{\Pi}(I)) - m(OPT_{\Pi}(I)) \leq \epsilon \times m(OPT_{\Pi}(I))$.

It would be ideal if one could obtain approximate solutions for a problem Π that are arbitrarily close to optimal if one is willing to allow extra algorithm runtime. This is encoded in the following entity.

Definition 11. (Adapted from Definition 3.10 in Ausiello et al. 1999) Given a minimization problem Π , a **polynomial-time approximation scheme (PTAS) for** Π is a set \mathcal{A} of algorithms such that for each integer k > 0, there is a $\frac{1}{k}$ -approximation algorithm $A_{\Pi}^k \in \mathcal{A}$ that runs in time polynomial in |I|.

The question of whether or not a problem has a PTAS can be answered using the following type of approximation-preserving reducibility.

Definition 12. (Papadimitriou & Yannakakis, 1991, page 427) Given two minimization problems Π and Π' , Π **L-reduces to** Π' , **i.e.**, $\Pi \leq_L \Pi'$ if there are polynomial-time algorithms f and g and constants $\alpha, \beta > 0$ such that for each instance I of Π

- (L1) Algorithm f produces an instance I' of Π' such that $m(OPT_{\Pi'}(I')) \leq \alpha \times m(OPT_{\Pi}(I))$; and
- (L2) For any solution for I' with value v', algorithm g produces a solution for I of value v such that $v m(OPT_{\Pi}(I)) \leq \beta \times (v' m(OPT_{\Pi'}(I')))$.

Lemma 3. (Arora et al., 1998, Theorem 1.2.2) If an optimization problem that is MAX SNP-hard under L-reductions has a PTAS then P = NP.

Theorem 6. If MLSC has a PTAS then P = NP.

Proof. We prove that the reduction from VC to MLSC in the proof of Theorem 5 is also an L-reduction from VC_B to MLSC as follows:

• Observe that $m(OPT_{VC_B}(I)) \ge |E|/B$ (the best case in which G is a collection of B-star subgraphs such that each edge is uniquely covered by the central vertex of its associated star) and $m(OPT_{MLSC}(I')) \le 2|E| + 2|E| + 2 = 4|E| + 2$ (the worst case in which the

vertex neurons corresponding to the two endpoints of every edge in G are selected). This gives us

$$m(OPT_{MLSC}(I')) \leq 4Bm(OPT_{VC_B}(I)) + 2$$

$$\leq 4Bm(OPT_{VC_B}(I)) + 2Bm(OPT_{VC_B}(I))$$

$$\leq 6Bm(OPT_{VC_B}(I))$$

which satisfies condition L1 with $\alpha = 6B$.

• Observe that any solution S' for the constructed instance I' of MLSC of value k + 2|E| + 2 implies a solution S for the given instance I of VC_B of size k, i.e., the vertices in V corresponding to the selected vertex neurons in S. Hence, it is the case that $m(S) - m(OPT_{VC_B}(I)) = m(S') - m(OPT_{MLSC}(I'))$, which satisfies condition L2 with $\beta = 1$.

As VC_B is MAX SNP-hard under L-reductions (Papadimitriou & Yannakakis, 1991, Theorem 2(d)), the L-reduction above proves that MLSC is also MAX SNP-hard under L-reductions. The result follows from Lemma 3.

B.2 RESULTS FOR MGSC

Theorem 7. If MGSC is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from CLIQUE to MGSC. Given an instance $\langle G = (V, E), k \rangle$ of CLIQUE, construct an instance $\langle M, d, w, \#n \rangle$ of MGSC as in the reduction in the proof of Theorem 1, omitting input vector *I*. Observe that this instance of MGSC can be created in time polynomial in the size of the given instance of CLIQUE. As $\#n_{in,g} = 1$, there are only two possible Boolean input vectors, (0) and (1). Given input vector (1), as MLP *M* in this reduction is the same as *M* in the proof of Theorem 1, the output in timestep 4 is once again 1; moreover, given input vector (0), no vertex or edge neurons can have output 1 and hence the output in timestep 4 is 0.

We now need to show the correctness of this reduction by proving that the answer for the given instance of CLIQUE is "Yes" if and only if the answer for the constructed instance of MGSC is "Yes". We prove the two directions of this if and only if separately as follows:

⇒ : Let $V' = \{v'_1, v'_2, \ldots, v'_k\} \subseteq V$ be a clique in G of size k. Consider the subcircuit C based on neurons $n_{in}, n_{out}, \{nv' \mid v' \in V'\}$, and $\{ne' \mid e' = (x, y) \text{ and } vx, vy \in V'\}$. Observe that in this subcircuit, $cd_r = 4, cw_r = k(k-1)/2$, and $\#n_{tot,r} = k(k-1)/2 + k + 2$. Given input (1), the output behaviour of the neurons in C from the presentation of input until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$n_{in}(1)$
	$nv'_1(1), nv'_2(1), \dots nv'_{ V' }(1)$
3	$ne'_1(1), ne'_2(1), \dots ne'_{k(k-1)/2}(1)$
4	$n_{out}(1)$

Moreover, given input (0), no vertex or edge neurons in C can have output 1 and the output of C at timestep 4 is 0. This means that C is behaviorally equivalent to M on all possible Boolean input vectors

 $\leftarrow : \text{Let } C \text{ be a subcircuit of } M \text{ that is behaviorally equivalent to } M \text{ on all possible Boolean input vectors and has } \#n_{tot,r} \leq \#n = k(k-1)/2 + k + 2 \text{ neurons. Consider the case of input vector (1). This vector must cause } C \text{ to generate output 1 at timestep 4 as } C \text{ is behaviorally equivalent to } M \text{ on all Boolean input vectors. As neurons in all four layers in } M \text{ must be present in } C \text{ to produce the required output, } cd_r = cd_g \text{ and both } n_{in} \text{ and } n_{out} \text{ are in } C. \text{ In order for } n_{out} \text{ to produce a non-zero output, there must be at least } k(k-1)/2 \text{ edge neurons in } C, \text{ each of which must be activated by the inclusion of the vertex neurons corresponding to both of their endpoint vertices. This requires the inclusion of at least k vertex neurons in C, as a set V'' of vertices in graph can have at most <math>|V''|(|V''| - 1)/2 \text{ distinct edges between them (with this maximum occurring if all pairs of vertices in V'' have an edge between them). As <math>\#n_{tot,r} \leq k(k-1)/2 + k + 2$, all of the above implies that there must be exactly k(k-1)/2 edge neurons and exactly k vertex neurons in C and the vertices in G corresponding to these vertex neurons must form a clique of size k in G.

As CLIQUE is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MGSC is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 8. If $\langle cd_g, \#n_{in,g}, \#n_{out,g}, B_{\max,g}, W_{\max,g}, cd_r, cw_r, \#n_{in,r}, \#n_{out,r}, \#n_{tot,r}, B_{\max,r}, W_{\max,r} \rangle$ -MGSC is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MGSC constructed in the reduction in the proof of Theorem 7, $cd_g = cd_r = 4$, $\#n_{in,g} = \#n_{in,r} = \#n_{out,r} = \#n_{out,r} = W_{\max,g} = W_{\max,r} = 1$, and $B_{\max,g}, B_{\max,r}, \#n_{tot,r}$, and cw_r are all functions of k in the given instance of CLIQUE. The result then follows from the fact that $\langle k \rangle$ -CLIQUE is W[1]-hard (Downey & Fellows, 1999).

Theorem 9. $\langle \#n_{tot,g} \rangle$ -MGSC is fixed-parameter tractable.

Proof. Consider the algorithm that generates each possible subcircuit of M and checks if that subcircuit is behaviorally equivalent to M on all possible Boolean input vectors of length $\#n_{in,g}$. If such a subcircuit is found, return "Yes"; otherwise, return "No". There are $2^{\#n_{in,g}}$ possible Boolean input vectors and the total number of subcircuits that need to be checked is at most $2^{\#n_{tot,g}}$. As $\#n_{in,g} \leq \#n_{tot,g}$ and each such subcircuit can be run on an input vector in time polynomial in the size of the given instance of MGSC, the above is a fixed-parameter tractable algorithm for MGSC relative to parameter-set $\{\#n_{tot,g}\}$.

Theorem 10. $\langle cd_q, cw_q \rangle$ -MGSC is fixed-parameter tractable.

Proof. Follows from the observation that $\#n_{tot,g} \leq cd_g \times cw_g$ and the algorithm in the proof of Theorem 9.

Let us now consider the PTAS-approximability of MGSC. A first thought would be to -reuse the reduction in the proof of Theorem 5 if the given MLP M and VC subcircuit are behaviorally equivalent under both possible input vectors, (1) and (0). We already know the former is true. With respect to the latter, observe that the output behaviour of the neurons in M from the presentation of input (0) until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$n_{in}(0)$
2	$ nvN_1(1), nvN_2(1), \dots nvN_{ V }(1) $
3	$neA_1(1), neA_2(1), \dots neA_{ E }(1)$
4	$neN_1(0), neN_2(0), \dots neN_{ E }(0)$
5	$n_{out}(0)$

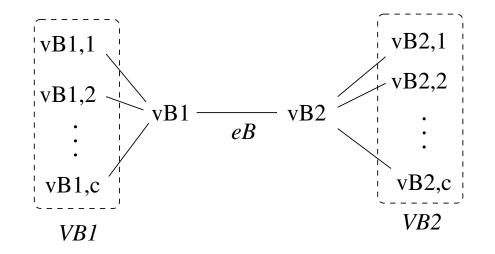


Figure 3: The *c*-way Bowtie Graph B_c .

However, in the VC subcircuit, we are no longer guaranteed that both endpoint vertex NOT neurons for any edge AND neuron (let alone the endpoint vertex NOT neurons for all edge AND neurons) will be the vertex cover encoded in the subcircuit. This means that all edge AND neurons could potentially output 0, which would cause M to output 1 at timestep 4.

This problem can be fixed if we can modify the given VC graph G to create a graph G' such that

- 1. we can guarantee that both endpoint vertex NOT neurons for at least one edge AND neuron are present in a VC subcircuit C constructed for G' (which would make at least one edge AND neuron output 1 and cause C to output 0 at timestep 4); and
- 2. we can easily extract a graph vertex cover of size at most k for G from any vertex cover of a particular size for G'.

To do this, we shall use the *c*-way bowtie graph B_c . For c > 0, B_c consists of a central edge e_B between vertices v_{B1} and v_{B2} such that *c* edges radiate outwards from v_{B1} and v_{B2} to the *c*-sized vertex-sets $V_{B1} = \{v_{B1,1}, v_{B1,2}, \ldots, v_{B1,c}\}$ and $V_{B2} = \{v_{B2,1}, v_{B2,2}, \ldots, v_{B2,c}\}$, respectively (see Figure 3). Note that such a graph has 2c+2 vertices and 2c+1 edges. Given a graph G = (V, E) with no isolated vertices such that $|V| \leq 2|E|$ (with the minimum occurring in a graph consisting of |E| endpoint-disjoint edges), let $Bow(G) = B_{4|E|} \cup G$. This graph has the following useful property.

Lemma 4. Given a graph G = (V, E) and a positive integer $k \leq |V|$, if Bow(G) has a vertex cover V' of size at most k + 2 then (1) $\{v_{B1}, v_{B2}\} \in V'$ and (2) G has a vertex cover of size at most k.

Proof. Let us prove the two consequent clauses as follows:

- 1. Any vertex cover V' of Bow(G) must cover all the edges in both $B_{4|E|}$ and G. Suppose $\{v_{B1}, v_{B2}\} \notin V'$. In order to cover the edges in $B_{4|E|}$, all 8|E| vertices in $V_{B1} \cup V_{B2}$ must be in V'. This is however impossible as $|V'| \le k+2 \le |V|+2 \le 2|E|+2 \le 4|E < 8|E|$. Similarly, suppose only one of v_{B1} and v_{B2} is in V'; let us assume it is v_{B1} . In that case, all vertices in V_{B2} must be in V'. However, this too is impossible as $|V' \{v_{B1}\}| \le k+1 \le |V|+1 \le 2|E|+1 \le 3|E| < 4|E| = |V_{B2}|$. Hence, both v_{B1} and v_{B2} must be in V'.
- 2. Given (1), $k' \leq k$ vertices remain in V' to cover G. All k' of these vertices need not be in G, e.g., some may be scattered over V_{B1} and V_{B2} . That being said, it is still the case that G must have a vertex cover of size at most k.

This concludes the proof.

Theorem 11. If MGSC is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from VC to MGSC. Given an instance $\langle G = (V, E), k \rangle$ of VC, construct the following instance $\langle M, d, w, \#n \rangle$ of MGSC based on G' = (V', E') = Bow(G): Let M be an MLP based on $\#n_{tot,g} = |V'| + 2|E'| + 2$ neurons spread across five layers:

- 1. Input layer: The single input neuron n_{in} (bias 0).
- 2. Hidden vertex layer: The vertex neurons $nvN_1, nvN_2, \dots nvN_{|V'|}$, all of which are NOT ReLU gates.
- Hidden edge layer I: The edge AND neurons neA1, neA2,...neA|E'|, all of which are 2-way AND ReLU gates.
- 4. Hidden edge layer II: The edge NOT neurons $neN_1, neN_2, \dots neN_{|E'|}$, all of which are NOT ReLU gates.
- 5. Output layer: The single output neuron n_{out} , which is an |E'|-way AND ReLU gate.

The non-zero weight connections between adjacent layers are as follows:

- The input neuron n_{in} is connected to each vertex NOT neuron with weight 1.
- Each vertex NOT neuron nvN_i , $1 \le i \le |V'|$, is connected to each edge AND neuron whose corresponding edge has an endpoint v'_i with weight 1.
- Each edge AND neuron neA_i, 1 ≤ i ≤ |E'|, is connected to its corresponding edge NOT neuron neN_i with weight 1.
- Each edge NOT neuron neN_i , $1 \le i \le |E'|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let d = 5, w = |E'|, and #n = 2|E'| + (k+2) + 2 = 2|E'| = k + 4. Observe that this instance of MGSC can be created in time polynomial in the size of the given instance of VC, the output behaviour of the neurons in M from the presentation of input (1) until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$n_{in}(1)$
2	$nvN_1(0), nvN_2(0), \dots nvN_{ V' }(0)$
3	$neA_1(0), neA_2(0), \dots neA_{ E' }(0)$
4	$neN_1(1), neN_2(1), \dots neN_{ E' }(1)$
5	$n_{out}(1)$

and the output behaviour of the neurons in M from the presentation of input (0) until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$n_{in}(0)$
2	$ nvN_1(1), nvN_2(1), \dots nvN_{ V' }(1) $
3	$neA_1(1), neA_2(1), \dots neA_{ E' }(1)$
4	$neN_1(0), neN_2(0), \dots neN_{ E' }(0)$
5	$n_{out}(0)$

We now need to show the correctness of this reduction by proving that the answer for the given instance of VC is "Yes" if and only if the answer for the constructed instance of MGSC is "Yes". We prove the two directions of this if and only if separately as follows:

⇒ : Let $V'' = \{v''_1, v''_2, \dots, v''_k\} \subseteq V$ be a vertex cover in G of size k. Consider the subcircuit C based on neurons n_{in} , n_{out} , $\{nv''N \mid v'' \in V''\} \cup \{nv_{B1}N, nv_{B2}B\}$, $\{neA_1, neA_2, \dots, neA_{|E'|}\}$, and $\{neN_1, neN_2, \dots, neN_{|E'|}\}$. Observe that in this subcircuit, $cd_r = d = 5$, $cw_r = w = |E'|$, and $\#n_{tot,r} = \#n = 2|E'| + k + 4$. The output behaviour of the neurons in C from the presentation of input (1) until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$n_{in}(1)$
2	All vertex NOT neurons (0)
3	$neA_1(0), neA_2(0), \dots neA_{ E' }(0)$
4	$neN_1(1), neN_2(1), \dots neN_{ E' }(1)$
5	$n_{out}(1)$

Moreover, the output behaviour of the neurons in C from the presentation of input (0) until the output is generated is as follows:

timestep	neurons (outputs)
0	
1	$n_{in}(0)$
2	All vertex NOT neurons (1)
3	At least one edge AND neuron has output 1, e.g., ne_BA
4	At least one edge NOT neuron has output 0, e.g., ne_BN
5	$n_{out}(0)$

This means that C is behaviorally equivalent to M on all possible Boolean input vectors.

 $\leftarrow : \text{Let } C \text{ be a subcircuit of } M \text{ that is behaviorally equivalent to } M \text{ on all possible Boolean input} \\ \text{vectors and has } \#n_{tot,r} \leq \#n = 2|E'| + k + 4 \text{ neurons. As neurons in all five layers} \\ \text{in } M \text{ must be present in } C \text{ to produce the required output, } cd_r = cd_g \text{ and both } n_{in} \text{ and} \\ n_{out} \text{ are in } C. \text{ In order for } n_{out} \text{ to produce a non-zero output, there must be at least } |E'| \\ \text{edge NOT neurons and } |E'| \text{ AND neurons in } C, \text{ and each of the latter must be connected} \\ \text{to at least one of the vertex NOT neurons corresponding to their endpoint vertices. As } \\ \#n_{tot,r} \leq 2|E'| + k + 4, \text{ there must be exactly } |E| \text{ edge NOT neurons, } |E'| \text{ edge AND} \\ \text{neurons, and } k + 2 \text{ vertex NOT neurons in } C \text{ and the vertices in } G' \text{ corresponding to these vertex NOT neurons must form a vertex cover } V'' \text{ of size } k + 2 \text{ in } G'. \text{ However, as } \\ G' = Bow(G), \text{ Lemma 4 implies not only that } \{nv_{B1}N, nv_{B2}N\} \in V'' \text{ but that } G \text{ has a vertex cover of size at most } k. \end{aligned}$

As VC is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MGSC is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 12. If MGSC has a PTAS then P = NP.

Proof. We prove that the reduction from VC to MLSC in the proof of Theorem 11 is also an L-reduction from VC_B to MGSC as follows:

• Observe that $m(OPT_{VC_B}(I)) \ge |E|/B$ (the best case in which G is a collection of B-star subgraphs such that each edge is uniquely covered by the central vertex of its associated star) and $m(OPT_{MGSC}(I')) \le 2|E'| + 2|E'| + 2 = 4|E'| + 2$ (the worst case in which the vertex neurons corresponding to the two endpoints of every edge in G are selected). As |E'| = 9|E| + 1, this gives us

$$m(OPT_{MLSC}(I')) \leq 36|E| + 4 + 2$$

$$\leq 36Bm(OPT_{VC_B}(I)) + 6$$

$$\leq 36Bm(OPT_{VC_B}(I)) + 6Bm(OPT_{VC_B}(I))$$

$$\leq 42Bm(OPT_{VC_B}(I))$$

which satisfies condition L1 with $\alpha = 42B$.

• Observe that any solution S' for for the constructed instance I' of MGSC of value k + 2|E'| + 4 implies a solution S for the given instance I of VC_B of size k in S. Hence, it is the case that $m(S) - m(OPT_{VC_B}(I)) = m(S') - m(OPT_{MGSC}(I'))$, which satisfies condition L2 with $\beta = 1$.

As VC_B is MAX SNP-hard under L-reductions (Papadimitriou & Yannakakis, 1991, Theorem 2(d)), the L-reduction above proves that MGSC is also MAX SNP-hard under L-reductions. The result follows from Lemma 3.

C SUFFICIENT CIRCUIT SEARCH AND COUNTING PROBLEMS

Definition 13. An entity x with property P is *minimal* if there is no non-empty subset of elements in x that can be deleted to create an entity x' with property P.

We shall assume here that all subcircuits are non-trivial, i.e., the subcircuit is of size $\langle M |$.

Consider the following search problem templates:

Name LOCAL SUFFICIENT CIRCUIT (AccLSC)

Input: A multi-layer perceptron M of depth cd_g with $\#n_{tot,g}$ neurons and maximum layer width cw_g , connection-value matrices $W_1, W_2, \ldots, W_{cd_g}$, neuron bias vector B, a Boolean input vector I of length $\#n_{g,in}$, integers d and w such that $1 \le d \le cd_g$ and $1 \le w \le cw_g$ **PrmAdd**. *Output*: A **CType** subcircuit C of M of depth $cd_r \le d$ with maximum layer width $cw_r \le w$ that C(I) = M(I), if such a subcircuit exists, and special symbol \bot otherwise.

Name GLOBAL SUFFICIENT CIRCUIT (AccGSC)

Input: A multi-layer perceptron M of depth cd_g with $\#n_{tot,g}$ neurons and maximum layer width cw_g , connection-value matrices $W_1, W_2, \ldots, W_{cd_g}$, neuron bias vector B, integers d and w such that $1 \le d \le cd_g$ and $1 \le w \le cw_g$ **PrmAdd**.

Output: A **CType** subcircuit C of M of depth $cd_r \leq d$ with maximum layer width $cw_r \leq w$ such that C(I) = M(I) for every possible Boolean input vector I of length $\#_{in,g}$, if such a subcircuit exists, and special symbol \perp otherwise.

Name LOCAL NECESSARY CIRCUIT (AccLNC)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a Boolean input vector I of length $\#n_{in}$ **PrmAdd**.

Output: A **CType** subcircuit C of M such that $C \cap C' \neq \emptyset$ for every sufficient circuit C' of M relative to I, if such a s subcircuit exists, and special symbol \perp otherwise.

Name GLOBAL NECESSARY CIRCUIT (AccGNC)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw,

connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B **PrmAdd**. *Output*: A **CType** subcircuit C of M such that for for every possible Boolean input vector I of length $\#n_{in}, C \cap C' \neq \emptyset$ for every sufficient circuit C' of M relative to I, if such a subcircuit exists, and special symbol \bot otherwise.

Name LOCAL CIRCUIT ABLATION (AccLCA)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , bias vector B, a Boolean input vector I of length $\#n_{in}$ **PrmAdd**.

Output: A **CType** subcircuit C of M such that $(M/C)(I) \neq M(I)$, if such a subcircuit exists, and special symbol \perp otherwise.

Name GLOBAL CIRCUIT ABLATION (AccGCA)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B **PrmAdd**.

Output: A **CType** subcircuit C of M such that $(M/C)(I) \neq M(I)$ every possible Boolean input vector I of length $\#n_{in}$, if such a subcircuit exists, and special symbol \perp otherwise.

Each these templates can be filled out to create six search problem variants as follows:

- 1. Exact-size Problem:
 - Name = "Exact"
 - Acc = "Ex"
 - **PrmAdd** = ", and a positive integer k < |M|"
 - **CType** = "size-k"
- 2. Bounded-size Problem:
 - Name = "Bounded"
 - Acc = "B"
 - **PrmAdd** = ", and a positive integer k < |M|"
 - **CType** = "size- $\leq k$ "
- 3. Minimal Problem:
 - Name = "Minimal"
 - Acc = "Mnl"
 - PrmAdd = ""
 - **CType** = "minimal"
- 4. Minimal Exact-size Problem:
 - Name = "Minimal exact"
 - Acc = "MnlEx"
 - **PrmAdd** = ", and a positive integer k < |M|"
 - **CType** = "minimal size-k"
- 5. Minimal Bounded-size Problem:
 - Name = "Minimal bounded"
 - Acc = "MnlB"
 - **PrmAdd** = ", and a positive integer k < |M|"
 - **CType** = "minimal size- $\leq k$ "
- 6. Minimum Problem:
 - Name = "Minimum"
 - Acc = "Min"
 - **PrmAdd** = ""
 - **CType** = "minimum"

We will use previous results for the following problems to prove our results for the problems above.

EXACT CLIQUE (ExClique) Input: An undirected graph G = (V, E) and a positive integer $k \le |V|$. Output: A k-size vertex subset V' of G that is a clique of size k in G, if such a V' exists, and special symbol \perp otherwise.

EXACT VERTEX COVER (ExVC) Input: An undirected graph G = (V, E) and a positive integer $k \le |V|$. Output: A k-size vertex subset V' of G that is a vertex cover of size k in G, if such a V' exists, and special symbol \perp otherwise.

MINIMAL VERTEX COVER (MnIVC) (Valiant, 1979, Problem 4) Input: An undirected graph G = (V, E). Output: A minimal subset V' of the vertices in G that is a vertex cover of G.

Given any search problem X above, let #X be the problem that returns the number of solution outputs. To assess the complexity of these counting problems, we will use the following definitions in Garey & Johnson 1979, Section 7.3, adapted from those originally given in Valiant 1979.

Definition 14. (Garey & Johnson, 1979, p. 168) A counting problem $\#\Pi$ is in #P if there is a nondeterministic algorithm such that for each input *I* of Π , (1) the number of 'distinct "guesses" that lead to acceptance of *I* exactly equals the number solutions of Π for input *I* and (2) the length of the longest accepting computation is bounded by a polynomial in |I|.

#P contains very hard problems, as it is known every class in the Polynomial Hierarchy (which include P and NP as its lowest members) Turing reduces to #P, i.e., $PH \subseteq P^{\#P}$ (Toda, 1991). We use the following type of reduction to isolate problems that are the hardest (#P-complete) and at least as hard as the hardest (#P-hard) in #P.

Definition 15. (Garey & Johnson, 1979, p. 168-169) Given two search problems Π and Π' , a (*polynomial time*) parsimonious reduction from Π to Π' is a function $f : I_{\Pi} \to I_{\Pi'}$ that can be computed in polynomial time such that for every $I \in \Pi$, the number of solutions of Π for input I is exactly equal to the number of Π' for input f(I).

We will also derive parameterized counting results using the framework given in Flum & Grohe 2006, Chapter 14. The definition of class #W[1] (Flum & Grohe, 2006, Definition 14.11) is rather intricate and need not concern us here. We will use the following type of reduction to isolate problems that are at least as hard as the hardest (#W[1]-hard) in #W[1].

Definition 16. (Adapted from Flum & Grohe 2006, Definition 14.10.a) Given two parameterized search problems $\langle k \rangle -\Pi$ and $\langle K \rangle -\Pi'$, a (*fpt*) parsimonious reduction from $\langle k \rangle -\Pi$ to $\langle K \rangle -\Pi'$ is a function $f : I_{\Pi} \to I_{\Pi'}$ computable in fixed-parameter time relative to parameter k such that for every $I \in \Pi$ (1) the number of solutions of Π for input I is exactly equal to the number of Π' for input f(I) and (2) for every parameter $k' \in K$, $k' \leq g_{k'}(k)$ for some function $g_{k'}()$.

Reductions are often established to be parsimonious by proving bijections between solution-sets for I and f(I), i.e., each solution to I corresponds to exactly one solution for f(I) and vice versa.

We will prove various parameterized results for our problems using reductions from ExClique. The parameterized results are proved relative to the parameters in Table 6. Lemmas 1 and 2 will be useful in deriving additional parameterized results from proved ones.

C.1 RESULTS FOR SUFFICIENT CIRCUIT PROBLEMS

Theorem 13. For $\Pi \in L = \{ \mathbf{V}LSC, \mathbf{V}GSC \mid \mathbf{V} \in \{Ex, B, MnlEx, MnlB\} \}$, ExClique polynomial-time parsimoniously reduces to Π .

Proof. Consider first the local sufficient circuit problem variants. Observe that for the reduction from Clique to MLSC in the proof of Theorem 1 (1) the reduction is also from ExClique, (2) each

Table 6: Parameters for the sufficient circuit, necessary circuit, circuit ablation problems. Note that for sufficient circuit problems, there are two versions of each parameter k – namely, those describing the given MLP M and the derived subcircuit C (distinguished by g- ands r-subscripts, respectively).

Parameter	Description
cd	# layers in given MLP
cw	max # neurons in layer in given MLP
$\#n_{tot}$	total # neurons in given MLP
$\#n_{in}$	# input neurons in given MLP
$\#n_{out}$	# output neurons in given MLP
$B_{\rm max}$	max neuron bias in given MLP
W _{max}	max connection weight in given MLP
k	Size of requested neuron subset

clique of size k in the given instance of ExClique has exactly one corresponding sufficient circuit of size k' = k + k(k-1)/2 + 2 in the constructed instance of MLSC and vice versa, and (3) courtesy of the bias in neuron n_{out} and the structure of the MLP M in the constructed instance of MLSC, no sufficient circuit can have size < k' and hence problem variants ExLSC, BLSC, MnlExLSC, and MnlBLSC (when k' = k + k(k-1)/2 + 2) have the same set of sufficient circuit solutions Hence, this reduction is also a polynomial-time parsimonious reduction from ExClique to each local sufficient circuit problem variant in L.

As for the global sufficient circuit problem variants, it was pointed out that in the proof of Theorem 7 that the reduction above is also a reduction from Clique to MGSC; moreover, all three properties above also hold modulo MGSC, ExGSC, BGSC, MnlExGSC, and MnlBGSC. Hence, this reduction is also a polynomial-time parsimonious reduction from ExClique to each global sufficient circuit problem variant in L.

Theorem 14. For $\Pi \in L = \{ \mathbf{V}LSC, \mathbf{V}GSC \mid \mathbf{V} \in \{Ex, B, MnlEx, MnlB\} \}, \langle k \rangle$ -ExClique fpt parsimoniously reduces to $\langle cd_g, \#n_{in,g}, \#n_{out,g}, B_{\max,g}, W_{\max,g}, cd_r, cw_r, \#n_{in,r}, \#n_{out,r}, \#n_{tot,r}, B_{\max,r}, W_{\max,r} \rangle$ - Π .

Proof. Observe that in the instance of MLSC constructed in the reduction in the proof of Theorem 1, $cd_g = cd_r = 4$, $\#n_{in,g} = \#n_{in,r} = \#n_{out,r} = \#n_{out,r} = W_{\max,g} = W_{\max,r} = 1$, and $B_{\max,g}, B_{\max,r}, \#n_{tot,r}$, and cw_r are all functions of k in the given instance of CLIQUE. The result then follows by the reasoning in the proof of Theorem 13.

Theorem 15. For $\Pi \in L = \{ \mathbf{V}LSC, \mathbf{V}GSC \mid \mathbf{V} \in \{Ex, B, MnlEx, MnlB\} \}$, if Π is polynomial-time solvable then P = NP.

Proof. Suppose there is a polynomial-time algorithm A for some $\Pi \in L$. Let R be the polynomial-time algorithm underlying the polynomial-time parsimonious reduction from ExClique to Π specified in the proof of Theorem 13. Construct an algorithm A' for the decision version of ExClique as follows: Given an input I for ExClique_D, create input I' for Π using R, and apply A to I' to create solution S. If $S = \bot$, return "No"; otherwise, return "Yes". Algorithm A' is a polynomial-time algorithm for ExClique_D; however, as ExClique_D is NP-complete (Garey & Johnson, 1979, Problem GT19), this implies that P = NP, giving the result.

Theorem 16. if MinLSC or MinGSC is polynomial-time solvable then P = NP.

Proof. Suppose there is a polynomial-time algorithm A for MinLSC (MinGSC). Let R be the polynomial-time algorithm underlying the polynomial-time parsimonious reduction from ExClique

to BLSC (BGSC) specified in the proof of Theorem 13. Construct an algorithm A' for the decision version of ExClique as follows: Given an input I for ExClique_D, create input I' for BSC (LSC) using R, and apply A to I' to create solution S. If $|S| \le k$, return "Yes"; otherwise, return "No". Algorithm A' is a polynomial-time algorithm for ExClique_D; however, as ExClique_D is NP-complete (Garey & Johnson, 1979, Problem GT19), this implies that P = NP, giving the result.

Theorem 17. For $\Pi \in L = \{ \mathbf{V}LSC, \mathbf{V}GSC \mid \mathbf{V} \in \{Ex, B, MnlEx, MnlB\} \}$ and $K = \{cd_g, \#n_{in,g}, \#n_{out,g}, B_{\max,g}, W_{\max,g}, cd_r, cw_r, \#n_{in,r}, \#n_{out,r}, \#n_{tot,r}, B_{\max,r}, W_{\max,r} \}$, if $\langle K \rangle$ - Π is fixed-parameter tractable then FPT = W[1].

Proof. Suppose there is a fixed-parameter tractable algorithm A for $\langle K \rangle$ -II for some $\Pi \in L$. Let R be the fixed-parameter algorithm underlying the fpt parsimonious reduction from $\langle k \rangle$ -ExClique to $\langle K \rangle$ -II specified in the proof of Theorem 14. Construct an algorithm A' for the decision version of $\langle k \rangle$ -ExClique as follows: Given an input I for $\langle k \rangle$ -ExClique_D, create input I' for II using R, and apply A to I' to create solution S. If $S = \bot$, return "No"; otherwise, return "Yes". Algorithm A' is a fixed-parameter tractable algorithm for $\langle k \rangle$ -ExClique_D; however, as $\langle k \rangle$ -ExClique_D is W[1]-complete (Downey & Fellows, 1999), this implies that FPT = W[1], giving the result.

Theorem 18. For $K = \{cd_g, \#n_{in,g}, \#n_{out,g}, B_{\max,g}, W_{\max,g}, cd_r, cw_r, \#n_{in,r}, \#n_{out,r}, \#n_{tot,r}, B_{\max,r}, W_{\max,r}\}$, if $\langle K \rangle$ -MinLSC or $\langle K \rangle$ -MinGSC is fixed-parameter tractable then FPT = W[1].

Proof. Suppose there is a fixed-parameter tractable algorithm A for $\langle K \rangle$ -MinLSC ($\langle K \rangle$ -MinGSC). Let R be the fixed-parameter algorithm underlying the fpt parsimonious reduction from $\langle k \rangle$ -ExClique to $\langle K \rangle$ -BLSC ($\langle K \rangle$ -BGSC) specified in the proof of Theorem 14. Construct an algorithm A' for the decision version of $\langle k \rangle$ -ExClique as follows: Given an input I for $\langle k \rangle$ -ExClique_D, create input I' for II using R, and apply A to I' to create solution S. If $|S| \leq k$, return "Yes"; otherwise, return "No". Algorithm A' is a fixed-parameter tractable algorithm for $\langle k \rangle$ -ExClique_D; however, as $\langle k \rangle$ -ExClique_D is W[1]-complete (Downey & Fellows, 1999), this implies that FPT = W[1], giving the result.

Theorem 19. For $\Pi \in L = \{ \mathbf{V}LSC \mid \mathbf{V} \in \{Ex, B, MnlEx, MnlB\} \}$, # Π is #P-complete.

Proof. As #ExVC is #P-complete (Provan & Ball 1983, Page 781; see also Garey & Johnson 1979, Page 169), #ExClique is #P-hard by the polynomial-time parsimonious reduction from ExVC to ExClique implicit in Garey & Johnson 1979, Lemma 3.1. The #P-hardness of #II then follows from the appropriate polynomial-time parsimonious reduction from ExClique to II specified in the proof of Theorem 13. Membership of #II in #P and the result follows from the nondeterministic algorithm for #II that, on each computation path, guesses a subcircuit C of M and then verified that C satisfies the properties required by II relative to MLP M input I.

Theorem 20. For $\Pi \in L = \{ \mathbf{V}GSC \mid \mathbf{V} \in \{Ex, B, MnlEx, MnlB\} \}$, # Π is #P-hard.

Proof. The result follows from the #P-hardness of #ExClique noted in the proof of Theorem 20 and the appropriate polynomial-time parsimonious reduction from ExClique to Π specified in the proof of Theorem 13.

Theorem 21. #MnlLSC is #P-complete.

Proof. Consider the reduction from MnIVC to MnILSC created by modifying the reduction from VC to MLSC given in the proof of Theorem 5 such that the bias and input-line weight of input neuron n_{in} are changed to 0 and 1 to ensure that all possible input vectors (namely, $\{0\}$ and $\{1\}$)

cause n_{in} to output 1. Observe that this modified reduction runs in time polynomial in the size of the given instance of MnIVC. We now need to show that this reduction is parsimonious, i.e., this reduction creates a bijection between the solution-sets of the given instance of MnIVC and the constructed instance of MnILSC. We prove the two directions of this bijection separately as follows:

- ⇒ : Let $V' = \{v'_1, v'_2, \ldots, v'_k\} \subseteq V$ be a minimal vertex cover in G. Consider the subcircuit C based on neurons n_{in} , n_{out} , $\{nv'N \mid v' \in V'\}$, $\{neA_1, neA_2, \ldots, neA_{|E|}\}$, and $\{neN_1, neN_2, \ldots, neN_{|E|}\}$. As shown in the ⇒-portion of the proof of correctness of the reduction in the proof of Theorem 5, C is behaviorally equivalent to M on I. As V' is minimal and only vertex NOT neurons can be deleted from M to create C, C must itself be minimal. Moreover, note that any such set V' in G is associated with exactly one set of vertex NOT neurons in (and thus exactly one sufficient circuit of) M.
- $\Leftarrow: \text{Let } C \text{ be a minimal subcircuit of } M \text{ that is behaviorally equivalent to } M \text{ on input } I. \text{ As neurons in all five layers in } M \text{ must be present in } C \text{ to produce the required output, both } n_{in} \text{ and } n_{out} \text{ are in } C. \text{ In order for } n_{out} \text{ to produce a non-zero output, all } |E| \text{ edge NOT neurons and all } |E| \text{ AND neurons must also be in } C, \text{ and each of the latter must be connected to at least one of the vertex NOT neurons corresponding to their endpoint vertices. Hence, the vertices in G corresponding to the vertex NOT neurons can be deleted from M to create C, this vertex cover must itself be minimal. Moreover, note that any such set of vertex NOT neurons in M is associated with exactly one set of vertices in (and hence exactly one vertex cover of) G.$

As #MnIVC is #P-complete (Valiant, 1979, Theorem 1(4)), the reduction above establishes that #MnILSC is #P-hard. Membership of #MnILSC in #P and hence the result follows from the non-deterministic algorithm for #MnILSC that, on each computation path, guesses a subcircuit C of M and then verifies that C is minimal and C(I) = M(I).

Theorem 22. #MnlGSC is #P-hard.

Proof. Recall that the parsimonious reduction from MnIVC to MnILSC in the proof of Theorem 21 creates an instance of MnILSC whose MLP M has the same output for every possible input vector; hence, this reduction is also a parsimonious reduction from MnIVC to MnIGSC. As #MnIVC is #P-complete (Valiant, 1979, Theorem 1(4)), this reduction establishes that #MnIGSC is #P-hard, giving the result.

Theorem 23. For $\Pi \in L = \{ \mathbf{V}LSC, \mathbf{V}GSC \mid \mathbf{V} \in \{ Ex, B, MnlEx, MnlB \} \}$, if # Π is polynomial-time solvable then P = NP.

Proof. Suppose there is a polynomial-time algorithm A for $\#\Pi$ for some $\Pi \in L$. Let R be the polynomial-time algorithm underlying the polynomial-time parsimonious reduction from ExClique to II specified in the proof of Theorem 13. Construct an algorithm A' for the decision version of ExClique as follows: Given an input I for ExClique_D, create input I' for Π using R, and apply A to I' to create solution S. If S = 0, return "No"; otherwise, return "Yes". Algorithm A' is a polynomial-time algorithm for ExClique_D; however, as ExClique_D is NP-complete (Garey & Johnson, 1979, Problem GT19), this implies that P = NP, giving the result.

Theorem 24. For $\Pi \in L = \{ \mathbf{V}LSC, \mathbf{V}GSC \mid \mathbf{V} \in \{Ex, B, MnlEx, MnlB\} \}$ and $K = \{cd_g, \#n_{in,g}, \#n_{out,g}, B_{\max,g}, W_{\max,g}, cd_r, cw_r, \#n_{in,r}, \#n_{out,r}, \#n_{tot,r}, B_{\max,r}, W_{\max,r} \}, \langle K \rangle$ -# Π is #W[1]-hard.

Proof. The result follows from the #W[1]-hardness of $\langle k \rangle$ -#ExClique (Flum & Grohe, 2006, Theorem 14.18) and the appropriate fpt parsimonious reduction from $\langle k \rangle$ -ExClique to $\langle K \rangle$ - Π specified in the proof of Theorem 14.

Theorem 25. For $\Pi \in L = \{ \mathbf{V}LSC, \mathbf{V}GSC \mid \mathbf{V} \in \{Ex, B, MnlEx, MnlB\} \}$ and $K = \{cd_g, \#n_{in,g}, \#n_{out,g}, B_{\max,g}, W_{\max,g}, cd_r, cw_r, \#n_{in,r}, \#n_{out,r}, \#n_{tot,r}, B_{\max,r}, W_{\max,r} \}$, if $\langle K \rangle$ -# Π is fixed-parameter tractable then FPT = #W[1].

Proof. Suppose there is a fixed-parameter tractable algorithm A for $\langle K \rangle$ -# Π for some $\Pi \in L$. Let R be the fixed-parameter algorithm underlying the fpt parsimonious reduction from $\langle k \rangle$ -ExClique to $\langle K \rangle$ - Π specified in the proof of Theorem 14. Construct an algorithm A' for $\langle k \rangle$ -#ExClique as follows: Given an input I for $\langle k \rangle$ ra-#ExClique, create input I' for # Π using R, and apply A to I' to create solution S. If S = 0, return "No"; otherwise, return "Yes". Algorithm A' is a fixed-parameter tractable algorithm for $\langle k \rangle$ -#ExClique $_D$; however, as $\langle k \rangle$ -ExCliqu $_D$ is #W[1]-complete (Flum & Grohe, 2006, Theorem 14.18), this implies that FPT = #W[1], giving the result.

D GLOBAL SUFFICIENT CIRCUIT PROBLEM (SIGMA COMPLETENESS)

MINIMUM GLOBAL SUFFICIENT CIRCUIT (MGSC)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices $W_1, W_2, \ldots, W_{cd_g}$, neuron bias vector B, and a positive integer k. *Question*: Is there a subcircuit C of M based on $\leq k$ neurons from M such that for every possible input I of M, C(I) = M(I)?

Given a subset N of the neurons in M, the subcircuit C of M based on x has the neurons in x and all connections in M among these neurons. Note that in order for the output of C to be equal to the output of M on input I, the numbers $\#n_{in}$ and $\#n_{out}$ of input and output neurons in M must exactly equal the numbers of input and output neurons in C; hence, no input or output neurons can be deleted from M in creating C. Following Barceló et al. 2020, page 4, all neurons in M use the ReLU activation function and the output x of each output neuron is stepped as necessary to be Boolean, i.e, step(x) = 0 if $x \le 0$ and is 1 otherwise.

We will prove our result for MGSC using a polynomial-time reduction from the problem MINIMUM DNF TAUTOLOGY. Given a DNF formula ϕ over a set V of variables, ϕ is a **tautology** if ϕ evaluates to True for every possible truth-assignment to the variables in V.

Our reduction will use specialized ReLU logic gates described in Barceló et al. 2020, Lemma 13. These gates assume Boolean neuron input and output values of 0 and 1 and are structured as follows:

- 1. NOT ReLU gate: A ReLU gate with one input connection weight of value -1 and a bias of 1. This gate has output 1 if the input is 0 and 0 otherwise.
- 2. *n*-way AND ReLU gate: A ReLU gate with *n* input connection weights of value 1 and a bias of -(n-1). This gate has output 1 if all inputs have value 1 and 0 otherwise.
- 3. *n*-way OR ReLU gate: A combination of an *n*-way AND ReLU gate with NOT ReLU gates on all of its inputs and a NOT ReLU gate on its output that uses DeMorgan's Second Law to implement $(x_1 \lor x_2 \lor \ldots x_n)$ as $\neg(\neg x_1 \land \neg x_2 \land \ldots \neg x_n)$. This gate has output 1 if any input has value 1 and 0 otherwise.

Theorem 26. MGSC is Σ_2^p -complete.

Proof. Let us first show the membership of MGSC in Σ_2^p . Using the alternating-quantifier definition of classes in the polynomial hierarchy, membership of a decision problem Π in Σ_2^p can be proved by showing that solving Π for input I is equivalent to solving a quantified formula of the form $\exists (x) \forall (y) : p(x, y)$ where both the sizes of x and y and the evaluation time of predicate formula p() are upper-bounded by polynomials in |I|. Such a formula for MGSC is

$$\exists (\mathcal{C} \subseteq \mathcal{M}) \forall \mathbf{x} \in \{0, 1\}^{\#n_{in}} : \mathcal{C}(\mathbf{x}) = \mathcal{M}(\mathbf{x})$$

We now show the Σ_2^p -hardness of MGSC. Consider the following reduction from 3DT to MGSC. Given an instance $\langle \phi, T, V, k \rangle$ of 3DT, construct the following instance $\langle M, k' \rangle$ of MGSC: Let M be an MLP based on 3|V| + 2T + 2 neurons spread across five layers:

- 1. Input neuron layer: The input neurons $ni_1, ni_2, \ldots, ni_{|V|}$ (all with bias 0).
- 2. Hidden layer I: The unnegated variable identity neurons $nvU_1, nvU_2, \ldots, nvU_{|V|}$ (all with bias 0) and negated variable NOT neurons $nvN_1, nvN_2, \ldots, nvN_{|V|}$ (all with bias 1).

3. Hidden layer II:

- (a) The term 3-way AND neurons $nT_1, xT_2, \ldots, xT_{|T|}$ (all with bias -2).
- (b) The gadget neuron n_g (bias |V| 1).
- 4. Hidden layer III: The modified term 2-way AND neurons $nTm_1, nTM_2, \ldots, nTM_{|T|}$ (all with bias -1).
- 5. Output layer: The stepped output neuron n_{out} .

The non-zero weight connections between adjacent layers are as follows:

- Each input neuron ni_i, 1 ≤ i ≤ |V|, is input-connected with weight 1 to its corresponding input line and output-connected with weights 1 and -1 to unnegated and negated variable neurons nvU_i and nvN_i, respectively.
- Each term neuron nT_i , $1 \le i \le |T|$, is input-connected with weight 1 to each of the 3 variable neurons corresponding to that term's literals.
- The gadget neuron n_g is input-connected with weight 1 to all of the unnegated and negated variable neurons.
- Each modified term neuron nTm_i , $1 \le i \le |T|$, is input-connected with weight 1 to the term neuron nT_i and the gadget neuron n_g and output-connected with weight 1 to the output neuron n_{out} .

All other connections between neurons in adjacent layers have weight 0. Finally, let k' = 3|V| + 2k + 2. Observe that this instance of MGSC can be constructed time polynomial in the size of the given instance of 3DT.

The following observations about the MLP M constructed above will be of use:

- The input to M is exactly that of the 3-DNF formula ϕ .
- The output neuron of M outputs 1 if and only if one or more of the modified term neurons output 1.
- Modified term neuron nTm_i outputs 1 if and only both the term neuron nT_i and the gadget neuron n_q output 1.
- The gadget neuron n_g outputs 1 for input I to a subcircuit C of M if and only if the negated and unnegated variable neurons corresponding to I each output 1; hence, n_g outputs 1 for all possible inputs to C if and only if all negated and unnegated variable neurons in hidden layer I are part of C.

As ϕ is a tautology, the above implies that (1) M outputs 1 for every possible input and (2) every global sufficient circuit of M must include all input and variable neurons, the gadget and output neurons, and at least one term / modified term neuron-pair.

We now need to show the correctness of this reduction by proving that the answer for the given instance of 3DT is "Yes" if and only if the answer for the constructed instance of MGSC is "Yes". We prove the two directions of this if and only if separately as follows:

 \Rightarrow : Let T', |T'| = k be a subset of the terms in ϕ that is a tautology. As noted above, any global sufficient circuit C for the constructed MLP M must include all input and variable neurons,

the gadget and output neurons, and at least one term / modified term neuron-pair. Let C contain the term / modified term neuron-pairs corresponding to the terms in T'. Such a C is therefore a global sufficient circuit for M of size k' = 3|V| = 2k + 2.

 \Leftarrow : Let C be a global sufficient circuit for M of size k' = 3|V| + 2k + 2. As noted above, C must include all input and variable neurons, the gadget and output neurons, and k term / modified term neuron-pairs. Let T' be the subset of k terms in ϕ corresponding to these neuron-pairs. Given the input-output equivalence ϕ and M (and hence any sufficient circuit for M), the disjunction of the k terms in T' must be a tautology.

As 3DT is Σ_2^p -hard (Schaefer & Umans, 2002, Problem L7), the reduction above establishes that MGSC is also Σ_2^p -hard. The result then follows from the membership of MGSC in Σ_2^p shown at the beginning of this proof.

E QUASI-MINIMAL SUFFICIENT CIRCUIT PROBLEM

QUASI-MINIMAL SUFFICIENT CIRCUIT (QMSC)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a set \mathcal{X} of input vectors of length $\#n_{in}$.

Output: a circuit C in \mathcal{M} and a neuron $v \in C$ such that $C(\mathbf{x}) = \mathcal{M}(\mathbf{x})$ and $[C \setminus \{v\}](\mathbf{x}) \neq \mathcal{M}(\mathbf{x})$

Theorem 27. QMSC is in PTIME (i.e., polynomial-time tractable).

Proof. Consider the following algorithm for QMSC. Build a sequence of MLPs by taking \mathcal{M} with all neurons labeled 1, and generating subsequent \mathcal{M}_i in the sequence by labeling an additional neuron with 0 each time (this choice can be based on any heuristic strategy, for instance, one based on gradients). The first MLP, \mathcal{M}_1 , obtained by removing all neurons labeled 0 (i.e., none) is such that $\mathcal{M}_1(x) = \mathcal{M}(x)$, and the last \mathcal{M}_n is guaranteed to give $\mathcal{M}_n(x) \neq \mathcal{M}(x)$ because all neurons are removed. Label the first MLP YES, and the last NO. Perform a variant of binary search on the sequence as follows. Evaluate the \mathcal{M}_i halfway between YES and NO while removing all its neurons labeled 0. If it satisfies the condition, label it YES, and repeat the same strategy with the sequence starting from the YES just labeled until the last \mathcal{M}_n . If it does *not* satisfy the condition, label it NO and repeat the same strategy with the sequence starting from the YES at the beginning of the original sequence until the NO just labeled. This iterative procedure halves the sequence each time. Halt when you find two adjacent $\langle \text{YES}, \text{NO} \rangle$ circuits (guaranteed to exist), and return the circuit set of the YES network V and the single neuron difference between YES and NO (the breaking point), $v \in V$. The complexity of this algorithm is roughly $O(n \log n)$.

F GNOSTIC NEURONS PROBLEM

GNOSTIC NEURONS (GN)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, and two sets \mathcal{X} and \mathcal{Y} of input vectors of length $\#n_{in}$, and a positive integer k such that $1 \le k \le \#n_{tot}$.

Output: a subset of neurons V in M of size $|V| \ge k$ such that $\forall_{v \in V}$ it is the case that $\forall_{\mathbf{x} \in \mathcal{X}}$ computing $M(\mathbf{x})$ produces activations $A^v_{\mathbf{x}} \ge t$ and $\forall_{\mathbf{y} \in \mathcal{Y}} : A^v_{\mathbf{y}} < t$.

Theorem 28. GN is in PTIME (i.e., polynomial-time tractable).

Proof. Consider the complexity of the following subroutines of an algorithm for GN. Computing the activations of all neurons of M for all $\mathbf{x} \in \mathcal{X}$ and all $\mathbf{y} \in \mathcal{Y}$ takes polynomial time in $|M|, |\mathcal{X}|$ and $|\mathcal{Y}|$. Labeling neurons that pass or not the activation threshold takes time polynomial in $|M|, |\mathcal{X}|$ and $|\mathcal{Y}|$. Finally, checking whether the set of neurons that fulfils the condition is of size at least k can be done in polynomial time in |M|. These subroutines can be put together to yield a polynomial-time algorithm for GN.

Parameter	Description	
cd	# layers in given MLP	
cw	<i>cw</i> max # neurons in layer in given MLP	
$\#n_{tot}$	total # neurons in given MLP	
$\#n_{in}$	# input neurons in given MLP	
$\#n_{out}$	# output neurons in given MLP	
B_{\max}	max neuron bias in given MLP	
W _{max}	max connection weight in given MLP	
k	Size of requested neuron subset	

Table 7: Parameters for the minimum necessary circuit problem.

Remark 1 One could also add to the output of the computational problem the requirement that if we silence (or activate) the neuron, we should elicit (or abolish) a behavior. Note that checking these effects can be done in polynomial time in all of the input parts given above and also in the size of the behavior set (which should be added to the input in these variants).

G NECESSARY CIRCUIT PROBLEM

MINIMUM LOCAL NECESSARY CIRCUIT (MLNC)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a Boolean input vector I of length $\#n_{in}$, and a positive integer k such that $1 \le k \le \#n_{tot}$.

Question: Is there a subset N', $|N'| \le k$, of the |N| neurons in M such that $N' \cap C \ne \emptyset$ for every sufficient circuit C of M relative to I?

MINIMUM GLOBAL NECESSARY CIRCUIT (MGNC)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, and a positive integer k such that $1 \le k \le \#n_{tot}$.

Question: Is there a subset $N', |N'| \le k$, of the |N| neurons in M such that for for every possible Boolean input vector I of length $\#n_{in}, N' \cap C \ne \emptyset$ for every sufficient circuit C of M relative to I?

We will use reductions from the Hitting Set problem to prove our results for the problems above.

Regarding the Hitting Set problem, we shall assume an ordering on the sets and elements in C and S, respectively.

Our parameterized results are proved relative to the parameters in Table 7. Lemmas 1 and 2 will be useful in deriving additional parameterized results from proved ones.

Our reductions will use specialized ReLU logic gates described in Barceló et al. 2020, Lemma 13. These gates assume Boolean neuron input and output values of 0 and 1 and are structured as follows:

- 1. NOT ReLU gate: A ReLU gate with one input connection weight of value -1 and a bias of 1. This gate has output 1 if the input is 0 and 0 otherwise.
- 2. *n*-way AND ReLU gate: A ReLU gate with *n* input connection weights of value 1 and a bias of -(n 1). This gate has output 1 if all inputs have value 1 and 0 otherwise.
- 3. *n*-way OR ReLU gate: A combination of an *n*-way AND ReLU gate with NOT ReLU gates on all of its inputs and a NOT ReLU gate on its output that uses DeMorgan's Second Law to implement $(x_1 \lor x_2 \lor \ldots x_n)$ as $\neg(\neg x_1 \land \neg x_2 \land \ldots \neg x_n)$. This gate has output 1 if any input has value 1 and 0 otherwise.

G.1 RESULTS FOR MLNC

Membership of MLNC in Σ_2^p can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

$$\exists [N \subseteq \mathcal{M}] \; \forall [\mathcal{C} \subseteq \mathcal{M}] : [\mathcal{C}(\mathbf{x}) = \mathcal{M}(\mathbf{x})] \implies N \cap \mathcal{C} \neq \emptyset$$

Theorem 29. If MLNC is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from HS to MLNC. Given an instance $\langle C, S, k \rangle$ of HS, construct the following instance $\langle M, I, k' \rangle$ of MLNC: Let M be an MLP based on $\#n_{tot} = |S| + |C| + 2$ neurons spread across four layers:

- 1. Input neuron layer: The single input neuron n_{in} (bias +1).
- 2. Hidden element layer: The element neurons $ns_1, ns_2, \ldots ns_{|S|}$ (all with bias 0).
- 3. Hidden set layer: The set AND neurons $nc_1, nc_2, \ldots, nc_{|C|}$ (such that neuron nc_i has bias $-|c_i|$).
- 4. **Output layer**: The single stepped output neuron n_{out} (bias 0).

The non-zero weight connections between adjacent layers are as follows:

- The input neuron has an edge of weight 0 coming from its input and is in turn connected to each of the element neurons with weight 1.
- Each element neuron ns_i , $1 \le i \le |S|$, is connected to each set neuron nc_j , $1 \le j \le |C|$, such that $s_i \in c_j$ with weight 1.
- Each set neuron nc_i , $1 \le i \le |C|$, is connected to the output neuron with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I = (0) and k' = k. Observe that this instance of MLNC can be created in time polynomial in the size of the given instance of HS. Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	_
1	$n_{in}(1)$
2	$ns_1, ns_2, \ldots, ns_{ S }$ (1)
3	$nc_1, nc_2, \ldots, nc_{ C }$ (1)
4	$n_{out}(1))$

Note the following about the behavior of M:

Observation 1. For any set neuron nc_i to output 1, it must receive input 1 from all of its incoming element neurons connected with weight 1.

Observation 2. For the output neuron to output 1, it is sufficient to get input 1 from any of its incoming set neurons with weight 1.

Observations 1 and 2 imply that any sufficient circuit for M must contain at least one set neuron and all of its associated element neurons.

We now need to show the correctness of this reduction by proving that the answer for the given instance of HS is "Yes" if and only if the answer for the constructed instance of MLNC is "Yes". We prove the two directions of this if and only if separately as follows:

- $\Rightarrow : \text{Let } S' = \{s'_1, s'_2, \dots, s'_k\} \subseteq S \text{ be a hitting set of size } k \text{ for } C. By the construction above, the } k \\ \text{element neurons corresponding to the elements in } S' \text{ collectively connect with weight 1 to} \\ \text{all set neurons in } M. By Observations 1 and 2, this means that the set } N \text{ of these element} \\ \text{neurons has a non-empty intersection with every sufficient circuit for } M, and hence that } N \\ \text{ is a necessary circuit for } M \text{ of size } k = k'. \end{cases}$
- $\Leftarrow: \text{Let } N \text{ be a necessary circuit for } M \text{ of size } k'. \text{ Let } N_S \text{ and } N_C \text{ be the subsets of } N \text{ that are element and set neurons. We can create a set } N' \text{ consisting only of element neurons by replacing each set neuron } n_c \text{ in } N_C \text{ with an arbitrary element neuron that is not already in } N_S \text{ and is connected to } n_c \text{ with weight } 1. \text{ Observe that } N' \text{ (whose size may be less than } k' \text{ if any } n_c \text{ already had an associated element neuron in } N_S \text{ remains a necessary circuit for } M. \text{ Moreover, as the element neurons in } N' \text{ by definition have a non-empty intersection with each sufficient circuit for } M, \text{ by Observations } 1 \text{ and } 2 \text{ above, the set } S' \text{ of elements in } S \text{ corresponding to the element neurons in } N' \text{ has a non-empty intersection with each set in } C \text{ and hence is a hitting set of size } N' \leq k' = k$

As HS is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MLNC is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 30. If $\langle cd, \#n_{in}, \#n_{out}, W_{max}, k \rangle$ -MLNC is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MLNC constructed in the reduction in the proof of Theorem 29, $\#n_{in} = \#n_{out} = W_{max} = 1$, cd = 4, and k' is a function of k in the given instance of HS. The result then follows from the facts that $\langle k \rangle$ -HS is W[2]-hard (by a reduction from $\langle k \rangle$ -DOMINATING SET; Downey & Fellows 1999) and $W[1] \subseteq W[2]$.

Theorem 31. $\langle \#n_{tot} \rangle$ -MLNC is fixed-parameter tractable.

Proof. Consider the algorithm that generates every possible subset N' of size at most k of the neurons in MLP M and for each such subset, generates every possible subset N'' of M, checks if N'' is a sufficient circuit for M relative to I and, if so, checks if N' has a non-empty intersection with N''. If an N' is found that has a non-empty intersection with each sufficient circuit for M relative to I, return "Yes"; otherwise, return "No". The number of possible subsets N' and N'' are both at most $2^{\#n_{tot}}$. As all subsequent checking operations can be done in time polynomial in the size of the given instance of MLNC, the above is a fixed-parameter tractable algorithm for MLNC relative to parameter-set $\{\#n_{tot}\}$.

Theorem 32. $\langle cw, cd \rangle$ -MLNC is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 31 and the observation that $\#n_{tot} \leq cw \times cd$.

Observe that the results in Theorems 30–32 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MLNC relative to many subsets of the parameters listed in Table 7.

Let us now consider the polynomial-time cost approximability of MLNC.

Theorem 33. If MLNC has a polynomial-time *c*-approximation algorithm for any constant c > 0 then P = NP.

Proof. Recall from the proof of correctness of the reduction in the proof of Theorem 29 that a given instance of HS has a hitting set of size k if and only if the constructed instance of MLNC has a necessary circuit of size k' = k. This implies that, given a polynomial-time *c*-approximation algorithm A for MLNC for some constant c > 0, we can create a polynomial-time *c*-approximation algorithm for HS by applying the reduction to the given instance x of HS to construct an instance

x' of MLNC, applying A to x' to create an approximate solution y', and then using y' to create an approximate solution y for x that has the same cost as y'. The result then follows from Ausiello et al. 1999, Problem SP7, which states that if HS has a polynomial-time *c*-approximation algorithm for any constant c > 0 a and is hence in approximation problem class APX then P = NP.

Note that this theorem also renders MLNC PTAS-inapproximable unless FPT = W[1].

G.2 RESULTS FOR MGNC

Membership of MLNC in Σ_2^p can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

 $\exists [N \subseteq \mathcal{M}] \forall [\mathcal{C} \subseteq \mathcal{M} \ s.t. \ \forall (\mathbf{x} \in \{0,1\}^{\#n_{in}})] : N \cap \mathcal{C} \neq \emptyset$ **Theorem 34.** If MGNC is polynomial-time tractable then P = NP.

Proof. Observe that in the instance of MLNC constructed by the reduction in the proof of Theorem 29, the input-connection weight 0 and bias 1 of the input neuron force this neuron to output 1 for both of the possible input vectors (1) and (0). Hence, with slight modifications to the proof of reduction correctness, this reduction also establishes the NP-hardness of MGNC.

Theorem 35. If $\langle cd, \#n_{in}, \#n_{out}, W_{max}, k \rangle$ -MGNC is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MGNC constructed in the reduction in the proof of Theorem 34, $\#n_{in} = \#n_{out} = W_{max} = 1$, cd = 4, and k' is a function of k in the given instance of HS The result then follows from the facts that $\langle k \rangle$ -HS is W[2]-hard (by a reduction from $\langle k \rangle$ -DOMINATING SET; Downey & Fellows 1999) and $W[1] \subseteq W[2]$.

Theorem 36. $\langle \#n_{tot} \rangle$ -MGNC is fixed-parameter tractable.

Proof. Modify the algorithm in the proof of Theorem 31 such that each potential sufficient circuit N'' is checked to ensure that M(I) = N''(I) for every possible Boolean input vector of length $\#n_{in}$. As the number of such vectors is $2^{\#n_{in}} < 2^{\#n_{tot}}$, the above is a fixed-parameter tractable algorithm for MGNC relative to parameter-set $\{\#n_{tot}\}$.

Theorem 37. $\langle cw, cd \rangle$ -MGNC is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 36 and the observation that $\#n_{tot} \leq cw \times cd$.

Observe that the results in Theorems 35–37 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MGNC relative to many subsets of the parameters listed in Table 7.

Let us now consider the polynomial-time cost approximability of MGNC.

Theorem 38. If MGNC has a polynomial-time *c*-approximation algorithm for any constant c > 0 then P = NP.

Proof. As the reduction in the proof of Theorem 34 is essentially the same as the reduction in the proof of Theorem 29, the result follows by the same reasoning as given in the proof of Theorem 33.

Note that this theorem also renders MGNC PTAS-inapproximable unless FPT = W[1].

H CIRCUIT ABLATION AND CLAMPING PROBLEMS

Given an MLP M and a subset N of the neurons in M, the MLP M' induced by N is said to be *active* if there is at least one path between the the input and output neurons in M'; otherwise, M' is *inactive*. As we are interested in inductions that preserve or violate output behaviour, all output neurons of M must be preserved in M'; however, we only require that at least one input neuron be so preserved. Unless otherwise stated, all inductions discussed wrt MLCA and MGCA below will be assumed to result in active MLP.

MINIMUM LOCAL CIRCUIT ABLATION (MLCA)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a Boolean input vector I of length $\#n_{in}$, and a positive integer k such that $1 \le k \le \#n_{tot}$. Question: Is there a subset $N', |N'| \le k$, of the |N| neurons in M such that $M(I) \ne M'(I)$ for the

Question: Is there a subset N', $|N'| \le k$, of the |N| neurons in M such that $M(I) \ne M'(I)$ for the MLP M' induced by $N \setminus N'$?

MINIMUM GLOBAL CIRCUIT ABLATION (MGCA)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, and a positive integer k such that $1 \le k \le \#n_{tot}$.

Question: Is there a subset $N', |N'| \le k$, of the |N| neurons in M such that for the MLP M' induced by $N \setminus N', M(I) \ne M'(I)$ for every possible Boolean input vector I of length $\#n_{in}$?

Given an MLP M and a neuron v in M, v is clamped to value val if the output of v is always val regardless of the inputs to v. As one can trivially change the output of an MLP by clamping one or more of its output neurons, we shall not allow the clamping of output neurons in the problems below.

MINIMUM LOCAL CIRCUIT CLAMPING (MLCC)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a Boolean input vector I of length $\#n_{in}$, a Boolean value val, and a positive integer k such that $1 \le k \le \#n_{tot}$.

Question: Is there a subset N', $|N'| \le k$, of the |N| neurons in M such that $M(I) \ne M'(I)$ for the MLP M' in which all neurons in N' are clamped to value val?

MINIMUM GLOBAL CIRCUIT CLAMPING (MGCC)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a Boolean value val, and a positive integer k such that $1 \le k \le \#n_{tot}$.

Question: Is there a subset $\overline{N'}$, $|\overline{N'}| \le k$, of the |N| neurons in M such that for the MLP M' in which all neurons in N' are clamped to value val, $M(I) \ne M'(I)$ for every possible Boolean input vector I of length $\#n_{in}$?

Following Barceló et al. 2020, page 4, all neurons in M use the ReLU activation function and the output x of each output neuron is stepped as necessary to be Boolean, i.e, step(x) = 0 if $x \le 0$ and is 1 otherwise.

For a graph G = (V, E), we shall assume an ordering on the vertices and edges in V and E, respectively. For each vertex $v \in V$, let the complete neighbourhood $N_C(v)$ of v be the set composed of v and the set of all vertices in G that are adjacent to v by a single edge, i.e., $v \cup \{u \mid u \in V \text{ and } (u, v) \in E\}$.

We will prove various classical and parameterized results for MLCA, MGCA, MLCC, and MGCC using reductions from CLIQUE. The parameterized results are proved relative to the parameters in Table 8. Lemmas 1 and 2 will be useful in deriving additional parameterized results from proved ones.

Parameter	Description
cd	# layers in given MLP
cw	max # neurons in layer in given MLP
$\#n_{tot}$	total # neurons in given MLP
$\#n_{in}$	# input neurons in given MLP
$\#n_{out}$	# output neurons in given MLP
$B_{\rm max}$	max neuron bias in given MLP
W _{max}	max connection weight in given MLP
k	Size of requested neuron subset

Table 8: Parameters for the minimum circuit ablation and clamping problems.

Additional reductions from DS used to prove polynomial-time cost inapproximability use specialized ReLU logic gates described in Barceló et al. 2020, Lemma 13. These gates assume Boolean neuron input and output values of 0 and 1 and are structured as follows:

- 1. NOT ReLU gate: A ReLU gate with one input connection weight of value -1 and a bias of 1. This gate has output 1 if the input is 0 and 0 otherwise.
- 2. *n*-way AND ReLU gate: A ReLU gate with *n* input connection weights of value 1 and a bias of -(n-1). This gate has output 1 if all inputs have value 1 and 0 otherwise.
- 3. *n*-way OR ReLU gate: A combination of an *n*-way AND ReLU gate with NOT ReLU gates on all of its inputs and a NOT ReLU gate on its output that uses DeMorgan's Second Law to implement $(x_1 \lor x_2 \lor \ldots x_n)$ as $\neg(\neg x_1 \land \neg x_2 \land \ldots \neg x_n)$. This gate has output 1 if any input has value 1 and 0 otherwise.

H.1 RESULTS FOR MINIMAL CIRCUIT ABLATION

The following hardness and inapproximability results are notable for holding when the given MLP M has three hidden layers.

H.1.1 RESULTS FOR MLCA

Towards proving NP-completeness, we first prove membership and then follow up with hardness. Membership in NP can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

$$\exists [\mathcal{S} \subseteq \mathcal{M}] : [\mathcal{M} \setminus \mathcal{S}](\mathbf{x}) \neq \mathcal{M}(\mathbf{x})$$

Theorem 39. If MLCA is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from CLIQUE to MLCA. Given an instance $\langle G = (V, E), k \rangle$ of CLIQUE, construct the following instance $\langle M, I, k' \rangle$ of MLCA: Let M be an MLP based on $\#n_{tot} = 3|V| + |E| + 2$ neurons spread across five layers:

- 1. Input neuron layer: The single input neuron n_{in} (bias +1).
- 2. Hidden vertex pair layer: The vertex neurons $nvP1_1, nvP1_2, \dots nvP1_{|V|}$ and $nvP2_1, nvP2_2, \dots nvP2_{|V|}$ (all with bias 0).
- 3. Hidden vertex regulator layer: The vertex neurons $nvR_1, nvR_2, \ldots nR_{|V|}$ (all with bias 0).
- 4. Hidden edge layer: The edge neurons $ne_1, ne_2, \ldots ne_{|E|}$ (all with bias -1).
- 5. Output layer: The single output neuron n_{out} (bias -(k(k-1)/2 1)).

The non-zero weight connections between adjacent layers are as follows:

- Each input neuron has an edge of weight 0 coming from its corresponding input and is in turn connected to each of the vertex pair neurons with weight 1.
- Each P1 (P2) vertex pair neuron $nvP1_i$ $(nvP2_i)$, $1 \le i \le |V|$, is connected to vertex regulator neuron nvR_i with weight -2 (1).
- Each vertex regulator neuron nv_i , $1 \le i \le |V|$, is connected to each edge neuron whose corresponding edge has an endpoint v_i with weight 1.
- Each edge neuron ne_i , $1 \le i \le |E|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I = (1) and k' = k. Observe that this instance of MLCA can be created in time polynomial in the size of the given instance of CLIQUE. Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	
1	$n_{in}(1)$
2	$nvP1_1(1), nvP1_2(1), \dots nvP1_{ V }(1), nvP2_1(1), nvP2_2(1), \dots nvP2_{ V }(1)$
3	$nvR_1(0), nvR_2(0), \dots nvR_{ V }(0)$
4	$ne_1(0), ne_2(0), \dots ne_{ E }(0)$
5	$n_{out}(0))$

We now need to show the correctness of this reduction by proving that the answer for the given instance of CLIQUE is "Yes" if and only if the answer for the constructed instance of MLCA is "Yes". We prove the two directions of this if and only if separately as follows:

- ⇒ : Let $V' = \{v'_1, v'_2, \ldots, v'_k\} \subseteq V$ be a clique in G of size $k'' \ge k$ and N' be the $k'' \ge k' = k$ sized subset of the P1 vertex pair neurons corresponding to the vertices in V'. Let M' be the version of M in which all neurons in N' are ablated. As each of these vertex pair neurons previously forced their associated vertex regulator neurons to output 0 courtesy of their connection-weight of -2, their ablation now allows these k'' vertex regulator neurons to output 1. As V' is a clique of size k'', exactly $k''(k'' - 1)/2 \ge k(k - 1)/2$ edge neurons in M' receive the requisite inputs of 1 on both of their endpoints from the vertex regulator neurons associated with the P1 vertex pair neurons in N'. This in turn ensures the output neuron produces output 1. Hence, $M(I) = 0 \ne 1 = M'(I)$.
- \Leftarrow : Let N' be a subset of N of size at most k' = k such that for the MLP M' induced by ablating all neurons in N', $M(I) \neq M(I')$. As M(I) = 0 and circuit outputs are stepped to be Boolean, M'(I) = 1. Given the bias of the output neuron, this can only occur if at least k(k-1)/2 edge neurons in M' have output 1 on input I, which requires that each of these neurons receives 1 from both of its endpoint vertex regulator neurons. These vertex regulator neurons can only output 1 if all of their associated P1 vertex neurons have been ablated; moreover, there must be exactly k such neurons. This means that the vertices in G corresponding to the P1 vertex pair neurons in N' must form a clique of size k in G.

As CLIQUE is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MLCA is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 40. If $\langle cd, \#n_{in}. \#n_{out}, W_{\max}, B_{\max}, k \rangle$ -MLCA is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MLCA constructed in the reduction in the proof of Theorem 39, $\#n_{in} = \#n_{out} = W_{max} = 1$, cd = 5, and B_{max} and k are function of k in the given instance of CLIQUE. The result then follows from the fact that $\langle k \rangle$ -CLIQUE is W[1]-hard (Downey & Fellows, 1999).

Theorem 41. $\langle \#n_{tot} \rangle$ -MLCA is fixed-parameter tractable.

Proof. Consider the algorithm that generates every possible subset N' of size at most k of the neurons N in MLP M and for each such subset, creates the MLP M' induced from M by ablating the neurons in N' and (assuming M' is active) checks if $M'(I) \neq M(I)$. If such a subset is found, return "Yes"; otherwise, return "No". The number of possible subsets N' is at most $k \times \# n_{tot}^k \leq \# n_{tot} \times \# n_{tot}^{\# n_{tot}}$. As any such M' can be generated from M, checked or activity, and run on I in time polynomial in the size of the given instance of MLCA, the above is a fixed-parameter tractable algorithm for MLCA relative to parameter-set $\{\# n_{tot}\}$.

Theorem 42. $\langle cw, cd \rangle$ -MLCA is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 41 and the observation that $\#n_{tot} \leq cw \times cd$.

Observe that the results in Theorems 40–42 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MLCA relative to many subsets of the parameters listed in Table 8.

Let us now consider the polynomial-time cost approximability of MLCA. As MLCA is a minimization problem, we cannot do this using reductions from a maximization problem like CLIQUE. Hence we will instead use a reduction from another minimization problem, namely DS.

Theorem 43. If MLCA is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from DS to MLCA. Given an instance $\langle G = (V, E), k \rangle$ of DS, construct the following instance $\langle M, I, k' \rangle$ of MLCA: Let M be an MLP based on $\#n_{tot,g} = 3|V| + 1$ neurons spread across four layers:

- 1. Input layer: The input vertex neurons $nv_1, nv_2, \ldots nv_{|V|}$, all of which have bias 1.
- 2. Hidden vertex neighbourhood layer I: The vertex neighbourhood AND neurons $nvnA_1, nvnA_2, \dots nvnA_{|V|}$, where $nvnA_i$ is an x-way AND ReLU gates such that $x = |N_C(v_i)|$.
- 3. Hidden vertex neighbourhood layer II: The vertex neighbourhood NOT neurons $nvnN_1, nvnN_2, \dots nvnN_{|V|}$, all of which are NOT ReLU gates.
- 4. **Output layer**: The single output neuron n_{out} , which is a |V|-way AND ReLU gate.

The non-zero weight connections between adjacent layers are as follows:

- Each input vertex neuron nv_i , $1 \le i \le |V|$, is connected to its input line with weight 0 and to each vertex neighbourhood AND neuron $nvnA_j$ such that $v_i \in N_C(v_j)$ with weight 1.
- Each vertex neighbourhood AND neuron $nvnA_i$, $1 \le i \le |V|$, is connected to its corresponding vertex neighbourhood NOT neuron $nvnN_i$ with weight 1.
- Each vertex neighbourhood NOT neuron $nvnN_i$, $1 \le i \le |V|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I be the |V|-length one-vector and k' = k. Observe that this instance of MLCA can be created in time polynomial in the size of the given instance of DS, Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$nv_1(1), nv_2(1), \dots nv_{ V }(1)$
2	$nvnA_1(1), nvnA_2(1), \dots nvnA_{ V }(1)$
3	$nvnN_1(0), nvnN_2(0), \dots nvnN_{ V }(0)$
4	$n_{out}(0)$

We now need to show the correctness of this reduction by proving that the answer for the given instance of DS is "Yes" if and only if the answer for the constructed instance of MLCA is "Yes". We prove the two directions of this if and only if separately as follows:

- ⇒ : Let $V' = \{v'_1, v'_2, \dots, v'_k\} \subseteq V$ be a dominating set in G of size k and N' be the k' = ksized subset of the input vertex neurons in M corresponding to the vertices in V'. Create
 MLP M' by ablated in M the neurons in N'. As V' is a dominating set, each vertex
 neighbourhood AND neuron in M' is missing a i-input from at least one input vertex neuron
 in N', which in turn ensures that each vertex neighbourhood AND neuron in M' has output
 0. This in turn ensures that M produces output 1 on input I such that $M(I) = 0 \neq 1 = M'(I)$.
- $\Leftarrow: \text{Let } N' \text{ be a } k'' \leq k' = k \text{-sized subset of the set } N \text{ of neurons in } M \text{ whose ablation in } M \text{ creates an MLP } M' \text{ such that } M(I) = 0 \neq M'(I). \text{ As all MLP outputs are stepped to be Boolean, this implies that } M'(I) = 1. \text{ This can only happen if all vertex neighbourhood NOT neurons output 1, which in turn can happen only if all vertex neighbourhood AND gates output 0. As <math>I = 1^{|V|}$, this can only happen if for each vertex neighbourhood AND neuron, at least one input vertex neuron previously producing a 1-input to that vertex neighbourhood AND neuron has been ablated in creating M'. This in turn implies that the k'' vertices in G corresponding to the elements of N' form a dominating set of size $k'' \leq k$ for G.

As DS is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MLCA is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 44. If MLCA has a polynomial-time *c*-approximation algorithm for any constant c > 0 then FPT = W[1].

Proof. Recall from the proof of correctness of the reduction in the proof of Theorem 43 that a given instance of DS has a dominating set of size k if and only if the constructed instance of MLCA has a subset N' of size k' = k of the neurons in given MLP M such that the ablation in M of the neurons in N' creates an MLP M' such that $M(I) \neq M'(I)$. This implies that, given a polynomial-time c-approximation algorithm A for MLCA for some constant c > 0, we can create a polynomial-time c-approximation algorithm for DS by applying the reduction to the given instance x of DS to construct an instance x' of MLCA, applying A to x' to create an approximate solution y', and then using y' to create an approximate solution y for x that has the same cost as y'. The result then follows from Chen & Lin 2019, Corollary 2, which implies that if DS has a polynomial-time c-approximation algorithm for any constant c > 0 then FPT = W[1].

Note that this theorem also renders MLCA PTAS-inapproximable unless FPT = W[1].

H.1.2 RESULTS FOR MGCA

Membership in in Σ_2^p can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

$$\exists [\mathcal{S} \subseteq \mathcal{M}] \; \forall [\mathbf{x} \in \{0, 1\}^{\#n_{in}}] : [\mathcal{M} \setminus \mathcal{S}](\mathbf{x}) \neq \mathcal{M}(\mathbf{x})$$

Theorem 45. If MGCA is polynomial-time tractable then P = NP.

Proof. Observe that in the instance of MLCA constructed by the reduction in the proof of Theorem 39, the input-connection weight 0 and bias 1 of the input neuron force this neuron to output 1 for both of the possible input vectors (1) and (0). Hence, with slight modifications to the proof of reduction correctness, this reduction also establishes the *NP*-hardness of MGCA.

Theorem 46. If $\langle cd, \#n_{in}, \#n_{out}, W_{\max}, B_{\max}, k \rangle$ -MGCA is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MGCA constructed in the reduction in the proof of Theorem 45, $\#n_{in} = \#n_{out} = W_{max} = 1$, cd = 5, and B_{max} and k are function of k in the given instance of CLIQUE. The result then follows from the fact that $\langle k \rangle$ -CLIQUE is W[1]-hard (Downey & Fellows, 1999).

Theorem 47. $\langle \#n_{tot} \rangle$ -MGCA is fixed-parameter tractable.

Proof. Modify the algorithm in the proof of Theorem 41 such that each created MLP M is checked to ensure that $M(I) \neq M'(I)$ for every possible Boolean input vector of length $\#n_{in}$. As the number of such vectors is $2^{\#n_{in}} \leq 2^{\#n_{tot}}$, the above is a fixed-parameter tractable algorithm for MGCA relative to parameter-set $\{\#n_{tot}\}$.

Theorem 48. $\langle cw, cd \rangle$ -MGCA is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 47 and the observation that $\#n_{tot} \leq cw \times cd$.

Observe that the results in Theorems 46–48 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MGCA relative to many subsets of the parameters listed in Table 8.

Let us now consider the polynomial-time cost approximability of MGCA. As MGCA is a minimization problem, we cannot do this using reductions from a maximization problem like CLIQUE. Hence we will instead use a reduction from another minimization problem, namely DS.

Theorem 49. If MGCA is polynomial-time tractable then P = NP.

Proof. Observe that in the instance of MLCA constructed by the reduction in the proof of Theorem 43, the input-connection weight 0 and bias 1 of the vertex input neurons force each such neuron to output 1 for input value 0 or 1. Hence, with slight modifications to the proof of reduction correctness, this reduction also establishes the *NP*-hardness of MGCA.

Theorem 50. If MGCA has a polynomial-time *c*-approximation algorithm for any constant c > 0 then FPT = W[1].

Proof. As the reduction in the proof of Theorem 49 is essentially the same as the reduction in the proof of Theorem 43, the result follows by the same reasoning as given in the proof of Theorem 44.

Note that this theorem also renders MGCA PTAS-inapproximable unless FPT = W[1].

H.2 RESULTS FOR MINIMAL CIRCUIT CLAMPING

Towards proving NP-completeness, we first prove membership and then follow up with hardness. Membership in NP can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

$$\exists [\mathcal{S} \subseteq \mathcal{M}] : \mathcal{M}_{\mathcal{S}}(\mathbf{x}) \neq \mathcal{M}(\mathbf{x})$$

The following hardness results are notable for holding when the given MLP M has only one hidden layer.

H.2.1 RESULTS FOR MLCC

Theorem 51. If MLCC is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from CLIQUE to MLCC. Given an instance $\langle G = (V, E), k \rangle$ of CLIQUE, construct the following instance $\langle M, I, val, k' \rangle$ of MLCC: Let M be an MLP based on $\#n_{tot} = |V| + |E| + 1$ neurons spread across three layers:

- 1. Input vertex layer: The vertex neurons $nv_1, nv_2, \ldots nv_{|V|}$ (all with bias -2).
- 2. Hidden edge layer: The edge neurons $ne_1, ne_2, \ldots ne_{|E|}$ (all with bias -1).
- 3. Output layer: The single output neuron n_{out} (bias -(k(k-1)/2 1)).

Note that this MLP has only one hidden layer. The non-zero weight connections between adjacent layers are as follows:

- Each vertex neuron nv_i , $1 \le i \le |V|$, is connected to each edge neuron whose corresponding edge has an endpoint v_i with weight 1.
- Each edge neuron ne_i , $1 \le i \le |E|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let $I = 0^{\#n_{in}}$, val = 1, and k' = k. Observe that this instance of MLCC can be created in time polynomial in the size of the given instance of CLIQUE. Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$nv_1(0), nv_2(0), \dots nv_{ V }(0)$
2	$ne_1(0), ne_2(0), \dots ne_{ E }(0)$
3	$n_{out}(0)$

We now need to show the correctness of this reduction by proving that the answer for the given instance of CLIQUE is "Yes" if and only if the answer for the constructed instance of MLCC is "Yes". We prove the two directions of this if and only if separately as follows:

⇒ : Let $V' = \{v'_1, v'_2, \dots, v'_k\} \subseteq V$ be a clique in G of size $k'' \ge k$ and N' be the $k'' \ge k' = k$ sized subset of the input vertex neurons corresponding to the vertices in V'. Let M' be the version of M in which all neurons in N' are clamped to value val = 1. As V' is a clique of size k'', exactly $k''(k'' - 1)/2 \ge k(k - 1)/2$ edge neurons in M' receive the requisite inputs of 1 on both of their endpoints from the vertex neurons in N'. This in turn ensures the output neuron produces output 1. Hence, $M(I) = 0 \neq 1 = M'(I)$.

 $\leftarrow : \text{Let } N' \text{ be a subset of } N \text{ of size at most } k' = k \text{ such that for the MLP } M' \text{ induced by clamping} \\ \text{all neurons in } N' \text{ to value } val = 1, M(I) \neq M(I'). \text{ As } M(I) = 0 \text{ and circuit outputs are} \\ \text{stepped to be Boolean, } M'(I) = 1. \text{ Given the bias of the output neuron, this can only occur} \\ \text{if at least } k(k-1)/2 \text{ edge neurons in } M' \text{ have output 1 on input } I, \text{ which requires that} \\ \text{ each of these neurons receives 1 from both of its endpoint vertex neurons. As } I = 0^{\#n_{in}}, \\ \text{ these 1-inputs could only have come from the clamped vertex neurons in } N'; moreover, \\ \text{ there must be exactly } k \text{ such neurons. This means that the vertices in } G \text{ corresponding to} \\ \text{ the vertex neurons in } N' \text{ must form a clique of size } k \text{ in } G. \end{cases}$

As CLIQUE is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MLCC is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 52. If $\langle cd, \#n_{out}, W_{max}, B_{max}, k \rangle$ -MLCC is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MLCC constructed in the reduction in the proof of Theorem 51, $\#n_{out} = W_{max} = 1$, cd = 3, and B_{max} and k are function of k in the given instance of CLIQUE. The result then follows from the fact that $\langle k \rangle$ -CLIQUE is W[1]-hard (Downey & Fellows, 1999).

Theorem 53. $\langle \#n_{tot} \rangle$ -MLCC is fixed-parameter tractable.

Proof. Consider the algorithm that generates every possible subset N' of size at most k of the neurons N in MLP M and for each such subset, creates the MLP M' induced from M by clamping the neurons in N' to val and checks if $M'(I) \neq M(I)$. If such a subset is found, return "Yes"; otherwise, return "No". The number of possible subsets N' is at most $k \times \#n_{tot}^k \leq \#n_{tot} \times \#n_{tot}^{\#n_{tot}}$. As any such M' can be generated from M and M' can be run on I in time polynomial in the size of the given instance of MLCC, the above is a fixed-parameter tractable algorithm for MLCC relative to parameter-set $\{\#n_{tot}\}$.

Theorem 54. $\langle cw, cd \rangle$ -MLCC is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 53 and the observation that $\#n_{tot} \leq cw \times cd$.

Observe that the results in Theorems 52–54 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MLCC relative to many subsets of the parameters listed in Table 8.

Let us now consider the polynomial-time cost approximability of MLCC. As MLCC is a minimization problem, we cannot do this using reductions from a maximization problem like CLIQUE. Hence we will instead use a reduction from another minimization problem, namely DS.

Theorem 55. If MLCC is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from DS to MLCC. Given an instance $\langle G = (V, E), k \rangle$ of DS, construct the following instance $\langle M, I, val, k' \rangle$ of MLCC: Let M be an MLP based on $\#n_{tot,q} = 3|V| + 1$ neurons spread across four layers:

- 1. Input layer: The input vertex neurons $nv_1, nv_2, \dots nv_{|V|}$, all of which have bias 1.
- 2. Hidden vertex neighbourhood layer I: The vertex neighbourhood AND neurons $nvnA_1, nvnA_2, \dots nvnA_{|V|}$, where $nvnA_i$ is an x-way AND ReLU gates such that $x = |N_C(v_i)|$.

- 3. Hidden vertex neighbourhood layer II: The vertex neighbourhood NOT neurons $nvnN_1, nvnN_2, \dots nvnN_{|V|}$, all of which are NOT ReLU gates.
- 4. **Output layer**: The single output neuron n_{out} , which is a |V|-way AND ReLU gate.

The non-zero weight connections between adjacent layers are as follows:

- Each input vertex neuron nv_i , $1 \le i \le |V|$, is connected to its input line with weight 0 and to each vertex neighbourhood AND neuron $nvnA_i$ such that $v_i \in N_C(v_i)$ with weight 1.
- Each vertex neighbourhood AND neuron $nvnA_i$, $1 \le i \le |V|$, is connected to its corresponding vertex neighbourhood NOT neuron $nvnN_i$ with weight 1.
- Each vertex neighbourhood NOT neuron $nvnN_i$, $1 \le i \le |V|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I be the |V|-length one-vector, val = 0, and k' = k. Observe that this instance of MLCC can be created in time polynomial in the size of the given instance of DS, Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$nvN_1(1), nvN_2(1), \dots nvN_{ V }(1)$
2	$nvnA_1(1), nvnA_2(1), \dots nvnA_{ V }(1)$
3	$nvnN_1(0), nvnN_2(0), \dots nvnN_{ V }(0)$
4	$n_{out}(0)$

We now need to show the correctness of this reduction by proving that the answer for the given instance of DS is "Yes" if and only if the answer for the constructed instance of MLCC is "Yes". We prove the two directions of this if and only if separately as follows:

- ⇒ : Let $V' = \{v'_1, v'_2, \dots, v'_k\} \subseteq V$ be a dominating set in G of size k and N' be the k' = k-sized subset of the input vertex neurons in M corresponding to the vertices in V'. Create MLP M' by clamping in M the neurons in N' to val = 0. As V' is a dominating set, each vertex neighbourhood AND neuron in M' is now missing a i-input from at least one input vertex neuron in N', which in turn ensures that each vertex neighbourhood AND neuron in M has output 0. This in turn ensures that M produces output 1 on input I such that $M(I) = 0 \neq 1 = M'(I)$.
- $\leftarrow : \text{Let } N' \text{ be a } k'' \leq k' = k \text{-sized subset of the set } N \text{ of neurons in } M \text{ whose clamping to} \\ val = 0 \text{ in } M \text{ creates an MLP } M' \text{ such that } M(I) = 0 \neq M'(I). \text{ As all MLP outputs} \\ \text{are stepped to be Boolean, this implies that } M'(I) = 1. \text{ This can only happen if all} \\ \text{vertex neighbourhood NOT neurons output 1, which in turn can happen only if all vertex} \\ \text{neighbourhood AND gates output 0. As } I = 1^{|V|}, \text{ this can only happen if for each vertex} \\ \text{neighbourhood AND neuron, at least one input vertex neuron previously producing a 1-input to that vertex neighbourhood AND neuron has been clamped to 0 in creating <math>M'$. This in turn implies that the k'' vertices in G corresponding to the elements of N' form a dominating set of size $k'' \leq k$ for G.

As DS is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MLCC is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 56. If MLCC has a polynomial-time *c*-approximation algorithm for any constant c > 0 then FPT = W[1].

Proof. Recall from the proof of correctness of the reduction in the proof of Theorem 55 that a given instance of DS has a dominating set of size k if and only if the constructed instance of MLCC has a subset N' of size k' = k of the neurons in given MLP M such that the clamping to val = 0 in M of the neurons in N' creates an MLP M' such that $M(I) \neq M'(I)$. This implies that, given a polynomial-time c-approximation algorithm A for MLCC for some constant c > 0, we can create a polynomial-time c-approximation algorithm for DS by applying the reduction to the given instance x of DS to construct an instance x' of MLCC, applying A to x' to create an approximate solution y', and then using y' to create an approximate solution y for x that has the same cost as y'. The result then follows from Chen & Lin 2019, Corollary 2, which implies that if DS has a polynomial-time c-approximation algorithm for any constant c > 0 then FPT = W[1].

Note that this theorem also renders MLCC PTAS-inapproximable unless FPT = W[1].

H.2.2 RESULTS FOR MGCC

Membership in in Σ_2^p can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

$$\exists [\mathcal{S} \subseteq \mathcal{M}] \; \forall [\mathbf{x} \in \{0, 1\}^{\#n_{in}}] : \mathcal{M}_{\mathcal{S}}(\mathbf{x}) \neq \mathcal{M}(\mathbf{x})$$

Theorem 57. If MGCC is polynomial-time tractable then P = NP.

Proof. Observe that in the instance of MLCC constructed by the reduction in the proof of Theorem 51, the biases of -2 in the input vertex neurons force these neurons to map any given Boolean input vector onto $0^{\#n_{in}}$. Hence, with slight modifications to the proof of reduction correctness, this reduction also establishes the *NP*-hardness of MGCC.

Theorem 58. If $\langle cd, \#n_{out}, W_{max}, B_{max}, k \rangle$ -MGCC is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MGCC constructed in the reduction in the proof of Theorem 57, $\#n_{out} = W_{max} = 1$, cd = 3, and B_{max} and k are function of k in the given instance of CLIQUE. The result then follows from the fact that $\langle k \rangle$ -CLIQUE is W[1]-hard (Downey & Fellows, 1999).

Theorem 59. $\langle \#n_{tot} \rangle$ -MLCC is fixed-parameter tractable.

Proof. Modify the algorithm in the proof of Theorem 53 such that each created MLP M is checked to ensure that $M(I) \neq M'(I)$ for every possible Boolean input vector of length $\#n_{in}$. As the number of such vectors is $2^{\#n_{in}} \leq 2^{\#n_{tot}}$, the above is a fixed-parameter tractable algorithm for MGCC relative to parameter-set $\{\#n_{tot}\}$.

Theorem 60. $\langle cw, cd \rangle$ -MGCC is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 59 and the observation that $\#n_{tot} \leq cw \times cd$.

Observe that the results in Theorems 58–60 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MGCC relative to many subsets of the parameters listed in Table 8.

Let us now consider the polynomial-time cost approximability of MGCC. As MGCC is a minimization problem, we cannot do this using reductions from a maximization problem like CLIQUE. Hence we will instead use a reduction from another minimization problem, namely DS.

Theorem 61. If MGCC is polynomial-time tractable then P = NP.

Proof. Observe that in the instance of MLCC constructed by the reduction in the proof of Theorem 55, the input-connection weight 0 and bias 1 of the vertex input neurons force each such neuron to output 1 for input value 0 or 1. Hence, with slight modifications to the proof of reduction correctness, this reduction also establishes the NP-hardness of MGCC.

Theorem 62. If MGCC has a polynomial-time *c*-approximation algorithm for any constant c > 0 then FPT = W[1].

Proof. As the reduction in the proof of Theorem 61 is essentially the same as the reduction in the proof of Theorem 55, the result follows by the same reasoning as given in the proof of Theorem 56.

Note that this theorem also renders MGCC PTAS-inapproximable unless FPT = W[1].

I CIRCUIT PATCHING PROBLEM

MINIMUM LOCAL CIRCUIT PATCHING (MLCP)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, Boolean input vectors x and y of length $\#n_{in}$, and a positive integer k such that $1 \le k \le (\#n_{tot} - (\#n_{in} + \#n_{out}))$. Question: Is there a subset $C, |C| \le k$, of the internal neurons in M such that for the MLP M'

Question: Is there a subset C, $|C| \leq k$, of the internal neurons in M such that for the MLP M created when M is y-patched wrt C, i.e., M' is created when M/C is patched with activations from M(x) and C is patched with activations from M(y), M'(x) = M(y)?

MINIMUM GLOBAL CIRCUIT PATCHING (MGCP)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, Boolean input vector y of length $\#n_{in}$, and a positive integer k such that $1 \le k \le (\#n_{tot} - (\#n_{in} + \#n_{out}))$.

Question: Is there a subset C, $|C| \le k$, of the internal neurons in M such that, for all possible input vectors x, for the MLP M' created when M is y-patched wrt C, i.e., M' is created when M/C is patched with activations from M(x) and C is patched with activations from M(y), M'(x) = M(y)?

Following Barceló et al. 2020, page 4, all neurons in M use the ReLU activation function and the output x of each output neuron is stepped as necessary to be Boolean, i.e., step(x) = 0 if $x \le 0$ and is 1 otherwise.

For a graph G = (V, E), we shall assume an ordering on the vertices and edges in V and E, respectively. For each vertex $v \in V$, let the complete neighbourhood $N_C(v)$ of v be the set composed of v and the set of all vertices in G that are adjacent to v by a single edge, i.e., $v \cup \{u \mid u \in V \text{ and } (u, v) \in E\}$.

We will prove various classical and parameterized results for MLCP and MGCP using reductions from DOMINATING SET. The parameterized results are proved relative to the parameters in Table 9. Our reductions (Theorems 63 and 67) uses specialized ReLU logic gates described in Barceló et al. 2020, Lemma 13. These gates assume Boolean neuron input and output values of 0 and 1 and are structured as follows:

- 1. NOT ReLU gate: A ReLU gate with one input connection weight of value -1 and a bias of 1. This gate has output 1 if the input is 0 and 0 otherwise.
- 2. *n*-way AND ReLU gate: A ReLU gate with *n* input connection weights of value 1 and a bias of -(n-1). This gate has output 1 if all inputs have value 1 and 0 otherwise.
- 3. *n*-way OR ReLU gate: A combination of an *n*-way AND ReLU gate with NOT ReLU gates on all of its inputs and a NOT ReLU gate on its output that uses DeMorgan's Second Law to implement $(x_1 \lor x_2 \lor \ldots x_n)$ as $\neg(\neg x_1 \land \neg x_2 \land \ldots \neg x_n)$. This gate has output 1 if any input has value 1 and 0 otherwise.

Parameter	Description
cd	# layers in given MLP
cw	max # neurons in layer in given MLP
$\#n_{tot}$	total # neurons in given MLP
$\#n_{in}$	# input neurons in given MLP
$\#n_{out}$	# output neurons in given MLP
B_{\max}	max neuron bias in given MLP
W _{max}	max connection weight in given MLP
k	Size of requested patching-subset of M

Table 9: Parameters for the minimum circuit patching problem.

I.1 RESULTS FOR MLCP

Towards proving NP-completeness, we first prove membership and then follow up with hardness. Membership in NP can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

$$\exists [\mathcal{S} \subseteq \mathcal{M}] : \mathcal{M}_{\mathcal{S}}(\mathbf{x}) = \mathcal{M}(\mathbf{y})$$

Theorem 63. If MLCP is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from DS to MLCP adapted from the reduction from DS to MSR in Theorem 103. Given an instance $\langle G = (V, E), k \rangle$ of DS, construct the following instance $\langle M, x, y, k' \rangle$ of MLCP: Let M be an MLP based on $\#n_{tot} = 4|V| + 1$ neurons spread across five layers:

- 1. Input layer: The input vertex neurons $nv_1, nv_2, \ldots nv_{|V|}$, all of which have bias 0.
- 2. Hidden vertex layer: The hidden vertex neurons $nhv_1, nhv_2, \dots nhv_{|V|}$, all of which are identity ReLU gates with bias 0.
- 3. Hidden vertex neighbourhood layer I: The vertex neighbourhood AND neurons $nvnA_1, nvnA_2, \dots nvnA_{|V|}$, where $nvnA_i$ is an x-way AND ReLU gates such that $x = |N_C(v_i)|$.
- 4. Hidden vertex neighbourhood layer II: The vertex neighbourhood NOT neurons $nvnN_1, nvnN_2, \dots nvnN_{|V|}$, all of which are NOT ReLU gates.
- 5. **Output layer**: The single output neuron n_{out} , which is a |V|-way AND ReLU gate.

The non-zero weight connections between adjacent layers are as follows:

- Each input vertex neuron nv_i , $1 \le i \le |V|$, is connected to its associated hidden vertex neuron nhv_i with weight 1.
- Each hidden vertex neuron nhv_i , $1 \le i \le |V|$, is connected to each vertex neighbourhood AND neuron $nvnA_j$ such that $v_i \in N_C(v_j)$ with weight 1.
- Each vertex neighbourhood AND neuron $nvnA_i$, $1 \le i \le |V|$, is connected to its corresponding vertex neighbourhood NOT neuron $nvnN_i$ with weight 1.
- Each vertex neighbourhood NOT neuron $nvnN_i$, $1 \le i \le |V|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let x and y be the |V|-length one- and zero-vectors and k' = k. Observe that this instance of MLCP can be created in time polynomial in the size of the given instance of DS, Moreover, the output behaviour of the neurons in M from the presentation of input x until the output is generated is

timestep	neurons (outputs)
0	—
1	$nv_1(1), nv_2(1), \dots nv_{ V }(1)$
2	$nhv_1(1), nhv_2(1), \dots nhv_{ V }(1)$
3	$nvnA_1(1), nvnA_2(1), \dots nvnA_{ V }(1)$
4	$\left nvnN_1(0), nvnN_2(0), \dots nvnN_{ V }(0) \right $
5	$n_{out}(0)$

and the output behaviour of the neurons in M from the presentation of input y until the output is generated is

timestep	neurons (outputs)
0	—
1	$nv_1(0), nv_2(0), \dots nv_{ V }(0)$
2	$nhv_1(0), nhv_2(0), \dots nhv_{ V }(0)$
3	$ nvnA_1(0), nvnA_2(0), \dots nvnA_{ V }(0) $
4	$ nvnN_1(1), nvnN_2(1), \dots nvnN_{ V }(1) $
5	$n_{out}(1)$

We now need to show the correctness of this reduction by proving that the answer for the given instance of DS is "Yes" if and only if the answer for the constructed instance of MLCP is "Yes". We prove the two directions of this if and only if separately as follows:

- ⇒ : Let $V' = \{v'_1, v'_2, \dots, v'_k\} \subseteq V$ be a dominating set in *G* of size *k* and *C* be the k' = ksized subset of the hidden vertex neurons in *M* corresponding to the vertices in *V'*. As V' is a dominating set, each vertex neighbourhood AND neuron receives input 0 from at
 least one hidden vertex neuron in *C* when *M* is *y*-patched wrt *C*. This ensures that each
 vertex neighbourhood AND neuron has output 0, which in turn ensures that each vertex
 neighbourhood NOT neuron has output 1 and for *M'* created by *y*-patching *M* wrt *C*, M'(x) = M(y) = 1.
- $\Leftarrow: \text{Let } C \text{ be a } k' = k \text{-sized subset of the internal neurons of } M \text{ such that when } M' \text{ is created by } y \text{-patching } M \text{ wrt } C, M'(x) = M(y) = 1. \text{ The output of } M' \text{ on } X \text{ can be 1 (and hence equal to the output of } M \text{ on } y) \text{ only if all vertex neighbourhood NOT neurons output 1, which in turn can happen only if all vertex neighbourhood AND gates output 0. However, as all elements of x have value 1, this means that each vertex neighbourhood AND neuron must be connected to at least one patched hidden vertex neuron (all of which have output 0 courtesy of y), which in turn implies that the <math>k' = k$ vertices in G corresponding to the patched hidden vertex neurons in C form a dominating set of size k for G.

As DS is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MLCP is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 64. If $\langle cd, \#n_{out}, W_{max}, B_{max}, k \rangle$ -MLCP is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MLCP constructed in the reduction in the proof of Theorem 63, $\#n_{out} = W_{max} = 1$, cd = 4, and B_{max} and k are function of k in the given instance of DS. The result then follows from the facts that $\langle k \rangle$ -DS is W[2]-hard (Downey & Fellows, 1999) and $W[1] \subseteq W[2]$.

Theorem 65. $\langle \#n_{tot} \rangle$ -MLCP is fixed-parameter tractable.

Proof. Consider the algorithm that generates all possible subset C of the internal neurons in M and for each such subset, checks if M' created by y-patching M wrt C is such that M'(x) = M(y). If such a C is found, return "Yes"; otherwise, return "No". The number of possible subsets C is at most $2^{(\#n_{tot})}$. Given this, as M can be patched relative to C and run on x and y in time polynomial in the size of the given instance of MLCP, the above is a fixed-parameter tractable algorithm for MLCP relative to parameter-set $\{\#n_{tot}\}$.

Observe that the results in Theorems 64 and 65 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MLCP relative to many subset of the parameters listed in Table 9.

Let us now consider the polynomial-time cost approximability of MLCP.

Theorem 66. If MLCP has a polynomial-time *c*-approximation algorithm for any constant c > 0 then FPT = W[1].

Proof. Recall from the proof of correctness of the reduction in the proof of Theorem 63 that a given instance of DS has a dominating set of size k if and only if the constructed instance of MLCP has a subset C of the internal neurons in M of size k' = k such that for the MLP M' created from M by y-patching M wrt C, M'(x) = M(y) This implies that, given a polynomial-time c-approximation algorithm A for MLCP for some constant c > 0, we can create a polynomial-time c-approximation algorithm for DS by applying the reduction to the given instance I of DS to construct an instance I' of MLCP, applying A to I' to create an approximate solution S', and then using S' to create an approximate solution S for I that has the same cost as S'. The result then follows from Chen & Lin 2019, Corollary 2, which implies that if DS has a polynomial-time c-approximation algorithm for any constant c > 0 then FPT = W[1].

Note that this theorem also renders MLCP PTAS-inapproximable unless FPT = W[1].

I.2 RESULTS FOR MGCP

Membership in in Σ_2^p can be proven via the definition of the polynomial hierarchy and the following alternating quantifier formula:

$$\exists [\mathcal{S} \subseteq \mathcal{M}] \; \forall [\mathbf{x} \in \{0, 1\}^{\#n_{in}}] : \mathcal{M}_{\mathcal{S}}(\mathbf{x}) = \mathcal{M}(\mathbf{y})$$

Theorem 67. If MGCP is polynomial-time tractable then P = NP.

Proof. Modify the reduction in the proof of Theorem 63 such that each hidden vertex neuron has input weight 0 and bias 1; this will force all hidden vertex neurons to output 1 for all input vectors x instead of just when x is the all-one vector. Hence, with slight modifications to the proof of reduction correctness for the reduction in the proof of Theorem 63, this modified reduction establishes the NP-hardness of MGCP.

Theorem 68. If $\langle cd, \#n_{out}, W_{max}, B_{max}, k \rangle$ -MGCP is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MGCP constructed in the reduction in the proof of Theorem 67, $\#n_{out} = W_{max} = 1$, cd = 4, and B_{max} and k are function of k in the given instance of DS. The result then follows from the facts that $\langle k \rangle$ -DS is W[2]-hard (Downey & Fellows, 1999) and $W[1] \subseteq W[2]$.

Theorem 69. $\langle \#n_{tot} \rangle$ -MGCP is fixed-parameter tractable.

Proof. Modify the algorithm in the proof of Theorem 65 such that each circuit M' created by ypatching M is checked to ensure that M'(x) = M(y) for every possible Boolean input vector xof length $\#n_{in}$. As the number of such vectors is $2^{\#n_{in}} < 2^{\#n_{tot}}$, the above is a fixed-parameter tractable algorithm for MGCP relative to parameter-set $\{\#n_{tot}\}$.

Observe that the results in Theorems 68 and 69 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MGCP relative to many subset of the parameters listed in Table 9.

Let us now consider the polynomial-time cost approximability of MGCP.

Theorem 70. If MGCP has a polynomial-time *c*-approximation algorithm for any constant c > 0 then FPT = W[1].

Proof. As the reduction in the proof of Theorem 67 is essentially the same as the reduction in the proof of Theorem 63, the result follows by the same reasoning as given in the proof of Theorem 66.

Note that this theorem also renders MGCP PTAS-inapproximable unless FPT = W[1].

J QUASI-MINIMAL CIRCUIT PATCHING PROBLEM

QUASI-MINIMAL CIRCUIT PATCHING (QMCP)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, an input vector \mathbf{y} and a set \mathcal{X} of input vectors of length $\#n_{in}$.

Output: a subset C in \mathcal{M} and a neuron $v \in C$, such that for the \mathcal{M}^* induced by patching C with activations from $\mathcal{M}(\mathbf{y})$ and $\mathcal{M} \setminus C$ with activations from $\mathcal{M}(\mathbf{x}), \forall_{\mathbf{x} \in \mathcal{X}} : \mathcal{M}^*(\mathbf{x}) = \mathcal{M}(\mathbf{y})$, and for \mathcal{M}' induced by patching identically except for $v \in C, \exists_{\mathbf{x} \in \mathcal{X}} : \mathcal{M}'(\mathbf{x}) \neq \mathcal{M}(\mathbf{y})$.

Theorem 71. QMCP is in PTIME (i.e., polynomial-time tractable).

Proof. Consider the following algorithm for QMCP. Build a sequence of MLPs by taking \mathcal{M} with all neurons labeled 0, and generating subsequent \mathcal{M}_i in the sequence by labeling an additional neuron with 1 each time (this choice can be based on any heuristic strategy, for instance, one based on gradients). The first MLP, \mathcal{M}_1 , obtained by patching all neurons labeled 1 (i.e., none) is such that $\mathcal{M}_1(x) \neq \mathcal{M}(y)$, and the last \mathcal{M}_n is guaranteed to give $\mathcal{M}_n(x) = \mathcal{M}(y)$ because all neurons are patched. Label the first MLP NO, and the last YES. Perform a variant of binary search on the sequence as follows. Evaluate the \mathcal{M}_{i} halfway between NO and YES while patching all its neurons labeled 1. If it satisfies the condition, label it YES, and repeat the same strategy with the sequence starting from the first \mathcal{M}_i until the YES just labeled. If it does *not* satisfy the condition, label it NO and repeat the same strategy with the sequence starting from the original sequence. This iterative procedure halves the sequence each time. Halt when you find two adjacent (NO, YES) patched networks (guaranteed to exist), and return the patched neuron set of the YES network V and the single neuron difference between YES and NO (the breaking point), $v \in V$. The complexity of this algorithm is roughly $O(n \log n)$.

K CIRCUIT ROBUSTNESS PROBLEM

Definition 17. Given an MLP M, a subset H of the elements in M, an integer $k \leq |H|$, and an input I to M, M is k-robust relative to H for I if for each subset $H' \subseteq H$, $|H'| \leq k$, M(I) = (M/H')(I).

Parameter	Description	Appl.
cd	# layers in given MLP	All
cw	max # neurons in layer in given MLP	All
$\#n_{tot}$	total # neurons in given MLP	All
$\#n_{in}$	# input neurons in given MLP	All
$\#n_{out}$	# output neurons in given MLP	All
B_{\max}	max neuron bias in given MLP	All
$W_{\rm max}$	max connection weight in given MLP	All
k	Requested level of robustness	All
H	Size of investigated region	$M{L,G}CR$

Table 10: Parameters for the minimum circuit robustness problem.

MAXIMUM LOCAL CIRCUIT ROBUSTNESS (MLCR)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a subset H of the neurons in M, a Boolean input vector I of length $\#n_{in}$, and a positive integer k such that $1 \le k \le |H|$. *Question*: Is M k-robust relative to H for I?

RESTRICTED MAXIMUM LOCAL CIRCUIT ROBUSTNESS (MLCR*)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a Boolean input vector I of length $\#n_{in}$, and a positive integer k such that $1 \le k \le |M|$. *Question*: Is M k-robust relative to H = M for I?

MAXIMUM GLOBAL CIRCUIT ROBUSTNESS (MGCR)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a subset H of the neurons in M, and a positive integer k such that $1 \le k \le |H|$.

Question: Is M k-robust relative to H for every possible Boolean input vector I of length $\#n_{in}$?

RESTRICTED MAXIMUM GLOBAL CIRCUIT ROBUSTNESS (MGCR*)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, and a positive integer k such that $1 \le k \le |M|$.

Question: Is M k-robust relative to H = M for every possible Boolean input vector I of length $\#n_{in}$?

Following Barceló et al. 2020, page 4, all neurons in M use the ReLU activation function and the output x of each output neuron is stepped as necessary to be Boolean, i.e., step(x) = 0 if $x \le 0$ and is 1 otherwise.

We will use previous results for MINIMUM LOCAL/GLOBAL CIRCUIT ABLATION, CLIQUE and VERTEX COVER to prove our results for the problems above.

For a graph G = (V, E), we shall assume an ordering on the vertices and edges in V and E, respectively.

We will prove various classical and parameterized results for MLCR, MLCR^{*}, MGCR, and MGCR^{*}. The parameterized results are proved relative to the parameters in Table 10. Lemmas 1 and 2 will be useful in deriving additional parameterized results from proved ones.

Several of our proofs involve problems that are hard for coW[1] and coNP, the complement classes of W[1] and NP (Garey & Johnson, 1979, Section 7.1). Given a decision problem **X** let co-**X** be the complement problem in which all instances answers are switched.

Observation 3. MLCR* is the complement of MLCA.

Proof. Let $X = \langle M, I, k \rangle$ be a shared input of MLCR^{*} and MLCA. If the the answer to MLCA on input X is "Yes", this means that there is a subset H of size $\leq k$ of the neurons of M that can be ablated such that $M(I) \neq (M/H)(I)$. This implies that the answer to MLCR^{*} on input X is "No". Conversely, if the answer to MLCA on input X is "No", this means that there is no subset H of size $\leq k$ of the neurons of M that can be ablated such that $M(I) \neq (M/H)(I)$. This implies that $M(I) \neq (M/H)(I)$. This implies that the answer to MLCR^{*} on input X is "No". Conversely, if the answer to MLCA on input X is "No", this means that there is no subset H of size $\leq k$ of the neurons of M that can be ablated such that $M(I) \neq (M/H)(I)$. This implies that the answer to MLCR^{*} on input X is "Yes". The observation follows from the definition of complement problem.

The following lemmas will be of use in the derivation and interpretation of results involving complement problems and classes.

Lemma 5. (Garey & Johnson, 1979, Section 7.1) Given a decision problem \mathbf{X} , if \mathbf{X} is *NP*-hard then co- \mathbf{X} is *coNP*-hard.

Lemma 6. Given a decision problem **X**, if **X** is *coNP*-hard and **X** is polynomial-time solvable then P = NP.

Proof. Suppose decision problem **X** is coNP-hard and solvable in polynomial-time by algorithm A. By the definition of problem, class hardness, for every problem **Y** in coNP there is a polynomialtime many-one reduction Π from **Y** to **X**; let A_{Π} be the polynomial-time algorithm encoded in Π . We can create a polynomial-time algorithm A' for co-**Y** by running A_{Π} on a given input, running A, and then complementing the produced output, i.e., "Yes" \Rightarrow "No" and "No" \Rightarrow "Yes". However, as co**X** is NP-hard by Lemma 5, this implies that P = NP.

Lemma 7. (Flum & Grohe, 2006, Lemma 8.23) Let C be a parameterized complexity class. Given a parameterized decision problem **X**, if **X** is C-hard then co-**X** is *co*C-hard.

Lemma 8. Given a parameterized decision problem \mathbf{X} , if \mathbf{X} is fixed-parameter tractable then co- \mathbf{X} is fixed-parameter tractable.

Proof. Given a fixed-parameter tractable algorithm A for **X**, we can create a fixed-parameter tractable algorithm A' for co-**X** by running A on a given input and then complementing the produced output, i.e., "Yes" \Rightarrow "No" and "No" \Rightarrow "Yes".

Lemma 9. Given a parameterized decision problem **X**, if **X** is coW[1]-hard and fixedparameter tractable then FPT = W[1].

Proof. Suppose decision problem **X** is coW[1]-hard and solvable in polynomial-time by algorithm *A*. By the definition of problem class hardness, for every problem **Y** in coW[1] there is a parameterized reduction Π from **Y** to **X**; let A_{Π} be the fixed-parameter tractable algorithm encoded in Π . We can create a polynomial-time algorithm A' for co-**Y** by running A_{Π} on a given input, running A, and then complementing the produced output, i.e., "Yes" \Rightarrow "No" and "No" \Rightarrow "Yes". However, as co**X** is W[1]-hard by Lemma 7, this implies that P = NP.

We will also be deriving polynomial-time inapproximability results for optimization versions of MLCR, MLCR*, MGCR, and MGCR*, i.e.,

- Max-MLCR, which asks for the maximum value k such that M is k-robust relative to H for I.
- Max-MLCR^{*}, which asks for the maximum value k such that M is k-robust relative to H = M for I.
- Max-MGCR, which asks for the maximum value k such that M is k-robust relative to H for every possible Boolean input vector I of length $\#n_{in}$

• Max-MGCR^{*}, which asks for the maximum value k such that M is k-robust relative to H = M for every possible Boolean input vector I of length $\#n_{in}$

The derivation of such results is complicated by both the coNP-hardness of the decision versions of these problems (and the scarcity of inapproximability results for coNP-hard problems which one could transfer to our problems by *L*-reductions) and the fact that the optimization versions of our problems are evaluation problems that return numbers rather than graph structures (which makes the use of instance-copy and gap inapproximability proof techniques [Garey & Johnson 1979, Chapter 6] extremely difficult). We shall sidestep many of these issues by deriving our results within the OptP framework for analyzing evaluation problems developed in Krentel 1988; Gasarch et al. 1995. In particular, we shall find the following of use.

Definition 18. (Adapted from (Krentel, 1988, page 493)) Let $f, g: \Sigma^* \to Z$. A metric reduction from f to g is a pair (T_1, T_2) of polynomial-time computable functions where $T_1: \Sigma^* \to \Sigma^*$ and $T_2: \Sigma^* \times Z \to Z$ such that $f(x) = T_2(x, g(T_1(x)))$ for all $x \in \Sigma^*$.

Lemma 10. (Corollary of (Krentel, 1988, Theorem 4.3)) Given an evaluation problem Π that is $OptP[O(\log n)]$ -hard under metric reductions, if Π has a *c*-additive approximation algorithm for some $c \in o(poly)^3$ then P = NP.

Some of our metric reductions use specialized ReLU logic gates described in Barceló et al. 2020, Lemma 13. These gates assume Boolean neuron input and output values of 0 and 1 and are structured as follows:

- 1. NOT ReLU gate: A ReLU gate with one input connection weight of value -1 and a bias of 1. This gate has output 1 if the input is 0 and 0 otherwise.
- 2. *n*-way AND ReLU gate: A ReLU gate with *n* input connection weights of value 1 and a bias of -(n 1). This gate has output 1 if all inputs have value 1 and 0 otherwise.
- 3. *n*-way OR ReLU gate: A combination of an *n*-way AND ReLU gate with NOT ReLU gates on all of its inputs and a NOT ReLU gate on its output that uses DeMorgan's Second Law to implement $(x_1 \lor x_2 \lor \ldots x_n)$ as $\neg(\neg x_1 \land \neg x_2 \land \ldots \neg x_n)$. This gate has output 1 if any input has value 1 and 0 otherwise.

The hardness (inapproximability) results in this section hold when the given MLP M has three (six) hidden layers.

K.1 RESULTS FOR MLCR-SPECIAL AND MLCR

Let us first consider problem MLCR*.

Theorem 72. If MLCR^{*} is polynomial-time tractable then P = NP.

Proof. As MLCR^{*} is the complement of MLCA by Observation 3 and MLCA is NP-hard by the proof of Theorem 39, Lemma 5 implies that MLCR^{*} is coNP-hard. The result then follows from Lemma 6.

Theorem 73. If $\langle cd, \#n_{in}, \#n_{out}, W_{\max}, B_{\max}, k \rangle$ -MLCR^{*} is fixed-parameter tractable then FPT = W[1].

Proof. The coW[1]-hardness of $\langle cd, \#n_{in}, \#n_{out}, W_{\max}, B_{\max}, k \rangle$ -MLCR^{*} follows from the W[1]-hardness of $\langle cd, \#n_{in}, \#n_{out}, W_{\max}, B_{\max}, k \rangle$ -MLCA (Theorem 40), Observation 3, and Lemma 7. The result then follows from Lemma 9.

Theorem 74. $\langle \#n_{tot} \rangle$ -MLCR* is fixed-parameter tractable.

Proof. The result follows from the fixed-parameter tractability of $\langle \#n_{tot} \rangle$ -MLCA Theorem 41, Observation 3, and Lemma 8.

³Note that o(poly) is the set of all functions f that are strictly upper bounded by all polynomials of n, i.e., $f(n) \le c \times g(n)$ for $n \ge n_0$ for all c > 0 and $g(n) \in \bigcup_k n^k = n^{O(1)}$.

Theorem 75. $\langle cw, cd \rangle$ -MLCR^{*} is fixed-parameter tractable.

Proof. The result follows from the fixed-parameter tractability of $\langle cw, cd \rangle$ -MLCA Theorem 42, Observation 3, and Lemma 8.

Observe that the results in Theorems 73–75 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MLCR* relative to many subsets of the parameters listed in Table 10.

We can derive a polynomial-time additive inapproximability result for Max-MLCR* using the following chain of metric reductions based on two evaluation problems:

- Min-VC, which asks for the minimum value k such that G has a vertex cover of size k.
- Min-MLCA, which asks for the minimum value k such that there is a k-size subset N' of the |N| neurons in M such that M(I) ≠ (M/N')(I).

Lemma 11. Min-VC metric reduces to Min-MLCA.

Proof. Consider the following reduction from Min-VC to Min-MLCA. Given an instance $X = \langle G = (V, E) \rangle$ of Min-VS, construct the following instance $X' = \langle M, I \rangle$ of Min-MLCA: Let M be an MLP based on $\#n_{tot} = 3|V| + 2|E| + 2$ neurons spread across six layers:

- 1. Input neuron layer: The single input neuron n_{in} (bias +1).
- 2. Hidden vertex pair layer: The vertex neurons $nvP1_1, nvP1_2, \dots nvP1_{|V|}$ and $nvP2_1, nvP2_2, \dots nvP2_{|V|}$ (all with bias 0).
- 3. Hidden vertex AND layer: The vertex neurons $nvA_1, nvA_2, \dots nA_{|V|}$, all of which are 2-way AND ReLU gates.
- 4. Hidden edge AND layer: The edge neurons $neA_1, neA_2, \dots neA_{|E|}$, all of which are 2-way AND ReLU gates.
- 5. Hidden edge NOT layer: The edge neurons $neN_1, neN_2, \dots neN_{|E|}$, all of which are NOT ReLU gates.
- 6. **Output layer**: The single output neuron n_{out} , which is an |E|-way AND ReLU gate.

The non-zero weight connections between adjacent layers are as follows:

- Each input neuron has an edge of weight 0 coming from its corresponding input and is in turn connected to each of the vertex pair neurons with weight 1.
- Each vertex pair neuron $nvP1_i$ $(nvP2_i)$, $1 \le i \le |V|$, is connected to vertex AND neuron nvR_i with weight 2 (0).
- Each vertex AND neuron nvA_i , $1 \le i \le |V|$, is connected to each edge AND neuron whose corresponding edge has an endpoint v_i with weight 1.
- Each edge AND neuron neA_i , $1 \le i \le |E|$, is connected to edge NOT neuron neN_i with weight 1.
- Each edge NOT neuron neN_i , $1 \le i \le |E|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I = (1). Observe that this instance of Min-MLCA can be created in time polynomial in the size of the given instance of Min-VC. Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	
1	$n_{in}(1)$
2	$ nvP1_1(1), nvP1_2(1), \dots nvP1_{ V }(1), nvP2_1(1), nvP2_2(1), \dots nvP2_{ V }(1) $
3	$ nvA_1(1), nvA_2(1), \dots nvA_{ V }(1)$
4	$neA_1(1), neA_2(1), \dots neA_{ V }(1)$
5	$ neN_1(0), neN_2(0), \dots neN_{ V }(0)$
6	$n_{out}(0))$

Note that, given the 0(2) connection-weights of P2 (P1) vertex pair neurons to vertex AND neurons, it is the outputs of P1 vertex pair neurons in timestep 2 that enables vertex AND neurons to output 1 in timestep 3.

We now need to show the correctness of this reduction by proving that the answer for the given instance of Min-VC is k if and only if the answer for the constructed instance of Min-MLCA is k. We prove the two directions of this if and only if separately as follows:

- ⇒ : Let $V' = \{v'_1, v'_2, \ldots, v'_k\} \subseteq V$ be a minimum-size vertex cover in *G* of size *k* and *N'* be the *k*-sized sized subset of the P1 vertex pair neurons corresponding to the vertices in *V'*. Let *M'* be the version of *M* in which all neurons in *N'* are ablated. As each of these vertex pair neurons previously allowed their associated vertex AND neurons to output 1, their ablation now allows these *k* vertex AND neurons to output 0. As *V'* is a vertex cover of size *k*, all edge AND neurons in *M'* receive inputs of 0 on at least one of their endpoints from the vertex AND neurons associated with the P1 vertex pair neurons in *N'*. This in turn ensures that all of the edge NOT neurons and the output neuron produces output 1. Hence, $M(I) = 0 \neq 1 = M'(I)$.
- \Leftarrow : Let N' be a minimum-sized subset of N of size k such that for the MLP M' induced by ablating all neurons in N', $M(I) \neq M(I')$. As M(I) = 0 and circuit outputs are stepped to be Boolean, M'(I) = 1. Given the bias of the output neuron, this can only occur if all |E| edge NOT (AND) neurons in M' have output 1 (0) on input I, the latter of which requiring that each edge AND neuron receives 0 from at least one of its endpoint vertex AND neurons. These vertex AND neurons can only output 0 if all of their associated P1 vertex neurons have been ablated. This means that the vertices in G corresponding to the P1 vertex pair neurons in N' must form a vertex cover of size k in G.

As this proves that Min-VC(X) = Min-MLCA(X'), the reduction above is a metric reduction from Min-VC to Min-MLCA.

Lemma 12. Min-MLCA metric reduces to Max-MLCR*.

Proof. As MLCA is the complement problem of MLCR^{*} (Observation 3), we already have a trivial reduction from MLCA to MLCR^{*} on their common input $X = \langle M, I \rangle$. We can then show that k is the minimum value such that M has a k circuit ablation relative to I if and only if k - 1 is the maximum value such that M is k - 1-robust relative to I:

⇒ If k is is the minimum value such that M has a k-sized circuit ablation relative to I then no subset of M of size k - 1 can be a circuit ablation of M relative to I, and M is (k - 1)-robust relative to I. Moreover, M cannot be k-robust relative to I as that would contradict the existence of a k-sized circuit ablation for M relative to I. Hence, k - 1 is the maximum robustness value for M relative to I. $\leftarrow \text{ If } k-1 \text{ is the maximum value such that } M \text{ is } (k-1) \text{-robust relative to } I \text{ then there must be a subset } H \text{ of } M \text{ of size } k \text{ that ensures } M \text{ is not } k-1 \text{-robust, i.e., } (M/H)(I) \neq M(I). \text{ Such an } H \text{ is a } k \text{-sized circuit ablation of } M \text{ relative to } I. \text{ Moreover, there cannot be a } (k-1) \text{-sized circuit ablation of } M \text{ relative to } I \text{ as that would contradict the } (k-1) \text{-robustness of } M \text{ relative to } I. \text{ Hence, } k \text{ is the minimum size of circuit ablations for } M \text{ relative to } I. \end{aligned}$

As this proves that $Min-MLCA(X) = Max-MLCR^*(X) + 1$, the reduction above is a metric reduction from Min-MLCA to $Max-MLCR^*$.

Theorem 76. If Max-MLCR*has a *c*-additive approximation algorithm for some $c \in o(poly)$ then P = NP.

Proof. The $OptP[O(\log n)]$ -hardness of Max-MLCR* follows from the $OptP[O(\log n)]$ -hardness of Min-VC (Gasarch et al., 1995, Theorem Theorem 3.3) and the metric reductions in Lemmas 11 and 12. The result then follows from Lemma 10

Let us now consider problem MLCR.

Lemma 13. MLCR* many-one polynomial-time reduces to MLCR.

Proof. Follows from the trivial reduction in which an instance $\langle M, I, k \rangle$ of MLCR^{*} is transformed into an instance $\langle M, H = M, I, k \rangle$ of MLCR.

Theorem 77. If MLCR is polynomial-time tractable then P = NP.

Proof. Follows from the *coNP*-hardness of MLCR* (Theorem 72), the reduction in Lemma 13, and Lemma 6.

Theorem 78. If $\langle cd, \#n_{in}, \#n_{out}, W_{\max}, B_{\max}, k \rangle$ -MLCR is fixed-parameter tractable then FPT = W[1].

Proof. Follows from the coW[1]-hardness of $\langle cd, \#n_{in}, \#n_{out}, W_{max}, B_{max}, k \rangle$ -MLCR* (Theorem 73), the reduction in Lemma 13, and Lemma 9.

Theorem 79. $\langle |H| \rangle$ -MLCR is fixed-parameter tractable.

Proof. Consider the algorithm that generates every possible subset H' of size at most k of the neurons N in H and for each such subset (assuming M/H' is active) checks if $(M/H')(I) \neq M(I)$. If such a subset is found, return "No"; otherwise, return "Yes". The number of possible subsets H' is at most $k \times |H|^k \leq |H| \times |H|^{|H|}$. As any such M' can be generated from M, checked or activity, and run on I in time polynomial in the size of the given instance of MLCR, the above is a fixed-parameter tractable algorithm for MLCR relative to parameter-set $\{|H|\}$.

Theorem 80. $\langle cw, cd \rangle$ -MLCR is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 79 and the observation that $|H| \leq cw \times cd$.

Theorem 81. $\langle \#n_{tot} \rangle$ -MLCR is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 79 and the observation that $|H| \leq \# n_{tot}$.

Theorem 82. If Max-MLCR has a *c*-additive approximation algorithm for some $c \in o(poly)$ then P = NP.

Proof. As Max-MLCR^{*} is a special case of Max-MLCR, if Max-MLCR has a *c*-additive approximation algorithm for some *c* then so does Max-MLCR^{*}. The result then follows from Theorem 76

K.2 RESULTS FOR MGCR-SPECIAL AND MGCR

Consider the following variant of MGCA:

SPECIAL CIRCUIT ABLATION (SCA)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, and a positive integer k such that $1 \le k \le \#n_{tot}$.

Question: Is there a subset N', $|N'| \le k$, of the |N| neurons in M such that for the MLP M' induced by $N \setminus N'$, $M(I) \ne M'(I)$ for some Boolean input vector I of length $\#n_{in}$?

Theorem 83. If SCA is polynomial-time tractable then P = NP.

Proof. Observe that in the instance of MLCA constructed by the reduction from CLIQUE in the proof of Theorem 40, the input-connection weight 0 and bias 1 of the input neuron force this neuron to output 1 for both of the possible input vectors (1) and (0). This means that the answer to the given instance of CLIQUE is "Yes" if and only if the answer to the constructed instance of MLCA relative to any of its possible input vectors is "Yes". Hence, with slight modifications to the proof of reduction correctness, this reduction also establishes the NP-hardness of SCA.

Theorem 84. If $\langle cd, \#n_{in}, \#n_{out}, W_{max}, B_{max}, k \rangle$ -SCA is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of SCA constructed in the reduction in the proof of Theorem 83, $\#n_{in} = \#n_{out} = W_{max} = 1$, cd = 5, and B_{max} and k are function of k in the given instance of CLIQUE. The result then follows from the fact that $\langle k \rangle$ -CLIQUE is W[1]-hard (Downey & Fellows, 1999).

Theorem 85. $\langle \#n_{tot} \rangle$ -SCA is fixed-parameter tractable.

Proof. Modify the algorithm in the proof of Theorem 41 such that each created MLP M is checked to ensure that $M(I) \neq M'(I)$ for every possible Boolean input vector of length $\#n_{in}$. As the number of such vectors is $2^{\#n_{in}} \leq 2^{\#n_{tot}}$, the above is a fixed-parameter tractable algorithm for SCA relative to parameter-set $\{\#n_{tot}\}$.

Theorem 86. $\langle cw, cd \rangle$ -SCA is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 85 and the observation that $\#n_{tot} \leq cw \times cd$.

Our results above for SCA above gain importance for us here courtesy of the following observation. **Observation 4.** MGCR* is the complement of SCA.

Proof. Let $X = \langle M, k \rangle$ be a shared input of MGCR^{*} and SCA. If the the answer to SCA on input X is "Yes", this means that there is a subset H of size $\leq k$ of the neurons of M that can be ablated such that $M(I) \neq (M/H)(I)$ for some input vector I. This implies that the answer to MGCR^{*} on input X is "No". Conversely, if the answer to SCA on input X is "No", this means that there is no subset H of size $\leq k$ of the neurons of M that can be ablated such that $M(I) \neq (M/H)(I)$ for any input vector I. This implies that the answer to MGCR^{*} on input X is "Yes". The observation follows from the definition of complement problem.

Theorem 87. If MGCR* is polynomial-time tractable then P = NP.

Proof. As MGCR^{*} is the complement of SCA by Observation 4 and SCA is NP-hard (Theorem 83), Lemma 5 implies that MGCR^{*} is coNP-hard. The result then follows from Lemma 6.

Theorem 88. If $\langle cd, \#n_{in}, \#n_{out}, W_{\max}, B_{\max}, k \rangle$ -MGCR^{*} is fixed-parameter tractable then FPT = W[1].

Proof. The coW[1]-hardness of $\langle cd, \#n_{in}, \#n_{out}, W_{max}, B_{max}, k \rangle$ -MGCR^{*} follows from the W[1]-hardness of $\langle cd, \#n_{in}, \#n_{out}, W_{max}, B_{max}, k \rangle$ -SCA (Theorem 84), Observation 4, and Lemma 7. The result then follows from Lemma 9.

Theorem 89. $\langle \#n_{tot} \rangle$ -MGCR^{*} is fixed-parameter tractable.

Proof. The result follows from the fixed-parameter tractability of $\langle \#n_{tot} \rangle$ -SCA (Theorem 85), Observation 4, and Lemma 8.

Theorem 90. $\langle cw, cd \rangle$ -MGCR* is fixed-parameter tractable.

Proof. The result follows from the fixed-parameter tractability of $\langle cw, cd \rangle$ -SCA (Theorem 86), Observation 4, and Lemma 8.

Observe that the results in Theorems 88–90 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MGCR* relative to many subsets of the parameters listed in Table 10.

We can derive a polynomial-time additive inapproximability result for Max-MGCR^{*} using the following chain of metric reductions based on two evaluation problems:

- Min-VC, which asks for the minimum value k such that G has a vertex cover of size k.
- Min-SCA, which asks for the minimum value k such that there is a k-size subset N' of the |N| neurons in M such that M(I) ≠ (M/N')(I) for some Boolean input vector I of length#n_{in}.

Lemma 14. Min-VC metric reduces to Min-SCA.

Proof. Observe that in the instance of Min-MLCA constructed by the reduction from Min-VC in the proof of Theorem 11, the input-connection weight 0 and bias 1 of the input neuron force this neuron to output 1 for both of the possible input vectors (1) and (0). This means that the answer to the constructed instance of Min-MLCA is the same relative to any of its possible input vectors. Hence, with slight modifications to the proof of reduction correctness, this reduction is also a metric reduction from Min-VC to Min-SCA such that for given instance X of Min-VC and constructed instance X' of Min-SCA, Min-VC(X) = Min-SCA(X').

Lemma 15. Min-SCA metric reduces to Max-MGCR*.

Proof. As SCA is the complement problem of MGCR^{*} (Observation 4), we already have a trivial reduction from SCA to MGCR^{*} on their common input $X = \langle M \rangle$. We can then show that k is the minimum value such that M has a k circuit ablation relative to some possible I if and only if k - 1 is the maximum value such that M is k - 1-robust relative to all possible I:

- ⇒ If k is is the minimum value such that M has a k-sized circuit ablation relative to some possible I then no subset of M of size k 1 can be a circuit ablation of M relative to any possible I, and M is (k 1)-robust relative to all possible I. Moreover, M cannot be k-robust relative to all possible I as that would contradict the existence of a k-sized circuit ablation for M relative to some possible I. Hence, k 1 is the maximum robustness value for M relative to all possible I.
- $\leftarrow \text{ If } k-1 \text{ is the maximum value such that } M \text{ is } (k-1) \text{-robust relative to all possible } I \text{ then there} \\ \text{must be a subset } H \text{ of } M \text{ of size } k \text{ that ensures } M \text{ is not } k-1 \text{-robust relative to all possible} \\ I, \text{ i.e., } (M/H)(I) \neq M(I) \text{ for some possible } I. \text{ Such an } H \text{ is a } k \text{-sized circuit ablation} \\ \text{of } M \text{ relative to that } I. \text{ Moreover, there cannot be a } (k-1) \text{-sized circuit ablation of } M \\ \text{ relative to some possible } I \text{ as that would contradict the } (k-1) \text{-robustness of } M \text{ relative to some} \\ \text{ to all possible } I. \text{ Hence, } k \text{ is the minimum size of circuit ablations for } M \\ \text{ relative to some possible } I. \end{aligned}$

As this proves that $Min-SCA(X) = Max-MGCR^*(X) + 1$, the reduction above is a metric reduction from Min-SCA to Max-MGCR^{*}.

Theorem 91. If Max-MGCR*has a *c*-additive approximation algorithm for some $c \in o(poly)$ then P = NP.

Proof. The $OptP[O(\log n)]$ -hardness of Max-MGCR* follows from the $OptP[O(\log n)]$ -hardness of Min-VC (Gasarch et al., 1995, Theorem Theorem 3.3) and the metric reductions in Lemmas 14 and 15. The result then follows from Lemma 10

Let us now consider problem MGCR.

Lemma 16. MGCR* many-one polynomial-time reduces to MGCR.

Proof. Follows from the trivial reduction in which an instance $\langle M, k \rangle$ of MGCR^{*} is transformed into an instance $\langle M, H = M, k \rangle$ of MGCR.

Theorem 92. If MGCR is polynomial-time tractable then P = NP.

Proof. Follows from the *coNP*-hardness of MGCR* (Theorem 87), the reduction in Lemma 16, and Lemma 6.

Theorem 93. If $\langle cd, \#n_{in}, \#n_{out}, W_{max}, B_{max}, k \rangle$ -MGCR is fixed-parameter tractable then FPT = W[1].

Proof. Follows from the coW[1]-hardness of $\langle cd, \#n_{in}, \#n_{out}, W_{max}, B_{max}, k \rangle$ -MGCR* (Theorem 88), the reduction in Lemma 16, and Lemma 9.

Theorem 94. $\langle \#n_{in}, |H| \rangle$ -MGCR is fixed-parameter tractable.

Proof. Modify the algorithm in the proof of Theorem 79 such that each created MLP M is checked to ensure that $M(I) \neq (H/H')(I)$ for every possible Boolean input vector of length $\#n_{in}$. As the number of such vectors is $2^{\#n_{in}}$, the above is a fixed-parameter tractable algorithm for MGCR relative to parameter-set $\{\#n_{in}, |H|\}$.

Theorem 95. $\langle cw, cd \rangle$ -MGCR is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 94 and the observations that $\#n_{tot} \leq cw \times cd$ and $|H| \leq cw \times cd$.

Theorem 96. $\langle \#n_{tot} \rangle$ -MGCR is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 94 and the observations that $\#n_{tot} \leq \#n_{tot}$ and $|H| \leq \#n_{tot}$.

Theorem 97. If Max-MGCR has a *c*-additive approximation algorithm for some $c \in o(poly)$ then P = NP.

Proof. As Max-MGCR^{*} is a special case of Max-MGCR, if Max-MGCR has a *c*-additive approximation algorithm for some *c* then so does Max-MGCR^{*}. The result then follows from Theorem 91

L SUFFICIENT REASONS PROBLEM

MINIMUM SUFFICIENT REASON (MSR)

Input: A multi-layer perceptron M of depth cd with $\#n_{tot}$ neurons and maximum layer width cw, connection-value matrices W_1, W_2, \ldots, W_{cd} , neuron bias vector B, a Boolean input vector I of length $\#n_{in}$, and a positive integer k such that $1 \le k \le \#n_{in}$.

Question: Is there a k-sized subset I' of I such that for each possible completion I'' of I', I and I'' are behaviorally equivalent with respect to M?

For a graph G = (V, E), we shall assume an ordering on the vertices and edges in V and E, respectively. For each vertex $v \in V$, let the complete neighbourhood $N_C(v)$ of v be the set composed of v and the set of all vertices in G that are adjacent to v by a single edge, i.e., $v \cup \{u \mid u \in V \text{ and } (u, v) \in E\}$.

We will prove various classical and parameterized results for MSR using reductions from CLIQUE. The parameterized results are proved relative to the parameters in Table 11. An additional reduction from DS (Theorem 103) use specialized ReLU logic gates described in Barceló et al. 2020, Lemma 13. These gates assume Boolean neuron input and output values of 0 and 1 and are structured as follows:

- 1. NOT ReLU gate: A ReLU gate with one input connection weight of value -1 and a bias of 1. This gate has output 1 if the input is 0 and 0 otherwise.
- 2. *n*-way AND ReLU gate: A ReLU gate with *n* input connection weights of value 1 and a bias of -(n 1). This gate has output 1 if all inputs have value 1 and 0 otherwise.
- 3. *n*-way OR ReLU gate: A combination of an *n*-way AND ReLU gate with NOT ReLU gates on all of its inputs and a NOT ReLU gate on its output that uses DeMorgan's Second Law to implement $(x_1 \lor x_2 \lor \ldots x_n)$ as $\neg(\neg x_1 \land \neg x_2 \land \ldots \neg x_n)$. This gate has output 1 if any input has value 1 and 0 otherwise.

L.1 RESULTS FOR MSR

The following hardness results are notable for holding when the given MLP M has only one hidden layer. As such, they complement and significantly tighten results given in (Barceló et al., 2020; Wäldchen et al., 2021), respectively.

Theorem 98. If MSR is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from CLIQUE to MSR. Given an instance $\langle G = (V, E), k \rangle$ of CLIQUE, construct the following instance $\langle M, I, k' \rangle$ of MSR: Let M be an MLP based on $\#n_{tot} = |V| + |E| + 1$ neurons spread across three layers:

- 1. Input vertex layer: The vertex neurons $nv_1, nv_2, \ldots nv_{|V|}$ (all with bias 0).
- 2. Hidden edge layer: The edge neurons $ne_1, ne_2, \ldots ne_{|E|}$ (all with bias -1).
- 3. Output layer: The single output neuron n_{out} (bias -(k(k-1)/2 1)).

Note that this MLP has only one hidden layer. The non-zero weight connections between adjacent layers are as follows:

- Each vertex neuron nv_i, 1 ≤ i ≤ |V|, is connected to each edge neuron whose corresponding edge has an endpoint v_i with weight 1.
- Each edge neuron ne_i , $1 \le i \le |E|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I = (1) and k' = k. Observe that this instance of MSR can be created in time polynomial in the size of the given instance of CLIQUE. Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	_
1	$nv_1(1), nv_2(1), \dots nv_{ V }(1)$
2	$ne_1(1), ne_2(1), \dots ne_{ E }(1)$
3	$n_{out}(E - (k(k-1)/2 - 1))$

Note that it is the stepped output of n_{out} in timestep 3 that yields output 1.

We now need to show the correctness of this reduction by proving that the answer for the given instance of CLIQUE is "Yes" if and only if the answer for the constructed instance of MSR is "Yes". We prove the two directions of this if and only if separately as follows:

⇒ : Let $V' = \{v'_1, v'_2, \dots, v'_k\} \subseteq V$ be a clique in G of size k and I' be the k' = k-sized subset of I corresponding to the vertices in V'. As V' is a clique of size k, exactly k(k-1)/2edge neurons in the constructed MLP M receive the requisite inputs of 1 on both of their endpoints from the vertex neurons associated with I'. This in turn ensures the output neuron produces output 1. No other possible inputs to the vertex neurons not corresponding to elements of I' can change the outputs of these activated edge neurons (and hence the output neuron as well) from 1 to 0. Hence, all completions of I' cause M to output 1 and are behaviorally equivalent to I with respect to M.

Parameter	Description
cd	# layers in given MLP
cw	max # neurons in layer in given MLP
$\#n_{tot}$	total # neurons in given MLP
$\#n_{in}$	# input neurons in given MLP
$\#n_{out}$	# output neurons in given MLP
$B_{\rm max}$	max neuron bias in given MLP
W _{max}	max connection weight in given MLP
k	Size of requested subset of input vector

Table 11: Parameters for the minimum sufficient reason problem.

 $\Leftarrow: \text{Let } I' \text{ be a } k' = k \text{-sized subset of } I \text{ such that all possible completions of } I' \text{ are behaviorally equivalent to } I \text{ with respect to } M, \text{ i.e., all such completions cause } M \text{ to output 1. Consider the completion } I'' \text{ of } I' \text{ in which all non-} I' \text{ elements have value 0. The output of } M \text{ on } I'' \text{ can be 1 (and hence equal to the output of } M \text{ on } I) \text{ only if at least } k(k-1)/2 \text{ edge neurons have output 1. As all non-} I' \text{ elements of } I'' \text{ have value 0, this means that both endpoints of each of these edge neuron must be connected to elements of } I' \text{ with output 1, which in turn implies that the } k' = k \text{ vertices in } G \text{ corresponding to the elements of } I' \text{ form a clique of size } k \text{ for } G.$

As CLIQUE is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MSR is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 99. If $\langle cd, \#n_{out}, W_{\max}, B_{\max}, k \rangle$ -MSR is fixed-parameter tractable then FPT = W[1].

Proof. Observe that in the instance of MSR constructed in the reduction in the proof of Theorem 98, $\#n_{out} = W_{max} = 1$, cd = 3, and B_{max} and k are function of k in the given instance of CLIQUE. The result then follows from the fact that $\langle k \rangle$ -CLIQUE is W[1]-hard (Downey & Fellows, 1999).

Theorem 100. $\langle \#n_{in} \rangle$ -MSR is fixed-parameter tractable.

Proof. Consider the algorithm that generates each possible subset I' of of I of size k and for each such I', checks if all possible completions of I' are behaviorally equivalent to I with respect to M. If such an I' is found, return "Yes"; otherwise, return "No". The number of possible I' is at most $(\#n_{in})^k \leq (\#n_{in})^{\#n_{in}}$ and the number of possible completions of any such I' is less than $2^{\#n_{in}}$. Given this, as M can be run on each completion of I' is time polynomial in the size of the given instance of MSR, the above is a fixed-parameter tractable algorithm for MSR relative to parameter-set $\{\#n_{in}\}$.

Theorem 101. $\langle \#n_{tot} \rangle$ -MSR is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 100 and the observation that $\#n_{in} \leq \#n_{tot}$.

Theorem 102. $\langle cw \rangle$ -MSR is fixed-parameter tractable.

Proof. Follows from the algorithm in the proof of Theorem 100 and the observation that $\#n_{in} \leq cw$.

Observe that the results in Theorems 99–102 in combination with Lemmas 1 and 2 suffice to establish the parameterized complexity status of MSR relative to every subset of the parameters listed in Table 11.

Let us now consider the polynomial-time cost approximability of MSR. As MSR is a minimization problem, we cannot do this using reductions from a maximization problem like CLIQUE. Hence we will instead use a reduction from another minimization problem, namely DS.

Theorem 103. If MSR is polynomial-time tractable then P = NP.

Proof. Consider the following reduction from DS to MSR. Given an instance $\langle G = (V, E), k \rangle$ of DS, construct the following instance $\langle M, I, k' \rangle$ of MSR: Let M be an MLP based on $\#n_{tot,g} = 3|V| + 1$ neurons spread across four layers:

- 1. Input layer: The input vertex neurons $nv_1, nv_2, \dots nv_{|V|}$, all of which have bias 0.
- 2. Hidden vertex neighbourhood layer I: The vertex neighbourhood AND neurons $nvnA_1, nvnA_2, \dots nvnA_{|V|}$, where $nvnA_i$ is an x-way AND ReLU gates such that $x = |N_C(v_i)|$.

- 3. Hidden vertex neighbourhood layer II: The vertex neighbourhood NOT neurons $nvnN_1, nvnN_2, \dots nvnN_{|V|}$, all of which are NOT ReLU gates.
- 4. **Output layer**: The single output neuron n_{out} , which is a |V|-way AND ReLU gate.

The non-zero weight connections between adjacent layers are as follows:

- Each input vertex neuron nv_i , $1 \le i \le |V|$, is connected to each vertex neighbourhood AND neuron $nvnA_j$ such that $v_i \in N_C(v_j)$ with weight 1.
- Each vertex neighbourhood AND neuron $nvnA_i$, $1 \le i \le |V|$, is connected to its corresponding vertex neighbourhood NOT neuron $nvnN_i$ with weight 1.
- Each vertex neighbourhood NOT neuron $nvnN_i$, $1 \le i \le |V|$, is connected to the output neuron n_{out} with weight 1.

All other connections between neurons in adjacent layers have weight 0. Finally, let I be the |V|-length zero-vector and k' = k. Observe that this instance of MSR can be created in time polynomial in the size of the given instance of DS, Moreover, the output behaviour of the neurons in M from the presentation of input I until the output is generated is as follows:

timestep	neurons (outputs)
0	—
1	$nvN_1(0), nvN_2(0), \dots nvN_{ V }(0)$
2	$nvnA_1(0), nvnA_2(0), \dots nvnA_{ V }(0)$
3	$nvnN_1(1), nvnN_2(1), \dots nvnN_{ V }(1)$
4	$n_{out}(1)$

We now need to show the correctness of this reduction by proving that the answer for the given instance of DS is "Yes" if and only if the answer for the constructed instance of MSR is "Yes". We prove the two directions of this if and only if separately as follows:

- ⇒ : Let $V' = \{v'_1, v'_2, \dots, v'_k\} \subseteq V$ be a dominating set in G of size k and I' be the k' = ksized subset of I corresponding to the vertices in V'. As V' is a dominating set, each vertex neighbourhood AND neuron receives input 0 from at least one input vertex neuron in the set of input vertex neurons associated with I', which in turn ensures that each vertex neighbourhood AND neuron has output 0. This in turn ensures that M produces output 1. No other possible inputs to the vertex neighbourhood AND neurons can change the output of these neurons from 0 to 1. Hence, all completions of I' cause M to output 1 and are behaviorally equivalent to I with respect to M.
- $\Leftarrow: \text{Let } I' \text{ be a } k' = k \text{-sized subset of } I \text{ such that all possible completions of } I' \text{ are behaviorally} \\ \text{equivalent to } I \text{ with respect to } M, \text{ i.e., all such completions cause } M \text{ to output 1. Consider} \\ \text{the completion } I'' \text{ of } I' \text{ in which all non-} I' \text{ elements have value 1. The output of } M \text{ on } I'' \\ \text{can be 1 (and hence equal to the output of } M \text{ on } I) \text{ only if all vertex neighbourhood NOT} \\ \text{neurons output 1, which in turn can happen only if all vertex neighbourhood AND gates} \\ \text{output 0. However, as all non-} I' \text{ elements of } I'' \text{ have value 1, this means that each vertex} \\ \text{neighbourhood AND neuron must be connected to at least one element of } I', which in turn implies that the <math>k' = k$ vertices in G corresponding to the elements of I' form a dominating set of size k for G.

As DS is NP-hard (Garey & Johnson, 1979), the reduction above establishes that MSR is also NP-hard. The result follows from the definition of NP-hardness.

Theorem 104. If MSR has a polynomial-time *c*-approximation algorithm for any constant c > 0 then FPT = W[1].

Proof. Recall from the proof of correctness of the reduction in the proof of Theorem 103 that a given instance of DS has a dominating set of size k if and only if the constructed instance of MSR has a subset I' of I of size k' = k such that every possible completion of I' is behaviorally equivalent to I with respect to M. This implies that, given a polynomial-time c-approximation algorithm A for MSR for some constant c > 0, we can create a polynomial-time c-approximation algorithm for DS by applying the reduction to the given instance x of DS to construct an instance x' of MSR, applying A to x' to create an approximate solution y', and then using y' to create an approximate solution y for x that has the same cost as y'. The result then follows from Chen & Lin 2019, Corollary 2, which implies that if DS has a polynomial-time c-approximation algorithm for any constant c > 0 then FPT = W[1].

Note that this theorem also renders MSR PTAS-inapproximable unless FPT = W[1].

M PROBABILISTIC APPROXIMATION SCHEMES

Let us now consider three other types of polynomial-time approximability that may be acceptable in situations where always getting the correct output for an input is not required:

- 1. algorithms that always run in polynomial time but are frequently correct in that they produce the correct output for a given input in all but a small number of cases (i.e., the number of errors for input size n is bounded by function err(n)) Hemaspaandra & Williams (2012);
- 2. algorithms that always run in polynomial time but are frequently correct in that they produce the correct output for a given input with high probability Motwani & Raghavan (1995); and
- 3. algorithms that run in polynomial time with high probability but are always correct (Gill, 1977).

Unfortunately, none of these options are in general open to us, courtesy of the following result.

Theorem 105. None of the hard problems in Table 4 are polynomial-time approximable in senses (1–3).

Proof. (Sketch) Holds relative to several strongly-believed or established complexity-class relation conjectures courtesy of the *NP*-hardness of the problems and the reasoning in the proof of (Wareham, 2022, Result E).