# Optimal Strategies for Winning Certain Coset-Guessing Quantum Games

Michael Schleppy, Emina Soljanin, and Nicolas Swanson

#### **Abstract**

In a recently introduced coset guessing game, Alice plays against Bob and Charlie, aiming to meet a joint winning condition. Bob and Charlie can only communicate before the game starts to devise a joint strategy. The game we consider begins with Alice preparing a 2m-qubit quantum state based on a random selection of three parameters. She sends the first m qubits to Bob and the rest to Charlie and then reveals to them her choice for one of the parameters. Bob is supposed to guess one of the hidden parameters, Charlie the other, and they win if both guesses are correct. From previous work, we know that the probability of Bob's and Charlie's guesses being simultaneously correct goes to zero exponentially as m increases. We derive a tight upper bound on this probability and show how Bob and Charlie can achieve it. While developing the optimal strategy, we devised an encoding circuit using only CNOT and Hadamard gates, which could be relevant for building efficient CSS-coded systems. We found that the role of quantum information that Alice communicates to Bob and Charlie is to make their responses correlated rather than improve their individual (marginal) correct guessing rates.

#### **Index Terms**

quantum correlations, classical correlations, quantum games, coset states, subspace states, CSS codes, monogamy of entanglement, quantum circuit

M. Schleppy and E. Soljanin are with the Department of Electrical and Computer Engineering, Rutgers, The State University of New Jersey, Piscataway, NJ 08854, USA, e-mail: (michael.schleppy@rutgers.edu, emina.soljanin@rutgers.edu). Nicolas Swanson is at the Combinatorics and Optimization department, the University of Waterloo, Waterloo, ON, Canada, e-mail: nicswanson@uwaterloo.ca.

#### I. Introduction

Quantum information science (QIS) promises to revolutionize the world of computing and information processing by exploiting quantum mechanics' unique properties. Traditional interest in QIS has revolved around computational speedups using quantum algorithms (i.e., Shor's factoring algorithm [1]) and information transmission (i.e., quantum teleportation [2]). These methods utilize phenomena such as superposition and entanglement, which are present in the quantum setting but not in the classical one.

The postulates of quantum mechanics also introduce restrictions, such as how quantum information is processed. A famous consequence is the no-cloning theorem (stemming from the unitary processing restriction), which refutes the existence of a universal cloning gate. Various information-securing schemes developed over the years exploit the no-cloning theorem to control how classical information encoded in quantum states can be accessed and distributed.

One of the early discovered implications of the no-cloning theorem is the principle of no passive eavesdropping in quantum communications, which underpins the security of protocols such as quantum key distribution [3] and blind quantum computing [4]. Another renowned, early security application of the no-cloning theorem is Wiesner's quantum money scheme [5], revisited and extended by Aaronson and Christiano [6]. There are several related, more recent cryptographic schemes, e.g., [7], [8] and references therein.

A cryptographically useful notion, first considered in [7], [9] is that of a *coset state* defined as follows: Given a k-dimensional subspace  $W \in \mathbb{F}_2^n$  and vectors  $x, z \in \mathbb{F}_2^n$ , we define the *coset state*  $|W_{x,z}\rangle \in (\mathbb{C}^2)^{\otimes n}$  by

$$|W_{x,z}\rangle = \frac{1}{\sqrt{2^k}} \sum_{u \in W} (-1)^{z \cdot u} |x + u\rangle. \tag{1}$$

The state  $|W_{x,z}\rangle$  depends on W, the coset W+x and the coset  $W^{\perp}+z$ ; hence the name coset state. Suppose a transmitter, Alice, prepares  $|W_{x,z}\rangle$  for k=m and n=2m and sends the first half of its 2m qubits to a receiver, Bob, and the other half to another receiver, Charlie. Suppose further that Alice reveals her choice of W to the receivers and asks Bob to guess x and Charlie to guess z. They can only communicate before the transmission starts. The concern of this paper is the probability that Bob and Charlie make correct guesses simultaneously. (Any x' and z' s.t.  $x+x'\in W$  and  $z+z'\in W^{\perp}$  constitute a correct answer.)

The authors of [7] conjectured that the probability of Bob's and Charlie's guesses being simulta-

neously correct goes to zero exponentially fast as n increases, even if they can request that Alice passes  $|W_{x,z}\rangle$  through some quantum channel (they chose) before revealing W. They showed that the validity of the conjecture implies the security of several cryptographic protocols. The proof of the conjecture appeared later in [10]. The authors derived an exponentially decreasing upper bound on the simultaneous correct guessing probability by using various general operator inequalities and techniques used in [11] to show monogamy of entanglement in some related problems. There are no claims in [10] that the bound is optimal nor methods to construct Bob and Charlie's strategies to achieve it.

We focus on the scenario in which Bob and Charlie cannot request that Alice passes  $|W_{x,z}\rangle$  through some quantum channel before revealing W. We first derive an upper bound lower than the one derived in [10], then show how Bob and Charlie can achieve it. Thus, the bound is optimal in this scenario. The proof techniques we use rely on finite field algebra and combinatorics and are different than those used in [7], [11].

We present an optimal guessing strategy for Bob and Charlie by using and modifying some ideas from (quantum CSS) coding theory. The authors of [12] also observed a connection with CSS codes but did not explore it. The optimal strategy includes a novel way of mapping an all-zero qubit state into the corresponding CSS-encoded state using only Hadamard and CNOT gates. This map is an offshoot contribution of possible interest to quantum coding theorists as simplifying circuitry for encoding, decoding, and operating systems implementing CSS codes is an active subject of current research [13].

We do not intend to claim that our results have further cryptographic relevance. Our interests come from the information theory of distributed communications and computing systems. Here, we aim to understand and quantify the classical and quantum correlations between Bob's and Charlie's guesses. To explain what this paper accomplishes toward that goal, consider the following classical scenario.

Suppose Alice reveals to Bob and Charlie her choice of  $W \subset \mathbb{F}_2^{2m}$  but withholds information about the x and z she picked uniformly at random. She asks Bob to guess the x-coset of W and Charlie the z-coset of  $W^{\perp}$  without sending them any further classical or quantum information. The probability that Bob guesses correctly is  $1/2^m$ , which holds for Charlie, too. The probability that both simultaneously guess correctly is  $1/2^{2m}$ . This paper shows that when Alice splits the

qubits of  $|W_{x,z}\rangle$  and sends half to Bob and half to Charlie, the probability of simultaneous correct guessing increases to  $1/2^m$  while the individual correct guessing probabilities remain  $\Theta(1/2^m)$ .

The rest of the paper is organized as follows: In Section II, we review some notation and basic definitions, and we formally define the coset guessing as a game. In Section III, we derive an upper bound on Bob's marginal probability of winning. In Section IV, we develop a canonical method of encoding subspace states using Hadamard and CNOT gates. Finally, in Section V, we present a strategy that Bob and Charlie can use to achieve the bound.

#### II. THE COSET GUESSING GAME

#### A. Preliminaries

Here, we state the notation and define the mathematical objects we need to describe the game. We need mostly standard algebraic and basic quantum computing notions provided in the appendix. For a quick primer on quantum computing, we refer the reader to [14].

## **Notation**

- $\mathbb{F}_2^k$  The vector space of dimension k over the field  $\mathbb{F}_2$ .
- G(n,k) The dual space of W, i.e., the set of all subspaces  $W\subseteq \mathbb{F}_2^n$  of dimension  $0\leqslant k\leqslant n$ .
- $W^{\perp}$  The set of all  $z \in \mathbb{F}_2^n$  for which  $x \cdot z = 0$  for all  $x \in W$ .
- $x_i^j$  The i,  $i+1,\ldots,j$ -th coordinates of a vector  $x\in\mathbb{F}_2^n$ .
- $\binom{n}{k}_q$  The q-binomial coefficient, equal to  $\prod_{j=0}^{k-1} \frac{q^{n-j}-1}{q^{k-j}-1}$ , and represents the cardinality of G(n,k) for q=2.
- CS(W) A set of coset representatives for the subspace  $W \subseteq \mathbb{F}_2^n$ .
- $CNOT_{i,T}$  Set of CNOT gates acting on an n-qubit register where i is the control bit index and T is the set the target bit indices.
- $[n] = \{1, 2, ..., n\}$  and  $[k, n] = \{k, k + 1, ..., n\}$ .

# Quantum Coset States

For a subspace  $W \in G(2m, m)$ , the *subspace state*  $|W\rangle \in (\mathbb{C}^2)^{\otimes 2m}$  is a uniform superposition of computational basis vectors with labels in W:

$$|W\rangle = \frac{1}{\sqrt{2^{m}}} \sum_{u \in W} |u\rangle \tag{2}$$

Given vectors  $x, z \in \mathbb{F}_2^{2m}$ , we define the *coset state*  $|W_{x,z}\rangle \in (\mathbb{C}^2)^{\otimes 2m}$  by

$$|W_{x,z}\rangle = \frac{1}{\sqrt{2^m}} \sum_{u \in W} (-1)^{z \cdot u} |x + u\rangle. \tag{3}$$

The state  $|W_{x,z}\rangle$  depends W the coset W+x and the coset  $W^{\perp}+z$ . Specifically, if x, x' belong to the same coset of W, and z, z' belong to the same coset of  $W^{\perp}$ , then  $|W_{x,z}\rangle = \pm |W_{x',z'}\rangle$ , meaning they are equal up to some global phase factor. Thus, for each subspace W, we can generate all coset states up to a global phase by iterating through a choice of CS(W) and  $CS(W^{\perp})$ .

**Example 1.** Consider dimension one subspaces of  $\mathbb{F}_2^2$  There are three subspaces of dimension 1 in  $\mathbb{F}_2^2$ .

$$W^{(1)} = \left\{ \begin{bmatrix} 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 1 \end{bmatrix} \right\} \quad W^{(2)} = \left\{ \begin{bmatrix} 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 1 \\ 0 \end{bmatrix} \right\} \quad W^{(3)} = \left\{ \begin{bmatrix} 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 1 \\ 1 \end{bmatrix} \right\} \tag{4}$$

Each subspace, together with its cosets and the cosets of its dual, defines four different coset states:

$$CS(W^{(1)}) = \{00, 10\} \qquad CS(W^{(2)}) = \{00, 01\} \qquad CS(W^{(3)}) = \{00, 01\}$$
 
$$CS(W^{(1)\perp}) = \{00, 01\} \qquad CS(W^{(2)\perp}) = \{00, 10\} \qquad CS(W^{(3)\perp}) = \{00, 10\}$$
 
$$|W_{00,00}^{(1)}\rangle = |0\rangle \otimes |+\rangle \qquad |W_{00,00}^{(2)}\rangle = |+\rangle \otimes |0\rangle \qquad |W_{00,00}^{(3)}\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle)$$
 
$$|W_{00,01}^{(1)}\rangle = |0\rangle \otimes |-\rangle \qquad |W_{00,10}^{(2)}\rangle = |-\rangle \otimes |0\rangle \qquad |W_{00,01}^{(3)}\rangle = \frac{1}{\sqrt{2}} (|00\rangle - |11\rangle)$$
 
$$|W_{10,00}^{(1)}\rangle = |1\rangle \otimes |+\rangle \qquad |W_{01,00}^{(2)}\rangle = |+\rangle \otimes |1\rangle \qquad |W_{10,00}^{(3)}\rangle = \frac{1}{\sqrt{2}} (|01\rangle + |10\rangle)$$
 
$$|W_{10,01}^{(1)}\rangle = |1\rangle \otimes |-\rangle \qquad |W_{01,10}^{(2)}\rangle = |-\rangle \otimes |1\rangle \qquad |W_{10,01}^{(3)}\rangle = \frac{1}{\sqrt{2}} (|01\rangle - |10\rangle) .$$

For a general  $W \in G(2m, m)$ , there will be  $2^{2m}$  different coset states.

## B. The Game Dynamics

There are three players in the game: Alice, Bob, and Charlie. Alice challenges Bob and Charlie by sending a 2m-qubit coset state  $|W_{x,z}\rangle$  based on a random choice of  $W \in G(2m,m)$ ,  $x \in \mathbb{F}_2^{2m}$ , and  $z \in \mathbb{F}_2^{2m}$ . She sends the first m qubits of  $|W_{x,z}\rangle$  to Bob and the rest to Charlie and then reveals her choice of W.

Bob's task is to guess some  $x' \in W + x$ , and Charlie's is to guess a  $z' \in W^{\perp} + z$ . Thus, given a  $W \in G(2\mathfrak{m},\mathfrak{m})$ , Bob uses a POVM  $\{B_x^W\}_{x \in CS(W)}$  and Charlie uses a POVM  $\{C_z^W\}_{z \in CS(W^{\perp})}$ . They locally measure their qubits, or equivalently, they measure  $|W_{x,z}\rangle$  with the product measurements  $\{B_{x'}^W \otimes C_{z'}^W\}_{x',z'}$  to get outcomes  $x' \in CS(W)$  and  $z' \in CS(W^{\perp})$ . Thus, they win with probability

 $\text{Tr}[(B_x^W \otimes C_z^W) | W_{x,z} \rangle \langle W_{x,z} |]$ . Their expected winning probability is the average over all possible Alice's choices of  $W \in G(2m, m)$ ,  $x \in CS(W)$ ,  $z \in CS(W^{\perp})$ :

$$p_{m} = E \left\{ Tr \left[ \left( B_{x}^{W} \otimes C_{z}^{W} \right) \left| W_{x,z} \right\rangle \left\langle W_{x,z} \right| \right] \right\}, \tag{5}$$

where E denotes the expectation (average) over  $W \in G(2m, m)$ ,  $x \in CS(W)$ ,  $z \in CS(W^{\perp})$  picked uniformly at random. The game dynamics are illustrated below.

## **Coset Guessing Game**

#### **Parameters:**

• A positive integer  $m \in \mathbb{Z}$ .

## **Strategy:**

• For each subspace  $W \in G(2m, m)$ , Bob and Charlie select POVMs  $\{B_x^W\}_{x \in CS(W)}$  and  $\{C_z^W\}_{z \in CS(W^{\perp})}$  respectively.

### Game Procedure:

- 1) Alice samples  $W \in G(2m, m)$ ,  $x \in CS(W)$ , and  $z \in CS(W^{\perp})$  uniformly at random. She prepares the state  $|W_{x,z}\rangle$ , comprised of 2m qubits.
- 2) Alice sends her state  $|W_{x,z}\rangle$  to Bob and Charlie so that Bob receives the first m qubits and Charlie receives the last m qubits.
- 3) Alice announces to Bob and Charlie which subspace  $W \in G(2m, m)$  she picked.
- 4) Bob and Charlie locally measure  $|W_{x,z}\rangle$  with the product measurements  $\{B_{x'}^W \otimes C_{z'}^W\}_{x',z'}$  to get outcomes  $x' \in CS(W)$  and  $z' \in CS(W^{\perp})$ .

Win Condition:  $x + x' \in W$  and  $z + z' \in W^{\perp}$ .

Choose  $W \in G(2m, m), x \in CS(W)$ , and  $z \in CS(W^{\perp})$ .

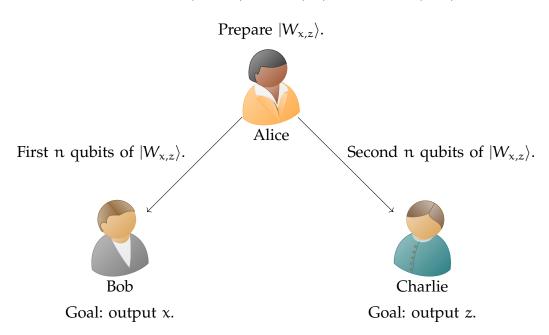


Fig. 1. An illustration of the considered coset guessing game.

**Example 2.** Recall in Example 1, when m = 1 there are 12 different coset states. In this simple example, we immediately see the problem that arises when Bob and Charlie try to guess x and z. If  $W = W^{(1)}$ , Bob can always guess x by simply measuring his qubit in the computational basis,  $\{|0\rangle, |1\rangle\}$ . Moreover, Charlie can always guess z by measuring his qubit in the Hadamard basis  $\{|+\rangle, |-\rangle\}$ . In the case  $W = W^{(2)}$ , this is no longer true since the choice of x affects Charlie's qubit, and the choice of x affects Bob's qubit. In the case  $W = W^{(3)}$ , there is entanglement between Bob and Charlie that makes things more interesting. We will return to this example in Section V.

This game is a variant of the game in [10]. There, Bob and Charlie can request that Alice perform a transformation  $\Phi(|W_{x,z}\rangle)$  before splitting and sending qubits. Moreover, the notation used in this paper is slightly different than that used in [10]. We use characters that are standard in coding theory, and we write G(2m, m) instead of  $G(m, \frac{m}{2})$ .

#### III. AN UPPER BOUND ON THE WINNING PROBABILITY

**Theorem 1.** Let  $p_m$  denote the supremum over all strategies of the winning probability for the coset guessing game parameterized by  $m \in \mathbb{N}$ . The following upper bound holds:

$$p_{\mathfrak{m}} \leqslant \frac{1}{\binom{2\mathfrak{m}}{\mathfrak{m}}_2} \sum_{k=0}^{\mathfrak{m}} 2^{k^2} \binom{\mathfrak{m}}{k}_2^2 \left(\frac{1}{2}\right)^k = \Theta\left(\frac{1}{2^{\mathfrak{m}}}\right)$$

*Proof.* Fix a subspace  $W \in G(2m, m)$ . We aim to show that the maximal probability of winning conditioned on the subspace W being chosen is at most  $\frac{1}{2^{m-k}}$ , where  $k = \dim(W \cap \langle e_i \rangle_{i=m+1}^{2m})$ , from which the upper bound will follow by counting subspaces.

Given W, x, and z, the selection of POVMs  $\{B_x^W\}_{x \in CS(W)}$  and  $\{C_z^W\}_{z \in CS(W^{\perp})}$  induces a probability distribution for Bob and Charlie's guesses  $\widehat{x}$  and  $\widehat{z}$ :

$$p(\widehat{x},\widehat{z}|W,x,z) = \text{Tr}\left[\left(B_{\widehat{x}}^{W} \otimes C_{\widehat{z}}^{W}\right)|W_{x,z}\rangle \langle W_{x,z}|\right]$$
(6)

The winning probability conditioned by the choice of subspace and coset representatives is thus p(x,z|W,x,z), which in turn is upper bounded by Bob's marginal probability of winning p(x|W,x,z):

$$p(x|W,x,z) = \sum_{\widehat{z}} p(x,\widehat{z}|W,x,z)$$

$$= \text{Tr}\left[\left(B_{x}^{W} \otimes \left(\sum_{\widehat{z}} C_{\widehat{z}}^{W}\right)\right)|W_{x,z}\rangle \langle W_{x,z}|\right]$$

$$= \text{Tr}\left[\left(B_{x}^{W} \otimes \text{Id}_{C}\right)|W_{x,z}\rangle \langle W_{x,z}|\right]$$

$$= \text{Tr}\left[B_{x}^{W} \text{Tr}_{C}\left[|W_{x,z}\rangle \langle W_{x,z}|\right]\right]$$
(7)

where we used the fact that POVM elements sum to identity and properties of the partial trace  $Tr_C$  over Charlie's m qubits. Averaging over x and z, we can determine Bob's marginal probability of winning conditioned solely on the choice of subspace W:

$$p_{\text{win}}^{\text{B}}(W) = \sum_{x,z} p(x,z)p(x|W,x,z)$$

$$= \frac{1}{4^{\text{m}}} \sum_{x,z} \text{Tr} \left[ B_{x}^{W} \text{Tr}_{C} \left[ |W_{x,z}\rangle \langle W_{x,z}| \right] \right]$$

$$= \frac{1}{2^{\text{m}}} \sum_{x} \text{Tr} \left[ B_{x}^{W} \rho_{x}^{B} \right]$$
(8)

$$ho_{
m x}^{
m B}=rac{1}{2^{
m m}}\sum_{z}{
m Tr}_{
m C}\left[\ket{W_{
m x,z}}ra{W_{
m x,z}}
ight]$$
 , and

**Lemma 1.** For every  $x,y \in CS(W)$ , the states  $\rho_x^B$  and  $\rho_{y^B}$  are either identical or orthogonal to each other, with equality occurring exactly when  $x+y \in W+\langle e_i \rangle_{i=m+1}^{2m}$ , i.e. they belong to the same coset of  $W+\langle e_i \rangle_{i=m+1}^{2m}$ .

*Proof:* Let  $C_u$  denote the equivalence class of vectors  $v \in W$  satisfying  $v_{m+1}^{2m} = u_{m+1}^{2m}$ . Two vectors  $u,v \in W$  lie in the same equivalence class if and only if  $u+v \in \langle e_i \rangle_{i=1}^m$ , so the number of equivalence classes is  $2^r$ , each with size  $2^{m-r}$ , where  $r = \dim(W \cap \langle e_i \rangle_{i=1}^m)$ . Define the state  $|\psi_{u,z}^x\rangle = \frac{1}{\sqrt{2^{m-r}}} \sum_{v \in C_u} (-1)^{z \cdot v} |x_1^m + v_1^m\rangle$  for an equivalence class  $C_u$  and  $z \in CS(W^\perp)$ . Then,

$$\operatorname{Tr}_{C}[|W_{x,z}\rangle\langle W_{x,z}|]] = \frac{1}{2^{m}} \sum_{\nu,w\in\mathcal{W}} (-1)^{z\cdot(\nu+w)} \operatorname{Tr}_{C}[|x+\nu\rangle\langle x+w|]$$

$$= \frac{1}{2^{m}} \sum_{C_{u}} \sum_{\nu,w\in C_{u}} (-1)^{z\cdot(\nu+w)} |x_{1}^{n} + \nu_{1}^{n}\rangle\langle x_{1}^{n} + w_{1}^{n}|$$

$$= \frac{1}{2^{r}} \sum_{C_{u}} |\psi_{u,z}^{x}\rangle\langle \psi_{u,z}^{x}|$$

$$(9)$$

Thus  $\rho_x^B = \frac{1}{2^{m+r}} \sum_z \sum_{C_u} |\psi_{u,z}^x\rangle \langle \psi_{u,z}^x|$ . Suppose that  $x + y \notin W + \langle e_i \rangle_{i=m+1}^{2m}$ . Then, there exist no vectors  $v, w \in W$  for which  $x_1^m + v_1^m = y_1^m + w_1^m$ , so the vectors  $|\psi_{u,z}^x\rangle$  and  $|\psi_{u',z'}^y\rangle$  are orthogonal

due to their disjoint basis support. It follows immediately that  $\rho_x^B$  and  $\rho_y^B$  are orthogonal.

Now, suppose that  $x+y \in W + \langle e_i \rangle_{i=m+1}^{2m}$ . Let  $w \in W \cap \langle e_i \rangle_{i=1}^m$  be chosen so that  $x_1^m + y_1^m = w_1^m$ . This ensures that  $w+v \in C_u$  for any  $v \in C_u$ , so therefore we have:

$$\begin{aligned} |\psi_{\mathbf{u},z}^{\mathbf{x}}\rangle &= \frac{1}{\sqrt{2^{m-r}}} \sum_{\mathbf{v} \in C_{\mathbf{u}}} (-1)^{z \cdot \mathbf{v}} |\mathbf{x}_{1}^{\mathbf{m}} + \mathbf{v}_{1}^{\mathbf{m}}\rangle \\ &= \frac{1}{\sqrt{2^{m-r}}} \sum_{\mathbf{v} \in C_{\mathbf{u}}} (-1)^{z \cdot \mathbf{v}} |\mathbf{y}_{1}^{\mathbf{m}} + \mathbf{w}_{1}^{\mathbf{m}} + \mathbf{v}_{1}^{\mathbf{m}}\rangle \\ &= \frac{(-1)^{z \cdot \mathbf{w}}}{\sqrt{2^{m-r}}} \sum_{\mathbf{v} \in C_{\mathbf{u}}} (-1)^{z \cdot (\mathbf{w} + \mathbf{v})} |\mathbf{y}_{1}^{\mathbf{m}} + (\mathbf{w} + \mathbf{v})_{1}^{\mathbf{m}}\rangle \\ &= (-1)^{z \cdot \mathbf{w}} |\psi_{1,z}^{\mathbf{y}}\rangle \end{aligned}$$
(10)

Thus  $ho_x^B = rac{1}{2^{m+r}} \sum_z \sum_{C_\mathfrak{u}} \ket{\psi_{\mathfrak{u},z}^x} ra{\psi_{\mathfrak{u},z}^x} = rac{1}{2^{m+r}} \sum_z \sum_{C_\mathfrak{u}} \ket{\psi_{\mathfrak{u},z}^y} ra{\psi_{\mathfrak{u},z}^y} = 
ho_y^B.$ 

Now, recalling  $k = \dim(W \cap \langle e_i \rangle_{i=m+1}^{2m})$  and noting that any coset C of  $W + \langle e_i \rangle_{i=m+1}^{2m}$  contains exactly  $2^{m-k}$  cosets of W, Bob cannot distinguish the states  $\rho_x^B$ ,  $\rho_y^B$  by any measurement for any coset representatives x, y that belong to the same coset of  $W + \langle e_i \rangle_{i=m+1}^{2m}$ . Denoting the coset of  $W + \langle e_i \rangle_{i=m+1}^{2m}$  containing x by  $C_x$ , we have:

$$p_{win}^{B}(W) = \frac{1}{2^{m}} \sum_{x} Tr[B_{x}^{W} \rho_{x}^{B}]$$

$$= \frac{1}{2^{m}} \sum_{e_{x}} \sum_{y \in e_{x}} Tr[B_{y}^{W} \rho_{x}^{B}]$$

$$= \frac{1}{2^{m}} \sum_{e_{x}} Tr[(\sum_{y \in e_{x}} B_{y}^{W}) \rho_{x}^{B}]$$

$$\leq \frac{1}{2^{m}} \sum_{e_{x}} Tr[\rho_{x}^{B}]$$

$$= \frac{2^{k}}{2^{m}} = \frac{1}{2^{m-k}}$$

$$(11)$$

Therefore, we are able to upper bound Bob's marginal probability of winning for the subspace W, in terms of the dimension of the intersection of W and  $\langle e_i \rangle_{i=m+1}^{2m}$ . We note that due to the orthogonality relations determined in Lemma 1, Bob can always achieve this winning probability with any POVM satisfying  $\sum_{y \in C_x} B_y^W = 2^{m-k} \rho_x^B$  for every equivalence class  $C_x$ .

It is now a matter of counting subspaces  $W \in G(2m, m)$  with  $\dim(W \cap \langle e_i \rangle_{i=m+1}^{2m}) = k$  for each  $0 \le k \le m$ . Results on enumerating subspaces over finite fields can be found throughout the literature, and we refer the reader to [15] from which the following result is derived:

**Lemma 2.** There are  $2^{(m-k)^2}\binom{m}{m-k}^2_2$  subspaces  $W \in G(2m,m)$  whose intersection with  $\langle e_i \rangle_{i=m+1}^{2m}$  has dimension k, where  $\binom{m}{k}_2$  is the q-binomial coefficient.

*Proof:* Fix a subspace  $V \subseteq \langle e_i \rangle_{i=m+1}^{2m}$  of dimension k. Using [15, Lemma 1] on the chain of subspaces  $V \subseteq \langle e_i \rangle_{i=m+1}^{2m} \subseteq \mathbb{F}_2^{2m}$ , there are  $2^{(m-k)^2} \binom{m}{m-k}_2$  subspaces  $W \subseteq \mathbb{F}_2^{2m}$  of dimension n satisfying  $W \cap \langle e_i \rangle_{i=m+1}^{2m} = V$ . Recalling that there are  $\binom{m}{k}_2 = \binom{m}{m-k}_2$  subspaces  $V \subseteq \langle e_i \rangle_{i=m+1}^{2m}$  of dimension m proves the lemma.

Thus, we express the upper bound for the winning probability as:

$$p_{m} \leqslant \frac{1}{\binom{2m}{m}_{2}} \sum_{k=0}^{m} 2^{(m-k)^{2}} \binom{m}{m-k}_{2}^{2} \left(\frac{1}{2}\right)^{m-k} = \frac{1}{\binom{2m}{m}_{2}} \sum_{k=0}^{m} 2^{k^{2}} \binom{m}{k}_{2}^{2} \left(\frac{1}{2}\right)^{k}$$
(12)

Lemma 3 describes the rate of decay for the upper bound:

**Lemma 3.** The asymptotic behavior of the bound satisfies  $\frac{1}{\binom{2m}{m}_2} \sum_{k=0}^m 2^{k^2} \binom{m}{k}_2^2 \left(\frac{1}{2}\right)^k = \Theta\left(\frac{1}{2^m}\right)$ .

*Proof:* Let  $f(m, k) = \frac{2^{k^2 \binom{m}{k}^2}}{\binom{2m}{m}}$ . The q-analog of Vandermonde's identity states that

$${2m \choose m}_2 = \sum_{k=0}^m 2^{k^2} {m \choose k}_2^2$$

and so  $f(m,k) \le 1$  for all  $0 \le k \le m$ . By computing the ratio  $\frac{f(m,k+1)}{f(m,k)}$  for  $0 \le k \le m-2$ , we observe that:

$$\frac{f(m, k+1)}{f(m, k)} = \frac{2^{(k+1)^2} {m \choose k+1}_2^2}{2^{k^2} {m \choose k}_2^2}$$

$$= 2^{(k+1)^2 - k^2} \left( \frac{\prod_{i=0}^k \frac{2^{m-i} - 1}{2^{k+1-i} - 1}}{\prod_{i=0}^{k-1} \frac{2^{m-i} - 1}{2^{k-i} - 1}} \right)^2$$

$$= 2^{2k+1} \left( \frac{2^{m-k} - 1}{2^{k+1} - 1} \right)^2$$

$$\geqslant \frac{1}{2} (2^{m-k} - 1)^2$$

$$\geqslant \frac{9}{2}.$$
(13)

It follows inductively that  $f(m,k)\leqslant (\frac{2}{9})^{m-k-1}f(m,m-1)$  for  $0\leqslant k\leqslant m-2$ , so we have

$$\frac{1}{\binom{2m}{m}_{2}} \sum_{k=0}^{m} 2^{k^{2}} \binom{m}{k}_{2}^{2} \left(\frac{1}{2}\right)^{k} = \sum_{k=0}^{m} f(m,k) \left(\frac{1}{2}\right)^{k} \\
\leq \sum_{k=0}^{m-1} f(m,m-1) \left(\frac{2}{9}\right)^{m-k-1} \left(\frac{1}{2}\right)^{k} + \frac{f(m,m)}{2^{m}} \\
\leq \left(\frac{2}{9}\right)^{m-1} \sum_{k=0}^{m-1} \left(\frac{9}{4}\right)^{k} + \frac{1}{2^{m}} \\
= \left(\frac{2}{9}\right)^{m-1} \frac{\left(\frac{9}{4}\right)^{m} - 1}{\frac{9}{4} - 1} + \frac{1}{2^{m}} \\
\leq \frac{9}{2} \left(\frac{1}{2^{m}}\right) + \frac{1}{2^{m}} = \frac{11}{2} \left(\frac{1}{2^{m}}\right) = O(\frac{1}{2^{m}}).$$
(14)

By the q-analog of Vadermonde's identity

$$\frac{1}{\binom{2m}{m}_2} \sum_{k=0}^{m} f(m,k) \left(\frac{1}{2}\right)^k \geqslant \frac{1}{\binom{2m}{m}_2} \sum_{k=0}^{m} f(m,k) \left(\frac{1}{2}\right)^m = \frac{1}{2^m}.$$

Thus, the upper bound asymptotically satisfies  $\frac{1}{\binom{2m}{m}_2}\sum_{k=0}^m 2^{k^2}\binom{m}{k}_2^2\left(\frac{1}{2}\right)^k = \Theta(\frac{1}{2^m})$ . We remark that the upper bound constant of  $\frac{11}{2}$  in (14) can be made smaller by a more careful derivation.  $\square$ 

#### IV. COSET STATE ENCODING AND REPRESENTATION

The rest of this paper focuses on showing how the bound derived in the previous section is achievable. In this section, we derive a particular representation of coset states, and in the next section, we present an optimal winning strategy based on the derived representation. In the next subsection, we devise a CNOT and H gates circuit N to encode  $|0\rangle^{\otimes 2m}$  into  $|W\rangle$ . We then show that we can pick coset representatives x & z such that  $Supp(x) \cap Supp(z) = \emptyset$  and

$$|W_{x,z}\rangle = N |x+z\rangle$$
.

The main idea of having such representation is to enable Bob and Charlie to invert the action of N by local actions and then measure to obtain the bits of x+z, which is only partially doable when N contains non-local actions. The details are in Section V.

These ideas are, to some extent, coding-theoretic in nature. The reader familiar with CSS codes may recognize that the  $CSS(C_1, C_2)$  with  $C_1 = \mathbb{F}_2^{2m}$  and  $C_2 = W$  could see 1)  $|W\rangle$  as the image of  $|0\rangle^{\otimes 2n}$  and 2) the coset states as X and Z error states:  $|W_{x,z}\rangle = X_{Supp(x)}Z_{Supp(z)}|W\rangle$ . Under this interpretation, Bob's task would be to locally decode X errors, and Charlie's would be to locally decode Z errors. For global decoding, a coding theorist would pick minimum-weight

coset representatives x and z for maximum likelihood decoding. However, as explained below, our optimal strategy benefits from a different choice of coset representatives.

## A. Subspace State Encoding

In this subsection, we devise a CNOT and H gates circuit N to map (encode) the state  $|0\rangle^{\otimes 2m}$  into a subspace state  $|W\rangle$ . The main result is shown in Proposition 1. We explain the idea by considering a subspace state corresponding to a subspace of  $\mathbb{F}_2^{2m}$  with a single generator  $v_i$ .

Let  $v_i \in \mathbb{F}_2^{2m}$  be a binary string of length m, whose first nonzero entry lies at the index i. Let  $S_i$  denote the support of the vector  $v_i$ , and let  $B_i = S_i \setminus \{i\}$ . Then the circuit  $CNOT_{i,B_i} H_i$  (where the index i is the control bit and the indices  $j \in B_i$  are the target bits) performs the following unitary map:

$$|0\rangle^{\otimes 2\mathfrak{m}}\overset{\mathrm{CNOT_{\mathfrak{i},B_{\mathfrak{i}}}}}{\mapsto}^{\mathrm{H_{\mathfrak{i}}}}\frac{1}{\sqrt{2}}\big(|0\rangle^{\otimes 2\mathfrak{m}}+|\nu_{\mathfrak{i}}\rangle\big)$$

Moreover, given any vector  $c \in \mathbb{F}_2^{2m}$  whose i-th bit is zero, the unitary transformation  $CNOT_{i,B_i}$   $H_i$  maps the vector

$$|c\rangle \mapsto \frac{1}{\sqrt{2}} (|c\rangle + |c + \nu_i\rangle).$$
 (15)

Thus, given another vector  $v_j \in \mathbb{F}_2^{2m}$  whose first non-zero entry lies at index j, we can generate a uniform superposition of the subspace generated by  $v_i$  and  $v_j$  via

$$|0\rangle^{\otimes 2\mathfrak{m}} \overset{CNOT_{\mathfrak{i},B_{\mathfrak{i}}}}{\mapsto} \overset{H_{\mathfrak{i}}}{\mapsto} \frac{1}{\sqrt{2}} \big(|0\rangle^{\otimes 2\mathfrak{m}} + |\nu_{\mathfrak{i}}\rangle \big) \overset{CNOT_{\mathfrak{j},B_{\mathfrak{j}}}}{\mapsto} \overset{H_{\mathfrak{j}}}{\mapsto} \frac{1}{2} \big(|0\rangle^{\otimes 2\mathfrak{m}} + |\nu_{\mathfrak{j}}\rangle + |\nu_{\mathfrak{i}}\rangle + |\nu_{\mathfrak$$

as long as the i'th bit of  $v_j$  is zero. We can continue this process with any number of vectors to generate the subspace spanned by those vectors.

We will use this method to generate  $|W\rangle$ , the uniform superposition of the computational basis vectors with labels in W. Let  $A_W$  be the matrix whose rows generate W. We will consider  $A_W$  in reduced-row echelon form and refer to it as the generator matrix of W. Since  $A_W$  is in reduced row echelon form, the index of the first 1 appearing in the bit string of a row vector  $A_W$  is a pivot column. This means this bit is zero for all other row vectors, so we can apply Equation (15) when needed. We are now ready to describe the circuit that maps  $|0\rangle^{\otimes 2^m}$  into  $|W\rangle$ 

**Proposition 1.** Given  $W \in G(2m, m)$ , let  $A_W$  be the generator matrix of W in reduced row echelon form. Let I denote the indices of the pivot columns of  $A_W$  and let  $J = \{(i,j) : i \in I, j \in I^c, A_{ij} = 1\}$ . Then

$$|W\rangle = \text{CNOT}_{\text{J}} \, \text{H}_{\text{I}} \, |0\rangle^{\otimes 2m} \,.$$

*Proof.* The first entry of a pair in J is always a pivot. For a fixed pivot  $i_0 \in I$ , there is exactly one row-vector  $a_{i_0}$  in  $A_W$  with a 1 at index  $i_0$ . The second entries in J,  $\{j:(i_0,j)\in J\}$ , form the support of the row vector  $a_{i_0}$ , excluding the pivot  $i_0$ . We can therefore decompose CNOT $_J$  as a product in terms of  $B_i = \text{Supp}(a_i) \setminus i$ :

$$\prod_{i\in I} CNOT_{i,B_i}.$$

The targets of these CNOT gates never contain an element of I, and each control bit is in I. Thus, for a specific  $i_0 \in I$  we can commute  $H_{i_0}$  with all gates except for  $CNOT_{i_0,B_{i_0}}$ . This allows us to write

$$CNOT_J\, \mathsf{H}_I\, |0\rangle^{\otimes 2\mathfrak{m}} = \prod_{\mathfrak{i}\in I} CNOT_{\mathfrak{i},\mathsf{B}_\mathfrak{i}}\, \mathsf{H}_\mathfrak{i}\, |0\rangle^{\otimes 2\mathfrak{m}}\,.$$

Using Equation (15), we end up with a superposition of the subspace generated by all  $a_i$ , which is exactly  $|W\rangle$ .

## B. Choosing Coset Representatives

Proposition 1 explains how we can see Alice's preparation of  $|W\rangle$  as passing the  $|0\rangle^{\otimes 2m}$  state through a circuit of depth at most m+1 to create  $|W\rangle$ . The circuit consists of Hadamard gates followed by CNOT gates. Alice can thus prepare the coset state as

$$|W_{x,z}\rangle = X_{\text{Supp}(x)}Z_{\text{Supp}(z)}|W\rangle = X_{\text{Supp}(x)}Z_{\text{Supp}(z)}C\text{NOT}_{J}H_{I}|0\rangle^{\otimes 2m}$$
(16)

for a given choice of x and z.

Recall that any choice  $x' \in C_x$  and  $z' \in C_z$  results in the same quantum state in (16). This section describes how we can select coset representatives that will allow us to represent coset states as

$$|W_{x,z}\rangle = \text{CNOT}_{\text{J}} \, \mathsf{H}_{\text{I}} \, |x+z\rangle \,.$$
 (17)

The usefulness of this representation will become clear in the following section which presents an optimal winning strategy. There are two features of the coset representatives x and z we chose that are essential the representation (17): the supports Supp(x) and Supp(z) are disjoint and allow us to derive (17) by using the standard (commutation) relations  $(I \otimes X) CNOT = CNOT(I \otimes X)$ ,  $(Z \otimes I) CNOT = CNOT(Z \otimes I)$ , and ZH = HX.

**Proposition 2.** Given  $W \in G(2m, m)$ , let  $A_W$  be the generator matrix of W in reduced row echelon form. Let I denote the indices of the pivot columns of  $A_W$ . Then

$$CS(W) = \langle e_i \rangle_{i \in I^c}$$
 and  $CS(W^{\perp}) = \langle e_i \rangle_{i \in I}$ 

are coset representatives sets of W and  $W^{\perp}$ .

*Proof.* Each  $e_i$  indexed by  $I^c$  is not in W, and moreover  $W \cap \langle e_i \rangle_{i \in I^c} = \{0\}$  since every non-zero vector has a 1 in some pivot index. Thus, W + e as e varies in  $\langle e_i \rangle_{i \in I^c}$  describes all  $2^m$  cosets of W. The same argument holds for  $W^{\perp}$  and I.

## C. Coset State Representation

Using the representation of  $|W\rangle$  from Proposition 1 and the disjoint representatives from Proposition 3, we can write

$$|W_{x,z}\rangle = X_{Supp(x)}Z_{Supp(z)}CNOT_{J}H_{I}|0\rangle^{\otimes 2m}$$
.

We now present an equivalent description of the state that is beneficial to Bob and Charlie's strategy.

**Proposition 3.** Given  $W \in G(2m, m)$ , let  $A_W$  be the generator matrix of W in reduced row echelon form. Let I denote the indices of the pivot columns of  $A_W$  and let  $J = \{(i,j) : i \in I, j \in I^c, A_{ij} = 1\}$ . Given  $\langle e_i \rangle_{i \in I}$  and  $\langle e_i \rangle_{i \in I^c}$ , we have

$$|W_{x,z}\rangle = \text{CNOT}_{\text{J}} \, \mathsf{H}_{\text{I}} \, |x+z\rangle$$

*Proof.* Consider the following identities:

$$(I \otimes X) \text{ CNOT} = \text{CNOT}(I \otimes X)$$
 and  $(Z \otimes I) \text{ CNOT} = \text{CNOT}(Z \otimes I)$ .

In particular, we have  $Z_{Supp(z)}$   $CNOT_J = CNOT_J Z_{Supp(z)}$  since  $Supp(z) \subseteq I^c$  and the controls of  $CNOT_J$  are indexed only with  $i \in I$ . Similarly,  $X_{Supp(x)}$   $CNOT_J = CNOT_J X_{Supp(x)}$  since  $Supp(x) \subseteq I$  and the target of  $CNOT_J$  are indexed with  $i \in I^c$ . Thus,

$$\left|W_{x,z}\right\rangle = CNOT_{J} \, X_{Supp(x)} Z_{Supp(z)} H_{I} \left|0\right\rangle^{\otimes 2m}.$$

Finally, we have that  $X_{Supp(x)}H_I=H_IX_{Supp(x)}$  since  $Supp(x)\subseteq I^c$  is disjoint from I and we use

the identity ZH = HX to get

$$|W_{x,z}\rangle = \text{CNOT}_{J} H_{I} X_{\text{Supp}(x)} Z_{\text{Supp}(z)} |0\rangle^{\otimes 2m}.$$

Finally, since we are working over  $\mathbb{F}_2$ , we have  $X_xX_z|0\rangle^{\otimes 2m}=|x+z\rangle$  as desired.  $\square$ 

### V. AN OPTIMAL WINNING STRATEGY

This section uses the representations from Section IV to prove the upper bound in Theorem 1 is tight. We will explicitly describe Bob and Charlie's strategy to win the game with the probability that saturates the bound. Recall that the bound is saturated when each player guesses correctly with probability  $\Theta(1/2^m)$ , and they are simultaneously correct or incorrect. In our strategy, Bob and Charlie process their states locally, so their classical and quantum correlations allow their guesses to be maximally correlated and correct with probability  $\Theta(1/2^m)$ ,

In the coset state  $|W_{x,z}\rangle = \text{CNOT}_J \, H_I \, |x+z\rangle$  there will be CNOT gates that Bob and Charlie can invert locally, depending on W, thus removing local entanglement and enabling subsequent inversion of the H gates. The scenario where they can invert all gates locally is equivalent to a classical game in which Alice sends them x+z instead of  $|W_{x,z}\rangle$ . We address this case in Section V-A. Then, in Section V-B, we show that after locally inverting all gates they can, Bob and Charlie (using only local operations) can reduce the remaining shared entanglement into a set of Bell-state pairs.

**Example 3.** To motivate the optimal strategy, we recall Example 1, which describes the possibilities for  $|W_{x,z}\rangle$  when m=1. For now, consider the two cases discussed previously in which there is no entanglement between Bob and Charlie. To reiterate, the best strategy Bob and Charlie can deploy for  $W^{(1)}$  will win with certainty by measuring in the computational basis and Hadamard basis, respectively. Meanwhile, the best strategy Bob and Charlie can deploy for  $W^{(2)}$  will win with probability  $\frac{1}{2}$ . Even though the marginal probabilities of Bob and Charlie guessing the correct x and z separately is  $\frac{1}{2}$ , they can form a strategy in which their joint probability of winning is also  $\frac{1}{2}$ . We can formally write down

the POVM's for both these cases:

$$\begin{split} \mathbf{B}_{00}^{W^{(1)}} &= |0\rangle \, \langle 0| & \mathbf{B}_{00}^{W^{(2)}} &= |+\rangle \, \langle +| \\ \mathbf{B}_{10}^{W^{(1)}} &= |1\rangle \, \langle 1| & \mathbf{B}_{01}^{W^{(2)}} &= |-\rangle \, \langle -| \\ \mathbf{C}_{00}^{W^{(1)}} &= |+\rangle \, \langle +| & \mathbf{C}_{00}^{W^{(2)}} &= |0\rangle \, \langle 0| \\ \mathbf{C}_{01}^{W^{(1)}} &= |-\rangle \, \langle -| & \mathbf{C}_{10}^{W^{(2)}} &= |1\rangle \, \langle 1| \, . \end{split}$$

This table formalizes that, in the case of  $W = W^{(1)}$ , Bob should guess 00 if he measures  $|0\rangle$ , and 10 otherwise. Similarly, Charlie should choose 00 if he measures  $|+\rangle$ , and 01 otherwise. On the other hand, the POVMs for  $W = W^{(2)}$  are chosen so that Bob and Charlie either both make an incorrect guess or both make a correct guess.

Recall now the case in which Bob and Charlie are given entangled qubits:

$$\begin{split} |W_{00,00}^{(3)}\rangle &= \frac{1}{\sqrt{2}}\left(|00\rangle + |11\rangle\right) = |\Phi^{+}\rangle \\ |W_{10,00}^{(3)}\rangle &= \frac{1}{\sqrt{2}}\left(|01\rangle + |10\rangle\right) = |\Psi^{+}\rangle \\ |W_{10,00}^{(3)}\rangle &= \frac{1}{\sqrt{2}}\left(|01\rangle + |10\rangle\right) = |\Psi^{+}\rangle \\ \end{split}$$

Theorem 1 gives an upper bound of  $\frac{2}{3}$  for Bob and Charlie's winning probability. Assuming this bound is tight, this means that Bob and Charlie should be able to win in the case  $W = W^{(3)}$  with probability  $\frac{1}{2}$ . Indeed, consider the strategy

$$\begin{split} B_{00}^{\mathcal{W}^{(3)}} &= \left| + i \right\rangle \left\langle + i \right| & B_{10}^{\mathcal{W}^{(3)}} &= \left| - i \right\rangle \left\langle - i \right| \\ C_{00}^{\mathcal{W}^{(3)}} &= \left| - i \right\rangle \left\langle - i \right| & C_{01}^{\mathcal{W}^{(3)}} &= \left| + i \right\rangle \left\langle + i \right| \end{split}$$

where  $|\pm i\rangle = \frac{|0\rangle \pm i|1\rangle}{\sqrt{2}}$ . In this case, one can check that Bob and Charlie both make the correct guess with probability  $\frac{1}{2}$ .

Example 3 is surprisingly indicative of the general case. When m is large, the state  $|W\rangle$  usually has a great deal of entanglement and there is more opportunity for Z-error information to Bob's side and X-information to be on Charlie's side as is the case when  $W = W^{(2)}$  in Example 3. Even with this added complexity, Bob and Charlie can perform local operations on their own qubits to reduce the state to simple one that looks like the m = 1 case. As described in Section III, it suffices to show for a fixed subspace  $W \in G(2m, m)$ , that Bob and Charlie can win with a probability of  $2^{-k}$  where  $k = \dim(\{v_1^m : v \in W\})$  is the dimension of W restricted to the first m coordinates. An overview of their winning strategy is given in Section V.

## **Optimal Coset Guessing Game Strategy**

**Preparation:** Before starting the game, Bob and Charlie will determine a set of circuits they plan to use for each subspace  $W \in G(2m, m)$ .

- For each  $W \in G(2m, m)$ , Bob and Charlie determine the sets I, J, CS(W),  $CS(W^{\perp})$  as in Section IV.
- For each  $W \in G(2m, m)$ , Bob and Charlie design circuits  $\mathcal{B}_W$ ,  $\mathcal{C}_W$  to be executed on their qubits of

$$|W_{x,z}\rangle = \text{CNOT}_{\text{J}} \, H_{\text{I}} \, |x+z\rangle$$

that:

- 1) Undo the CNOT gates that are local to either Bob or Charlie.
- 2) Undo H gates on control qubits that have are CNOT-free after the previous step.
- 3) Apply CNOT gates to isolate their entanglement to shared bell state pairs.

**Game Dynamics:** Once the game begins, Bob and Charlie are no longer allowed to communicate.

- Once Alice sends  $|W_{x,z}\rangle$  to Bob and Charlie and announces  $W \in G(2m, m)$ , Bob and Charlie apply circuits  $\mathcal{B}_W$ ,  $\mathcal{C}_W$  respectively to their qubits.
  - They measure in the  $|\pm i\rangle = \frac{1}{\sqrt{2}}(|0\rangle \pm |1\rangle)$  basis for qubits in shared bell state pairs and measure in the computational basis otherwise.
  - They store their respective outputs b, c in classical registers.
- Bob and Charlie apply linear maps on b, c determined by the circuits  $\mathcal{B}_W$ ,  $\mathcal{C}_W$  to recover guesses  $\hat{x}$ ,  $\hat{z}$  for x, z respectively.
  - Bob and Charlie win with probability  $2^k$ , where  $k = dim(\{v_1^m : v \in W\}) = n dim(W \cap \langle e_i \rangle_{i=m+1}^{2m})$ .

# A. Entanglement Between Bob and Charlie is Locally Removable

We describe how Bob and Charlie can simplify the shared  $|W_{x,z}\rangle$  state by performing local operations on their respective qubits. If there is no entanglement between Bob and Charlie after these operations, they can simplify the state to  $|x+z\rangle$ , reducing the game to a classical one.

**Example 4.** Suppose m = 2 and the reduced-row echelon generator matrix for W is

$$A = \begin{pmatrix} 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{pmatrix}.$$

We have  $I = \{1,3\}$ ,  $CS(W) = \langle e_2, e_4 \rangle$  and  $CS(W^{\perp}) = \langle e_1, e_3 \rangle$ . Suppose Alice chooses

$$x = \begin{pmatrix} 0 & 0 & 0 & 1 \end{pmatrix} \qquad z = \begin{pmatrix} 1 & 0 & 1 & 0 \end{pmatrix}$$

and so we have

$$|W\rangle = |\Phi^{+}\rangle \otimes |+\rangle \otimes |0\rangle$$
 and  $|W_{x,z}\rangle = |\Phi^{-}\rangle \otimes |-\rangle \otimes |1\rangle$ 

with  $|\Phi^{\pm}\rangle = \frac{1}{\sqrt{2}}(|00\rangle \pm |11\rangle)$ . When Alice sends the first 2 qubits of  $|W_{x,z}\rangle$  to Bob and second 2 qubits to Charlie, they receive states with no shared entanglement. We claim this implies they can reduce their shared state to  $|x+z\rangle$ .

First, we show how Charlie will be able to recover  $(x+z)_3^4$ . Charlie knows his first qubit is not entangled with any other qubit, and he knows it must be  $|+\rangle$  or  $|-\rangle$  when  $z_3=0$  or  $z_3=1$  respectively. By applying H to this qubit, he obtains  $|0\rangle$  or  $|1\rangle$  when  $z_3=0$  or 1, turning the qubit into  $|z_3\rangle$ . Likewise, he knows his second qubit is  $|x_4\rangle$  since the fourth column of  $A_W$  is all 0's.

Bob similarly knows that his qubits are entangled and are one of the four bell state pairs depending on  $z_1$  and  $x_2$ . Since the bell state pairs can be encoded using Proposition 1 and Proposition 3, Bob knows his bell state pair is

CNOT<sub>1,2</sub> 
$$H_1 |z_1x_2\rangle$$
.

So Bob may remove the entanglement by applying  $CNOT_{1,2} H_1$  himself, yielding  $|z_1x_2\rangle$ .

It is not always possible to undo the operations Alice uses to create  $|W\rangle$  as shown above. For example, a CNOT gate may be applied to one of Bob's qubits and one of Charlie's qubits. It is exactly these cases that give rise to shared entanglement between Bob and Charlie, which is handled in Section V-B.

Given the state  $|W_{x,z}\rangle = \text{CNOT}_J \, H_I \, |x+z\rangle$ , the next proposition describes the obvious operations Bob and Charlie can make to undo some of the CNOT and H operations in CNOT<sub>J</sub>  $H_I \, |x+z\rangle$  that are local to the first m and second m qubits.

**Proposition 4.** Bob and Charlie can win the coset guessing game with probability  $p_m$  if they can win the same game given the state

$$|\widehat{W}_{x,z}\rangle = \text{CNOT}_{I'}\,\mathsf{H}_{I'}|x+z\rangle$$
 (18)

where 
$$J' = \{(i,j) : 1 \leqslant i \leqslant m, m+1 \leqslant j \leqslant 2m, (i,j) \in J\}$$
 and  $I' = \{i : (i,j) \in J' \text{ for any } j\}$ .

*Proof.* We show that Bob and Charlie can get from the original game state to the state in (18) by applying only local gates with no need to communicate. Bob and Charlie start with each having m qubits of the state

$$|W_{x,z}\rangle = \text{CNOT}_{\text{J}} H_{\text{I}} |x+z\rangle$$
.

For any pair  $(i,j) \in J$  with  $1 \le i,j \le m$ , Bob can apply  $CNOT_{ij}$ . Similarly, for any pair  $(i,j) \in J$  with  $m+1 \le i,j \le 2m$ , let Charlie apply  $CNOT_{ij}$  to his qubits. Since all CNOT gates indexed by J commute, the resulting state is

$$\begin{split} \text{CNOT}_{\mathsf{J} \setminus \mathsf{J}'} \, \text{CNOT}_{\mathsf{J}} \, \mathsf{H}_{\mathsf{I}} \, | \mathsf{x} + \mathsf{z} \rangle &= \text{CNOT}_{\mathsf{J} \setminus \mathsf{J}'} \, \text{CNOT}_{\mathsf{J} \setminus \mathsf{J}'} \, \text{CNOT}_{\mathsf{J}'} \, \mathsf{H}_{\mathsf{I}} \, | \mathsf{x} + \mathsf{z} \rangle \\ &= \text{CNOT}_{\mathsf{I}'} \, \mathsf{H}_{\mathsf{I}} \, | \mathsf{x} + \mathsf{z} \rangle \, . \end{split}$$

Finally, for any  $i \in I$  such that there are no longer any CNOT gates with control qubit i, the gate  $H_i$  can be applied since it will commute with every CNOT indexed by J'. The resulting state then has the form

$$\begin{split} \mathsf{H}_{\mathsf{I}\setminus\mathsf{I}'}\mathsf{CNOT}_{\mathsf{J}'}\,\mathsf{H}_{\mathsf{I}}\,|x+z\rangle &= \mathsf{CNOT}_{\mathsf{J}'}\,\mathsf{H}_{\mathsf{I}\setminus\mathsf{I}'}\mathsf{H}_{\mathsf{I}}\,|x+z\rangle \\ &= \mathsf{CNOT}_{\mathsf{J}'}\,\mathsf{H}_{\mathsf{I}\setminus\mathsf{I}'}\mathsf{H}_{\mathsf{I}\setminus\mathsf{I}'}\mathsf{H}_{\mathsf{I}'}\,|x+z\rangle \\ &= \mathsf{CNOT}_{\mathsf{J}'}\,\mathsf{H}_{\mathsf{I}'}\,|x+z\rangle = |\widehat{W}_{\mathsf{x},z}\rangle\,. \end{split}$$

If there is no entanglement between Bob and Charlie, then there is no pair  $(i,j) \in J$  with  $i \le m < j$ . This means the state  $|\widehat{W}_{x,z}\rangle$  has become  $|x+z\rangle$ . Bob and Charlie can reach the desired winning probability by playing the following classical game.

Suppose Alice generates  $W \in G(2m, m)$ ,  $x \in CS(W)$ , and  $z \in CS(W^{\perp})$  with the representations in Section IV and simply sends the first m bits of x + z to Bob and the second m bits of x + z to Charlie. We will show that Bob and Charlie can jointly and respectively guess x and z with probability  $2^{-k}$  where k is equal to the dimension of W restricted to the first m coordinates.

We still require that Bob and Charlie do not communicate after receiving their respective bits of x + z, so it may seem as if the information about  $z \in CS(W^{\perp})$  on Bob's side and the information about  $x \in CS(W)$  on Charlie's side cannot be exchanged. However, our choice of

representations for CS(W) and  $CS(W^{\perp})$  as described in Proposition 2 allow Bob and Charlie to perfectly correlate information about the other side's bits without communicating.

**Example 5.** Suppose m = 3 and the reduced-row echelon generator matrix for W is

$$A = \begin{pmatrix} 1 & 0 & 1 & 0 & 0 & 1 \\ 0 & 1 & 1 & 1 & 0 & 1 \\ 0 & 0 & 0 & 0 & 1 & 0 \end{pmatrix}.$$

Recall that  $CS(W) = \langle e_3, e_4, e_6 \rangle$  and  $CS(W^{\perp}) = \langle e_1, e_2, e_5 \rangle$ . Suppose Alice has 011110, which she splits to send to Bob and Charlie:

$$\underbrace{011110}_{Alice} = \underbrace{011}_{Bob} \underbrace{110}_{Charlie}$$

Since Bob and Charlie know and agree on this description of CS(W) and  $CS(W^{\perp})$ , they know that

$$x + z = z_1 z_2 x_3 x_4 z_5 x_6$$
.

Bob needs to identify x bits indexed by  $I^c$ , while Charlie needs to identify z bits indexed by I. Since Bob is given the first three bits, he can immediately identify one out of three bits of x, and likewise, Charlie can identify one out of three bits of z. While Bob and Charlie are left to guess the other two bits, they can improve their joint probability of winning to be higher than choosing uniformly at random. In this case, Bob can guess x = 001001 by setting his guess for  $x_4$  to the first bit he sees on his side and making his guess for  $x_6$  to the second bit on his side. Charlie can similarly guess z = 100010 by guessing  $z_1$  and  $z_2$  to be the bits he sees, but does not need.

In this case, Bob and Charlie are both incorrect in their guesses. This is because Bob and Charlie have guessed that  $z_1 = x_4$  and  $z_2 = x_6$ . So, if one person incorrectly guesses a bit, they both do. Neither Bob nor Charlie know their missing bits, but they can make their guesses coincide. Their joint probability of winning is therefore equal to the marginal probability of either Bob or Charlie winning. This is the probability that  $z_1 = x_4$  and  $z_2 = x_6$ , which is  $\frac{1}{4}$ , which agrees with  $2^{-k}$  and  $k = 2 = |I \cap [m]|$ .

Formally, Bob and Charlie agree on a bijection  $h_W: I \cap [m] \to I^c \cap [m+1,2m]$  for every subspace W. For every bit  $b_i$  Bob sees such that  $i \in I^c$ , he guesses  $x_i = b_i$ . For the other possibly nonzero bits of x indexed by  $I^c \cap [m+1,2m]$ , he guesses  $x_{h_W(i)} = b_i$ . Charlie will do similarly using  $h_W^{-1}$  so that they jointly guess  $z_i = x_{h_W(i)}$  for every  $i \in I \cap [m]$ .

We transfer this classical game into the language of quantum by encoding the classical bits

into a state. We do this to refer to it later in this section; however, no quantum properties are needed.

**Proposition 5.** Given  $W \in G(2m, m)$ , let  $A_W$  be the generator matrix of W in reduced row echelon form. Let I denote the indices of the pivot columns of  $A_W$  and let  $J = \{(i,j) : i \in I, j \in I^c, A_{ij} = 1\}$ . Finally, let  $CS(W) = \langle e_i \rangle_{i \in I^c}$  and  $CS(W^{\perp}) = \langle e_i \rangle_{i \in I}$ .

For every  $W \in G(2m,m)$ , there exists a bijection  $h_W: I \cap [m] \to I^c \cap [m+1,2m]$ . For any such bijection, the POVMs  $B_x^W = \bigotimes_{i=1}^m B_i^W$  and  $C_z^W = \bigotimes_{j=m+1}^{2n} C_j^W$  with

$$B_{i}^{W} = \begin{cases} \left|x_{i}\right\rangle\left\langle x_{i}\right| & i \in I^{c} \\ \left|x_{h_{W}(i)}\right\rangle\left\langle x_{h_{W}(i)}\right| & i \in I \end{cases} \qquad C_{j}^{W} = \begin{cases} \left|z_{j}\right\rangle\left\langle z_{j}\right| & j \in I \\ \left|z_{h_{W}^{-1}(j)}\right\rangle\left\langle z_{h_{W}^{-1}(j)}\right| & j \in I^{c} \end{cases}$$

satisfy

$$\text{Tr}\big[(B_x^W\otimes C_z^W)\left|x+z\right\rangle\left\langle x+z\right|\big] = \begin{cases} 1 & z_{\mathfrak{i}} = x_{h_W(\mathfrak{i})} \text{ for all } \mathfrak{i} \in I \cap [m] \\ 0 & \text{otherwise} \end{cases}.$$

The first case in the definition of  $B_i$  and  $C_i$  outlines what Bob and Charlie should guess, given the bits they receive are on the correct side. The second case correlates their uncertain guesses. For Bob, this can be interpreted as measuring the i'th qubit to make a guess for  $x_{h_W(i)}$ . Our claim is that Bob and Charlie win if and only if  $x_i = z_{h_W^{-1}(i)}$ .

*Proof.* Our bijection always exists as the size of the domain equals the size of the codomain, both k. Splitting up each qubit we may write

$$\begin{split} &\operatorname{Tr} \big[ (B_{\mathbf{x}}^{W} \otimes C_{\mathbf{z}}^{W}) \, | \mathbf{x} + \mathbf{z} \rangle \, \langle \mathbf{x} + \mathbf{z} | \big] = \\ & \prod_{i=1}^{m} \operatorname{Tr} \big[ (B_{i}^{W} \otimes C_{\mathbf{m}+i}^{W}) (|\mathbf{x}_{i} + \mathbf{z}_{i}\rangle \otimes |\mathbf{x}_{\mathbf{m}+i} + \mathbf{z}_{\mathbf{m}+i}\rangle) (\langle \mathbf{x}_{i} + \mathbf{z}_{i}| \otimes \langle \mathbf{x}_{\mathbf{m}+i} + \mathbf{z}_{\mathbf{m}+i} |) \big] \\ & = \prod_{i=1}^{n} \langle \mathbf{x}_{i} + \mathbf{z}_{i} | B_{i}^{W} | \mathbf{x}_{i} + \mathbf{z}_{i} \rangle \cdot \langle \mathbf{x}_{\mathbf{m}+i} + \mathbf{z}_{\mathbf{m}+i} | C_{\mathbf{m}+i}^{W} | \mathbf{x}_{\mathbf{m}+i} + \mathbf{z}_{\mathbf{m}+i} \rangle \,. \end{split}$$

We compute

$$\left\langle \mathbf{x}_{i}+z_{i}
ightert B_{i}^{W}\leftert \mathbf{x}_{i}+z_{i}
ight
angle =egin{dcases} \left\langle x_{i}
ightert \leftert \mathbf{x}_{i}
ight
angle ^{2}=1 & i\in \mathrm{I}^{\mathrm{c}} \ \left\langle z_{i}
ightert \leftert \mathbf{x}_{\mathrm{h}_{W}\left(i
ight)}
ight
angle ^{2} & i\in \mathrm{I} \end{cases}$$

and likewise

$$\langle x_{m+i} + z_{m+i} | \, C_{m+1}^W | x_{m+i} + z_{m+i} \rangle = \begin{cases} \langle z_{m+i} | | z_{m+i} \rangle^2 = 1 & m+i \in I \\ \\ \langle x_{m+i} | | z_{h_W^{-1}(m+i)} \rangle^2 & m+i \in I^c \end{cases} .$$

If we have  $z_i \neq x_{h_W(i)}$ , for some  $i \in I \cap [m]$ , then the product is zero as expected. Otherwise, if  $z_i = x_{h_W(i)}$  for all  $i \in I \cap [m]$ , then we also have  $z_{h_W^{-1}(i)} = x_i$  for all  $i \in I^c \cap [m+1,2m]$  since  $h_W$  is a bijection. In this case all terms in the product are 1 as desired.

The probability of winning this classical game is then the probability that  $z_i = x_{h_W(i)}$  at the indices  $I \cap [m]$ . Since all the bits are chosen uniformly at random, this occurs with probability  $2^{-|I \cap [m]|} = 2^{-k}$  as desired.

## B. Entanglement Between Bob and Charlie is not Locally Removable

This section deals with the case where Bob and Charlie after locally inverting all CNOT gates they can, still share entanglement. We start with  $|\widehat{W}_{x,z}\rangle$  from Proposition 4 and perform another simplification to the state using local operations.

The state

$$|\widehat{W}_{x,z}\rangle = \text{CNOT}_{J'} \, \mathsf{H}_{I'} \, |x+z\rangle$$

consists of |J'| + |I'| entangled qubits. Moreover, since the control bits are on Bob's side and the target bits are on Charlie's side, the entanglement in  $|\widehat{W}_{x,z}\rangle$  is entirely shared between Bob and Charlie, meaning every qubit Bob has either has no entanglement or is entangled with qubits on Charlie's side. Unfortunately, we cannot remove this entanglement without applying gates non-locally across Bob's and Charlie's sides. Nonetheless, we find a method to simplify the shared entanglement between Bob and Charlie so that they can achieve an optimal winning strategy.

**Example 6.** As in Example 5, suppose m = 3 and the reduced-row echelon generator matrix for W is

$$A = \begin{pmatrix} 1 & 0 & 1 & 0 & 0 & 1 \\ 0 & 1 & 1 & 1 & 0 & 1 \\ 0 & 0 & 0 & 0 & 1 & 0 \end{pmatrix}.$$

Recall that  $CS(W) = \langle e_3, e_4, e_6 \rangle$  and  $CS(W^\perp) = \langle e_1, e_2, e_5 \rangle$ . For any choices of  $x \in CS(W)$  and

 $z \in CS(W^{\perp})$ , we have

$$|W_{x,z}\rangle = {\rm CNOT_{1,3}\,CNOT_{1,6}\,CNOT_{2,3}\,CNOT_{2,4}\,CNOT_{2,6}\,H_{1,2,5}\,|x+z\rangle} \ |\widehat{W}_{x,z}\rangle = {\rm CNOT_{1,6}\,CNOT_{2,4}\,CNOT_{2,6}\,H_{1,2}\,|x+z\rangle} \ .$$

All but the third and fifth qubit are entangled since  $CNOT_{i,j} H_i | x + z \rangle$  entangles the i and j'th qubits. We will present operations Bob and Charlie can apply so that each entangled qubit forms an EPR pair with a single qubit on the other side. In this example, Bob will apply  $H_1 CNOT_{1,2}$ , Charlie will apply  $CNOT_{4,6}$  and the resulting state will be

$$CNOT_{2.6} H_2 CNOT_{4.6} CNOT_{2.1} |x+z\rangle$$
.

We can then interpret CNOT<sub>4,6</sub> CNOT<sub>2,1</sub> as an isomorphism  $\mathbb{F}_2^{2m} \to \mathbb{F}_2^{2m}$  that changes only the first m bits of z and second m bits of x. If y is the image of this map, Bob and Charlie's simplified state is

$$CNOT_{2,6} H_2 |y\rangle$$

where

$$y = \begin{pmatrix} z_1 + z_2 & z_2 & x_3 & x_4 & z_5 & x_4 + x_6 \end{pmatrix}.$$

Our first goal will be to ensure that each qubit on Bob's side is entangled only with qubits on Charlie's side; then, we will repeat the same for Charlie. That is, Bob and Charlie will perform local operations so that the pairs in J' satisfy  $(i_1,j),(i_2,j)\in J'$  imply  $i_1=i_2$  and  $(i,j_1),(i,j_2)\in J'$  imply  $j_1=j_2$ .

**Proposition 6.** Bob and Charlie can win the coset guessing game with probability  $p_m$  if they can win the same game given the state

$$CNOT_{i_1,j_1} H_{i_1} \cdots CNOT_{i_\ell,j_\ell} H_{i_\ell} |y\rangle$$

where  $i_1,\ldots,i_\ell\subseteq [m]$  and  $j_1,\ldots,j_\ell\subseteq [m+1..2m]$  are all distinct and  $y\in \mathbb{F}_2^{2m}$  satisfies

$$y = (f_1(x_1^m + z_1^m), f_2(x_{m+1}^{2m} + z_{m+1}^{2m}))$$

under group isomorphisms  $f_1, f_2 : \mathbb{F}_2^{2m} \to \mathbb{F}_2^{2m}$  known to Bob and Charlie satisfying  $f_1(x_1^m) = x_1^m$  and  $f_2(z_{m+1}^{2m}) = z_{m+1}^{2m}$ .

*Proof.* We will show how Bob and Charlie can apply gates to their qubits so that entanglement is limited to pairs of qubits (i,j), where  $1 \le i \le m, m+1 \le j \le 2m$ . Consider the following

identities:

$$\begin{split} CNOT_{jk} \, CNOT_{ij} \, CNOT_{ik} &= CNOT_{ij} \, CNOT_{jk} \\ CNOT_{ij} \, CNOT_{ik} \, CNOT_{jk} &= CNOT_{jk} \, CNOT_{ij} \\ (H_i \otimes H_j) \, CNOT_{ij} &= CNOT_{ji} (H_i \otimes H_j). \end{split}$$

We want to understand how the gates  $CNOT_{i,i'}$  for  $i,i' \in I$  and  $CNOT_{j,j'}$  for  $j,j' \in I^c$  pass through  $CNOT_J$ . Using the identities above, for every  $i,i' \in I$ , we know  $CNOT_{i,i'}$  commutes with every CNOT gate in  $CNOT_J$  except for those of the form  $CNOT_{i',j}$ . Let  $J_{i'} = \{(i',j) \in J\}$  and  $J_{i'}(i) = \{(i,j) : (i',j) \in J_{i'}\}$ , then

$$\begin{split} CNOT_{i,i'}CNOT_{J} &= CNOT_{i,i'}CNOT_{J_{i'}}CNOT_{J\setminus J_{i'}} \\ &= CNOT_{J_{i'}}CNOT_{J_{i'}(i)}CNOT_{i,i'}CNOT_{J\setminus J_{i'}} \\ &= CNOT_{J_{i'}}CNOT_{J_{i'}(i)}CNOT_{J\setminus J_{i'}}CNOT_{i,i'} \\ &= CNOT_{J(A')}CNOT_{i,i'} \end{split}$$

For a matrix  $A_W$  in reduced row echelon form, we denote the set of pivot columns as I(A) and  $J(A) = \{(i,j) : A_{ij} = 1, i < j\}$ . Likewise, given sets  $I = \{i_1, i_2, ..., i_l\} \subseteq [2m]$  and J consisting of pairs of indices (i,j) with  $i \in I$  and i < j, we denote by A(I,J) the m-by-2m matrix with  $A_{k,i_k} = 1$ ,  $A_{ij} = 1$  for  $(i,j) \in J$  and zero elsewhere, and J(A') is the set obtained from the matrix A', and A' is the matrix obtained by adding the i'-th row of  $A_W$  to the i-th row of  $A_W$  modulo 2 in the non-pivot columns of  $A_W$ . Similarly, suppose  $i,i' \in I^c$ . Then  $CNOT_{i,i'}$  commutes with every CNOT gate in  $CNOT_J$  except for those of the form  $CNOT_{j,i}$ . Let  $J_i = \{(j,i) \in J\}$  and  $J_i(i') = \{(j,i') : (j,i) \in J_{i'}\}$ , then

$$\begin{split} CNOT_{i,i'}CNOT_{J} &= CNOT_{i,i'}CNOT_{J_i}CNOT_{J\setminus J_i} \\ &= CNOT_{J_i}CNOT_{J_i(i')}CNOT_{i,i'}CNOT_{J\setminus J_i} \\ &= CNOT_{J_i}CNOT_{J_i(i')}CNOT_{J\setminus J_i}CNOT_{i,i'} \\ &= CNOT_{I(A')}CNOT_{i,i'} \end{split}$$

where J(A') is the set obtained from the matrix A', and A' is the matrix obtained by adding the i-th columns of  $A_W$  to the i'-th column of  $A_W$  modulo 2. As such, this allows us to perform Gaussian elimination on the non-pivot columns of  $A_W$  up to swapping columns. In particular, we can ensure there exists at most a single 1 in each non-pivot column.

By Proposition 4, we can assume  $I \subseteq [m]$  and J consists of pairs (i,j) with  $1 \leqslant i \leqslant m$ ,  $m+1 \leqslant j \leqslant 2m$ , i.e. in the matrix  $A_W$  denoting control-target qubit pairs, all pivots lie in the first m columns, and all non-zero non-pivot columns lie in the last n columns.

Bob and Charlie thus proceed as follows: they agree on a Gaussian elimination procedure to reduce  $A_W$  to a matrix A' where each non-zero non-pivot column in the last n indices has at most a single 1 entry. Bob applies the appropriate gates  $CNOT_{J_1}$  to his qubits, and Charlie applies the appropriate gates  $CNOT_{J_2}$  to his qubits:

$$\begin{aligned} \text{CNOT}_{J_2} \, \text{CNOT}_{J_1} \, \text{CNOT}_{J} \, \text{H}_{I} \, | x+z \rangle &= \text{CNOT}_{J(A')} \, \text{CNOT}_{J_2} \, \text{CNOT}_{J_1} \, \text{H}_{I} \, | x+z \rangle \\ &= \text{CNOT}_{J(A')} \, \text{H}_{I} \, \text{CNOT}_{J_2} \, \text{CNOT}_{J_1'} \, | x+z \rangle \end{aligned}$$

where  $J_1' = \{(j,i) : (i,j) \in J_1\}$ , and J(A') has the form  $\{(i_1,j_1),(i_2,j_2),\ldots,(i_\ell,j_\ell)\}$  stated in the hypothesis. For any indices  $i \in I$  but  $i \notin \{i_1,\ldots,i_\ell\}$ , Bob can also apply the Hadamard gate  $H_i$  so that the processed state is now  $CNOT_{J(A')}H_{I'}CNOT_{J_2}CNOT_{J_1'}|x+z\rangle$ , where  $I' = \{i_1,\ldots,i_\ell\}$ . Since  $J_1'$  and  $J_2$  are local to Bob and Charlie respectively and  $Supp(x) \cap Supp(z) = \emptyset$ , we may

write  $\mathrm{CNOT_{J_2}\,CNOT_{J_1'}\,}|x+z\rangle = \mathrm{CNOT_{J_1'}\,}|x_1^m+z_1^m\rangle \otimes \mathrm{CNOT_{J_2}\,}|x_{m+1}^{2m}+z_{m+1}^{2m}\rangle = |\mathfrak{y}\rangle$ 

where  $y \in \mathbb{F}_2^{2m}$ . Since  $CNOT_{1,2}(|b_1,b_2\rangle) = |b_1,b_1+b_2\rangle$ , we can interpret both  $CNOT_{J_1'}$  and  $CNOT_{J_2}$  as group homomorphisms on  $x+z \in \mathbb{F}_2^{2m}$ . Moreover, since  $J_1'$  only has indices on Bob's side and  $J_2$  only has indices on Charlie's side, they can be interpreted as homomorphisms on the first and second coordinates of  $\mathbb{F}_2^{2m}$ . Thus, we have  $f_1, f_2 : \mathbb{F}_2^{2m} \to \mathbb{F}_2^{2m}$  that effect bits indexed by  $J_1'$ ,  $J_2$ . By our constructions, we have  $J_1' \subseteq (I \cap [m])^2$  and similarly  $J_2 \subseteq (I^c \cap [m+1..2m])^2$ . This means the x bits on Bob's side do not change and the z bits on Charlie's side do not change, in other terms:

$$f_1(x_1^m) = x_1^m \text{ and } f_2(z_{m+1}^{2m}) = z_{m+1}^{2m}.$$

Since  $J_1'$  and  $J_2$  can be calculated from  $A_W$ , the bijections  $f_1$ ,  $f_2$  sending  $x + z \mapsto y$  are known to both Bob and Charlie.

In general, the resulting state

$$CNOT_{i_1,j_1}\,H_{i_1}\cdot\ldots\cdot CNOT_{i_\ell,j_\ell}\,H_{i_\ell}\,|y\rangle$$

is a collection of computational qubits and EPR pairs. There are  $\ell$  bell state pairs, and the other computational qubits occur at all indices outside of  $\{i_1, \ldots, i_\ell, j_1, \ldots, j_\ell\}$ . The specific string of bits and bell state pairs depends on y.

Now Bob and Charlie are ready to measure their qubits. For all qubits with indices outside  $\{i_1, \ldots, i_\ell, j_1, \ldots, j_\ell\}$ , the measurements Bob and Charlie should make are exactly the same as in Section V-A, except now Bob and Charlie need y instead of x + z. After obtaining y, they can use the bijection  $y \mapsto x + z$ .

For the bell pairs in the state indexed by  $(i,j) \in \{(i_1,j_1),\ldots,(i_t,j_t)\}$ , Bob and Charlie should measure each pair in the  $|\pm i\rangle$  basis as in Example 2. Since neither Bob nor Charlie can be certain about the measurements they obtain from a bell pair, Bob and Charlie will not always be able to correlate their guesses classically. However, the qubit Bob measures determine the qubit that Charlie measures, so their measurements are correlated. Bob and Charlie can exploit this by correlating their guesses on the outcome of measuring each bell state pair. Measuring in the  $|\pm i\rangle$  basis has the effect of reducing Bob and Charlie's task to guessing which one of two bell pairs was measured. That is, their guesses will depend on the probability their measurement corresponds to their guess, which can always be made to be  $\frac{1}{2}$ .

**Theorem 2.** Bob and Charlie can win the coset guessing game with a probability

$$p_{m} = \frac{1}{\binom{2m}{m}_{2}} \sum_{k=0}^{m} 2^{k^{2}} \binom{m}{k}_{2}^{2} \left(\frac{1}{2}\right)^{k} = \Theta\left(\frac{1}{2^{m}}\right).$$

The strategy they use to achieve the bound is given below.

- 1) Bob and Charlie reduce their shared state to that of Proposition 6, yielding the group isomorphisms  $f_1, f_2$ , and  $f := (f_1, f_2)$ .
- 2) For each  $x \in CS(W)$  Bob computes  $y_B = f(x)$  and for each  $z \in CS(W^{\perp})$  Charlie computes  $y_C = f(z)$ .
- 3) For each  $W \in G(2m, m)$ , they agree on a bijection

$$h_W: (I\cap [\mathfrak{m}])\setminus \{i_1,\ldots,i_\ell\} \to (I^c\cap [\mathfrak{m}+1,2\mathfrak{m}])\setminus \{j_1,\ldots,j_\ell\}.$$

4) They measure using the POVMs

$$B_x^W = \bigotimes_{i=1}^m B_i^W$$
 and  $C_z^W = \bigotimes_{j=m+1}^{2m} C_j^W$ 

where

$$B_i^{\mathcal{W}} = \begin{cases} \left| (y_B)_i \right\rangle \langle (y_B)_i \right| & i \not\in \{i_1, \dots, i_\ell\} \text{ and } i \in I^c \\ \\ \left| (y_B)_{h_W(i)} \right\rangle \langle (y_B)_{h_W(i)} \right| & i \not\in \{i_1, \dots, i_\ell\} \text{ and } i \in I \\ \\ \left| +i \right\rangle \langle +i \right| & i_t \in \{i_1, \dots, i_\ell\} \text{ and } (y_B)_{j_t} = 0 \\ \\ \left| -i \right\rangle \langle -i \right| & i_t \in \{i_1, \dots, i_\ell\} \text{ and } (y_B)_{j_t} = 1 \end{cases}$$

and

$$C_{j}^{W} = \begin{cases} \left| \left(y_{C}\right)_{j}\right\rangle \left\langle \left(y_{C}\right)_{j}\right| & \text{$j \not\in \{j_{1},\ldots,j_{\ell}\}$ and $j \in I$} \\ \\ \left|\left(y_{C}\right)_{h_{W}^{-1}(j)}\right\rangle \left\langle \left(y_{C}\right)_{h_{W}^{-1}(j)}\right| & \text{$j \not\in \{j_{1},\ldots,j_{\ell}\}$ and $j \in I^{c}$} \\ \\ \left|+i\right\rangle \left\langle +i\right| & \text{$j \in \{j_{1},\ldots,j_{\ell}\}$ and $(\widehat{y}_{C})_{h_{W}^{-1}(j)} = 1$} \\ \\ \left|-i\right\rangle \left\langle -i\right| & \text{$j \in \{j_{1},\ldots,j_{\ell}\}$ and $(\widehat{y}_{C})_{h_{W}^{-1}(j)} = 0$.} \end{cases}$$

*Proof.* Following the proof of Theorem 1, it suffices to show that  $p_m(W) = 2^{-k}$  where k is the dimension of W intersected with the first m coordinates. Assume Bob and Charlie share the state

$$CNOT_{i_1,j_1} H_{i_1} \cdots CNOT_{i_\ell,j_\ell} H_{i_\ell} |y\rangle$$

and know the isomorphisms f<sub>1</sub>, f<sub>2</sub> such that

$$f_1(y_1^m) = x_1^m + f_1(z_1^m)$$
 and  $f_2(y_{m+1}^{2m}) = f_2(x_{m+1}^{2m}) + z_{m+1}^{2m}$ .

For each  $1 \leqslant i \leqslant m < j \leqslant 2m$  we compute

$$\begin{split} y_i &= \begin{cases} (x_1^m)_i + f_1(z_1^m)_i = f_1(z_1^m)_i = (y_C)_i & i \in I \cap [m] \\ (x_1^m)_i + f_1(z_1^m)_i = x_i = f_1(x_1^m)_i = (y_B)_i & i \in I^c \cap [m] \end{cases} \\ y_j &= \begin{cases} f_2(x_{m+1}^{2m})_j + (z_{m+1}^{2m})_j = z_j = f(z_{m+1}^{2m})_j = (y_C)_j & j \in I \cap [m+1, 2m] \\ f_2(x_{m+1}^{2m})_j + (z_{m+1}^{2m})_j = f_2(x_{m+1}^{2m})_j = (y_B)_j & j \in I^c \cap [m+1, 2m]. \end{cases} \end{split}$$

We split up their shared state into qubits that are entangled and those that are not:

$$\begin{split} &\operatorname{Tr} \! \left[ \left( B_x^W \otimes C_z^W \right) | \varphi \rangle \left\langle \varphi | \right] \\ &= \left\langle y | \, H_{i_\ell} \operatorname{CNOT}_{i_\ell, j_\ell} \cdots H_{i_1} \operatorname{CNOT}_{i_1, j_1} \left( B_x^W \otimes C_z^W \right) \operatorname{CNOT}_{i_1, j_1} H_{i_1} \cdots \operatorname{CNOT}_{i_\ell, j_\ell} H_{i_\ell} | y \right\rangle \\ &= \left( \prod_{(i,j) \in \{(i_1,j_1), \dots, (i_\ell, j_\ell)\}} \left\langle y_{\{i,j\}} | \, H_i \operatorname{CNOT}_{i,j} \left( B_i^W \otimes C_j^W \right) \operatorname{CNOT}_{i,j} H_i \, | y_{\{i,j\}} \right\rangle \right) \\ & \cdot \left( \prod_{i \in [n] \setminus \{i_1, \dots, i_\ell\}, j \in [n+1,2n] \setminus \{j_1, \dots, j_\ell\}} \left\langle y_i | \, B_i^W | y_i \right\rangle \cdot \left\langle y_j | \, C_j^W | y_j \right\rangle \right). \end{split}$$

First, we deal with the qubits with no entanglement. By our choice of  $y_B$  and  $y_C$ , we have

$$\begin{split} \langle y_i | \, B_i^W \, | y_i \rangle &= \begin{cases} \langle (y_C)_i | \, | (y_B)_{h_W(i)} \rangle^2 & i \in (I \cap [m]) \setminus \{i_1, \dots, i_\ell\} \\ \\ \langle (y_B)_i | \, | (y_B)_i \rangle^2 &= 1 & i \in I^c \cap [m] \end{cases} \\ \langle y_j | \, C_j^W \, | y_j \rangle &= \begin{cases} \langle (y_C)_j | \, | (y_C)_j \rangle^2 &= 1 & j \in I \cap [m+1, 2m] \\ \\ \langle (y_B)_j | \, | (y_C)_{h_W^{-1}(j)} \rangle^2 & j \in (I^c \cap [m+1, 2m]) \setminus \{j_1, \dots, j_\ell\}. \end{cases} \end{split}$$

The product of these two values is 1 if and only if  $(y_B)_i = (y_C)_{h_W(i)}$  since  $h_W$  is chosen to restrict to a bijection on the indices

$$(I\cap [m])\setminus \{i_1,\ldots,i_\ell\} \to (I^c\cap [m+1,2m])\setminus \{j_1,\ldots,j_\ell\}.$$

Furthermore, since f is group isomorphism, we have

$$y = f(x + z) = f(x) + f(z) = y_B + y_C.$$

Thus, Bob and Charlie win if and only if  $y_i = y_{h_W(i)}$ . This is exactly the condition in Proposition 5, except we are replacing x + z with y. Even so, we know  $f : x + z \mapsto y$  is a bijection, and thus, the bits of y are distributed uniformly random when x and z are chosen to be uniformly random. The probability that  $y_i = y_{h_W(i)}$  holds on all indices  $(I \cap [m]) \setminus \{i_1, \dots, i_\ell\}$  is thus  $2^{-k+\ell}$ .

For the entangled qubit case, for all  $i \in \{i_1, \dots, i_\ell\} \subseteq I \cap [m]$  and  $j \in \{j_1, \dots, j_\ell\} \subseteq I^c \cap [m+1, 2m]$  we have

$$y_i = (y_C)_i$$
 and  $y_j = (y_B)_j$ .

Now suppose  $i = i_t$  and  $j = j_t$  for some  $t \in [\ell]$ . By our choice of  $B_i$  and  $C_j$ , we have

$$B_{i} = egin{cases} \left| +i \right
angle \left\langle +i 
ight| & y_{j} = 0 \ \left| -i 
ight
angle \left\langle -i 
ight| & y_{j} = 1 \end{cases}$$

and similarly

$$C_{j} = \begin{cases} \left|+i\right\rangle \left\langle+i\right| & y_{i} = 1\\ \left|-i\right\rangle \left\langle-i\right| & y_{i} = 0 \end{cases}$$

Recalling that  $CNOT_{i,j}H|y_{i,j}\rangle$  can take on any of the four EPR pairs, we compute

$$\begin{split} \langle y_{i,j} | H_i \, CNOT_{i,j} \left( B_i^W \otimes C_j^W \right) CNOT_{i,j} \, H_i \, | y_{i,j} \rangle \\ &= \begin{cases} \left\langle \Phi^+ | \left( |+i \rangle \left\langle +i | \otimes |-i \rangle \left\langle -i | \right) | \Phi^+ \right\rangle & | y_{i,j} \rangle = |00 \rangle \\ \left\langle \Phi^- | \left( |+i \rangle \left\langle +i | \otimes |+i \rangle \left\langle +i | \right) | \Phi^- \right\rangle & | y_{i,j} \rangle = |10 \rangle \\ \left\langle \Psi^+ | \left( |-i \rangle \left\langle -i | \otimes |-i \rangle \left\langle -i | \right) | \Psi^+ \right\rangle & | y_{i,j} \rangle = |01 \rangle \\ \left\langle \Psi^- | \left( |-i \rangle \left\langle -i | \otimes |+i \rangle \left\langle +i | \right) | \Psi^- \right\rangle & | y_{i,j} \rangle = |11 \rangle \end{cases} \\ &= \frac{1}{2} \end{split}$$

in every case. This means the probability that Bob and Charlie guess both bits correctly is  $\frac{1}{2}$  for all  $\ell$  EPR pairs. Combining this with the probability they guess all other bits correctly, we get  $2^{-k+\ell} \cdot 2^{-\ell} = 2^{-k}$  as desired.

The strategy Bob and Charlie use is entirely different for the qubits that end up being bell-state pairs. It is no longer the case that Bob guesses x if and only if Charlie guesses z. Now, Bob and Charlie will win only if they, by complete chance, measure the correct qubits.

Suppose after Bob and Charlie make their guesses, Alice tells Bob and Charlie if they have guessed correctly. If there are no bell state pairs, then Bob and Charlie know that their outputs are deterministic, so they can trust Alice's response. For example, if Alice plays the game for multiple rounds with the same x and z, Bob and Charlie learn nothing new after the first round. However, if Alice tells Bob and Charlie they are incorrect N consecutive rounds, then they only know their guess was actually incorrect with probability  $N2^{-\ell}$ . This means Bob and Charlie gain less information from Alice's response as the number of entangled qubits increases.

#### VI. CONCLUSION

We considered a stricter version of a coset guessing game introduced and analyzed in [7], [9], [10] and derived an upper bound, which is below the one previously known. We then presented an optimal strategy to achieve this bound. While developing the optimal strategy, we devised an encoding circuit using only CNOT and Hadamard gates, which could be relevant for building efficient CSS-coded systems. We found that the role of quantum information that Alice communicates to Bob and Charlie is to make their responses correlated rather than improve their individual (marginal) correct guessing rates.

It remains open to determine asymptotically optimal strategies for the general game. We did not address the question of *rigidity* or *robustness* for our game, i.e., the uniqueness of optimal strategies and the closeness of nearly optimal strategies to optimal strategy. Both properties are relevant to the certification of devices in device-independent quantum cryptography (DIQC). Results about implementing monogamy-of-entanglement games into quantum key distribution (QKD) protocols have been studied in [16]. However, in contrast to the coset monogamy game, our coset guessing game cannot be considered a monogamy-of-entanglement game since the presence of Charlie does not lower Bob's probability of winning.

#### **ACKNOWLEDGMENTS**

We thank G. L. Matthews, A. Paul, J. Shapiro, and N. Verma for the discussions at the 2024 VT-Swiss Coding Theory & Cryptography Summer School & Collaboration Workshop.

#### **APPENDICES**

#### A. Some Standard Quantum Gates

Unitary operators that act on one or more qubits are often referred to as *quantum gates*. The Pauli and Hadamard gates are the most commonly used single-qubit gates, and the CNOT is the most commonly used two-qubit gate.

## The Identity and the Pauli Matrices/Gates:

The matrices are given below, together with their action on the basis vectors in the quantum circuit notation:

$$I = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \quad |0\rangle \quad \boxed{1} \quad |0\rangle$$

$$V = \begin{bmatrix} 0 & -i \\ i & 0 \end{bmatrix} \quad |0\rangle \quad \boxed{Y} \quad i |1\rangle$$

$$X = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \quad |0\rangle \quad \boxed{X} \quad |1\rangle$$

$$Z = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} \quad |0\rangle \quad \boxed{Z} \quad |0\rangle$$

$$Z = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} \quad |0\rangle \quad \boxed{Z} \quad |0\rangle$$

Note that X maps  $|0\rangle$  into  $|1\rangle$  and vice versa, and thus it is often referred to as the quantum NOT or the bit-flip gate.

# The Hadamard gate:

The Hadamard gate is defined by the normalized Haramard  $2 \times 2$  matrix. The matrix is given below, together with its action on the basis vectors in the quantum circuit notation:

$$H = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \quad |0\rangle \quad \boxed{H} \quad (|0\rangle + |1\rangle)/\sqrt{2}$$

The basis of  $\mathbb{C}^2$  defined by vectors  $|+\rangle=(|0\rangle+|1\rangle)/\sqrt{2}$  and  $|-\rangle=(|0\rangle-|1\rangle)/\sqrt{2}$  that results from the Hadamard action of the computational basis is known as the Hadamard basis.

### The CNOT Gate:

The two-qubit quantum gate known as quantum XOR or controlled-not gate CNOT is specified as a map of the bases vectors and as follows:

$$\begin{array}{ccc} \text{CNOT}: |x,y\rangle \to |x,x \oplus y\rangle & & |x\rangle & & |x\rangle \\ x,y \in \{0,1\} & & |y\rangle & & & |x \oplus y\rangle \end{array}$$

We refer to x as the control bit and y as the target. The target bit is flipped if the control bit equals 1. Similarly, we say that qubit  $|x\rangle$  is the control qubit, and qubit  $|y\rangle$  is the target qubit.

Observe that the target qubit undergoes the X (NOT) action if the control qubit is  $|1\rangle$ .

We can create Bell States by H and CNOT gates as follows:

## B. Positive Operator-Valued Measure (POVM)

Quantum measurement extract classical information from quantum states. We define a general measurement as follows:

- A set of positive-semidefinite operators  $\{E_i\}$  such that  $\sum_i E_i = I.$
- For input  $|\psi\rangle$ , output i happens wp  $\langle\psi|\,E_i\,|\psi\rangle$ , and  $|\psi\rangle$  collapses to  $\frac{1}{\sqrt{\langle\psi|E_i|\psi\rangle}}E_i\,|\psi\rangle$ .

We most often consider positive-semidefinite E<sub>i</sub> that are projections on non-orthogonal vectors. matrices

#### REFERENCES

- [1] P. W. Shor, "Algorithms for quantum computation: discrete logarithms and factoring," in 35th Annual Symposium on Foundations of Computer Science, Santa Fe, New Mexico, USA, 20-22 November 1994e. Ieee, 1994, pp. 124–134.
- [2] C. H. Bennett, G. Brassard, C. Crépeau, R. Jozsa, A. Peres, and W. K. Wootters, "Teleporting an unknown quantum state via dual classical and einstein-podolsky-rosen channels," *Physical review letters*, vol. 70, no. 13, p. 1895, 1993.
- [3] C. H. Bennett and G. Brassard, "Quantum cryptography: Public key distribution and coin tossing," *Theoretical computer science*, vol. 560, pp. 7–11, 2014.
- [4] A. Broadbent, J. Fitzsimons, and E. Kashefi, "Universal blind quantum computation," in 2009 50th Annual IEEE Symposium on Foundations of Computer Science. IEEE, Oct. 2009. [Online]. Available: http://dx.doi.org/10.1109/FOCS.2009.36
- [5] S. Wiesner, "Conjugate coding," ACM Sigact News, vol. 15, no. 1, pp. 78-88, 1983.
- [6] S. Aaronson and P. F. Christiano, "Quantum money from hidden subspaces," Theory Comput., vol. 9, pp. 349-401, 2013.
- [7] A. Coladangelo, J. Liu, Q. Liu, and M. Zhandry, "Hidden cosets and applications to unclonable cryptography," in Advances in Cryptology—CRYPTO 2021: 41st Annual International Cryptology Conference, CRYPTO 2021, Virtual Event, August 16–20, 2021, Proceedings, Part I 41. Springer, 2021, pp. 556–584.
- [8] P. Ananth, F. Kaleoglu, and Q. Liu, "Cloning games: a general framework for unclonable primitives," in *Annual International Cryptology Conference*. Springer, 2023, pp. 66–98.
- [9] T. Vidick and T. Zhang, "Classical proofs of quantum knowledge," in Advances in Cryptology EUROCRYPT 2021 40th Annual International Conference on the Theory and Applications of Cryptographic Techniques, Zagreb, Croatia, October 17-21, 2021, Proceedings, Part II, ser. Lecture Notes in Computer Science, A. Canteaut and F. Standaert, Eds., vol. 12697. Springer, 2021, pp. 630–660.
- [10] E. Culf and T. Vidick, "A monogamy-of-entanglement game for subspace coset states," Quantum, vol. 6, p. 791, 2022.
- [11] M. Tomamichel, S. Fehr, J. Kaniewski, and S. Wehner, "A monogamy-of-entanglement game with applications to device-independent quantum cryptography," *New Journal of Physics*, vol. 15, no. 10, p. 103002, 2013.
- [12] E. Culf, T. Vidick, and V. V. Albert, "Group coset monogamy games and an application to device-independent continuous-variable qkd," arXiv preprint arXiv:2212.03935, 2022.
- [13] N. Rengaswamy, A. R. Calderbank, M. Newman, and H. D. Pfister, "On optimality of CSS codes for transversal T," *IEEE J. Sel. Areas Inf. Theory*, vol. 1, no. 2, pp. 499–514, 2020.
- [14] E. Soljanin, "Quantum information processing: An essential primer," *IEEE J. Sel. Areas Inf. Theory*, vol. 1, no. 2, pp. 351–366, 2020.
- [15] M. Braun, M. Kiermaier, and A. Wassermann, "q-analogs of designs: Subspace designs," *Network Coding and Subspace Designs*, pp. 171–211, 2018.
- [16] E. Cervero-Martín and M. Tomamichel, "Device independent security of quantum key distribution from monogamy-of-entanglement games," arXiv preprint arXiv:2312.04079, 2023.