

CONINGER: EFFICIENT HIGH-FIDELITY SINGING VOICE GENERATION WITH MINIMAL STEPS

1st Yulin Song

Dept. of Computer Science and Technology
Beijing University of Technology
Beijing, China
keylxiao@emails.bjut.edu.cn

2nd Jing Yu

Dept. of Computer Science and Technology
Beijing University of Technology
Beijing, China
jing.yu@bjut.edu.cn

2nd Guorui Sang

Dept. of Computer Science and Technology
Beijing University of Technology
Beijing, China
maluyelang@emails.bjut.edu.cn

Chuangbai Xiao[†]

Dept. of Computer Science and Technology
Beijing University of Technology
Beijing, China
cbxiao@bjut.edu.cn

Abstract—Singing voice synthesis (SVS) system is expected to generate high-fidelity singing voice from given music scores (lyrics, duration and pitch). Recently, diffusion models have performed well in this field. However, sacrificing inference speed to exchange with high-quality sample generation limits its application scenarios. In order to obtain high quality synthetic singing voice more efficiently, we propose a singing voice synthesis method based on the consistency model, ConSinger, to achieve high-fidelity singing voice synthesis with minimal steps. The model is trained by applying consistency constraint and the generation quality is greatly improved at the expense of a small amount of inference speed. Our experiments show that ConSinger is highly competitive with the baseline model in terms of generation speed and quality. Audio samples are available at <https://keylxiao.github.io/consinger>.

Index Terms—Singing voice synthesis, consistency models, diffusion models, Transformer

I. INTRODUCTION

SVS is designed to generate emotionally realistic human audio. With the rapid development of deep learning, SVS system evolves into a two-stage generation: first, an acoustic model interprets the music score as the corresponding acoustic features (e.g., mel-spectrograms or World vocoder parameters [1]); then, a vocoder is used to convert the generated features into audio waveforms. Several new-type SVS systems based on Generative Adversarial Network (GAN) [2], [3] and Denoising Diffusion Probabilistic Model (DDPM) [4], [5] have been proposed to synthesize higher quality singing voice. However, these methods suffer from less stable training or slow inference speed. Achieving high speed inference while maintaining high quality sampling has become a challenging task.

Recently, consistency model [6], a model that balances high generation speed with satisfactory sampling quality, shows ex-

cellent performance in many fields, such as image generation [6], controllable music generation [7] and video generation [8]. Both the distillation method and the isolated training method have been successfully applied in the Text-to-speech (TTS) field [9], [10], but the dependence on the teacher model and two training networks increase the training burden.

We propose ConSinger, a consistency model for SVS, which does not require a teacher model and only needs a single training network. ConSinger can be trained by optimizing consistency loss and generates mel-spectrogram approximately matching the ground truth distribution with minimal steps. Inspired by the shallow diffusion mechanism [4], ConSinger can further improve the singing quality at the slight cost of generating speed. Based on this, we review the denoising generative model [11]–[13] from another perspective and propose the final version: it can get better generation quality with the same generation speed. The evaluation results show that our method is highly competitive compared to baseline models in terms of generation speed and quality. The key contributions of this work can be summarized as follows:

- We proposed a SVS method based on the consistency model for generating high-fidelity singing voice in real time with minimal steps.
- We perform multiple evaluations and analyses of the generated results, further comparing and relating them to the shallow diffusion mechanism proposed by [4].

II. RELATED WORK

To address the shortcomings of diffusion models, [6] proposed a consistency character for *probabilistic flow ordinary differential equation* (PF ODE) with the following conditions:

$$\begin{aligned} f(\mathbf{x}_\epsilon, \epsilon) &= \mathbf{x}_\epsilon, \\ f(\mathbf{x}_t, t) &= f(\mathbf{x}_{t'}, t'). \end{aligned} \quad (1)$$

[†]Corresponding author.

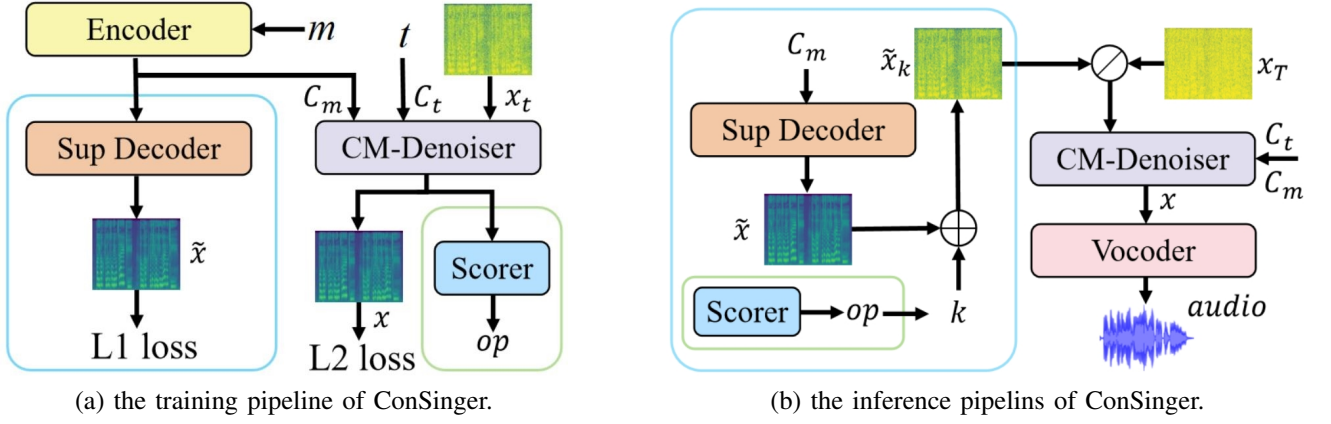


Fig. 1. The training and inference pipelines of ConSinger, the supplementary decoder and the scorer are included in the two light colored boxes. m is the music score; t is the step number; C_t and C_m are their embedding information; \tilde{x} is the mel-spectrogram generated by supplementary decoder; x_t means the ground truth mel-spectrogram x with t -level Gaussian noise; op is the optimal point calculated by scorer. k is the noise-add level calculated in place of T .

According to [14], the starting point of the PF ODE is set to a small positive number ϵ for numerical stability. Then, we utilize a kind of skip connection to satisfy both conditions above:

$$f_{\theta}(\mathbf{x}_t, t) = c_{skip}(t)\mathbf{x}_t + c_{out}(t)F_{\theta}(\mathbf{x}_t, t). \quad (2)$$

Here, $F_{\theta}(\cdot, \cdot)$ represents a neural network and $f_{\theta}(\cdot, \cdot)$ is the final output of models. c_{skip} and c_{out} are differentiable functions, while $t = \epsilon$, $c_{skip} = 1$ and $c_{out} = 0$, we can satisfy this by setting:

$$c_{skip}(t) = \frac{\sigma_{data}^2}{(t - \epsilon)^2 + \sigma_{data}^2}, c_{out}(t) = \frac{\sigma_{data}(t - \epsilon)}{\sqrt{\sigma_{data}^2 + t^2}}, \quad (3)$$

where σ_{data} is a balance parameter, the points on the PF ODE trajectory can be sampled by:

$$\mathbf{x}_t = \mathbf{x}_{\epsilon} + t_n \mathbf{z}, \quad (4)$$

where $\mathbf{z} \sim \mathcal{N}(0, \mathbf{I})$ and time step t_n , which can also be regarded as the noise level, is obtained as follows:

$$t_n = \left[\epsilon^{\frac{1}{\rho}} + \frac{n-1}{N-1} (T^{\frac{1}{\rho}} - \epsilon^{\frac{1}{\rho}}) \right]^{\rho}. \quad (5)$$

With the above as precondition, all points $p_t(\mathbf{x})$ along the sampling trajectory of PF ODE are directly associated with the original data distribution point $p_0(\mathbf{x})$, such that one-step generation can be achieved. In this study, we opt for isolated training method and propose enhancements to it.

III. METHODOLOGY

The training and inference pipelines of ConSinger are depicted in Figure 1. In this Section, we first present the architecture of ConSinger; then we propose three versions of ConSinger.

A. Model Architecture

Encoder: We utilize the encoder structure in [4], which converts music score into score condition sequence C_m . Specifically, a lyrics encoder and N feed-forward transformer blocks [15] turn phoneme ID into linguistic sequence. Pitch embedding sequence will be generated by pitch ID through a pitch encoder. Then, the duration predictor projects the linguistic sequence into the sequence in the mel-spectrogram domain. Finally, the encoder binds the linguistic sequence and pitch sequence into a sequence of music score conditions, denoted as C_m .

Supplementary Decoder: We use a simple mel-spectrogram decoder as the supplementary decoder, which is consistent with decoders in [16], [17]. Specifically, the decoder is based on a feed-forward variant of the Transformer model [15], [18]. Each layer is composed of a self-attention sublayer block and a convolutional sublayer block. Both sublayers are equipped with residual connections, layer normalization and dropout mechanism.

CM-Denoiser: The CM-Denoiser is expected to restore the ground truth mel-spectrogram from Gaussian noise. The diffusion model is flexible in its network requirement, such that we have a wide array of alternatives available. Here we use a non-causal WaveNet [19]–[21].

Scorer: The Scorer is designed to take a few reconstruction samples during training to compare with the reference ground truth samples in order to obtain the optimal denoising level op . We adopt the Fréchet Audio Distance (FAD) [22] as the reference score.

Time Step Processing: We use sinusoidal position embedding to transform the time step t into a continuous hidden condition C_t [15].

Vocoder: In the final stage of inference, the model needs to utilize a vocoder to convert mel-spectrograms generated by CM-Denoiser into waveforms perceptible to humans.

B. Initial Version

In the training procedure, ConSinger obtains a t -level noise-add mel-spectrogram \mathbf{x}_t and predicts the ground truth \mathbf{x} based on C_t and C_m . To satisfy both conditions of Eq. (1), we define the loss function as:

$$\mathcal{L}(\theta) = \|\mathbf{x} - f_\theta(\mathbf{x}_n, m, t_n)\|^2. \quad (6)$$

Importance Sampler: We designed a simple sampler to obtain the time step t_n in Eq. (5) more accurately. Concretely, a loss table $L(\cdot)$ records the cumulative average loss at each point on the trajectory and serves as a guide in the selection of sampling points. The formulation is given by $h_n = (1 - \lambda) \frac{L(n)}{\sum_{i=2}^N L(i)} + \lambda$. Here, λ is the equilibrium parameter, which is used to adjust the model for random sampling and importance sampling. The model takes 10 samples from each sampling point before enabling the importance sampler to reduce the randomness.

The inference procedure involves sampling from a T -level Gaussian noise distribution $\mathcal{N}(0, T^2\mathbf{I})$ and utilize it to predict ground truth mel-spectrogram.

C. Use Supplementary Decoder

Utilizing T times standard Gaussian noise as the starting point for one-step restore poses a considerable challenge for the network. Inspired by the shallow diffusion mechanism [4], we can use a previous simple acoustic model to provide a large amount of prior knowledge for ConSinger. Given a data sample \mathbf{x} and its corresponding $\tilde{\mathbf{x}}$ (generated by supplementary decoder), the conditional distributions of \mathbf{x} and $\tilde{\mathbf{x}}_t$ are:

$$\begin{aligned} q(\mathbf{x}_t | \mathbf{x}) &= \mathcal{N}(\mathbf{x}_t; \mathbf{x}, t^2\mathbf{I}), \\ q(\tilde{\mathbf{x}}_t | \tilde{\mathbf{x}}) &= \mathcal{N}(\tilde{\mathbf{x}}_t; \tilde{\mathbf{x}}, t^2\mathbf{I}). \end{aligned} \quad (7)$$

The KL-divergence between two Gaussian distributions is:

$$\begin{aligned} D_{KL}(\mathcal{N}(\mathbf{x}_t) || \mathcal{N}(\tilde{\mathbf{x}}_t)) &= \frac{1}{2} [\text{tr}(\tilde{\Sigma}^{-1}\Sigma) + \\ &(\tilde{\mu} - \mu)^\top \tilde{\Sigma}^{-1}(\tilde{\mu} - \mu) - d + \ln\left(\frac{\det \tilde{\Sigma}}{\det \Sigma}\right)] \\ &= \frac{\|\mathbf{x} - \tilde{\mathbf{x}}\|_2^2}{2t^2}. \end{aligned} \quad (8)$$

Here, $\tilde{\mu}$, μ are means; $\tilde{\Sigma}$ and Σ are covariance matrices; d is the dimension.


$$\begin{aligned} &E_{\mathbf{x} \in \mathcal{D}} [D_{KL}(\mathcal{N}(\mathbf{x}_k) || \mathcal{N}(\tilde{\mathbf{x}}_k))] \\ &= E_{\mathbf{x} \in \mathcal{D}} \left[\frac{1}{2k^2} \|\mathbf{x} - \tilde{\mathbf{x}}\|_2^2 \right] \\ &\leq E_{\mathbf{x} \in \mathcal{D}} [D_{KL}(\mathcal{N}(\mathbf{x}_T) || \mathcal{N}(0, T^2\mathbf{I}))], \end{aligned} \quad (9)$$

which means using the mel-spectrogram with k -level noise as the restore point is at least no worse than Gaussian distribution $\mathcal{N}(0, T^2\mathbf{I})$. The value of k is continuously optimized in the training phase.

D. Use Scorer to Determine the Optimal Point

During the training phase, we introduce a scorer to derive the optimal restore point op on the trajectory, replacing the k calculated in Section III-C.

When performing ablation experiments, we found that the result quality restored by ConSinger (v2) is not simply linear with the level of noise (Figure 2). We consider this is because: 1) ConSinger outputs a weighted combination of the input noise and the network output in Eq. (2); 2) in Eq. (3), c_{skip} is transformed from 1 to 0, while c_{out} is transformed from 0 to 0.5; 3) the time step, which can be viewed as the noise level, is quasi-exponential in Eq. (5).

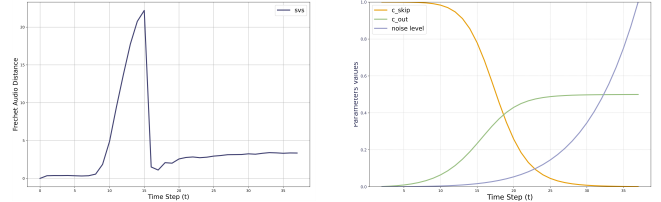

(a) FAD of different PF points. (b) model parameters.

Fig. 2. The subfigure (a) shows the mel-spectrogram quality restored from different noise level. The points on the x-axis with values of 0 and 1 represent GT and GT (mel+HiFi-GAN). The subfigure (b) shows the function curves of three important parameters of the model (Eq. (3) & Eq. (5), $\rho = 7$) and the time step t (Normalized) in the consistency model.

We can interpret Figure 2 in a piecewise manner: 1) from 2 to 6, ConSinger gradually reduces the proportion of the input mel-spectrogram $\tilde{\mathbf{x}}_t$, which means the impact of the noise output by the supplementary decoder continuously reduces. The increase in the proportion of network output improves the quality of generation. This part is consistent with the results obtained from ablation experiments in [4]: when the denoising ability of the model is too weak (too few denoising steps in DiffSinger, low mixing ratio of the network in ConSinger), the results still carry some unknown distribution of noise from the supplementary decoder; 2) from 7 to 15, the mixed Gaussian noise in $\tilde{\mathbf{x}}$ increases sharply, yet the model remains overly trusting of $\tilde{\mathbf{x}}_t$, leading to a significant reduction in the ability to reconstruction. 3) from 16 to 37, as the proportion of network output in the mixed result increases, the restore result of ConSinger will gradually become stable, but it cannot reach the same quality as the first part due to excessive noise in $\tilde{\mathbf{x}}_t$.

IV. EXPERIMENTS

A. Experimental Setup

Dataset: We conduct our SVS experiments on PopCS dataset [4], which contains 117 Chinese pop songs (total around 5.89 hours with lyrics) collected from a qualified female vocalist, all recorded at 24kHz. Following [4], [16], [23], F_0 (fundamental frequency) of the original waveform is extracted as pitch information during testing. We randomly select clips from two songs for testing.

Implementation Details: We set the hop size and frame size to 128 and 512. The mel-spectrograms are linearly normalized

to between $[-1, 1]$, and the number of mel bins is 80; We set $\epsilon = 0.02$, $T = 80$, $\sigma_{data} = 0.5$ and $\rho = 7$, following [6]. The number of points on the PF ODE trajectory is adjusted to 50. λ in importance sampler is 0.05. We calculate $k = 37$ in Eq. (9); Other structural parameters of the model are consistent with [4];

Evaluation Metrics: We use both subjective and objective assessments to evaluate the speed of model inference (NFE & RTF) and the quality of generated samples (FAD & MOS): 1) number of function evaluations (**NFE**) represents the total number of times the network is evaluated in the form of $x + y$, x denotes the number of times the supplementary decoder was used, and y represents the number of times the CM-denoiser was used; 2) real-time factor (**RTF**) is defined as the ratio between the total time the system takes to synthesize a given amount of audio and the duration of the audio; 3) Fréchet Audio Distance (**FAD**) [22]. Here we use the same method as [24]; 4) mean opinion score (**MOS**) [25] is used to measure the subjective perceived quality of the synthesized song. In this work, 20 qualified listeners are asked to make judgments on the synthesized audio on a scale of 0 to 5.

Training and Inference: We train the encoder and the supplementary decoder for 160k steps. Then, we train CM-Denoiser 280k steps. The scorer update the optimal point every 1k steps. We employ a pre-trained HiFi-GAN [26] for converting the predicted mel-spectrograms to audios.

B. Evaluation Results

We compared ConSinger with the following models: 1) GT, the ground truth singing voice; 2) GT(mel+HiFi-GAN), which converts reference audio to mel-spectrograms and then restores it to audio using HiFi-GAN vocoder; 3) FFTSinger [16] uses a supplementary decoder to generate mel-spectrograms and convert it to audio; 4) DiffSinger [4], a SVS system trained with diffusion models.

TABLE I
EVALUATION RESULTS ON POPCS FOR SVS.

method	NFE	RTF↓	FAD↓	MOS↑
GT	-	-	-	4.44
GT(mel+HiFi-GAN)	-	-	0.3542	4.33
FFTSinger	1+0	0.0149	1.9319	3.26
DiffSinger	1+51	0.0519	0.8779	3.81
ConSinger(v1)	0+1	0.0171	3.5254	2.72
ConSinger(v2)	1+1	0.0188	3.3510	2.96
ConSinger(v3)	1+1	0.0183	0.3191	3.88

From Table I, ConSinger (v3) has similar generation speed with FFTSinger, but greatly improves the generation quality, which achieves optimal performance on objective and subjective quality indicators. At the same time, ConSinger (v3) greatly improves the generation quality (+1.16 MOS) at a 10% reduction in the generation speed (RTF 0.0171 vs. 0.0188) by using the scorer, demonstrating the effectiveness of our approach.

C. Ablation Studies

We performed ablation experiments on ConSinger(v3) to further demonstrate the effectiveness of our approach. Concretely, We used Comparative Mean Opinion Score (CMOS) and Comparative Fréchet Audio Distance (CFAD) for evaluation. In Table II, *IS* means using the importance sampler. *noise* indicates whether consistency constraint is applied (Eq. 2-5), that is, whether to directly input the output of the supplementary decoder into the CM-denoiser. Note that the importance sampler and ρ are both conditions in the consistency model. The results show that both the importance sampler and the use of consistency constraints contribute to improving the audio quality. Using other ρ also results in a decrease in the quality.

TABLE II
ABLATION STUDIES ON CONSINGER(V3).

No.	<i>IS</i>	<i>noise</i>	ρ	CMOS	CFAD
1	✓	✓	7	0.00	0.000
2	×	✓	7	-0.06	-0.008
3	×	×	-	-0.04	-0.051
4	✓	✓	4	-0.23	-0.011

Same as DiffSinger, ConSinger (v2 & v3) denoise prior knowledge with noise to get better results. That is, the supplementary decoder provides the mel-spectrogram skeleton for the model, the addition of a small amount of noise on this basis helps the denoiser to perform a more elaborate carving.

V. CONCLUSION

In this work, we introduced ConSinger, a SVS method based on the consistency model. In order to improve the generation quality and minimize the loss of inference time, we proposed the second version, which restores mel-spectrograms from intermediate point on the PF ODE trajectory rather than the boundary point. Inspired by the ablation experiments performed on this basis, we presented the final version of ConSinger and correlated the experiment results with the ablation experiment in DiffSinger. Our experiments show that DiffSinger does not fully exploit the performance of the network by predicting and denoising a small amount of noise at a time, and therefore it consumes abundant inference time.

Although the generation speed is satisfactory, ConSinger requires a supplementary decoder to generate high quality audio, which burdens the training process. The experiment results indicate that there is still room for improvement in the generative quality of ConSinger. And in the training stage, the goal of scorer optimization is FAD, which may cause the model to learn the wrong features. We consider the limitations mentioned above as future work.

VI. ACKNOWLEDGMENT

We thank participants of the listening test for the valuable evaluations.

REFERENCES

- [1] M. Morise, F. Yokomori, and K. Ozawa, "World: a vocoder-based high-quality speech synthesis system for real-time applications," *IEICE TRANSACTIONS on Information and Systems*, vol. 99, no. 7, pp. 1877–1884, 2016.
- [2] J. Chen, X. Tan, J. Luan, T. Qin, and T.-Y. Liu, "Hifisinger: Towards high-fidelity neural singing voice synthesis," *arXiv preprint arXiv:2009.01776*, 2020.
- [3] S. Xu, W. Zhao, and J. Guo, "RefineGAN: Universally Generating Waveform Better than Ground Truth with Highly Accurate Pitch and Intensity Responses," in *Interspeech*, 2022.
- [4] J. Liu, C. Li, Y. Ren, F. Chen, and Z. Zhao, "Diffsinger: Singing voice synthesis via shallow diffusion mechanism," in *Proceedings of the AAAI conference on artificial intelligence*, vol. 36, no. 10, 2022, pp. 11 020–11 028.
- [5] Y.-P. Cho, Y. Tsao, H.-M. Wang, and Y.-W. Liu, "Mandarin singing voice synthesis with denoising diffusion probabilistic wasserstein gan," in *2022 Asia-Pacific Signal and Information Processing Association Annual Summit and Conference (APSIPA ASC)*. IEEE, 2022, pp. 1956–1963.
- [6] Y. Song, P. Dhariwal, M. Chen, and I. Sutskever, "Consistency models," in *International Conference on Machine Learning*, 2023.
- [7] Z. Novack, J. McAuley, T. Berg-Kirkpatrick, and N. J. Bryan, "Ditto: Diffusion inference-time t-optimization for music generation," *arXiv preprint arXiv:2401.12179*, 2024.
- [8] X. Wang, S. Zhang, H. Zhang, Y. Liu, Y. Zhang, C. Gao, and N. Sang, "Videolcm: Video latent consistency model," *arXiv preprint arXiv:2312.09109*, 2023.
- [9] Z. Ye, W. Xue, X. Tan, J. Chen, Q. Liu, and Y. Guo, "Comospeech: One-step speech and singing voice synthesis via consistency model," in *Proceedings of the 31st ACM International Conference on Multimedia*, 2023, pp. 1831–1839.
- [10] X. Li, F. Bu, A. Mehrish, Y. Li, J. Han, B. Cheng, and S. Poria, "Cm-tts: Enhancing real time text-to-speech synthesis efficiency through weighted samplers and consistency models," *arXiv preprint arXiv:2404.00569*, 2024.
- [11] Y. Song and S. Ermon, "Generative modeling by estimating gradients of the data distribution," *Advances in neural information processing systems*, vol. 32, 2019.
- [12] J. Ho, A. Jain, and P. Abbeel, "Denoising diffusion probabilistic models," *Advances in neural information processing systems*, vol. 33, pp. 6840–6851, 2020.
- [13] Y. Song, J. Sohl-Dickstein, D. P. Kingma, A. Kumar, S. Ermon, and B. Poole, "Score-based generative modeling through stochastic differential equations," in *International Conference on Learning Representations*, 2021.
- [14] T. Karras, M. Aittala, T. Aila, and S. Laine, "Elucidating the design space of diffusion-based generative models," *Advances in Neural Information Processing Systems*, vol. 35, pp. 26 565–26 577, 2022.
- [15] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin, "Attention is all you need," *Advances in neural information processing systems*, vol. 30, 2017.
- [16] M. Blaauw and J. Bonada, "Sequence-to-sequence singing synthesis using the feed-forward transformer," in *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2020, pp. 7229–7233.
- [17] Y. Ren, C. Hu, X. Tan, T. Qin, S. Zhao, Z. Zhao, and T.-Y. Liu, "Fastspeech 2: Fast and high-quality end-to-end text to speech," in *International Conference on Learning Representations*, 2021.
- [18] Y. Ren, Y. Ruan, X. Tan, T. Qin, S. Zhao, Z. Zhao, and T.-Y. Liu, "Fastspeech: Fast, robust and controllable text to speech," *Advances in neural information processing systems*, vol. 32, 2019.
- [19] A. van den Oord, S. Dieleman, H. Zen, K. Simonyan, O. Vinyals, A. Graves, N. Kalchbrenner, A. Senior, and K. Kavukcuoglu, "WaveNet: A Generative Model for Raw Audio," in *Proc. 9th ISCA Workshop on Speech Synthesis Workshop (SSW 9)*, 2016, p. 125.
- [20] D. Rethage, J. Pons, and X. Serra, "A wavenet for speech denoising," in *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2018, pp. 5069–5073.
- [21] Z. Kong, W. Ping, J. Huang, K. Zhao, and B. Catanzaro, "Diffwave: A versatile diffusion model for audio synthesis," in *International Conference on Learning Representations*, 2021.
- [22] K. Kilgour, M. Zuluaga, D. Roblek, and M. Sharifi, "Fréchet audio distance: A reference-free metric for evaluating music enhancement algorithms," in *Interspeech*, 2019.
- [23] Y. Ren, X. Tan, T. Qin, J. Luan, Z. Zhao, and T.-Y. Liu, "Deepsinger: Singing voice synthesis with data mined from the web," in *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 2020, pp. 1979–1989.
- [24] X. Zhang, L. Xue, Y. Wang, Y. Gu, X. Chen, Z. Fang, H. Chen, L. Zou, C. Wang, J. Han *et al.*, "Amphion: An open-source audio, music and speech generation toolkit," *arXiv preprint arXiv:2312.09911*, 2023.
- [25] M. Chu and H. Peng, "Objective measure for estimating mean opinion score of synthesized speech," Apr. 4 2006, uS Patent 7,024,362.
- [26] J. Kong, J. Kim, and J. Bae, "Hifi-gan: Generative adversarial networks for efficient and high fidelity speech synthesis," *Advances in neural information processing systems*, vol. 33, pp. 17 022–17 033, 2020.