

SoundCollage: Automated Discovery of New Classes in Audio Datasets

Ryuhaerang Choi^{*†}, Soumyajit Chatterjee[‡], Dimitris Spathis[‡], Sung-Ju Lee[†],
Fahim Kawsar^{‡§}, Mohammad Malekzadeh[‡]

[‡]Nokia Bell Labs, Cambridge, UK [†]KAIST, South Korea [§]University of Glasgow, UK

Email: {ryuhaerang.choi,profsj}@kaist.ac.kr,

{soumyajit.chatterjee, dimitrios.spathis, fahim.kawsar, mohammad.malekzadeh}@nokia-bell-labs.com

Abstract—Developing new machine learning applications often requires the collection of new datasets. However, existing datasets may already contain relevant information to train models for new purposes. We propose *SoundCollage*: a framework to discover *new classes* within audio datasets by incorporating (1) an *audio pre-processing pipeline* to decompose different sounds in audio samples, and (2) an *automated model-based annotation mechanism* to identify the discovered classes. Furthermore, we introduce *clarity* measure to assess the coherence of the discovered classes for better training new downstream applications. Our evaluations show that the accuracy of downstream audio classifiers within discovered class samples and a held-out datasets improves over the baseline by up to 34.7% and 4.5%, respectively, highlighting the potential of *SoundCollage* in making datasets reusable by labeling with newly discovered classes. To encourage further research in this area, we open-source our code at github.com/nokia-bell-labs/audio-class-discovery.

Index Terms—Acoustic Signal Processing, Sound Classification, Dataset Reusability

I. INTRODUCTION

Training or fine-tuning a machine learning (ML) model for emerging audio processing applications often requires high-quality labeled data. This necessity is typically fulfilled by collecting a new audio dataset tailored to the intended application, ensuring that the semantics of the annotated labels align with the application’s needs. Notably, audio signals often capture rich contextual and environmental information. For instance, datasets collected for Coronavirus disease detection through coughing sounds may also contain other respiratory sounds considered irrelevant for the main application [1]. Such additional audio signatures can be **reused** to train models for other healthcare applications like detecting chronic obstructive pulmonary disease or heart diseases [2]. In other words, when processed effectively, audio datasets can often accommodate the requirements of multiple applications, reducing the costs for a separate data collection.

This presents an opportunity to explore beyond the annotated label space and discover *new classes* within existing datasets. To identify new classes at runtime, prior works have mostly adapted zero (or few)-shot learning [3], [4], which rely on identifying the unknown classes using the existing definitions available from the known classes. Other alternatives with supervised clustering rules also work similarly by confining the search for new classes based on existing classes [5], [6] or known musical components [7], [8]. Naturally, all these approaches limit the search for new classes to semantic attributes of the known classes, such as using predefined audio signatures or signal characteristics derived from domain knowledge, which can be challenging to obtain in many real-world scenarios. Finally, other supervised methods [9] require costly supervision, by

engaging users during runtime to specify the class to which the current audio signal belongs, which may be an unrealistic assumption.

The most promising approach is **unsupervised task-discovery**, first proposed in [10], where new class boundaries are discovered within data that may not have been labeled beforehand. This approach offers a flexible solution as it utilizes inherent inductive biases and statistical patterns present within the data, by using ML models as a proxy. However, the current unsupervised task-discovery approaches do not assign meaningful labels to the **discovered classes**. The major issue is that all existing work [6], [10], [11] are tailored for image data only and do not accommodate the nuances of audio data, which require fundamentally different inductive biases given the natural differences in the data properties compared to images [12]. Our systematic investigation shows (see TABLE III) that the existing baseline fails to discover unique classes from the audio datasets.

This paper presents the framework, *SoundCollage*, to discover classes within existing audio datasets without direct human supervision. As shown in Fig. 1, we first employ a set of signal processing steps designed to decompose the different components of audio signals. These steps reduce the inherent complexity of audio signals in which various patterns, such as human voice elements and background noises, intertwine. The decomposed components are then fed into a subsequent unsupervised task discovery module to identify new classes. *SoundCollage* then automatically annotates these identified classes with human-readable labels, for which we utilize pre-trained audio-event classification models, such as YAMNet [13]. The final output of our proposed framework is a “collage of sounds” labeled with different newly discovered classes. To summarise our contributions, compared to existing unsupervised class discovery approaches, we (a) propose a set of systematically selected **audio signal processing** approaches to decompose the complex audio data, (b) incorporate **pre-trained models** to label the newly discovered classes, (c) introduce a new measure, **clarity**, to evaluate the semantic coherence of discovered classes, and finally, (d) train models with the newly discovered classes, thus, **reusing** the same dataset for new applications, albeit originally collected for different purposes.

We evaluate *SoundCollage* on AudioSet [14], a multi-label benchmark dataset for audio-event detection that includes a diverse set of classes. Using our proposed clarity measure, we conduct a systematic evaluation to assess the quality of the identified class boundaries. *SoundCollage* outperforms the baseline [10], achieving an average clarity improvement of 1.3%. Importantly, the gain in clarity of the class boundaries is reflected in the performance of downstream classifiers. Our evaluations on a held-out test set obtained from FSD50K [15], an additional benchmark audio dataset, demonstrate that the downstream classifiers trained using the data discovered by *SoundCollage* achieve an accuracy improvement up to 4.5%.

*Work is mainly done during the author’s internship at Nokia Bell Labs.

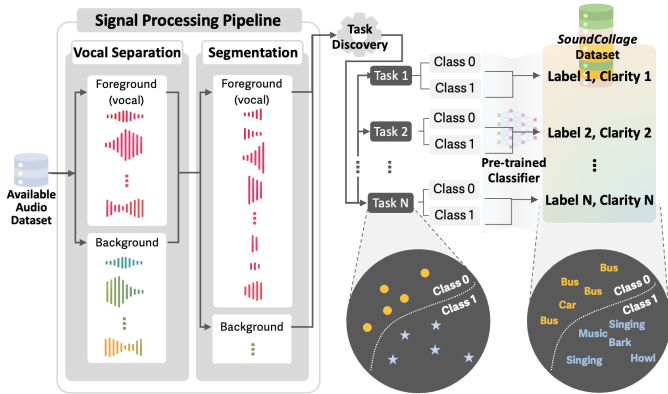


Fig. 1: Conceptual illustration of *SoundCollage*.

II. METHODOLOGY

Problem Statement. We assume a dataset $\mathcal{D} = \langle \mathcal{A}, \mathcal{L} \rangle$ is given where \mathcal{A} is the set of audio samples and \mathcal{L} is the optional label information available from initial human annotations. We aim to discover new classes c_1, c_2, \dots such that $c_i \notin \mathcal{L}$, and automatically assign a semantic label to each c_i without human supervision.

A. Signal Pre-processing Pipeline

The primary feature of audio data is the presence of multiple sound sources, making the underlying audio signatures to be a convoluted signal of all the individual audio components. For example, an audio data with domestic sounds can contain sounds caused by domestic activities, pets, adult human speech, child cry, child speech, etc. [16]. Inspired by this feature, *SoundCollage* separates key acoustic signal components from an audio signal to efficiently discover new classes from the data. We achieve this by designing signal pre-processing steps which aim to generate augmented samples with fewer concurrent sound sources. Without pre-processing, the complexity of original audio could complicate identifying common acoustic patterns across multiple samples for discovering new classes. Thus, the objective of this step is to decompose a complex audio wave into simpler acoustic components.

We first employ *vocal separation* to separate overlapping vocal and background sounds within samples using the REPET-SIM method [17]. Unlike the original binary mask approach, we use Wiener filtering to generate a soft mask and adjust the FFT windows overlap accordingly. Notably, Wiener filtering is widely utilized in human voice processing due to its optimal performance in minimizing the MSE between the estimated and desired signals. Its ability to adapt to the statistical characteristics of both signal and noise makes it exceptionally suited for dynamically varying noise environments typical in voice communications, allowing us to separate the voice and background signatures into separate components [18]. More specifically, each sample is divided into two components: one with enhanced vocal components (**Comp#1**), and the other containing background audio signatures (**Comp#2**).

However, each of these components can still contain significant variations. For example, the vocal component can include alternating sequences of adult and child voices. Same observations are also present from the background audio where multiple sound sources can be present. Building on this insight, we further *segment* the data by applying a change-point-detection algorithm [19] to divide continuous audio streams, ensuring each segment captures homogeneous acoustic

patterns by avoiding abrupt time-domain changes. This method facilitates further discovery of classes by exploiting consistent patterns within each segment. Remarkably, this segmentation also increases the total number of samples for the subsequent class discovery.

B. Task Discovery

Task discovery is based on the principle that when labels in a dataset are meaningful, DNNs with the same architecture but different initializations, trained on this dataset, show notable similarities in their output space [20], [21]. To formulate this, let τ denote a task defined by binary labels assigned to a set of audio samples X , i.e., $\tau : X \rightarrow \{0, 1\}$. Let $\mathcal{D}(X, \tau) = \{(x, \tau(x)) | x \in X\}$ denote a labeled dataset for task τ . Let $\mathcal{P}(\cdot)$ denote a learning algorithm, e.g., stochastic gradient descent using binary cross-entropy loss, and $w \sim \mathcal{P}(\mathcal{D}(X, \tau))$ denote the outcome of training a randomly initialized model for task τ . To assess the generalization of w , we split $\mathcal{D}(X, \tau)$ into a training set $\mathcal{D}(X_{tr}, \tau)$ and a test set $\mathcal{D}(X_{te}, \tau)$. After training two DNNs with different initializations, w_1 and w_2 , *agreement score* (AS) [10], [22] is defined as:

$$AS(\tau; X_{tr}, X_{te}) = \mathbb{E}_{w_1, w_2 \sim \mathcal{P}(\mathcal{D}(X_{tr}, \tau))} \mathbb{E}_{x \sim X_{te}} [(f(x; w_1) = f(x; w_2))]. \quad (1)$$

AS is used to discover new class boundaries within a dataset of images. First, a task τ is generated by randomly assigning a label (either 0 or 1) to each sample in the dataset. Next, to estimate the AS value in Eqn. 1, multiple iterations are performed, where in each iteration, two randomly initialized DNNs are trained on τ . The task discovery algorithm then finds a task τ which maximizes $AS(\tau)$. Finally, a task τ is identified as a new class boundary if the AS is higher than a threshold, as a high AS indicates meaningful class boundaries that closely resemble human-labeled tasks.

C. Automated Labeling of Discovered Classes

After discovering a set of tasks τ_1, \dots, τ_K with high AS, we need to translate each task into a meaningful class c_1, \dots, c_K . A simplistic approach is to rely on costly human annotators to label the discovered tasks [9], [23], which is especially unrealistic when dealing with audio datasets collected from real-world environments that contain numerous hidden classes. To this end, we utilize an existing *pre-trained audio-event classification* model to assign meaningful classes to the discovered tasks. For each discovered task τ_i , we consider N_i samples from the binary classes present within the task. These samples are then passed to the pre-trained model to assign the new class c_i to the task τ_i . The output of this step is a set of “**sound collages**” which is composed of pieces from different audio sources grouped into **newly discovered, meaningful classes**.

D. Clarity Measure

A significant drawback of existing unsupervised task discovery work [10] is the lack of a measure to assess how clearly one class differentiates from another from a *semantic* perspective, as if evaluated by humans. Current baseline solely rely on the model’s perspective, assessed by AS, which only measures how well a trained model generalizes on a given task. To fill this gap, we introduce the **clarity** measure, which enables principled evaluation of class boundaries from a semantic standpoint. The details follow.

Given a task τ_i with N_i samples, let Y_j represent a specific label from the set of semantic labels obtained for all samples, using YAMNet [13] (e.g., Y_j : singing). The total number of samples in class 0 and class 1 are denoted as N_i^0 and N_i^1 , respectively. The number of samples in class 0 labeled with Y_j is denoted as

N_{ij}^0 (similarly in class 1, it is denoted as N_{ij}^1). The clarity C of a class boundary is defined as

$$C = \max \left(\frac{|N_{ij}^0 - N_{ij}^1| - \min\{N_{ij}^0, N_{ij}^1\}}{\max\{N_i^0, N_i^1\}}, 0 \right). \quad (2)$$

Equation (2) measures the quality of the class boundary discovered in a task for a given semantic label. To clarify, consider two tasks τ_1 and τ_2 with their corresponding class boundaries for a YAMNet label Y_0 . Suppose τ_1 for label Y_0 has fifteen samples in class 1 and five in class 0, while τ_2 for label Y_0 has ten samples in class 1 and none in class 0. Given the label Y_0 , Equation (2) penalizes τ_1 for its less distinct boundary while highlighting τ_2 for higher clarity.

III. EVALUATION

A. Datasets

TABLE I: **Details of the processed AudioSet.** Our pre-processing creates two components from each sample: Comp#1 with enhanced vocal signatures, and Comp#2 with background audio signatures.

Class	# of original samples	# of samples after signal preprocessing		
			Total	Selected
Speech	797	Comp#1	2,288	2,288
		Comp#2	2,164	2,164
Domestic sounds, home sounds	8,237	Comp#1	21,895	10,000
		Comp#2	21,323	10,000
Outside rural or natural	12,463	Comp#1	34,278	10,000
		Comp#2	33,020	10,000

We run *SoundCollage* on AudioSet [24], a multi-label benchmark dataset with 632 audio event classes organized in a hierarchical ontology. We focus on classes higher up in the hierarchy as they are more likely to contain a mixture of various sounds. Notably, the annotations in AudioSet vary in quality. This in turn often results in a drop in overall quality of the dataset with audio data incorrectly labeled for the presence of certain audio signatures, like sounds from animals or vehicles [25]. Therefore, for a principled evaluation, we deliberately choose *Speech* samples labeled with only one additional child class (i.e., Male speech, Female speech, Child speech, Babbling) to ensure high-quality ground-truth labels. For the other subsets domestic sounds and outside or natural audio, we consider all samples within each category, regardless of label quality, to validate the generalizability and robustness of *SoundCollage* across varying labeling qualities. A brief summary of the dataset size is provided in TABLE I.

TABLE I also describes the number of samples used in our experiments. Following our pre-processing pipeline, the number of samples increases, and their lengths vary (<10 secs), while the original samples are all 10 secs long. The baseline task discovery framework always uses the complete set of original samples. In contrast, *SoundCollage* utilizes the complete set of original samples only for *Speech* data. For other subsets, we randomly select 10K samples to have a fair comparison and speed up the overall process of discovering new classes.

Cross-dataset validation. To evaluate downstream audio classifiers, we use FSD50K [15], a benchmark multi-label audio dataset with clip durations ranging from 0.3 to 30 seconds, labeled based on the AudioSet ontology. Note that we *exclusively* use the FSD50K dataset to evaluate the performance of downstream audio classifiers to ensure the validity of *SoundCollage* on a completely held-out dataset.

B. Implementation

To discover new classes from the audio datasets, we extract 64x64 mel-frequency cepstral coefficients (MFCCs) from the audio

TABLE II: **SoundCollage vs. Baseline Task-discovery [10].**

Dataset	System	Clarity	AS
Speech	Baseline	0.302 ± 0.070	0.803 ± 0.067
	Ours Comp#1	0.306 ± 0.116	0.804 ± 0.095
	Ours Comp#2	0.286 ± 0.099	0.710 ± 0.104
Domestic sounds, home sounds	Baseline	0.336 ± 0.108	0.898 ± 0.033
	Ours Comp#1	0.350 ± 0.075	0.914 ± 0.026
Outside rural or natural	Ours Comp#2	0.367 ± 0.160	0.903 ± 0.028
	Baseline	0.342 ± 0.115	0.915 ± 0.024
	Ours Comp#1	0.372 ± 0.150	0.914 ± 0.018
	Ours Comp#2	0.355 ± 0.086	0.903 ± 0.023

TABLE III: **Diversity of the discovered classes.** One of the most discovered class for the baseline approach was *Silence*, whereas our approach discovers more unique classes.

Dataset	System	Proportion of Silence Class (%)	Total # of Unique Classes
Speech (single label)	Baseline	6.3	24
	Ours	0.0	78
Domestic sounds, home sounds	Baseline	9.4	27
	Ours	1.6	52
Outside rural or natural	Baseline	9.4	25
	Ours	0.0	53

samples. For *SoundCollage*, these MFCCs are extracted after the signal pre-processing step (see Fig. 1). As the baseline task discovery approach [10] is only designed for images without any pre-processing, we directly use the raw audio data for it. For the baseline approach [10], we use the official implementation available [26]. We use default parameters for the task discovery framework and consider the discovered task after the fourth epoch, where the AS typically stabilizes at 0.85 or higher. This threshold is determined by empirical analysis of AS on human-labeled tasks using the baseline task discovery framework. We choose the top 20 samples per class based on the softmax probabilities to annotate the discovered classes without human intervention. These are then fed to a pre-trained audio classifier, YAMNet [13]. We finally take the top 10 predictions from YAMNet as the newly discovered classes.

We use a Random Forest model with 10 estimators for the downstream audio classifier. Raw waveform data points are used as input features for cross-validation on AudioSet, while 10-second windows are used for testing on the held-out FSD50K dataset. Each evaluation uses 100 samples/class.

C. Baseline Comparison

We use clarity (see Eqn. 2) and AS (see Eqn. 1) as the primary measures for evaluating class discovery across all the discovered tasks and report the average in TABLE II. Our approach generally outperforms the baseline in clarity, demonstrating an average improvement of 0.013, while remaining in close competition with the baseline in terms of AS. However, in the speech Comp#2, *SoundCollage* underperforms because we selectively used samples originally annotated with a single label, as mentioned in Section III-A, resulting in fewer non-vocal background audio signals. Nevertheless, our method **performs better even with fewer original samples** from each class. This is particularly evident for the ‘outside rural or natural sounds’, where the baseline had the entirety of the 12K samples compared to our selected 10K samples.

We further investigate the classes and labels discovered using the pre-trained audio event model, YAMNet. Fig. 2 illustrates the top 5 clarity tasks with associated labels. Tasks discovered by *SoundCollage* generally exhibit superior clarity and AS. **Our approach**

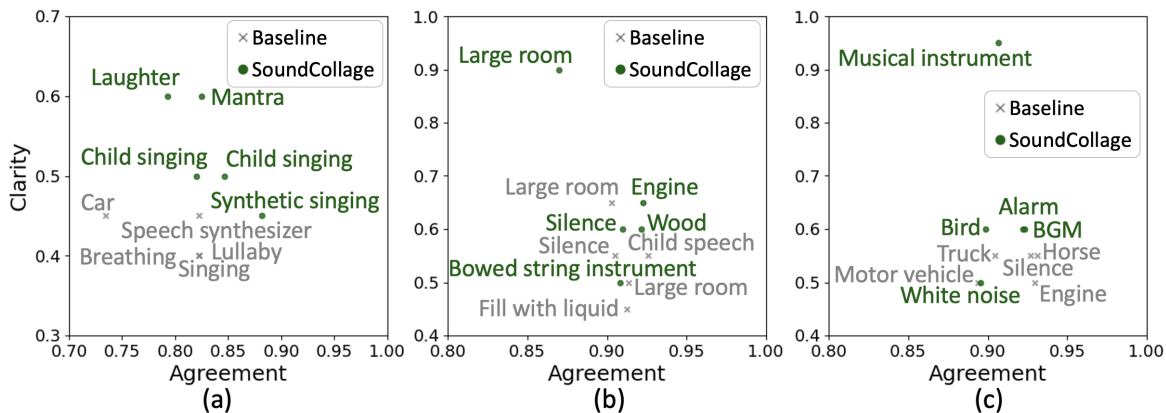


Fig. 2: **Top-5 discovered classes ranked according to clarity for – (a) speech, (b) domestic, and (c) natural sounds subsets from AudioSet.** Our approach discovers new classes with both higher clarity and agreement.

TABLE IV: **Downstream classification performance on AudioSet.**

Each class is the *highest clarity* class among all classes discovered from the original dataset. Labels indicate the semantic meaning assigned by YAMNet.

Original	System	Acc (%)	Prec (%)	Rec (%)	F1 (%)	Label
Speech	Baseline	51.8 ± 4.6	51.7 ± 4.8	51.8 ± 4.6	51.4 ± 5.0	Speech synthesizer
	Ours	75.6 ± 13.0	77.7 ± 14.1	75.6 ± 13.0	74.0 ± 13.8	Mantra
Domestic sounds, home sounds	Baseline	56.2 ± 10.8	53.7 ± 16.0	56.2 ± 10.8	54.1 ± 13.4	Laughter
	Ours	90.9 ± 5.3	91.1 ± 5.2	90.9 ± 5.3	90.9 ± 5.3	Inside, large room or hall
Outside rural or natural	Baseline	62.2 ± 19.7	63.1 ± 21.4	62.2 ± 19.7	59.3 ± 21.1	Silence
	Ours	91.6 ± 4.2	92.1 ± 4.8	91.6 ± 4.2	91.2 ± 4.6	Musical instrument

also discovers a more diverse set of classes from the audio data while the baseline redundantly discovers *Silence* (see TABLE III). This quantitative analysis shows that our pre-processing pipeline extracts semantically meaningful audio components, leading to class boundaries with higher clarity.

We conduct an additional quantitative analysis by comparing the accuracy of downstream audio classifiers (Section III-B) trained on samples labeled with the new classes. We assess the classifier performance with 5-fold cross-validation using samples of the highest clarity class across all the discovered tasks. **The analysis shows that *SoundCollage* offers higher classifier performance with consistent improvements of up to 34.7%** (see TABLE IV). This is because (1) the baseline approach lacks a signal pre-processing method tailored for audio data, and (2) its discovered classes have lower clarity despite having higher AS.

D. Cross-data Quantitative Analysis

Motivated by the aforementioned observation, we further investigate the performance of the downstream classifier on a held-out test set from the FSD50K dataset [15] for the *common* classes with clarity ≥ 0.50 . The results described in TABLE V demonstrate a similar trend, wherein the classifier trained on labeled samples generated by *SoundCollage* outperforms the classifier trained on labeled samples provided by the baseline, with accuracy improvements up to 4.5%. **This quantitative analysis shows that the output dataset labeled with new classes by *SoundCollage* enables training downstream classifiers with higher accuracy than the baseline.**

E. Clarity vs Agreement Score

We observe no statistically significant correlation (p-value > 0.2) between the clarity and the AS for *SoundCollage* as well as the

TABLE V: **Downstream classification performance on held-out data from FSD50K.** We report classification results only for *common* classes discovered by both the baseline and *SoundCollage*, present in FSD50K with a clarity ≥ 0.50 .

Label	System	Acc	Prec	Rec	F1	Clarity
Motor vehicle	Baseline	0.570	0.592	0.450	0.511	0.50
	Ours	0.605	0.567	0.890	0.693	0.50
Engine	Baseline	0.595	0.732	0.300	0.426	0.50
	Ours	0.640	0.604	0.810	0.692	0.65

baseline. This is because clarity measures how semantically well-defined the discovered task (or the class boundary) is, whereas AS as defined [10], [22] is a similarity between two neural networks. However, as a high AS depicts that the discovered class boundaries are highly generalizable, we observe that the tasks that exhibit a high clarity also exhibit high agreement scores, but the converse is not true. This shows that **clarity is a more judiciously designed measure for defining the semantic clarity of the discovered tasks than the AS.**

F. Limitations and Future Work.

One concern is related to the limitations of the pre-trained audio event classification model in finding all potential meaningful classes. We aim to choose audio-foundation models as an emerging alternative [27], [28]. Additionally, the end-to-end process of discovering new classes consumes significant time and resources. Thus, another research direction would be redesigning the task discovery algorithm to make it more efficient.

IV. CONCLUSION

We show that current unsupervised task discovery algorithms must be adapted specifically to address the nuances present in the audio data. We explored various signal preprocessing techniques and potential automated annotation methods to achieve this. Our findings are integrated into a unified framework, *SoundCollage*, designed to facilitate the automated discovery of new classes in audio datasets. Experimental results show that *SoundCollage* identifies more unique classes, generally providing improved clarity and consistency compared to the baseline. Additionally, our framework boosts the performance of downstream classifiers. We envision *SoundCollage* as a tool to enhance dataset re-usability by augmenting samples and expanding their label spaces.

REFERENCES

- [1] Tong Xia, Dimitris Spathis, J Ch, Andreas Grammenos, Jing Han, Apinan Hasthanasombat, Erika Bondareva, Ting Dang, Andres Floto, Pietro Cicuta, et al., “Covid-19 sounds: a large-scale audio dataset for digital respiratory screening,” in *Thirty-fifth conference on neural information processing systems datasets and benchmarks track*, 2021.
- [2] Sebastien Baur, Zaid Nabulsi, Wei-Hung Weng, Jake Garrison, Louis Blankemeier, Sam Fishman, Christina Chen, Sujay Kakarmath, Minyoi Maimbolwa, Nsala Sanjase, et al., “Hear–health acoustic representations,” *arXiv preprint arXiv:2403.02522*, 2024.
- [3] Kai Han, Andrea Vedaldi, and Andrew Zisserman, “Learning to discover novel visual categories via deep transfer clustering,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2019.
- [4] Colin Troisemaine, Vincent Lemaire, Stéphane Gosselin, Alexandre Reiffers-Masson, Joachim Flocon-Cholet, and Sandrine Vaton, “Novel class discovery: an introduction and key concepts,” 2023.
- [5] Lei Shu, Hu Xu, and Bing Liu, “Unseen class discovery in open-world classification,” 2018.
- [6] Haoang Chi, Feng Liu, Bo Han, Wenjing Yang, Long Lan, Tongliang Liu, Gang Niu, Mingyuan Zhou, and Masashi Sugiyama, “Meta discovery: Learning to discover novel classes given very limited data,” in *International Conference on Learning Representations*, 2022.
- [7] Joonsu Gha, Vincent Herrmann, Benjamin Grewe, Jürgen Schmidhuber, and Anand Gopalakrishnan, “Unsupervised musical object discovery from audio,” *arXiv preprint arXiv:2311.07534*, 2023.
- [8] Jun-You Wang, Chung-Che Wang, Chon-In Leong, and Jyh-Shing Roger Jang, “Mir-mlpop: A multilingual pop music dataset with time-aligned lyrics and audio,” in *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2024, pp. 1366–1370.
- [9] Jason Wu, Chris Harrison, Jeffrey P Bigham, and Gierad Laput, “Automated class discovery and one-shot interactions for acoustic activity recognition,” in *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*, 2020.
- [10] Andrei Atanov, Andrei Filatov, Teresa Yeo, Ajay Sohmshtetty, and Amir Zamir, “Task discovery: Finding the tasks that neural networks generalize on,” *Advances in Neural Information Processing Systems*, 2022.
- [11] Yen-Chang Hsu, Zhaoyang Lv, and Zsolt Kira, “Learning to cluster in order to transfer across domains and tasks,” in *International Conference on Learning Representations (ICLR)*, 2018.
- [12] Zhoutong Zhang, Yunyun Wang, Chuang Gan, Jiajun Wu, Joshua B Tenenbaum, Antonio Torralba, and William T Freeman, “Deep audio priors emerge from harmonic convolutional networks,” in *International Conference on Learning Representations*, 2019.
- [13] M. Plakal and D. Ellis, “Sound classification with YAMNet,” <https://www.tensorflow.org/hub/tutorials/yamnet>, Last Accessed: October 31, 2024.
- [14] Sound Understanding group in the Machine Perception Research organization at Google, “Audioset,” <https://research.google.com/audioset/index.html>, Last Accessed: October 31, 2024.
- [15] Eduardo Fonseca, Xavier Favory, Jordi Pons, Frederic Font, and Xavier Serra, “FSD50K: an open dataset of human-labeled sound events,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2022.
- [16] Xuewen Yao, Megan Micheletti, Mckensey Johnson, Edison Thomaz, and Kaya de Barbaro, “Infant crying detection in real-world environments,” in *ICASSP 2022 - 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022, pp. 131–135.
- [17] Zafar Rafii and Bryan Pardo, “Music/voice separation using the similarity matrix.,” in *ISMIR*, 2012.
- [18] Chung-Chien Hsu, Kah-Meng Cheong, Jen-Tzung Chien, and Tai-Shih Chi, “Modulation wiener filter for improving speech intelligibility,” in *2015 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2015, pp. 370–374.
- [19] Sylvain Arlot, Alain Celisse, and Zaid Harchaoui, “A kernel multiple change-point algorithm via model selection,” *Journal of machine learning research*, 2019.
- [20] Guy Hacohen, Leshem Choshen, and Daphna Weinshall, “Let’s agree to agree: Neural networks share classification order on real datasets,” in *International Conference on Machine Learning*, 2020.
- [21] Iuliia Pliushch, Martin Mundt, Nicolas Lupp, and Visvanathan Ramesh, “When deep classifiers agree: Analyzing correlations between learning order and image statistics,” in *Computer Vision – ECCV 2022: 17th European Conference*, 2022.
- [22] Mikhail Belkin, Daniel Hsu, Siyuan Ma, and Soumik Mandal, “Reconciling modern machine-learning practice and the classical bias–variance trade-off,” *Proceedings of the National Academy of Sciences*, 2019.
- [23] Soumyajit Chatterjee, Arun Singh, Bivas Mitra, and Sandip Chakraborty, “Acconotate: Exploiting acoustic changes for automatic annotation of inertial data at the source,” in *2023 19th International Conference on Distributed Computing in Smart Systems and the Internet of Things*, 2023.
- [24] Jort F. Gemmeke, Daniel P. W. Ellis, Dylan Freedman, Aren Jansen, Wade Lawrence, R. Channing Moore, Manoj Plakal, and Marvin Ritter, “Audio set: An ontology and human-labeled dataset for audio events,” in *Proc. IEEE ICASSP 2017*, New Orleans, LA, 2017.
- [25] Stefano Damiano, Luca Bondi, Shabnam Ghaffarzagdegan, Andre Gun-toro, and Toon van Waterschoot, “Can synthetic data boost the training of deep acoustic vehicle counting networks?,” in *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2024, pp. 631–635.
- [26] Andrei Atanov, Andrei Filatov, Teresa Yeo, Ajay Sohmshtetty, and Amir Zamir, “Task discovery framework open source,” <https://github.com/EPFL-VILAB/TaskDiscovery>, Last Accessed: October 31, 2024.
- [27] Yu-An Chung, Yu Zhang, Wei Han, Chung-Cheng Chiu, James Qin, Ruoming Pang, and Yonghui Wu, “W2v-bert: Combining contrastive learning and masked language modeling for self-supervised speech pre-training,” 2021.
- [28] Dongchao Yang, Jinchuan Tian, Xu Tan, Rongjie Huang, Songxiang Liu, Xuankai Chang, Jiatong Shi, Sheng Zhao, Jiang Bian, Xixin Wu, Zhou Zhao, and Helen Meng, “Uniaudio: An audio foundation model toward universal audio generation,” *arXiv preprint arXiv:2310.00704*, 2023.