

# Simplifying and Characterizing DAGs and Phylogenetic Networks via Least Common Ancestor Constraints

Anna Lindeberg and Marc Hellmuth

*Department of Mathematics, Faculty of Science, Stockholm University, SE-10691 Stockholm, Sweden*

## Abstract

Rooted phylogenetic networks, or more generally, directed acyclic graphs (DAGs), are widely used to model species or gene relationships that traditional rooted trees cannot fully capture, especially in the presence of reticulate processes or horizontal gene transfers. Such networks or DAGs are typically inferred from genomic data of extant taxa, providing only an estimate of the true evolutionary history. However, these inferred DAGs are often complex and difficult to interpret. In particular, many contain vertices that do not serve as least common ancestors (LCAs) for any subset of the underlying genes or species, thus lacking direct support from the observed data. In contrast, LCA vertices represent ancestral states substantiated by the data, offering important insights into evolutionary relationships among subsets of taxa. To reduce unnecessary complexity and eliminate unsupported vertices, we aim to simplify a DAG to retain only LCA vertices while preserving essential evolutionary information.

In this paper, we characterize LCA-relevant and lca-relevant DAGs, defined as those in which every vertex serves as an LCA (or unique LCA) for some subset of taxa. We introduce methods to identify LCAs in DAGs and efficiently transform any DAG into an LCA-relevant or lca-relevant one while preserving key structural properties of the original DAG or network. This transformation is achieved using a simple operator “ $\ominus$ ” that mimics vertex suppression.


**Keywords:** Phylogenetic Networks; Reticulate Evolution; Regular DAGs; Hasse Diagram; Cluster; Transformation; NP-Completeness; Algorithms

## 1 Introduction

Rooted networks and, more generally, directed acyclic graphs (DAGs), are essential in mathematical phylogenetics for modeling complex evolutionary relationships that traditional rooted trees cannot fully represent [22, 24, 25]. In a DAG  $G$ , the leaf set  $L(G)$  represents extant taxa, such as genes or species, while internal vertices  $v \in V(G) \setminus L(G)$  correspond to ancestral states and are associated with sets  $C_G(v)$  of descendant leaves known as “hardwired clusters” [23, 24, 26], or *clusters* [20] for short. Typically, only the leaf set  $L(G)$  is available and a primary task is to reconstruct the evolutionary history - i.e., phylogenetic networks or DAGs - using information provided solely by the taxa in  $L(G)$ . This information, often derived from genomic sequence data and sequence similarities, can reveal clusters within the unknown DAG  $G$  that are used to reconstruct  $G$  [13, 23, 24, 26].

However, DAGs and networks inferred from genomic data can be highly complex and tangled, often containing redundant information [9, 12]. In particular, unlike phylogenetic trees, the number of vertices in a DAG  $G$  is not generally bounded by the number of leaves. As a result, various methods have been developed to simplify DAGs while preserving their most significant features [12, 17, 21]. Our research builds on this line of work and focuses on eliminating vertices from a DAG  $G$  that are “less relevant” in the sense that they are not least common ancestors of certain subsets of  $L(G)$ .

A least common ancestor (LCA) of a subset  $A \subseteq L(G)$  is a vertex  $v$  that is an ancestor of all  $x \in A$  and has no descendant that also satisfies this property. LCAs are essential for understanding and interpreting evolutionary relationships in phylogenetics [19, 30, 36, 39]. In evolutionary biology, there is a general consensus that inferred networks and DAGs should be phylogenetic, that is, they should not contain vertices with in- and out-degree one. The reason is simple: such vertices cannot be observed from any biological data since there is no historical

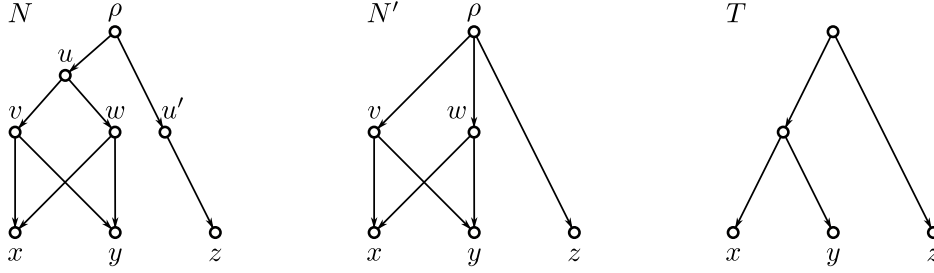

**Figure 1:** Shown are three networks  $N$ ,  $N'$  and  $T$ . All have the same clustering system  $\mathcal{C} = \{\{x\}, \{y\}, \{z\}, \{x, y\}, \{x, y, z\}\}$  and leaf set  $X = \{x, y, z\}$ . Here, only  $N'$  and  $T$  are phylogenetic. The network  $N$  is not phylogenetic, since  $N$  contains the vertex  $u'$  with in- and out-degree one. Moreover, vertices  $u$  and  $u'$  in  $N$  are not LCAs of any subset of leaves. “Removing”  $u$  and  $u'$  from  $N$  – as explained in detail in Section 6 – yields the simplified network  $N'$  in which all vertices are LCAs of some subset of  $X$ . Hence,  $N'$  is LCA-REL but not lca-REL as the vertices  $v$  and  $w$  are not unique LCAs in  $N'$  for any subset of  $X$ . If desired,  $N'$  can now be further simplified by “removing” one of  $v$  or  $w$  resulting in the phylogenetic and lca-REL tree  $T$ .

trace left justifying their existence [18]. By similar reasoning, LCA vertices should represent ancestral relationships evidenced by a clear phylogenetic signal in the data. Vertices that are not LCAs of any subset of taxa of the underlying data, i.e., the leaves in  $G$ , lack direct relevance to the observed ancestral relationships; see, for example, vertex  $u$  or  $u'$  in the network  $N$  in Figure 1. Consequently, non-LCA vertices may lack clear interpretation and could be considered less significant or redundant in an evolutionary context. Therefore, simplifying a DAG by “removal” of non-LCA vertices resulting in a DAG in which each vertex is a (unique) LCA of at least some leaves is a natural next step. We demonstrate that this transformation can be performed efficiently while preserving the structural integrity of the original DAG. The central questions considered here are as follows:

1. Is a given vertex a (unique) LCA of a specific, known subset  $A \subseteq L(G)$ ?
2. Is a given vertex a (unique) LCA of some unknown subset  $A \subseteq L(G)$ , possibly with a prescribed size  $|A|$ ?
3. Can one characterize and recognize DAGs  $G$  in which every vertex is a (unique) LCA of some subset of  $L(G)$ ?
4. Is it possible to efficiently remove all vertices from a DAG  $G$  that do not satisfy (1) or (2) and thus, to simplify  $G$  to a DAG in which each vertex is a (unique) LCA of some subset of  $L(G)$  while preserving as many structural features of  $G$  as possible?

We will address these problems from different perspectives. Numerous results have been established for Question 1 and 2 for the case  $|A| = 2$  [3–5, 8, 15, 16, 28, 29, 34, 37], or when assuming that  $A = C_G(v)$  for a given vertex  $v$  [35].

This paper is organized as follows. We start with introducing the basic definitions needed in Section 2. In Section 3, we define the notions of lca-REL and LCA-REL DAGs, as well as  $k$ -lca and  $k$ -LCA vertices. In short, a vertex  $v$  is a  $k$ -LCA (resp.,  $k$ -lca) in  $G$  if there exists a subset  $A \subseteq L(G)$  of size  $|A| = k$  such that  $v$  is a LCA (resp., unique LCA) of the vertices in  $A$ . As we will see, a vertex  $v$  is a  $k$ -LCA vertex (resp.,  $k$ -lca vertex) for some  $k$  precisely if  $v$  is a LCA (resp., unique LCA) of the vertices in  $C_G(v)$  (cf. Corollary 3.6). A DAG is LCA-REL (resp., lca-REL) if each of its vertices is a LCA (resp., unique LCA) for some subset  $A$ . We then show that the set of least common ancestors of a set  $A \subseteq L(G)$  can be determined in linear time when  $|A| \in O(1)$  is constant. Additionally, we demonstrate that recognizing lca-REL and LCA-REL DAGs can be done in polynomial time.

In Section 4, we continue by characterizing lca-REL and LCA-REL DAGs. As shown in Theorem 4.4, LCA-REL DAGs are precisely those DAGs that do not contain adjacent vertices  $u$  and  $v$  with the same cluster, i.e.,  $C_G(v) = C_G(u)$ . We then provide several characterizations of lca-REL DAGs in Theorem 4.5. Among other results, lca-REL DAGs are exactly those LCA-REL DAGs with (PCC) property, meaning  $C_G(u) \subseteq C_G(v)$  if and only if  $u$  is an ancestor of  $v$  or vice versa. Moreover, we show a close connection between lca-REL DAGs and so-called regular DAGs where the latter, loosely speaking, are DAGs that are completely determined by their set of clusters. In particular, lca-REL DAGs with all shortcuts removed are regular (cf. Corollary 4.9). Novel characterizations of regular DAGs are presented in Theorem 4.10. Similar to phylogenetic trees, the number of vertices in lca-REL DAGs  $G$  is bounded above by the number of leaves, see Lemma 4.12.

Not all DAGs are lca-REL or LCA-REL. Hence, the question arises whether one can transform a given DAG  $G$  into an lca-REL or LCA-REL DAG  $H$  while preserving as much of the structure of  $G$  as possible. In Section 5, we provide an axiomatic framework for the phrase “preserving as much structure of  $G$  as possible” resulting in five axioms (S1) – (S5). These include, among other conditions, that the vertex set of  $H$  is a subset of the vertex set of  $G$ , that no new clusters are introduced and that the ancestor-relationship between the vertices in  $H$  are

consistent with those in  $G$ . To transform a given DAG into an lca-REL or LCA-REL one, we introduce a simple operator  $\ominus$  that acts on the vertices and edges of  $G$  [41]. Specifically, we denote with  $G \ominus v$  the DAG obtained from  $G$  by removing vertex  $v$  and its incident edges and connecting each parent of  $v$  with each child of  $v$ . Using this method, vertices  $v$  can be removed stepwise from  $G$ , resulting in an lca-REL or LCA-REL DAG  $H$  that satisfies the axioms (S1) – (S5). In particular, we provide conditions under which the set  $W$  of vertices such that  $G \ominus W$  is lca-REL or LCA-REL is uniquely determined and of minimum size. Furthermore, polynomial-time algorithms are given to transform any DAG into an lca-REL or LCA-REL one. The established algorithms are implemented in Python and hosted at GitHub [31].

Following [17], we discuss in Section 6 a general framework for any transformation  $\varphi(G)$  that “simplifies” a DAG  $G$ , formalized through three axioms (P1) – (P3). Given a suitable notion of restriction of DAGs, we show that the  $\ominus$ -operator can be used to derive simplifications  $\varphi(G)$  that satisfy axioms (P1) – (P3). We exemplify different types of simplification steps on a biological network with reticulation events that is based on a study of the *Viola* genus from Marcussen et al. [33].

While we have provided polynomial-time algorithms to verify whether a given DAG  $G$  is lca-REL or LCA-REL and to transform  $G$  into an lca-REL or LCA-REL DAG if it is not, an open question remains: can it be decided in polynomial-time if a vertex  $v$  is a  $k$ -lca or  $k$ -LCA vertex for a given  $k$ ? In Section 7, we show that this problem is NP-complete in general. However, it becomes polynomial-time solvable for DAGs with the (N3O) property, i.e., DAGs that do not contain three pairwise overlapping clusters. Such DAGs are of particular interest, as they include important subclasses of phylogenetic networks, such as rooted phylogenetic trees and galled-trees.

We close this paper with Section 8, where we summarize the main results and provide open problems for future work.

## 2 Basics

**Sets and Set Systems.** All sets considered here are assumed to be finite. Here,  $2^X$  denotes the powerset of a set  $X$ . For  $J \subseteq \{1, \dots, |X|\}$ , we write  $X(J) \subseteq 2^X$  for the set of all subsets  $A$  of  $X$  with  $|A| \in J$ . Two sets  $M$  and  $M'$  overlap if  $M \cap M' \notin \{\emptyset, M, M'\}$ .

A set system  $\mathcal{C}$  (on  $X$ ) is a subset  $\mathcal{C} \subseteq 2^X$ . A set system  $\mathcal{C}$  on  $X$  is *grounded* if  $\{x\} \in \mathcal{C}$  for all  $x \in X$  and  $\emptyset \notin \mathcal{C}$ , while  $\mathcal{C}$  is a *clustering system* if it is grounded and satisfies  $X \in \mathcal{C}$ . Furthermore, a set system *satisfies (N3O)* if it does not contain three distinct pairwise overlapping clusters.


**Directed Graphs, DAGs and Networks.** A *directed graph*  $G = (V, E)$  is an ordered pair consisting of a nonempty set  $V(G) := V$  of *vertices* and a set  $E(G) := E \subseteq (V \times V) \setminus \{(v, v) \mid v \in V\}$  of *edges*. For directed graphs  $G = (V_G, E_G)$  and  $H = (V_H, E_H)$ , an *isomorphism between  $G$  and  $H$*  is a bijective map  $\varphi: V_G \rightarrow V_H$  such that  $(u, v) \in E_G$  if and only if  $(\varphi(u), \varphi(v)) \in E_H$ . If such a map exist, then  $G$  and  $H$  are *isomorphic*, in symbols  $G \simeq H$ .

A  $v_1 v_n$ -*path*  $P = (V, E)$  has an ordered vertex set  $V = \{v_1, v_2, \dots, v_n\}$  and the edges in  $E$  are precisely of one of the form  $(v_i, v_{i+1})$  or  $(v_{i+1}, v_i)$ ,  $i = 1, 2, \dots, n-1$ . The *length* of  $P$  is the number  $|E| = n-1$  of its edges. A directed graph  $G$  is *connected* if there exists an  $xy$ -path between any pair of vertices  $x$  and  $y$ . If all edges in  $P$  are precisely of the form  $(v_i, v_{i+1})$  for each  $i = 1, 2, \dots, n-1$ , then  $P$  is called *directed*.

For a directed graph  $G = (V, E)$ , we define  $\text{indeg}_G(v) := |\{u \in V : (u, v) \in E\}|$  and  $\text{outdeg}_G(v) := |\{u \in V : (v, u) \in E\}|$  for each  $v \in V$  as the *in-degree* respectively *out-degree* of  $v$  in  $G$ . A directed graph  $G$  is *phylogenetic*, if it does not contain a vertex  $v$  with  $\text{outdeg}_G(v) = 1$  and  $\text{indeg}_G(v) \leq 1$ .

A directed graph  $G$  is *acyclic* if there exist no *directed cycle*, that is, no sequence of  $k \geq 2$  distinct vertices  $v_1, v_2, \dots, v_k \in V$  such that  $(v_1, v_2), (v_2, v_3), \dots, (v_{k-1}, v_k), (v_k, v_1) \in E$ . A directed acyclic graph is called *DAG*. An edge  $e = (u, w)$  in a DAG  $G$  is a *shortcut* if there is a directed  $uw$ -path that does not contain the edge  $e$  [10, 32]. A DAG without shortcuts is *shortcut-free*.

Let  $G$  be a DAG with an associated partial order  $\preceq_G$  on its vertex set  $V(G)$  defined by  $v \preceq_G w$  if and only if there is a directed path (possibly of length zero) from  $w$  to  $v$ . In this case, we say that  $w$  is an ancestor of  $v$  and  $v$  is a descendant of  $w$ . If  $v \preceq_G w$  and  $v \neq w$ , we write  $v \prec_G w$ . Two vertices  $u, v \in V(G)$  are  $\preceq_G$ -*incomparable* if neither  $u \preceq_G v$  nor  $v \preceq_G u$  is true. We denote by  $L(G) \subseteq V(G)$  the  $\preceq_G$ -minimal vertices of  $G$  and we call  $x \in L(G)$  a leaf of  $G$ . Note that  $\text{outdeg}_G(x) = 0$  for all  $x \in L(G)$ . It easy to verify that  $\preceq_G$ -minimal vertices must exist in any DAG  $G$ : take a longest directed  $uv$ -path  $P$  in  $G$ , i.e.,  $P$  has a maximum number of edges among all paths in  $G$ . In this case  $v$  must be a leaf as, otherwise, there is an edge  $(v, w)$  such that either  $w \notin P$  in which case  $P$  was not a longest directed path or  $w \in P$  in which case  $G$  contains a cycle; both cases leading to a contradiction. Thus,  $L(G) \neq \emptyset$  for all DAGs  $G$ . A vertex of  $G$  that is not contained in  $L(G)$  is called an *inner vertex*. Moreover, if  $(u, v)$  is an edge of  $G$ , then  $u$  is a *parent* of  $v$ , while  $v$  is a *child* of  $u$ . We let  $\text{child}_G(v)$  denote the set of all children of a vertex  $v$ .

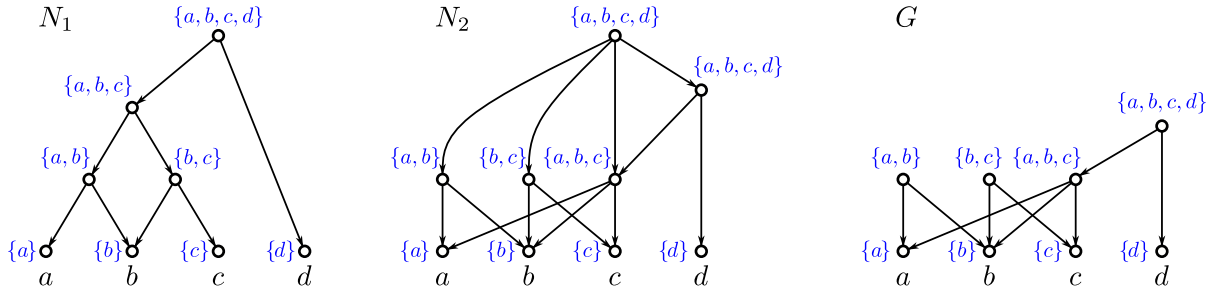

**Figure 2:** Shown are two phylogenetic networks  $N_1$  and  $N_2$  and a phylogenetic DAG  $G$  such that  $\mathfrak{C}_{N_1} = \mathfrak{C}_{N_2} = \mathfrak{C}_G$ . The clusters  $\mathfrak{C}(v)$  are drawn next to each individual vertex  $v$  and highlighted by blue text. Out of the shown DAGs, only  $N_1$  satisfies (PCC), is regular and has the strong-(CL) property (i.e.,  $v = \text{lca}_{N_1}(\mathfrak{C}_{N_1}(v))$  for all  $v$  in  $N_1$ ; cf. Def. 4.1). Moreover, only  $N_1$  is lca-REL and LCA-REL (cf. Def. 3.7). Here,  $G$  is LCA-REL but  $N_2$  is not.

If  $L(G) = X$ , then  $G$  is a DAG on  $X$ . A vertex  $v \in V(G)$  of a DAG  $G$  that is  $\preceq_G$ -maximal is called a *root* and the set of roots of  $G$  is denoted by  $R(G)$ . Note that  $\text{indeg}_G(r) = 0$  for all  $r \in R(G)$ . By similar arguments as for leaves,  $R(G) \neq \emptyset$  for all DAGs  $G$ . For every  $v \in V(G)$  in a DAG  $G$ , the set of its descendant leaves

$$\mathfrak{C}_G(v) := \{x \in L(G) \mid x \preceq_G v\}$$

is a *cluster* of  $G$ . We write  $\mathfrak{C}_G := \{\mathfrak{C}_G(v) \mid v \in V(G)\}$  for the set of all clusters in  $G$ . By construction,  $\mathfrak{C}_G(x) = \{x\}$  for all  $x \in L(G)$ . Moreover, for all  $v \in V(G)$ , there are vertices  $x$  with  $x \preceq_G v$  that are  $\preceq_G$ -minimal and, thus contained in  $L(G)$ . Hence,  $\mathfrak{C}_G(v) \neq \emptyset$  for all  $v \in V(G)$ , in particular  $\emptyset \notin \mathfrak{C}_G$  holds. Therefore,  $\mathfrak{C}_G$  is a grounded set system on  $L(G)$  for every DAG  $G$ . For later reference we provide

**Lemma 2.1** ([41, L 2.4]). *For all DAGs  $G$  and all  $u, v \in V(G)$  it holds that  $u \preceq_G v$  implies  $\mathfrak{C}_G(u) \subseteq \mathfrak{C}_G(v)$ .*

The converse of Lemma 2.1 is, in general, not satisfied. By way of example, consider the DAG  $G$  in Figure 2, where the three roots  $r_1, r_2$  and  $r_3$ , read from left to right, are pairwise  $\preceq_G$ -incomparable but satisfy  $\mathfrak{C}_G(r_1), \mathfrak{C}_G(r_2) \subsetneq \mathfrak{C}_G(r_3)$ .

The following simple result shows that the cluster associated with a vertex can be expressed as the union of the clusters associated to its children.

**Lemma 2.2.** *Let  $G = (V, E)$  be a DAG on  $X$  and  $A \subseteq X$  nonempty. For all inner vertices  $v \in V$ , it holds that*

$$\mathfrak{C}_G(v) = \bigcup_{u \in \text{child}_G(v)} \mathfrak{C}_G(u) \quad \text{and} \quad A \setminus \mathfrak{C}_G(v) = \bigcap_{u \in \text{child}_G(v)} (A \setminus \mathfrak{C}_G(u)).$$

*Proof.* Let  $v$  be an inner vertex of  $G$ . Lemma 2.1 implies that  $\bigcup_{u \in \text{child}_G(v)} \mathfrak{C}_G(u) \subseteq \mathfrak{C}_G(v)$ . Now, let  $x \in \mathfrak{C}_G(v)$ . Since  $x \prec v$ , there is a directed path from  $v$  to  $x$  and consequently a child  $u$  of  $v$  with  $x \preceq u$  and thus,  $x \in \mathfrak{C}_G(u)$ . Hence,  $\mathfrak{C}_G(v) = \bigcup_{u \in \text{child}_G(v)} \mathfrak{C}_G(u)$ . Therefore,  $A \setminus \mathfrak{C}_G(v) = A \setminus (\bigcup_{u \in \text{child}_G(v)} \mathfrak{C}_G(u)) = \bigcap_{u \in \text{child}_G(v)} (A \setminus \mathfrak{C}_G(u))$ .  $\square$

A (*rooted*) *network*  $N$  is a DAG for which  $|R(N)| = 1$ , i.e.,  $N$  has a unique root  $\rho \in V(N)$ . In a network  $N$ , we have  $v \preceq_N \rho$  for all  $v \in V(N)$  and, thus, in particular,  $\mathfrak{C}_N(\rho) = X$ , i.e.,  $X \in \mathfrak{C}_N$ . Hence,  $\mathfrak{C}_N$  is a clustering system (cf. [20, Lemma 14]). The converse, however, is in general not satisfied, see Figure 2 for an example where  $G$  is not a network but  $\mathfrak{C}_G$  is a clustering system. A network  $N$  is a *tree*, if there is no vertex  $v$  with  $\text{indeg}(v) > 1$ .

Lemma 2.1 shows that if two vertices are  $\preceq_G$ -comparable, then their respective clusters are comparable with respect to inclusion. The following property ensures the converse, namely,  $\preceq_G$ -comparability of vertices  $u$  and  $v$  based on subset-relations between the underlying clusters  $\mathfrak{C}_G(u)$  and  $\mathfrak{C}_G(v)$ .

**Definition 2.3.** *A DAG  $G$  has the path-cluster-comparability (PCC) property if it satisfies, for all  $u, v \in V(G)$ :  $u$  and  $v$  are  $\preceq_G$ -comparable if and only if  $\mathfrak{C}_G(u) \subseteq \mathfrak{C}_G(v)$  or  $\mathfrak{C}_G(v) \subseteq \mathfrak{C}_G(u)$ .*

By [20, Lemma 24], for every clustering system  $\mathfrak{C}$  there is a network  $N$  with  $\mathfrak{C}_N = \mathfrak{C}$  that satisfies (PCC). This result builds on the concepts of Hasse diagrams and regular networks. Before delving into the properties of these specific types of DAGs, we first demonstrate that the  $\preceq_G$ -ancestor relationship and, consequently (PCC), is preserved under the removal of shortcuts.

**Definition 2.4.** *We denote with  $G^-$  the DAG obtained from the DAG  $G$  by removal of all shortcuts.*

**Lemma 2.5.** *Let  $G = (V, E)$  be a DAG on  $X$  with  $\ell > 0$  shortcuts and let  $e$  be a shortcut in  $G$ . Then,  $G' := (V, E \setminus \{e\})$  is a DAG on  $X$  with  $\ell - 1$  shortcuts. In particular,  $G^-$  is uniquely determined for all DAGs  $G$ . Moreover, for all  $u, v \in V$ , it holds that  $u \prec_G v$  if and only if  $u \prec_{G'} v$  and, for all  $v \in V$ , it holds that  $\mathfrak{C}_G(v) = \mathfrak{C}_{G'}(v)$ . Furthermore,  $G$  satisfies (PCC) if and only if  $G'$  satisfies (PCC).*

*Proof.* Let  $G = (V, E)$  be a DAG on  $X$  with  $\ell > 0$  shortcuts and let  $e$  be a shortcut in  $G$ . Put  $G' := (V, E \setminus \{e\})$ . Reusing exactly the same argument as used in the proof of [20, Lem. 1], where an analogous result was provided for networks, shows that  $G'$  is a DAG on  $X$  such that, for all  $u, v \in V$ , it holds that  $v \prec_G u$  if and only if  $v \prec_{G'} u$  and, for all  $v \in V$ , it holds that  $C_G(v) = C_{G'}(v)$ . Since  $e = (a, b)$  is a shortcut, there is a directed  $ab$ -path  $P_{ab}$  that does not contain  $e$ . Consider now an arbitrary edge  $f = (u, v) \neq e$  of  $G$ . If  $f$  is a shortcut of  $G$ , there is a directed  $uv$ -path  $P_{uv}$  in  $G$  that does not contain  $f$ . There are two cases:  $e$  is not an edge in  $P_{uv}$ , or it is. In the first case put  $P := P_{uv}$ . In the latter case, replace the edge  $e$  in  $P_{uv}$  by the path  $P_{ab}$  and denote the resulting subgraph by  $P$ . Since  $G$  is a DAG, the edge  $f$  is not contained in  $P_{ab}$  and thus  $P$  is a directed path that does not contain  $f$ . Clearly,  $P$  remains a directed  $uv$ -path in  $G'$  that does not contain  $f$ , so  $f$  is a shortcut of  $G'$ . If, instead,  $f$  is not a shortcut of  $G$ , then any  $uv$ -path in  $G$  must coincide with the edge  $f$ . Clearly, any  $uv$ -path must coincide with the edge  $f$  in  $G'$ . In summary, an edge distinct from  $e$  is a shortcut of  $G$  if and only if it is a shortcut of  $G'$ . Consequently,  $G'$  has  $\ell - 1$  shortcuts. The latter arguments directly imply that  $G^-$  is uniquely determined.

Finally, suppose that  $G$  satisfies (PCC). Hence,  $C_G(u) \subseteq C_G(v)$  precisely if  $u$  and  $v$  are  $\prec_G$ -comparable. Since  $v \prec_G u$  if and only if  $v \prec_{G'} u$  for all  $u, v \in V$  and  $C_G(w) = C_{G'}(w)$  for all  $w \in V$ , it immediately follows that  $G'$  satisfies (PCC). By similar arguments, if  $G'$  satisfies (PCC), then  $G$  satisfies (PCC).  $\square$

**Hasse Diagrams and Regular DAGs.** The *Hasse diagram*  $\mathcal{H}(\mathcal{C})$  of a set system  $\mathcal{C} \subseteq 2^X$  is the DAG with vertex set  $\mathcal{C}$  and directed edges from  $A \in \mathcal{C}$  to  $B \in \mathcal{C}$  if (i)  $B \subsetneq A$  and (ii) there is no  $C \in \mathcal{C}$  with  $B \subsetneq C \subsetneq A$ . We note that  $\mathcal{H}(\mathcal{C})$  is also known as the *cover digraph* of  $\mathcal{C}$  [2]. The Hasse diagram  $\mathcal{H}(\mathcal{C})$  is not necessarily phylogenetic. By way of example, for  $\mathcal{C} = \{\{x, y\}, \{x\}\}$ ,  $\mathcal{H}(\mathcal{C})$  is a non-phylogenetic network since its unique root  $\{x, y\}$  has out-degree 1 and in-degree 0. Nevertheless, if  $\mathcal{C}$  is a grounded set system, then the underlying Hasse diagram is phylogenetic, as we will show in Lemma 4.7.

In general, we are interested in DAGs  $G$  with certain properties and that satisfy  $\mathcal{C}_G = \mathcal{C}$  for a given grounded set system  $\mathcal{C}$ . Structural properties of  $\mathcal{H}(\mathcal{C})$  are, in this context, often helpful. However,  $\mathcal{C}_{\mathcal{H}(\mathcal{C})} \neq \mathcal{C}$  holds as the leaves of  $\mathcal{H}(\mathcal{C})$  are labeled with the inclusion-minimal elements in  $\mathcal{C}$ , i.e., as sets. To circumvent this, we write

$$G \doteq \mathcal{H}(\mathcal{C})$$

for the directed graph that is obtained from  $\mathcal{H}(\mathcal{C})$  by relabeling all vertices  $\{x\}$  in  $\mathcal{H}(\mathcal{C})$  by  $x$ . Thus, for  $G \doteq \mathcal{H}(\mathcal{C})$  it holds that  $\mathcal{C}_G = \mathcal{C}$  provided that  $\mathcal{C}$  is a grounded set system on  $X$ .

**Definition 2.6** ([2]). *A DAG  $G = (V, E)$  is regular if the map  $\varphi: V \rightarrow V(\mathcal{H}(\mathcal{C}_G))$  defined by  $v \mapsto C_G(v)$  is an isomorphism between  $G$  and  $\mathcal{H}(\mathcal{C}_G)$ .*

We emphasize that not every DAG  $G \doteq \mathcal{H}(\mathcal{C})$  is regular. By way of example, consider the set system  $\mathcal{C} = \{\{x\}, \{x, y\}\}$  where  $G \doteq \mathcal{H}(\mathcal{C})$  consists of a single edge and where each  $v \in V(G)$  satisfies  $C_G(v) = \{x\}$ , i.e.,  $\varphi: G \rightarrow V(\mathcal{H}(\mathcal{C}_G))$  via  $v \mapsto C_G(v)$  will map both of the vertices of  $G$  to  $\{x\}$  and thus, does not yield an isomorphism between  $G$  and  $\mathcal{H}(\mathcal{C})$ . However, as we will see in Lemma 4.7,  $\mathcal{H}(\mathcal{C})$  is regular whenever  $\mathcal{C}$  is grounded.

### 3 Least Common Ancestors and lca- & LCA-Relevant DAGs


For a given a DAG  $G$  and a subset  $A \subseteq L(G)$ , a vertex  $v \in V(G)$  is a *common ancestor* of  $A$  if  $v$  is ancestor of every vertex in  $A$ . Moreover,  $v$  is a *least common ancestor* (LCA) of  $A$  if  $v$  is a  $\preceq_G$ -minimal vertex that is an ancestor of all vertices in  $A$ . The set  $\text{LCA}_G(A)$  comprises all LCAs of  $A$  in  $G$ . In general, not every set  $A \subseteq L(G)$  has a least common ancestor in a DAG: consider the DAG with three leaves  $\{x, y, z\}$  and two  $\prec_G$ -maximal vertices  $p, q$  such that  $C_G(p) = \{x, y\}$  respectively  $C_G(q) = \{x, z\}$ , in which case  $x$  and  $y$  have no common ancestor at all and, therefore,  $\text{LCA}_G(\{y, z\}) = \emptyset$ . In a network  $N$ , the unique root is a common ancestor for all  $A \subseteq L(N)$  and, therefore,  $\text{LCA}_N(A) \neq \emptyset$ . We provide now a simple characterization of vertices that belong to  $\text{LCA}(A)$ .

**Lemma 3.1.** *For all DAGs  $G = (V, E)$  on  $X$ , all nonempty subsets  $A \subseteq X$  and vertices  $v \in V$  the following statements are equivalent.*

- (1)  $v \in \text{LCA}_G(A)$ .
- (2)  $A \subseteq C_G(v)$  and  $A \not\subseteq C_G(u)$  for all  $u \in \text{child}_G(v)$ .
- (3)  $A \subseteq C_G(v)$  and  $A \not\subseteq C_G(u)$  for all  $u \in V$  with  $u \prec_G v$ .

*In particular, if  $v \in \text{LCA}_G(A)$  for some  $\emptyset \neq A \subseteq X$ , then  $C_G(u) \neq C_G(v)$  for all  $u \in \text{child}_G(v)$ .*

*Proof.* Let  $G$  be a DAG on  $X$  and  $A \subseteq X$  nonempty. By definition, if  $v \in \text{LCA}_G(A)$ , then  $v$  is an ancestor of every vertex in  $A$  i.e.  $A \subseteq C_G(v)$  and no descendant of  $v$  is an ancestor of every vertex in  $A$ . Hence, for all  $u \in V$

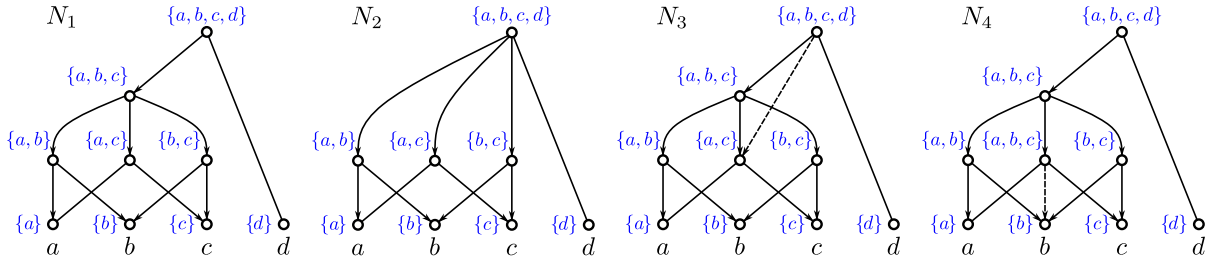

**Figure 3:** Shown are four phylogenetic networks  $N_1$ ,  $N_2$ ,  $N_3$  and  $N_4$  with the same set of leaves. Here,  $N_1$  and  $N_2 = N_1 \ominus u$  are regular networks. The networks  $N_3$  and  $N_4$  only differ from  $N_1$  by one edge each, as highlighted by dashed lines. Each inner vertex  $v$  of these networks with  $C_{N_i}(v) \neq \{a, b, c\}$  is a 2-lca-vertex. In  $N_1$ , the vertex  $u$  with cluster  $C_{N_1}(u) = \{a, b, c\}$  is not a 2-lca vertex, but a 3-lca vertex. Consequently,  $N_1$  is a  $\{1, 2, 3\}$ -lca-REL network but not  $\{1, 2\}$ -lca-REL. One may also verify that the same holds for the network  $N_3$  but that  $N_2$  is  $\{1, 2\}$ -lca-REL. For  $N_4$  we can apply Lemma 3.4 to the edge  $(u, u')$  connecting the vertices  $u$  and  $u'$  for which  $C_{N_4}(u) = \{a, b, c\} = C_{N_4}(u')$  holds and conclude that  $N_4$  is not LCA-REL and, therefore, not lca-REL. In particular, the vertex  $u$  in  $N_4$  is not the LCA of any subset of leaves.

with  $u \prec_G v$  at least one vertex in  $A$  is not contained in  $C_G(u)$ , which implies that  $A \not\subseteq C_G(u)$ . Hence, (1) implies (3). Trivially, (3) implies (2). Now, suppose that Statement (2) is satisfied. Since  $A$  is not empty and  $A \subseteq C_G(v)$ ,  $v$  is a common ancestor of every vertex in  $A$ . Moreover,  $A \not\subseteq C_G(u)$  for all  $u \in \text{child}_G(v)$  implies together with Lemma 2.1 that  $A \not\subseteq C_G(w)$  for all descendants  $w$  of  $v$ . Hence,  $v$  is a least common ancestor of the vertices in  $A$ , i.e.,  $v \in \text{LCA}_G(A)$ . Thus, (2) implies (1).

Suppose now that  $v \in \text{LCA}_G(A)$  for some non-empty  $A \subseteq X$ . Thus,  $A \subseteq C_G(v)$ . If  $v$  has no children, then the statement is vacuously true. Hence, assume that  $v$  is an inner vertex. By statement (2),  $A \not\subseteq C_G(u)$  and, therefore,  $C_G(u) \neq C_G(v)$  for all  $u \in \text{child}_G(v)$ .  $\square$

We will, in particular, be interested in situations where the LCA of certain sets of leaves is uniquely defined. More precisely, we are interested in DAGs where  $|\text{LCA}_G(A)| = 1$  holds for certain subsets  $A \subseteq X$ . For simplicity, we will write  $\text{lca}_G(A) = v$  in case that  $\text{LCA}_G(A) = \{v\}$  and say that  $\text{lca}_G(A)$  is *well-defined*; otherwise, we leave  $\text{lca}_G(A)$  *undefined*.

**Definition 3.2** (*k-LCA and k-lca vertices*). Let  $G$  be a DAG on  $X$ ,  $k \geq 1$  be an integer and  $v \in V(G)$ .

1. The vertex  $v$  is a *k-LCA vertex* if  $v \in \text{LCA}_G(A)$  for some subset  $A \subseteq X$  of size  $|A| = k$ .
2. The vertex  $v$  is a *k-lca vertex* if  $v = \text{lca}_G(A)$  for some subset  $A \subseteq X$  of size  $|A| = k$ .

For a subset  $\mathcal{J} \subseteq \{1, \dots, |X|\}$ , the vertex  $v$  is an  $\mathcal{J}$ -LCA vertex (resp.,  $\mathcal{J}$ -lca vertex) if it is a *k-LCA vertex* (resp., *k-lca vertex*) for some  $k \in \mathcal{J}$ .

By Lemma 3.1, a vertex  $v$  can neither be a *k-LCA* nor a *k-lca* vertex whenever  $k > |C(v)|$ . A less obvious relationship between *k-LCA* and  $\ell$ -LCA vertices (respectively *k-lca* and  $\ell$ -lca vertices) is captured by the following lemma.

**Lemma 3.3.** *If  $v$  is a  $k$ -LCA vertex of a DAG  $G$  for some  $k \geq 1$ , then  $v$  is an  $\ell$ -LCA vertex of  $G$  for all  $\ell$  with  $k \leq \ell \leq |C_G(v)|$ . If  $v$  is a  $k$ -lca vertex of a DAG  $G$  for some  $k \geq 1$ , then  $v$  is an  $\ell$ -lca vertex of  $G$  for all  $\ell$  with  $k \leq \ell \leq |C_G(v)|$ .*

*Proof.* Let  $G$  be a DAG on  $X$ . It is an easy task to verify that a vertex is a 1-lca vertex if and only if it is a leaf which, in turn, happens if and only if it is a 1-LCA vertex. Since, for a leaf  $x \in X$  we have  $C_G(x) = \{x\}$ , the two statements are trivial for the case when  $k = 1$ .

Suppose now that  $v$  is a *k-LCA* vertex of  $G$  for some  $k \geq 2$ . Hence, there is some set  $A \subseteq X$  of size  $|A| = k \geq 2$  such that  $v \in \text{LCA}_G(A)$ . By Lemma 3.1,  $A \subseteq C_G(v)$  and  $A \not\subseteq C_G(u)$  for all children  $u$  of  $v$ . Clearly, the latter property remains for all subsets  $A' \subseteq C_G(v)$  with  $A \subseteq A'$ . By Lemma 3.1,  $v \in \text{LCA}_G(A')$  for all such  $A' \subseteq C_G(v)$  with  $A \subseteq A'$ . Therefore,  $v$  is a  $\ell$ -LCA vertex of  $G$ ,  $k \leq \ell \leq |C_G(v)|$ .

Suppose now that  $v$  is a *k-lca* vertex. Hence, there is some set  $A \subseteq X$  of size  $|A| = k$  such that  $v = \text{lca}_G(A)$  and, therefore,  $\text{LCA}_G(A) = \{v\}$ . Let  $A' \subseteq X$  be such that  $A \subseteq A' \subseteq C_G(v)$ . We show that  $\text{LCA}_G(A') = \{v\}$ . Since  $A' \subseteq C_G(v)$ ,  $v$  is a common ancestor of  $A'$ . Hence, there is a vertex  $w \preceq_G v$  that is a least common ancestor of  $A'$ . Since  $A \subseteq A'$ , this vertex  $w$  is also a common ancestor of  $A$ . But this implies that  $w \prec_G v$  is not possible since  $v = \text{lca}_G(A)$ . Hence,  $w = v$  must hold, i.e.,  $v \in \text{LCA}_G(A')$ . Assume, for contradiction, that there exists some  $u \in \text{LCA}_G(A')$  such that  $u \neq v$ . Note that  $u$  and  $v$  must be  $\preceq_G$ -incomparable. Since  $A \subseteq A'$  and  $u \in \text{LCA}_G(A')$ , the vertex  $u$  is in particular a common ancestor of the vertices in  $A$ . This, together with

$\text{lca}_G(A) = v$ , means  $v \preceq_G u$ ; a contradiction. Consequently,  $\text{LCA}_G(A') = \{v\}$ . Hence,  $v = \text{lca}_G(A')$  must hold for all  $A \subseteq A' \subseteq \mathcal{C}_G(v)$ . In summary,  $v$  is a  $\ell$ -lca vertex of  $G$ ,  $k \leq \ell \leq |\mathcal{C}_G(v)|$ .  $\square$

Generally, the converse of Lemma 3.3 is not satisfied. Consider, for example, the vertex  $u$  of the network  $N_1$  that satisfies  $\mathcal{C}_{N_1}(u) = \{a, b, c\}$  in Figure 3, which is a 3-lca vertex (thus, in particular, a 3-LCA vertex), but neither a 2-lca vertex nor a 2-LCA vertex.

The following two results provide a characterization of vertices that are not  $\{1, \dots, |X|\}$ -LCA, resp., not  $\{1, \dots, |X|\}$ -lca vertices. These result will be employed in Section 5 to efficiently transform a given DAG  $G$  into a DAG  $G'$  in which all vertices are  $k$ -LCA or  $k$ -lca vertices for at least one  $k \in \{1, \dots, |X|\}$ .

**Lemma 3.4.** *For a DAG  $G$  on  $X$  and a vertex  $v \in V(G)$ , the following statements are equivalent.*

- (1)  $v$  is not a  $k$ -LCA vertex for any  $k \in \{1, \dots, |X|\}$ .
- (2) there is a child  $u$  of  $v$  in  $G$  such that  $\mathcal{C}_G(u) = \mathcal{C}_G(v)$ .
- (3)  $v \notin \text{LCA}_G(\mathcal{C}_G(v))$

*Proof.* Let  $G$  be a DAG on  $X$ ,  $v \in V(G)$  and put  $C := \mathcal{C}_G(v)$ . If  $v$  is not a  $k$ -LCA vertex for any  $k \in \{1, \dots, |X|\}$ , then in particular,  $v \notin \text{LCA}_G(C)$ . By Lemma 3.1, there must be a child  $u$  of  $v$  such that  $C \subseteq \mathcal{C}_G(u)$ . Since  $u \prec_G v$ , Lemma 2.1 implies  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v) = C$  and thus,  $\mathcal{C}_G(u) = C$ . Hence, (1) implies (2). If there is a child  $u$  of  $v$  in  $G$  such that  $\mathcal{C}_G(u) = C$ , then  $u \prec_G v$  implies that  $v \notin \text{LCA}_G(C)$ , i.e., (2) implies (3). Assume now that  $v \notin \text{LCA}_G(C)$  and put  $\ell := |C|$ . Clearly,  $v$  is not a  $k$ -LCA vertex for any  $A \subseteq X$  of size  $|A| > \ell$  as, in this case,  $A \not\subseteq C$ . Moreover, since  $v$  is not an  $\ell$ -LCA vertex, contraposition of Lemma 3.3 implies that  $v$  is not a  $k$ -lca vertex for any  $k \in \{1, \dots, \ell\}$ . Thus, (3) implies (1).  $\square$

**Lemma 3.5.** *For a DAG  $G$  on  $X$  and a vertex  $v \in V(G)$ , the following statements are equivalent.*

- (1)  $v$  is not a  $k$ -lca vertex for any  $k \in \{1, \dots, |X|\}$ .
- (2) there is a child  $u$  of  $v$  in  $G$  such that  $\mathcal{C}_G(u) = \mathcal{C}_G(v)$  or  $|\text{LCA}_G(\mathcal{C}_G(v))| \geq 2$ .
- (3)  $v \neq \text{lca}_G(\mathcal{C}_G(v))$ .

*Proof.* Let  $G$  be a DAG on  $X$ ,  $v \in V(G)$  and put  $C := \mathcal{C}_G(v)$ . We start with showing that (1) implies (2). Suppose that  $v$  is not a  $k$ -lca vertex for any  $k \in \{1, \dots, |X|\}$ , then in particular,  $v \neq \text{lca}_G(C)$ . Thus, if  $v \in \text{LCA}_G(C)$ , then  $|\text{LCA}_G(C)| \geq 2$ . If  $v \notin \text{LCA}_G(C)$ , then Lemma 3.1 implies that there must be a child  $u$  of  $v$  such that  $C \subseteq \mathcal{C}_G(u)$ . Since  $u \prec_G v$ , Lemma 2.1 implies  $\mathcal{C}_G(u) \subseteq C$  and thus,  $\mathcal{C}_G(u) = C$ . Thus, (1) implies (2). Assume now that statement (2) holds. If  $|\text{LCA}_G(C)| \geq 2$ , then in particular  $v \neq \text{lca}_G(C)$ . If there is a child  $u$  of  $v$  in  $G$  such that  $\mathcal{C}_G(u) = C$ , then Lemma 3.4 implies that  $v \notin \text{LCA}_G(C)$  and thus,  $v \neq \text{lca}_G(C)$ . Hence, (2) implies (3). Finally, suppose that  $v \neq \text{lca}_G(C)$ . Hence,  $v$  is not an  $\ell$ -lca vertex for  $\ell = |C|$ . Contraposition of Lemma 3.3 implies that  $v$  is not a  $k$ -lca vertex for any  $k \in \{1, \dots, \ell\}$ . Clearly,  $v$  is not a  $k$ -lca vertex for any  $A \subseteq X$  of size  $|A| > \ell$  as, in this case,  $A \not\subseteq C$ . Consequently, (3) implies (1).  $\square$

Lemma 3.4 and 3.5 will be useful in both Section 4 and Section 5. The contrapositive of statements (1) and (3) in these lemmas together with the fact that  $v$  can only be a  $k$ -lca or  $k$ -LCA vertex if  $k \leq |\mathcal{C}_G(v)|$  imply

**Corollary 3.6.** *Let  $G$  be a DAG on  $X$ ,  $v \in V(G)$ . Then,  $v$  is a  $k$ -LCA vertex in  $G$  for some  $k$  if and only if  $v \in \text{LCA}_G(\mathcal{C}_G(v))$ . Moreover,  $v$  is a  $k$ -lca vertex in  $G$  for some  $k$  if and only if  $v = \text{lca}_G(\mathcal{C}_G(v))$ . In both cases,  $k \leq |\mathcal{C}_G(v)|$ .*

In what follows, we consider DAGs for which each vertex  $v$  satisfies  $v \in \text{LCA}(A)$  or  $v = \text{lca}(A)$  for some set  $A$  whose size  $k = |A|$  is contained in a specified set  $\mathcal{J}$  of integers.

**Definition 3.7.** *Let  $G$  be a DAG on  $X$ ,  $v \in V(G)$  and  $\mathcal{J}$  be a set of integers.*

1.  $G$  is  $\mathcal{J}$ -lca-relevant (in short  $\mathcal{J}$ -lca-REL) if all vertices in  $V(G)$  are  $\mathcal{J}$ -lca vertices.  
DAGs that are  $\{1, 2, \dots, |X|\}$ -lca-REL are simply called lca-REL.
2.  $G$  is  $\mathcal{J}$ -LCA-relevant (in short  $\mathcal{J}$ -LCA-REL) if all vertices in  $V(G)$  are  $\mathcal{J}$ -LCA vertices.  
DAGs that are  $\{1, 2, \dots, |X|\}$ -LCA-REL are simply called LCA-REL.

Thus,  $G$  is LCA-REL if each vertex  $v$  in  $G$  is a least common ancestor for at least some set  $A \subseteq X$ . Similarly,  $G$  is lca-REL if, for all  $v \in V(G)$ , there is some set  $A \subseteq X$  such that  $v = \text{lca}_G(A)$ .

**Observation 3.8.** *Every  $\mathcal{J}$ -lca-REL DAG is lca-REL and LCA-REL. Every  $\mathcal{J}$ -LCA-REL DAG is LCA-REL.*

---

**Algorithm 1** Find\_LCA\_of\_set\_A

---

**Input:** A DAG  $G = (V, E)$  on  $X$  and a nonempty set  $A \subseteq X$

**Output:** The set  $\text{LCA}_G(A)$

- 1: **if**  $|A| = 1$  **then return**  $A$
  - 2: Compute topological order  $\ll$  on the elements in  $V$  resulting in the order  $v_1 \ll v_2 \ll \dots \ll v_n$
  - 3: Sort  $A$  w.r.t.  $\ll$
  - 4: Initialize the array  $C$  of size  $n = |V|$  whose entries are empty sets  $\triangleright C[i]$  will store  $A \setminus \mathcal{C}_G(v_i)$
  - 5: Initialize the empty set  $\text{LCA}$
  - 6: **for**  $i = n, \dots, 1$  (in this order) **do**
  - 7:   **if**  $v_i$  is a leaf of  $G$  **then**
  - 8:      $C[i] \leftarrow A \setminus \{v_i\}$ , kept sorted w.r.t.  $\ll$
  - 9:   **else**
  - 10:      $C[i] \leftarrow \bigcap_{v_j \in \text{child}_G(v_i)} C[j]$ , kept sorted w.r.t.  $\ll$
  - 11:     **if**  $C[i] = \emptyset$  and  $C[j] \neq \emptyset$  for every  $v_j \in \text{child}_G(v_i)$  **then** Add  $v_i$  to  $\text{LCA}$
  - 12: **return**  $\text{LCA}$
- 

There are DAGs and even networks that are not  $\mathcal{J}$ -lca-REL for any  $\mathcal{J} \subseteq \{1, \dots, |X|\}$ , see the network  $N_4$  in Figure 3. In contrast, for every set  $\mathcal{J} \subseteq \{1, \dots, n\}$  with  $1 \in \mathcal{J}$ , there is an  $\mathcal{J}$ -lca-REL DAG  $G$ . To see this, let  $\mathcal{J} = \{i_1, \dots, i_\ell\}$  with  $1 = i_1 < i_2 < \dots < i_\ell$  and take the Hasse diagram of the clustering system  $\{\{j\} \mid 1 \leq j \leq i_\ell\} \cup \{\{1, \dots, j\} \mid j \in \{i_2, \dots, i_\ell\}\}$  which is  $\mathcal{J}$ -lca-REL.

The requirement that  $1 \in \mathcal{J}$  is indispensable for  $\mathcal{J}$ -lca-REL DAGs. To see this, observe that every leaf  $x \in L(G)$  of a DAG  $G$  satisfies  $\text{LCA}_G(\{x\}) = \{x\}$  and that  $x$  cannot be an ancestor of any vertex  $y \neq x$ . Hence, a leaf  $x \in L(G)$  is always a 1-lca vertex but never a  $k$ -lca vertex for  $k > 1$ . Since  $L(G) \neq \emptyset$  for all DAGs  $G$ , every DAG contains at least one 1-lca vertex and thus, at least one 1-LCA vertex. Hence, if *all* vertices are  $\mathcal{J}$ -LCA or  $\mathcal{J}$ -lca vertices, then  $1 \in \mathcal{J}$  must hold. The latter is captured by the following

**Definition 3.9.** For any DAG  $G$  considered here, the set  $\mathcal{J}^1$  denotes a subset of  $\{1, \dots, |L(G)|\}$  that satisfies  $1 \in \mathcal{J}^1$ .

A useful structural property of LCA-REL and lca-REL DAGs is provided next.

**Lemma 3.10.** An LCA-REL or lca-REL DAG does not contain vertices  $w$  with  $\text{outdeg}_G(w) = 1$  and is, thus, phylogenetic.

*Proof.* Let  $G$  be an LCA-REL DAG. Contraposition of Lemma 3.4 shows that  $G$  cannot contain vertices  $w$  that have a child  $u$  such that  $\mathcal{C}_G(w) = \mathcal{C}_G(u)$ . Hence,  $G$  can, in particular, not have any vertex with a single child, i.e.,  $\text{outdeg}_G(w) \neq 1$  for all  $w \in V(G)$ . Thus,  $G$  is phylogenetic. Since every lca-REL DAG is, in particular, LCA-REL the statement holds for lca-REL DAGs as well.  $\square$

We finally show that the set  $\text{LCA}_G(A)$  in a DAG  $G = (V, E)$  can be determined in  $O((|V| + |E|)|A|)$  time. Assuming that the size of  $A$  is treated as constant, i.e.,  $|A| \in O(1)$ , this result implies that  $\text{LCA}_G(A)$  can be determined in linear time. To achieve this goal, we use a *topological order*  $\ll$  on  $V$ , i.e., a total order on the vertices in  $G$  such that  $(u, v) \in E$  implies  $v \ll u$ . Since we consider DAGs, such an order always exists [7]. The pseudocode of the underlying algorithm is provided in Algorithm 1. The main idea of this algorithm is as follows: we determine the set  $A \setminus \mathcal{C}_G(v_i)$ , which is stored in  $C[i]$ , for each  $v_i \in V$ . We then employ Lemma 3.1 which states that  $v_i \in \text{LCA}_G(A)$  if and only if  $A \subseteq \mathcal{C}_G(v_i)$  and  $A \not\subseteq \mathcal{C}_G(v_j)$  for all  $v_j \in \text{child}_G(v_i)$  which, in turn, is precisely if  $C[i] = \emptyset$  and  $C[j] \neq \emptyset$  for all  $j$  such that  $v_j \in \text{child}_G(v_i)$  (see Line 11 in Algorithm 1).

**Proposition 3.11.** For a given DAG  $G = (V, E)$  on  $X$  and a non-empty set  $A \subseteq X$ , Algorithm 1 correctly determines  $\text{LCA}_G(A)$ . Moreover, Algorithm 1 can be implemented to run in  $O((|V| + |E|)|A|)$  time.

*Proof.* Let the DAG  $G = (V, E)$  on  $X$  and the non-empty set  $A \subseteq X$  serve as an input for Algorithm 1. For simplicity, put  $\text{LCA}(\cdot) := \text{LCA}_G(\cdot)$ . We start with proving the correctness of Algorithm 1. In Line 1, we first check if  $|A| = 1$  and, in the affirmative case,  $\text{LCA}(A) = A$  must hold and the algorithm correctly returns  $A$ . Otherwise, if  $|A| > 1$ , the algorithm continues as follows. In Line 2, the vertices in  $V$  are topologically ordered resulting in  $v_1 \ll v_2 \ll \dots \ll v_n$ , where  $n := |V|$ . Sorting  $A$  in Line 3 and maintaining sorted elements in Lines 8 and 10 are primarily used to establish the runtime but do not influence the correctness proof. Thus, we can treat the set  $A$  and the array  $C$  as unordered for now. The array  $C$  and the empty set  $\text{LCA}$  is initialized in Line 4 and 5, respectively. The entry  $C[i]$  will store the elements of  $A \setminus \mathcal{C}_G(v_i)$ . The main idea of this algorithm is based on Lemma 3.1 which states that  $v_i \in \text{LCA}(A)$  precisely if  $A \subseteq \mathcal{C}_G(v_i)$  and  $A \not\subseteq \mathcal{C}_G(v_j)$  for all  $v_j \in \text{child}_G(v_i)$ . The latter is precisely if  $C[i] = \emptyset$  and  $C[j] \neq \emptyset$  for all  $j$  that correspond to indices of the



children  $v_j$  of  $v_i$ . It thus suffices to show that  $C[i]$  is correctly determined for all  $i \in \{1, \dots, n\}$ . In the *for*-loop in Line 6 the vertices are processed in the order  $v_n, v_{n-1}, \dots, v_1$ . Based on the topological order, this ensures that, whenever  $v_i$  is processed, all its descendants have been processed as they must be located in  $v_{i+1}, \dots, v_n$ . If  $v_i$  is a leaf of  $G$ , then  $\mathcal{C}_G(v_i) = \{v_i\}$  holds. Hence,  $C[i] = A \setminus \mathcal{C}_G(v_i) = A \setminus \{v_i\}$  is correctly determined in Line 8. Otherwise, i.e. if  $v_i$  is an inner vertex, then we put  $C[i] = \bigcap_{v_j \in \text{child}_G(v_i)} C[j]$  in Line 10. By the latter arguments and induction, for each such  $v_j$  the set  $C[j]$  has already been correctly determined. This and Lemma 2.2 implies that  $C[i] = \bigcap_{v_j \in \text{child}_G(v_i)} A \setminus \mathcal{C}_G(v_j) = A \setminus \mathcal{C}_G(v_i)$  is correctly determined. In Line 11, we simply verify if the conditions of Lemma 3.1 are satisfied and, in the affirmative case,  $v_i$  is correctly added to LCA. In summary,  $\text{LCA}(A)$  is correctly determined.

Let us now consider the runtime of Algorithm 1. To this end, we assume that  $n = |V|$ ,  $m = |E|$  and  $k = |A|$ . Line 1 takes constant time. Determining the topological order  $\ll$  of  $V$  can be done in  $O(n+m)$  time and sorting  $A$  in Line 3 can be done in  $O(k \log k)$  time [7]. The tasks in Line 4-5 can be accomplished in  $O(n)$  time. We may assume that the DAG  $G$  is represented as an adjacency list  $L$ . In this case, we can traverse all entries of  $L$  and check whether the entry  $L[v_i]$  is empty (resp. non-empty) in which case  $v_i$  is a leaf (resp. inner vertex). As a pre-processing step this takes  $O(n)$  time and we can, afterwards, check in constant time as whether  $v_i$  is a leaf or not. Thus, the *if*-condition in Line 7 can be evaluated in constant time. In Line 8, we can traverse the sorted set  $A$ , adding all elements except  $v_i$  to the ordered set  $C[i]$  in  $O(k)$  time, keeping the order of the elements. Since this is repeated for the  $|X|$  leaves of  $G$ , Line 8 contributes with  $O(k|X|)$  over all iterations. In Line 10, we compute the intersection of ordered sets and keep the order. The intersection of two sorted sets  $S$  and  $S'$  resulting in a sorted set can be done in  $O(|S| + |S'|)$  time [1]. Each set  $C[j]$  has  $O(k)$  elements, as they are subsets of  $A$ . Thus, computing the  $\ll$ -sorted set  $C[i]$  as the intersection  $\bigcap_{v_j \in \text{child}_G(v_i)} C[j]$  can be done  $O(|\text{child}_G(v_i)|k)$  time. As the latter task is repeated for all inner vertices of  $G$ , the total runtime, for Line 10 is  $O(\sum_{i=1}^n (|\text{child}_G(v_i)|k)) = O(mk)$  time. In Line 11, we simply make  $|\text{child}_G(v_i)| + 1$  constant time look-ups in the array  $C$  to determine whether the ordered sets are empty or not. Once again summing over all inner vertices, this contributes with  $O(m)$  to the total runtime.

In summary, the total runtime of Algorithm 1 is in  $O(n+m+k \log k + k|X| + mk)$  time. Since  $\log k < k \leq |X|$  and  $|X| \leq n$ , the terms  $k|X|$  and  $k \log k$  are both dominated by the term  $nk$ . Thus, the total runtime simplifies to  $O(nk + mk)$ .  $\square$

Since  $\text{LCA}_G(A)$  can be determined for  $G = (V, E)$  in  $O((|V| + |E|)|A|)$  time and since  $|\text{LCA}_G(A)| \in O(|V(G)|)$ , the additional costs for checking if  $v \in \text{LCA}_G(A)$  or  $v = \text{lca}_G(A)$  add  $O(|V|)$  to the cost of computing  $\text{LCA}_G(A)$ . Moreover, by Corollary 3.6, a DAG is LCA-REL, resp., lca-REL if and only if, for all of its vertices  $v$ , it holds that  $v \in \text{LCA}_G(\mathcal{C}_G(v))$ , resp.,  $v = \text{lca}_G(\mathcal{C}_G(v))$ . Summarizing the latter arguments, we obtain

**Corollary 3.12.** *For a given DAG  $G = (V, E)$  on  $X$ , a non-empty set  $A \subseteq X$  and a vertex  $v \in V$ , it can be determined in  $O((|V| + |E|)|A|)$  time if  $v \in \text{LCA}_G(A)$  and if  $v = \text{lca}_G(A)$ . Moreover, it can be decided in polynomial time if  $G$  is LCA-REL (resp., lca-REL) or not.*

## 4 Characterization of lca- & LCA-Relevant DAGs and Regular DAGs

By Corollary 3.6, every  $k$ -lca vertex  $v$  and therefore, every vertex  $v$  in an  $\mathcal{J}^1$ -lca-REL DAG, satisfies  $v = \text{lca}_G(\mathcal{C}_G(v))$ . To cover such type of DAGs we provide


**Definition 4.1.** *A DAG  $G$  satisfies the cluster-lca (CL) property if  $\text{lca}_G(\mathcal{C}_G(v))$  is well-defined for all  $v \in V(G)$ . A DAG  $G$  has the strong cluster-lca (strong-CL) property if  $v = \text{lca}_G(\mathcal{C}_G(v))$  for all  $v \in V(G)$ .*

By definition, strong-CL implies (CL). However, there are DAGs with the (CL) property but without the strong-CL property and DAGs without (CL) property, see Figure 4 for an example.

**Lemma 4.2.** *If a DAG  $G$  satisfies (PCC) then it satisfies (CL). If  $G$  satisfies (CL), then  $\text{lca}_G(\mathcal{C}_G(v)) \preceq_G v$  and  $\mathcal{C}(\text{lca}_G(\mathcal{C}_G(v))) = \mathcal{C}_G(v)$  for all  $v \in V(G)$ .*

*Proof.* We emphasize first that these results have been proven for the case that  $G$  is a network, cf. [20, L. 36 & 38]. Suppose that  $G$  is DAG on  $X$  that is not a network and thus,  $|R(G)| > 1$ . Let  $N$  be the network obtained from  $G$  by adding a new root  $\rho$  to  $G$  and edges  $(\rho, r)$  for all  $r \in R(G)$ . By construction  $V(G) = V(N) \setminus \{\rho\}$ ,  $\mathcal{C}_N(\rho) = X$  and  $\mathcal{C}_N(v) = \mathcal{C}_G(v)$  for all  $v \in V(G)$ . Assume first that  $G$  that satisfies (PCC). It is straightforward to verify that  $N$  satisfies (PCC). Therefore,  $N$  satisfies (CL). One easily observes that, for all  $v \in V(G)$ , we have  $\text{lca}_N(\mathcal{C}_N(v)) = \text{lca}_G(\mathcal{C}_G(v))$ . Since  $N$  satisfies (CL),  $G$  satisfies (CL). Moreover, since the statements are true for  $N$  and since  $\text{lca}_N(\mathcal{C}_N(v)) = \text{lca}_G(\mathcal{C}_G(v))$ , we can conclude that the second statement is satisfied for the DAG  $G$ .  $\square$

We provide now a simple characterization of DAGs with (CL) property.

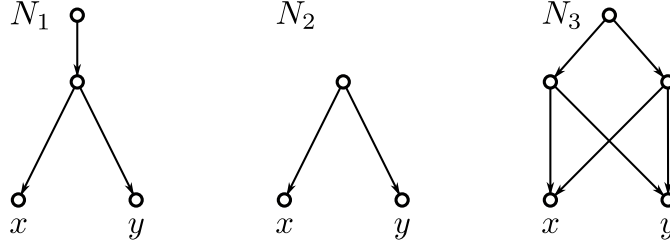

**Figure 4:** Shown are three networks  $N_1$ ,  $N_2$  and  $N_3$  having the same clustering system  $\mathcal{C} = \{\{x\}, \{y\}, \{x, y\}\}$ . The network  $N_1$  has the (CL) but not the strong-(CL) property. The network  $N_2$  has the strong-(CL) and, thus, also the (CL) property. The network  $N_3$  has neither the strong-(CL) nor the (CL) property.

**Proposition 4.3.** A DAG  $G = (V, E)$  has the (CL) property if and only if, for every vertex  $v \in V$ ,  $v = \text{lca}_G(\mathcal{C}_G(v))$  or  $v$  has a child  $u$  such that  $\mathcal{C}_G(v) = \mathcal{C}_G(u)$ .

*Proof.* Let  $G = (V, E)$  be DAG and  $v \in V$ . Suppose that  $G$  has the (CL) property. If  $v = \text{lca}_G(\mathcal{C}_G(v))$ , then we are done. Hence, assume that  $v \neq \text{lca}_G(\mathcal{C}_G(v))$ . Then, Lemma 3.5 implies that there either is a child  $u$  of  $v$  in  $G$  with  $\mathcal{C}_G(v) = \mathcal{C}_G(u)$ , or  $|\text{LCA}_G(\mathcal{C}_G(v))| \geq 2$ . However, the latter cannot hold since  $G$  has the (CL) property, which establishes the *only if*-direction.

Conversely, assume that every vertex  $v \in V$  satisfies: (a)  $v = \text{lca}_G(\mathcal{C}_G(v))$  or (b)  $v$  has a child  $u$  such that  $\mathcal{C}_G(v) = \mathcal{C}_G(u)$ . If  $v = \text{lca}_G(\mathcal{C}_G(v))$ , then  $\text{lca}_G(\mathcal{C}_G(v))$  is well-defined. Suppose that  $v$  has a child  $u$  such that  $\mathcal{C}_G(v) = \mathcal{C}_G(u)$ . We can now take a  $\preceq_G$ -minimal vertex  $w$  that satisfies  $w \preceq_G u$  and  $\mathcal{C}_G(w) = \mathcal{C}_G(v)$ . If  $w$  is a leaf, then  $\mathcal{C}_G(w) = \{w\}$  and we have  $w = \text{lca}_G(\mathcal{C}_G(w))$  which implies that  $\text{lca}_G(\mathcal{C}_G(w)) = \text{lca}_G(\mathcal{C}_G(v))$  is well-defined. Otherwise,  $w$  is an inner vertex. By choice of  $w$ , all children  $u'$  of  $w$  must satisfy  $\mathcal{C}_G(u') \neq \mathcal{C}_G(w)$ , i.e.,  $w$  does not satisfy (b) and must therefore, satisfy (a) i.e. that  $w = \text{lca}_G(\mathcal{C}_G(w))$ . This together with  $\mathcal{C}_G(w) = \mathcal{C}_G(v)$  implies that  $\text{lca}_G(\mathcal{C}_G(v))$  is well-defined. In summary,  $G$  satisfies (CL).  $\square$

As we shall see later, there is a close relationship between regular DAGs, DAGs that are lca-REL and DAGs with the strong-(CL) property. Before considering lca-REL DAGs, we provide a characterization of LCA-REL DAGs that is an immediate consequence of Lemma 3.4 applied to all vertices.

**Theorem 4.4.** A DAG  $G$  is LCA-REL if and only if there are no adjacent vertices  $u$  and  $v$  in  $G$  that satisfy  $\mathcal{C}_G(u) = \mathcal{C}_G(v)$ .

The more specific property of being lca-REL imposes more structural constraints on the DAG in question which, in turn, allows us to provide the following characterization.

**Theorem 4.5.** The following statements are equivalent for every DAG  $G$ .

- (1)  $G$  is lca-REL
- (2)  $G$  has the strong-(CL) property.
- (3)  $G$  has the (CL) property and is LCA-REL.
- (4)  $G$  satisfies (PCC) and is LCA-REL.
- (5)  $G$  satisfies (PCC) and  $u \neq v$  implies  $\mathcal{C}_G(u) \neq \mathcal{C}_G(v)$  for all  $u, v \in V(G)$ .
- (6)  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v)$  if and only if  $u \preceq_G v$  for all  $u, v \in V(G)$ .

*Proof.* By Corollary 3.6, Statements (1) and (2) are equivalent. Now, assume that Statement (3) holds. Let  $v$  be a vertex of  $G$ . Corollary 3.6 together with the fact that  $v$  is a  $k$ -LCA vertex for some  $k$  implies that  $v \in \text{LCA}_G(\mathcal{C}_G(v))$ . Since  $G$  has the (CL) property, we have  $|\text{LCA}_G(\mathcal{C}_G(v))| = 1$ . The latter two arguments imply that  $v = \text{lca}_G(\mathcal{C}_G(v))$ . Since  $v$  was chosen arbitrarily,  $G$  is an lca-REL DAG, i.e., Statement (1) holds. Since the two equivalent Statements (1) and (2) together immediately imply Statement (3), we conclude that Statements (1), (2) and (3) are equivalent.

Therefore, it suffices to show that the following implications (2)  $\Rightarrow$  (4)  $\Rightarrow$  (5)  $\Rightarrow$  (6)  $\Rightarrow$  (2) hold. Assume that Condition (2) holds. Hence,  $G$  is a DAG that has the strong-(CL) property. To show (PCC), observe that, by Lemma 2.1,  $u \preceq_G v$  implies  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v)$  for all  $u, v \in V(G)$ . Suppose now that  $u, v \in V(G)$  are such that  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v)$ . Since  $G$  satisfies strong-(CL),  $u = \text{lca}_G(\mathcal{C}_G(u))$ . This together with  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v)$  and the definition of lcas implies that  $u = \text{lca}_G(\mathcal{C}_G(u)) \preceq_G v$ . Hence,  $G$  satisfies (PCC). In addition,  $G$  is LCA-REL since (2) and (3) are equivalent. In summary, (2) implies (4).

Assume that Condition (4) holds. Hence,  $G$  satisfies (PCC) and is LCA-REL. Since  $G$  satisfies (PCC), there cannot be any incomparable vertices  $u, v$  in  $G$  with  $\mathcal{C}_G(v) = \mathcal{C}_G(u)$ . Thus, any two incomparable vertices have

distinct clusters. By Theorem 4.4, no adjacent vertices  $u$  and  $v$  in  $G$  can satisfy  $\mathcal{C}_G(u) = \mathcal{C}_G(v)$ . This together with Lemma 2.1 implies that for any two vertices  $u, v$  in  $G$  with  $u \prec_G v$  it holds that  $\mathcal{C}_G(u) \subsetneq \mathcal{C}_G(v)$ . In summary,  $u \neq v$  implies  $\mathcal{C}_G(u) \neq \mathcal{C}_G(v)$  for all  $u, v \in V(G)$ . Hence, (4) implies (5).

Assume that Condition (5) holds. Hence,  $G$  is a DAG that satisfies (PCC) and where  $u \neq v$  implies  $\mathcal{C}_G(u) \neq \mathcal{C}_G(v)$  for all  $u, v \in V(G)$ . Let  $u, v \in V(G)$  be chosen arbitrarily. If  $u \preceq_G v$ , then Lemma 2.1 implies that  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v)$ . Suppose now that  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v)$ . Since  $G$  satisfies (PCC),  $u$  and  $v$  must be  $\preceq_G$ -comparable. However, the case  $v \prec_G u$  cannot occur since then  $u \neq v$  and, thus,  $\mathcal{C}_G(u) \neq \mathcal{C}_G(v)$  which together with Lemma 2.1 implies that  $\mathcal{C}_G(v) \subsetneq \mathcal{C}_G(u)$ ; a contradiction to  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v)$ . Thus,  $u \preceq_G v$  holds and (5) implies (6).

Assume that Condition (6) holds. Hence,  $G$  is a DAG such that  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v)$  if and only if  $u \preceq_G v$  for all  $u, v \in V(G)$ . Thus,  $G$  satisfies (PCC). By Lemma 4.2,  $G$  satisfies (CL). Thus,  $w = \text{lca}_G(\mathcal{C}_G(v))$  is well-defined for all  $v \in V(G)$ . Again, by Lemma 4.2,  $\mathcal{C}_G(w) = \mathcal{C}_G(v)$ . Thus, we have  $\mathcal{C}_G(w) \subseteq \mathcal{C}_G(v)$  implying  $w \preceq_G v$ . In addition,  $\mathcal{C}_G(v) \subseteq \mathcal{C}_G(w)$  implies  $v \preceq_G w$ . Consequently,  $w = v$  holds. Therefore,  $v = \text{lca}_G(\mathcal{C}_G(v))$  for all  $v \in V(G)$  and  $G$  has the strong-(CL) property. In summary, (6) implies (2), which completes this proof.  $\square$

We are now in the position to show the close connection between regular DAGs and lca-REL DAGs. Regular networks have very constrained structural properties, as characterized in [20, Thm. 2]. Here, we generalize these results to arbitrary DAGs.

**Theorem 4.6.** *The following statements are equivalent for every DAG  $G$ .*

- (1)  $G$  is regular
- (2)  $G$  does not contain vertices with out-degree 1, is shortcut-free and satisfies (PCC).

*In particular, a regular DAG is phylogenetic.*

*Proof.* If  $G$  is a network, then we can use [20, Thm. 2] which states that (1) and (2) are equivalent for networks. If  $G$  is a DAG that is not a network, then  $|R(G)| > 1$ . In this case, we can obtain a network  $N_G$  from  $G$  by adding a new root  $\rho$  to  $G$  and edges  $(\rho, r)$  for all  $r \in R(G)$ . It is now a straightforward task – which we leave to the reader – to verify that  $G$  satisfies (1) if and only if  $N_G$  does and that  $G$  satisfies (2) if and only if  $N_G$  does. Since (1) and (2) are equivalent for networks, the latter arguments show that (1) and (2) are equivalent for DAGs. In particular, since regular DAGs have no vertices of out-degree 1, they must be phylogenetic.  $\square$

We note that DAGs that are shortcut-free and satisfy (PCC) are also known as *semi-regular* [20]. The following result generalizes [20, Lemma 22] that has been established for networks.

**Lemma 4.7.** *For every set system  $\mathcal{C}$ , the Hasse diagram  $\mathcal{H}(\mathcal{C})$  is a shortcut-free DAG that satisfies (PCC). Moreover, if  $\mathcal{C}$  is grounded, then  $\mathcal{H}(\mathcal{C})$  is regular and phylogenetic. Furthermore, if  $\mathcal{C}$  is a clustering system, then  $\mathcal{H}(\mathcal{C})$  is a regular network.*

*Proof.* The first statement is a direct consequence of the definition of the Hasse diagram. Hence, to prove that  $\mathcal{H} := \mathcal{H}(\mathcal{C})$  is regular for grounded set systems  $\mathcal{C}$ , it suffices to show that  $\mathcal{H}$  has no vertex of out-degree 1 (cf. Theorem 4.6). For contradiction, assume that  $\mathcal{H}$  has a vertex  $C$  such that  $\text{outdeg}_{\mathcal{H}}(C) = 1$ . Let  $C'$  be the unique child of  $C$ . Since  $C, C' \in \mathcal{C}$  are distinct clusters with  $C' \subsetneq C$  and  $C' \neq \emptyset$ , there is some element  $x \in C \setminus C'$ . Since  $\mathcal{C}$  is grounded,  $\{x\} \in \mathcal{C}$ . But then the definition of  $\mathcal{H}$  together with  $\{x\} \subseteq C$  and  $\{x\} \not\subseteq C'$  implies  $\{x\} \prec_{\mathcal{H}} C$  while  $\{x\}$  and  $C'$  are  $\preceq_{\mathcal{H}}$ -incomparable. One easily verifies that this implies that  $C$  must have at least two children; a contradiction. Thus,  $\mathcal{H}$  is regular. By Theorem 4.6,  $\mathcal{H}$  is phylogenetic.

Finally, by definition, every clustering system  $\mathcal{C}$  on  $X$  is grounded and thus,  $\mathcal{H}(\mathcal{C})$  is regular. Since  $X$  is the unique inclusion-maximal cluster in  $\mathcal{C}$ , it follows that  $X$  is the unique root of  $\mathcal{H}(\mathcal{C})$ . Taking the latter arguments together,  $\mathcal{H}(\mathcal{C})$  is a regular network for clustering systems  $\mathcal{C}$ .  $\square$

Next, we show that, roughly speaking, DAGs with the strong-(CL) property differ from regular DAGs only by the presence of additional shortcuts.

**Theorem 4.8.** *A DAG  $G$  has the strong-(CL) property if and only if  $G$  is isomorphic to the regular DAG  $\mathcal{H}(\mathcal{C}_G)$  to which  $\ell \geq 0$  shortcuts have been added.*

*Proof.* Suppose that  $G$  is a DAG on  $X$  with the strong-(CL) property. Let  $H \doteq \mathcal{H}(\mathcal{C}_G)$  in which also every inner vertex  $C$  obtains a new label  $v$  for some  $v \in V(G)$  with  $\mathcal{C}_G(v) = C$ . By definition,  $H$  is a DAG on  $X$ . By Theorem 4.5,  $\mathcal{C}_G(u) \neq \mathcal{C}_G(v)$  for all distinct  $u, v \in V(G)$  and thus,  $v \in V(G)$  if and only if there is a unique cluster  $C \in \mathcal{C}_G$  such that  $C = \mathcal{C}_G(v)$ . Hence, the aforementioned relabeling of the inner vertex is well-defined and uniquely determined and we have, in particular,  $V(H) = V(G)$  and  $\mathcal{C}_H(v) = \mathcal{C}_G(v)$  for all  $v \in V(G)$ . Note that, since  $G$  is a DAG,  $\mathcal{C}_G$  is a grounded set system and Lemma 4.7 implies that  $\mathcal{H}(\mathcal{C}_G)$  is regular. Since  $\mathcal{H}(\mathcal{C}_G) \simeq H$ , the DAG  $H$  is regular. We show now that  $H$  is a subgraph of  $G$ . Let  $u, v \in V$  be such that  $\mathcal{C}_G(u) \subsetneq \mathcal{C}_G(v)$  and there is no cluster  $C \in \mathcal{C}_G$  such that  $\mathcal{C}_G(u) \subsetneq C \subsetneq \mathcal{C}_G(v)$ . Thus,  $u \neq v$  and Theorem 4.5 implies that  $u \prec_G v$ . Hence, there

is a directed  $vu$ -path  $P$  in  $G$ . If there would be vertex  $w$  in  $P$  such that  $u \prec_G w \prec_G v$ , then Theorem 4.5 together with  $C_G(w) \neq C_G(v)$  and  $C_G(w) \neq C_G(u)$  implies that  $C_G(u) \subsetneq C_G(w) \subsetneq C_G(v)$ ; a contradiction. Consequently,  $P$  just consists of the single edge  $(u, v) \in E(G)$ . By definition of regular DAGs these type of edges  $(u, v)$  are precisely the edges in  $H$  and, therefore,  $E(H) \subseteq E(G)$ , i.e.,  $H$  is a subgraph of  $G$  with  $V(H) = V(G)$ .

Now, let  $(u, v) = e \in E(G) \setminus E(H)$  and thus,  $v \prec_G u$ . Since  $C_G(u) \neq C_G(v)$ , Lemma 2.1 implies  $C_G(v) \subsetneq C_G(u)$ . As argued above,  $u, v \in V(G) = V(H)$  and  $C_H(v) = C_G(v)$  and  $C_H(u) = C_G(u)$ . Thus,  $C_H(v) \subsetneq C_H(u)$ . Since  $H$  is regular, Theorem 4.6 implies that  $H$  satisfies (PCC). Hence,  $u \prec_H v$  or  $v \prec_H u$  holds. However,  $u \prec_H v$  would together with Lemma 2.1 imply that  $C_H(u) \subsetneq C_H(v)$ ; a case that cannot occur. Thus, only  $v \prec_H u$  is possible. Hence, there is a directed path from  $u$  to  $v$  in  $H$ . Since  $E(H) \subseteq E(G)$ , this path exists in  $G$  and, in particular, avoids the edge  $(u, v)$ . Hence,  $(u, v)$  is a shortcut in  $G$ . As the latter arguments hold for all edges in  $E(G) \setminus E(H)$ , every edge in  $E(G) \setminus E(H)$  is a shortcut in  $G$ . Thus,  $G$  is isomorphic to the regular DAG  $H \doteq \mathcal{H}(C_G)$  to which  $\ell \geq 0$  shortcuts have been added.

Let  $H \doteq \mathcal{H}(C_G)$  and suppose now that  $G$  is isomorphic to  $H'$ , where  $H'$  is obtained from  $H$  by adding  $\ell \geq 0$  shortcuts. Since there is a bijection between  $V(G)$  and  $V(H')$ , we can w.l.o.g. assume that  $V := V(G) = V(H') = V(H)$ . This together with stepwise application of Lemma 2.5 implies that  $C_H(v) = C_G(v)$  for all  $v \in V$ . By definition of  $H$ ,  $C_H(v) \neq C_H(u)$  and, therefore,  $C_G(v) \neq C_G(u)$  for all distinct  $u, v \in V$ . In addition, Theorem 4.6 implies that  $H$  satisfies (PCC) implies that  $G$  satisfies (PCC). This allows us to apply Theorem 4.5 and to conclude that  $G$  has the strong-(CL) property.  $\square$

By Observation 3.8 every  $\mathcal{J}^1$ -lca-REL DAG is lca-REL and, by Theorem 4.5, has the strong-(CL) property. This together with Theorem 4.8 implies

**Corollary 4.9.** *Every  $\mathcal{J}^1$ -lca-REL DAG  $G$  from which all shortcuts have been removed is regular.*

The converse of Corollary 4.9 is, in general, not satisfied without specifying  $\mathcal{J}^1$ , i.e., not every regular DAG is  $\mathcal{J}^1$ -lca-REL for arbitrary  $\mathcal{J}^1$ . By way of example, the regular network  $N_1$  in Figure 3 is not  $\{1, 2\}$ -lca-REL. Nevertheless, we obtain the following new characterization of regular DAGs.

**Theorem 4.10.** *For every DAG  $G$ , the following statements are equivalent.*

- (1)  $G$  is regular.
- (2)  $G$  is shortcut-free and has the strong-(CL) property.
- (3)  $G$  is shortcut-free and lca-REL.

*Proof.* The equivalence between (1) and (2) is an immediate consequence of Theorem 4.8 and 4.6. The equivalence between (2) and (3) follows from Theorem 4.5.  $\square$

Theorem 4.10 together with Lemma 4.7 implies

**Corollary 4.11.** *For every grounded set system  $\mathcal{C}$ , there is a phylogenetic lca-REL, and thus also LCA-REL, DAG  $G$  with  $C_G = \mathcal{C}$ .*

As argued in the example succeeding Def. 2.6,  $\mathcal{H}(\mathcal{C})$  is in general not regular in case  $\mathcal{C}$  is not grounded. Moreover, for every DAG  $G$ , the set system  $C_G$  is always grounded. Consequently, the requirement that  $\mathcal{C}$  is grounded cannot be omitted in Corollary 4.11.

In phylogenetic trees, the number of inner vertices and edges is bounded from above (linearly) by the number of its leaves. In general, phylogenetic DAGs and thus, general DAGs, lack this property. For lca-REL DAGs and thus, also  $\mathcal{J}^1$ -lca-REL DAGs, we nevertheless obtain the following simple result.

**Lemma 4.12.** *The number of vertices and edges in lca-REL DAGs  $G$  is asymptotically bounded from above by the number of leaves and it holds that  $|V(G)| = |C_G|$ .*

*Proof.* Let  $G = (V, E)$  be an lca-REL DAGs  $G$  on  $X$ . Hence, by the equivalence between Statements (2) and (3) of Theorem 4.5 it holds that  $u \neq v$  implies  $C_G(u) \neq C_G(v)$ , for all  $u, v \in V(G)$ . Trivially,  $C_G(u) \neq C_G(v)$  implies  $u \neq v$ . Taken the latter two arguments together,  $|V(G)| = |C_G|$ . Clearly  $|C_G| \in O(2^{|X|})$  and, therefore, the number of vertices in  $G$  is asymptotically bounded above by the number of leaves. As the number of edges in any DAG  $G$  is always bounded from above by the number of vertices in  $G$ , the number of edges in  $G$  is asymptotically bounded above by the number of leaves.  $\square$

Lemma 4.12 cannot be extended to the case of LCA-REL DAGs. To see this, consider, for example, the DAG  $G_k$  obtained from any LCA-REL network  $N$  on  $X$  by adding  $k$  additional roots  $r_1, \dots, r_k$  connected to the leaves in  $X$  by edges  $(r_i, x)$  for each  $x \in X$  and  $1 \leq i \leq |X|$ . In this case,  $G_k$  remains LCA-REL and  $|V(G_k)| = |V(N)| + k$ . Since  $k$  does not depend on  $|X|$  and can be chosen arbitrarily, no upper bound on  $|V(G_k)|$  depending on  $|X|$  can be found.

## 5 The $\ominus$ -Operator and Computation of lca- & LCA-Relevant DAGs

Not all DAGs are  $\mathcal{J}^1$ -lca-REL or  $\mathcal{J}^1$ -LCA-REL. This raises the question of whether it is possible to “transform” a non- $\mathcal{J}^1$ -lca-REL resp., non- $\mathcal{J}^1$ -LCA-REL DAG  $G$  into an  $\mathcal{J}^1$ -lca-REL, resp.,  $\mathcal{J}^1$ -LCA-REL DAG  $H$  while preserving as many structural properties of  $G$  as possible. To clarify, we aim to maintain the following structural properties:

- (S1)  $H$  remains a DAG on  $X$  such that  $\mathcal{C}_H \subseteq \mathcal{C}_G$ , meaning no new clusters are introduced.
- (S2)  $V(H) \subseteq V(G)$ , meaning no new vertices are introduced.
- (S3)  $H$  preserves the ancestor relationship  $\prec_G$ , i.e.,  $u \prec_G w$  if and only if  $u \prec_H w$  for all  $u, w \in V(H)$ .
- (S4)  $H$  is  $\mathcal{J}^1$ -lca $_G$ -preserving, i.e.,  $\text{lca}_H(A) = \text{lca}_G(A)$  for all  $A \in X(\mathcal{J}^1)$  for which  $\text{lca}_G(A)$  is well-defined.

In case we are interested in  $\mathcal{J}^1$ -LCA-REL DAG, we strengthen (S4) to

- (S5)  $H$  is  $\mathcal{J}^1$ -LCA $_G$ -preserving, i.e.,  $\text{LCA}_H(A) = \text{LCA}_G(A)$  for all  $A \in X(\mathcal{J}^1)$ .

Note that (S5) implies (S4). Moreover, Property (S4), resp., (S5) implies that that  $\mathcal{J}^1$ -lca, resp.,  $\mathcal{J}^1$ -LCA vertices in  $G$  remain  $\mathcal{J}^1$ -lca, resp.,  $\mathcal{J}^1$ -LCA vertices in  $H$ . This together with (S2) implies that no new vertices that violate the property of being  $\mathcal{J}^1$ -lca, resp.,  $\mathcal{J}^1$ -LCA vertices are introduced. A powerful tool in this context is the following  $\ominus$ -operator.

**Definition 5.1** ([41]). *Let  $G = (V, E)$  be a DAG and  $v \in V$ . Then  $G \ominus v = (V', E')$  is the directed graph with vertex set  $V' = V \setminus \{v\}$  and edges  $(p, q) \in E'$  precisely if  $v \neq p, v \neq q$  and  $(p, q) \in E$ , or if  $(p, v) \in E$  and  $(v, q) \in E$ . For a non-empty subset  $W = \{w_1, \dots, w_\ell\} \subsetneq V$ , define  $G \ominus W := (\dots((G \ominus w_1) \ominus w_2) \dots) \ominus w_\ell$ .*

In simple words, the directed graph  $G \ominus v$  is obtained from  $G = (V, E)$  by removing  $v$  and its incident edges and connecting each parent  $p$  of  $v$  with each child  $q$  of  $v$ . In case  $v$  is a leaf or a root in  $G$ , then  $v$  and its incident edges are simply deleted. The  $\ominus$ -operator was formally introduced in [41] and is also known as `collapse` in the Biopython package [6, 42], or as “suppression” when the vertex in question has both in-degree and out-degree one [24]. However, the properties of the  $\ominus$ -operator seem not to have been studied in the literature so far.

By construction,  $G \ominus v$  remains a DAG such that  $p \preceq_G q$  if and only if  $p \preceq_{G \ominus v} q$  for all  $p, q \neq v$ . This preservation of the partial order implies that also the clusters remain unchanged as long as the deleted vertex is not a leaf. Moreover, if  $v \in V \setminus X$ , then the latter arguments imply that leaves of  $G$  remain leaves in  $G \ominus v$ , i.e.,  $G \ominus v$  is a DAG on  $X$ . Finally, it is an easy task to verify that for distinct  $u, v \in V$  it holds that  $(G \ominus u) \ominus v = (G \ominus v) \ominus u$ . Thus,  $G \ominus W$  is well-defined. We summarize the latter into

**Observation 5.2.** *Let  $G$  be a DAG on  $X$  and  $W \subseteq V(G) \setminus X$  be a non-empty subset. Then,  $G \ominus W$  is a DAG on  $X$  that satisfies (S1), (S2) and (S3). In particular,  $\mathcal{C}_G(u) = \mathcal{C}_{G \ominus W}(u)$  for all  $u \in V(G \ominus W)$ .*

We provide now a sufficient condition under which the  $\ominus$ -operator preserves connectivity.

**Lemma 5.3.** *Let  $G = (V, E)$  be a connected DAG on  $X$  and  $v \in V$ . If  $v$  is not a  $k$ -LCA or  $k$ -lca vertex of  $G$  for any  $k \in \{1, \dots, |X|\}$ , then  $G \ominus v$  is connected.*


*Proof.* Let  $G = (V, E)$  be a connected DAG on  $X$  and  $v \in V$  a vertex that is not a  $k$ -LCA or  $k$ -lca vertex of  $G$  for any  $k \in \{1, \dots, |X|\}$ . Assume, for contradiction, that  $G \ominus v$  is not connected. Hence, there are distinct vertices  $u, w$  in  $G \ominus v$  for which there is no  $uw$ -path in  $G \ominus v$ . Since  $G$  is connected and  $u, w \in V(G \ominus v) \subseteq V(G)$ , there is an  $uw$ -path  $P_{uw}$  in  $G$  which, by assumption, is not contained in  $G \ominus v$ . Hence,  $P_{uw}$  must contain the vertex  $v$  and  $u, v, w$  are pairwise distinct. To recall, paths do not contain “repeated” vertices, that is,  $v$  is contained in exactly two edges contained in  $P_{uw}$ . Let  $u'$ , resp.,  $w'$  be the neighbor of  $v$  along the subpath of  $P_{uw}$  from  $v$  to  $u$ , resp.,  $v$  to  $w$ . Note that  $u' = u$  or  $w' = w$  is possible. Hence  $P_{uw}$  consists of an  $uu'$ -path  $P_{uu'}$ , an  $u'w'$ -path  $P_{u'w'}$  that contains  $v$  and consist of exactly two edges and a  $w'w$ -path  $P_{w'w}$ .

Note that any  $u'w'$ -path  $P'$  in  $G \ominus v$  would imply the existence of an undirected  $uw$ -path in  $G \ominus v$ , by combining  $P_{uu'}$ ,  $P'$  and  $P_{w'w}$ . Since there is no  $uw$ -path in  $G \ominus v$ , it follows that there is no  $u'w'$ -path in  $G \ominus v$ . Note that in  $G$  the vertices  $u'$  and  $w'$  must be children or parents of  $v$ . Hence, we consider the following three possible cases that can appear in  $G$ :  $\{w', u'\}$  contains (i) one parent and one child of  $v$ , (ii) two parents of  $v$  and (iii) two children of  $v$ .

In Case (i), we can assume without loss of generality that  $w'$  is a child of  $v$  and  $u'$  a parent of  $v$  in  $G$ . By construction, we have in  $G \ominus v$  the edge  $(u', w')$  and, therefore, an  $u'w'$ -path in  $G \ominus v$ ; a contradiction.

In Case (ii), both  $u'$  and  $w'$  are parents of  $v$ . Since every leaf is a 1-lca vertex of  $G$  and  $v$  is, in particular, not a 1-lca vertex,  $v$  must have some child  $v'$  in  $G$ . By construction, we have in  $G \ominus v$  the edges  $(u', v')$  and  $(w', v')$  which results in an  $u'w'$ -path in  $G \ominus v$ ; a contradiction.

In Case (iii), both  $u'$  and  $w'$  are children of  $v$ . Consider the set  $A := \mathcal{C}_G(u') \cup \mathcal{C}_G(w')$ . Since  $u', w' \prec_G v$ , Lemma 2.1 ensures that  $A \subseteq \mathcal{C}_G(v)$  and hence,  $v$  is a common ancestor of the elements of  $A$ . Therefore,  $\text{LCA}_G(A) \neq \emptyset$ . If  $v$  is not a  $k$ -LCA vertex, then  $v \notin \text{LCA}_G(A)$ . If  $v$  is not a  $k$ -lca vertex, then  $v \notin \text{LCA}_G(A)$

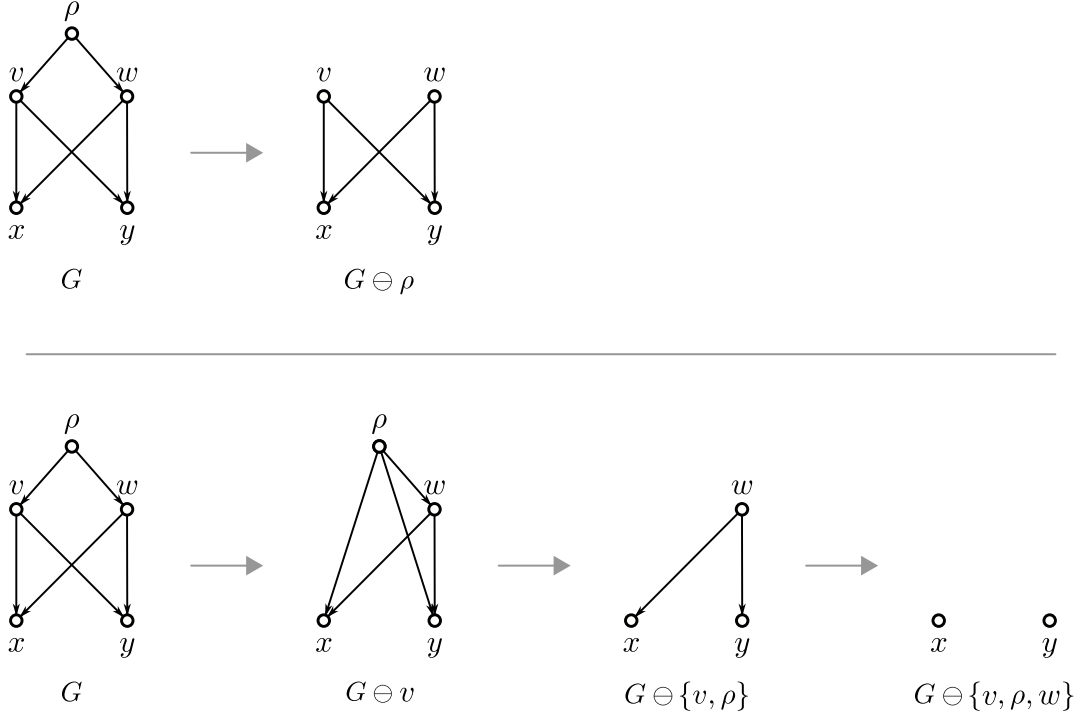

**Figure 5:** The network  $G$  is neither lca-REL nor LCA-REL, since none of the vertices  $v$ ,  $w$  and  $\rho$  in  $G$  are  $\{1, 2\}$ -lca vertices. Since  $\rho$  is the only vertex that is not a  $\{1, 2\}$ -LCA,  $G \ominus \rho$  is LCA-REL. The set  $W = \{\rho, v, w\}$  is the set of all vertices that are not  $\{1, 2\}$ -lca vertices. The stepwise computation of  $G \ominus v$ ,  $(G \ominus v) \ominus \rho$  and  $G \ominus W$  is shown in the lower part and results in a disconnected DAG. However, Algorithm 3 determines whether a vertex is a  $\{1, 2\}$ -lca vertex in the updated DAG. Hence, if we start with  $v$  to obtain  $G \ominus v$ , there is only one vertex left that is not an  $\{1, 2\}$ -lca vertex, namely  $\rho$ . In  $(G \ominus v) \ominus \rho$  each vertex is a  $\{1, 2\}$ -lca vertex and the algorithm terminates.

or  $v \in \text{LCA}_G(A)$  and  $|\text{LCA}_G(A)| > 1$ . In either case, we may choose  $z \in \text{LCA}_G(A)$  such that  $z \neq v$ . Thus  $z \in V(G \ominus v)$ . By Observation 5.2 we have  $\mathcal{C}_{G \ominus v}(u') = \mathcal{C}_G(u')$ ,  $\mathcal{C}_{G \ominus v}(w') = \mathcal{C}_G(w')$  and  $\mathcal{C}_{G \ominus v}(z) = \mathcal{C}_G(z)$ . Clearly there are paths in  $G \ominus v$  from  $u'$  to every element in  $\mathcal{C}_{G \ominus v}(u')$  respectively from  $w'$  to every element in  $\mathcal{C}_{G \ominus v}(w')$ . Moreover, there are paths from  $z$  to every element in  $\mathcal{C}_{G \ominus v}(z)$ . Since  $\mathcal{C}_{G \ominus v}(z) = \mathcal{C}_G(z)$  contains every element of  $A$ , there is a  $u'w'$ -path in  $G \ominus v$ ; a contradiction.

In summary, all three possible Cases (i), (ii) and (iii) yield a contradiction. Consequently,  $G \ominus v$  must be connected.  $\square$

In contrast to Lemma 5.3,  $G \ominus v$  may be disconnected if  $v$  is a  $k$ -lca vertex or a  $k$ -LCA vertex, even if  $G$  is connected. The possibly simplest example here is the DAG  $H$  consisting of a single root  $w$  with leaf-children  $x$  and  $y$ ; in  $H$ , the root satisfy  $w = \text{lca}_G(\{x, y\})$  and  $G \ominus w$  is the disconnected DAG  $(\{x, y\}, \emptyset)$ , see also Figure 5.

**Theorem 5.4.** *Let  $G$  be a DAG on  $X$  and  $W \subseteq V(G)$  be a non-empty subset of vertices that are not  $\mathcal{J}^1$ -lca (resp., not  $\mathcal{J}^1$ -LCA) vertices in  $G$ . Then,  $G \ominus W$  is a DAG on  $X$  that satisfies (S1) – (S4) (resp., (S1) – (S5)) w.r.t.  $G$ .*

*In particular, if  $W$  contains every vertex of  $G$  that is not an  $\mathcal{J}^1$ -lca vertex (resp. not an  $\mathcal{J}^1$ -LCA vertex) of  $G$ , then  $G \ominus W$  is  $\mathcal{J}^1$ -lca-REL (resp.  $\mathcal{J}^1$ -LCA-REL).*

*Proof.* Let  $G = (V, E)$  be a DAG on  $X$  and  $W \subseteq V$  be a non-empty subset of vertices that are not  $\mathcal{J}^1$ -lca (resp., not  $\mathcal{J}^1$ -LCA) vertices. Observe first that for all  $x \in X$  we have, by definition,  $\text{LCA}_G(x) = \{x\}$  and thus,  $W \subseteq V \setminus X$ . This together with Observation 5.2 implies that  $G \ominus W$  is a DAG on  $X$  that satisfies (S1), (S2) and (S3) and  $\mathcal{C}_G(w) = \mathcal{C}_{G \ominus W}(w)$  for all  $w \in V(G \ominus W)$ .

We show first that  $u \in \text{LCA}_G(A)$  and  $u \neq v$  implies that  $u \in \text{LCA}_{G \ominus v}(A)$  for any vertex  $v \in V \setminus X$  and  $A \subseteq X$ . By (S2),  $u \in V(G \ominus v)$ . By Lemma 3.1,  $u \in \text{LCA}_G(A)$  only if  $A \subseteq \mathcal{C}_G(u)$  and  $A \not\subseteq \mathcal{C}_G(u')$  for all  $u' \in V(G)$  with  $u' \prec_G u$ . Since  $\mathcal{C}_G(u) = \mathcal{C}_{G \ominus v}(u)$ , we have  $A \subseteq \mathcal{C}_{G \ominus v}(u)$ . Since  $G \ominus v$  satisfies (S3) and since  $\mathcal{C}_G(w) = \mathcal{C}_{G \ominus v}(w)$  for all  $w \in V(G \ominus v)$ , we can conclude that  $A \not\subseteq \mathcal{C}_{G \ominus v}(u')$  for all  $u' \in V(G \ominus v)$  with  $u' \prec_{G \ominus v} u$ . Application of Lemma 3.1 now shows that  $u \in \text{LCA}_{G \ominus v}(A)$  must hold.

Suppose now that  $W$  is a subset of non- $\mathcal{J}^1$ -LCA vertices in  $G$  and let  $v \in W$ . We show now that  $\text{LCA}_{G \ominus v}(A) = \text{LCA}_G(A)$  for all  $A \in X(\mathcal{J}^1)$ . Let  $A \in X(\mathcal{J}^1)$  and assume first that  $\text{LCA}_G(A) = \emptyset$ . This in particular implies that there is no vertex  $w \in V$  such that  $A \subseteq \mathcal{C}_G(w)$ . Since  $\mathcal{C}_G(w) = \mathcal{C}_{G \ominus v}(w)$  for all  $w \in V(G \ominus v)$  it follows that there

---

**Algorithm 2** LCA-REL

---

**Input:** A DAG  $G = (V, E)$  on  $X$ **Output:** An LCA-REL DAG  $G \ominus W$  satisfying (S1) – (S5) w.r.t.  $G$ 

- 1:  $W \leftarrow \emptyset$
  - 2: **for** all vertices  $v \in V$  **do**
  - 3:     **if**  $v \notin \text{LCA}_G(\mathcal{C}_G(v))$  **then**
  - 4:         Add  $v$  to  $W$
  - 5: **return**  $G \ominus W$ .
- 

---

**Algorithm 3** lca-REL

---

**Input:** A DAG  $G = (V, E)$  on  $X$ **Output:** An lca-REL DAG on  $X$  satisfying (S1) – (S4) w.r.t.  $G$ .

- 1: **for** all vertices  $v \in V(G)$  **do**
  - 2:     **if**  $v \neq \text{lca}_G(\mathcal{C}_G(v))$  **then**
  - 3:          $G \leftarrow G \ominus v$
  - 4: **return**  $G$ .
- 

is no vertex  $w \in V(G \ominus v)$  such that  $A \subseteq \mathcal{C}_{G \ominus v}(w)$ . Hence,  $\text{LCA}_{G \ominus v}(A) = \emptyset$ . Assume now that  $\text{LCA}_G(A) \neq \emptyset$ . Hence, there is some vertex  $u \in \text{LCA}_G(A)$ . Since  $v$  is not an  $\mathcal{J}^1$ -LCA vertex,  $u \neq v$  and  $v \notin \text{LCA}_G(A)$  must hold. This together with the result of the preceding paragraph implies that  $\text{LCA}_G(A) \subseteq \text{LCA}_{G \ominus v}(A)$ . Conversely, assume that  $u \in \text{LCA}_{G \ominus v}(A)$ . By Lemma 3.1,  $A \subseteq \mathcal{C}_{G \ominus v}(u)$  and  $A \not\subseteq \mathcal{C}_{G \ominus v}(u')$  for all  $u' \in V(G \ominus v)$  with  $u' \prec_{G \ominus v} u$  must hold. If  $v \not\prec_G u$ , then Observation 5.2 together with (S2) implies that  $A \subseteq \mathcal{C}_G(u)$  and  $A \not\subseteq \mathcal{C}_G(u')$  for all  $u' \in V(G)$  with  $u' \prec_G u$ , in which case,  $u \in \text{LCA}_G(A)$ . Assume that  $v \prec_G u$ . Then either  $A \not\subseteq \mathcal{C}_G(v)$  or  $A \subseteq \mathcal{C}_G(v)$ . In the first case, Lemma 3.1 implies that  $u \in \text{LCA}_G(A)$ . In the last case, Lemma 3.1 together with the assumption that  $v$  is not an  $\mathcal{J}^1$ -LCA vertex in  $G$  implies that there must be a child  $w$  of  $v$  such that  $A \subseteq \mathcal{C}_G(w)$ . But then,  $w \prec_G u$  and  $w \in V \setminus \{v\}$  must hold. Again, Observation 5.2 together with (S2) implies that  $w \prec_{G \ominus v} u$  and  $A \subseteq \mathcal{C}_{G \ominus v}(w)$  which together with Lemma 3.1 implies that  $u \notin \text{LCA}_{G \ominus v}(A)$ ; a contradiction. Hence,  $u \in \text{LCA}_G(A)$  must hold. In summary,  $\text{LCA}_{G \ominus v}(A) = \text{LCA}_G(A)$  for all  $A \in X(\mathcal{J}^1)$ . Thus,  $G \ominus v$  satisfies (S5) and, thus, in particular (S4). We can now repeat the latter arguments on  $G \ominus v$  and an element in  $v' \in W \setminus \{v\}$  to conclude that  $(G \ominus v) \ominus v'$  is a DAG on  $X$  that satisfies  $\text{LCA}_{(G \ominus v) \ominus v'}(A) = \text{LCA}_{G \ominus v}(A) = \text{LCA}_G(A)$  for all  $A \in X(\mathcal{J}^1)$  and thus, that  $(G \ominus v) \ominus v'$  satisfies (S4) and (S5). By induction,  $G \ominus W$  is a DAG on  $X$  that satisfies (S4) and (S5).

Assume now that  $v \in W$  is not an  $\mathcal{J}^1$ -lca vertex in  $G$ . Let  $A \in X(\mathcal{J}^1)$  and suppose that  $u = \text{lca}_G(A)$  is well-defined. Hence,  $u \neq v$  and, since  $G \ominus v$  satisfies (S2),  $u \in V(G \ominus v)$ . Moreover, by the arguments in the second paragraph of this proof,  $u \in \text{LCA}_{G \ominus v}(A)$ . Assume, for contradiction, that  $u \neq \text{lca}_{G \ominus v}(A)$  and, thus,  $|\text{LCA}_{G \ominus v}(A)| > 1$ . Thus, there is a vertex  $w \in \text{LCA}_{G \ominus v}(A)$  such that  $u$  and  $w$  are  $\preceq_{G \ominus v}$ -incomparable. By (S2),  $w$  is  $\preceq_G$ -incomparable to  $u$ . By Observation 5.2 and Lemma 3.1,  $A \subseteq \mathcal{C}_{G \ominus v}(w) = \mathcal{C}_G(w)$ . Hence,  $w$  is ancestor of all vertices  $x \in A$  in  $G$ . Therefore, there is a vertex  $w' \preceq_G w$  such that  $w' \in \text{LCA}_G(A)$ . Since by assumption  $\text{LCA}_G(A) = \{u\}$  it follows that  $w' = u$  must hold. But then  $w$  and  $u$  are not  $\preceq_G$ -incomparable; a contradiction. Thus,  $u = \text{lca}_{G \ominus v}(A)$  must hold and  $G \ominus v$  satisfies (S4). Again, by induction,  $G \ominus W$  satisfies (S4).

For the last statement, note that if  $W$  contains every vertex of  $G$  that is not an  $\mathcal{J}^1$ -lca vertex (resp., not an  $\mathcal{J}^1$ -LCA vertex), then  $v \in V(G \ominus W)$  if and only if  $v$  is an  $\mathcal{J}^1$ -lca vertex (resp., an  $\mathcal{J}^1$ -LCA vertex) of  $G$ . Hence,  $G \ominus W$  contains precisely all  $\mathcal{J}^1$ -lca vertices (resp.,  $\mathcal{J}^1$ -LCA vertices) of  $G$ . As  $G \ominus W$  satisfies (S4) (resp., (S5)) it follows that every vertex in  $G \ominus W$  is an  $\mathcal{J}^1$ -lca (resp.,  $\mathcal{J}^1$ -LCA) vertex. Thus,  $G \ominus W$  is  $\mathcal{J}^1$ -lca-REL (resp.,  $\mathcal{J}^1$ -LCA-REL).  $\square$

As we shall see in Section 7, it is in NP-hard to determine as whether a given DAG is  $\mathcal{J}^1$ -lca-REL or  $\mathcal{J}^1$ -LCA-REL for general  $\mathcal{J}^1$ . However, for the special case that  $\mathcal{J}^1 = \{1, 2, \dots, |X|\}$ , we deal with lca-REL or LCA-REL DAGs. In fact, simplifying  $G$  into an lca-REL or LCA-REL DAG using the  $\ominus$ -operator is tractable and we provide here polynomial-time algorithms to achieve these transformations.

We start with Algorithm 2 to compute an LCA-REL version  $H$  of an input DAG  $G$  that satisfies (S1) – (S5). To recall,  $G$  is not LCA-REL if there is a vertex  $v$  in  $G$  such that  $v$  is not a least common ancestor for any non-empty  $A \subseteq X$ . By Lemma 3.4, the latter is precisely the case if  $v \notin \text{LCA}_G(\mathcal{C}_G(v))$  which is the only condition that needs to be checked in Algorithm 2 (Line 3).

**Proposition 5.5.** *Let  $G$  be a DAG on  $X$  and  $W$  be the set of all vertices that are not  $\{1, \dots, |X|\}$ -LCA vertices of  $G$ . Then, Algorithm 2 with input  $G$  returns the DAG  $G \ominus W$  on  $X$  that is LCA-REL, phylogenetic and satisfies*

*Properties (S1) – (S5) w.r.t.  $G$ . In particular,  $W$  is the unique and, therefore, smallest subset of  $V(G)$  such that  $G \ominus W$  is LCA-REL and satisfies (S1) – (S5) w.r.t.  $G$ . Moreover, it holds that  $\mathcal{C}_{G \ominus W} = \mathcal{C}_G$  and, if  $G$  is connected, then  $G \ominus W$  is connected. Finally, Algorithm 2 can be implemented to run in polynomial time.*

*Proof.* Let  $G = (V, E)$  be a DAG on  $X$  that serves as input for Algorithm 2. By construction in Line 3 and 4, the set  $W$  contains a vertex  $w$  if and only if  $w \notin \text{LCA}_G(\mathcal{C}_G(w))$ . By Lemma 3.4, the latter is precisely if  $w$  is not a  $\{1, \dots, |X|\}$ -LCA vertex of  $G$ . In other words, after the last iteration of the *for*-loop of Algorithm 2 the set  $W$  comprises all vertices of  $G$  that are not  $\{1, \dots, |X|\}$ -LCA vertices of  $G$ . By Theorem 5.4, the output DAG  $H := G \ominus W$  thus satisfies Properties (S1) – (S5) w.r.t.  $G$  and  $H$  is LCA-REL. Moreover,  $H$  is phylogenetic due to Lemma 3.10.

We continue with showing that  $W$  is the unique subset of  $V$  such that  $H = G \ominus W$  is LCA-REL and satisfies (S1) – (S5). Let  $W^*$  be some subset of  $V$  such that  $H^* := G \ominus W^*$  is LCA-REL and satisfies (S1) – (S5). Observe first that, since  $H$  and  $H^*$  satisfy (S5),  $\text{LCA}_G(A) = \text{LCA}_H(A) = \text{LCA}_{H^*}(A)$  for all  $A \subseteq X$ . This together with  $H$  and  $H^*$  being LCA-REL implies that each vertex of  $H$  and  $H^*$  is contained in  $\text{LCA}_G(A)$  for some  $A \subseteq X$  and, in particular,  $V(H^*) = \bigcup_{A \subseteq X} \text{LCA}_G(A) = V(H)$ . Consequently,  $W^* = V \setminus V(H^*) = V \setminus V(H) = W$ .

We show now that  $\mathcal{C}_G = \mathcal{C}_H$ . Since  $H$  satisfies Property (S1) w.r.t.  $G$ , it holds that  $\mathcal{C}_H \subseteq \mathcal{C}_G$ . To show that  $\mathcal{C}_G \subseteq \mathcal{C}_H$ , let  $C \in \mathcal{C}_G$  be a cluster of  $G$  and  $v$  a vertex of  $G$  such that  $\mathcal{C}_G(v) = C$ . Since  $v$  is a common ancestor of the vertices in  $C$ , there is some  $u \in \text{LCA}_G(C)$  such that  $u \leq_G v$ . Note that  $u \notin W$ . Since  $u \in \text{LCA}_G(C)$ , we have  $C \subseteq \mathcal{C}_G(u)$ . By Lemma 2.1,  $\mathcal{C}_G(u) \subseteq \mathcal{C}_G(v) = C$ . Taken the latter two arguments together,  $C = \mathcal{C}_G(u)$  must hold. Since  $u \notin W$  and  $V(H) = V(G \ominus W)$ ,  $u$  is a vertex of  $H$ . This together with Observation 5.2 implies that  $C = \mathcal{C}_G(u) = \mathcal{C}_H(u) \in \mathcal{C}_H$ . In summary,  $\mathcal{C}_G = \mathcal{C}_H$ .

Assume now that  $G$  is connected. If  $W = \emptyset$ , then  $G = G \ominus W$  and there is nothing to show. Hence suppose that  $v \in W$ . If  $W = \{v\}$ , then Lemma 5.3 implies that  $H$  is connected. Suppose that there is some  $u \in W \setminus \{v\}$ . We show that  $u$  cannot be a  $k$ -LCA vertex in  $G \ominus v$ . To see this, observe first that, since  $G \ominus v$  satisfies (S5),  $k$ -LCA vertices of  $G$  remain  $k$ -LCA vertices in  $G \ominus v$ . Hence, the set  $U$  of all vertices that are not  $\{1, \dots, |X|\}$ -LCA vertices of  $G \ominus v$  is a subset of  $W \setminus \{v\}$ . Assume, for contradiction, that  $u$  is a  $k$ -LCA vertex in  $G \ominus v$  and thus,  $U \subsetneq W \setminus \{v\}$ . By Theorem 5.4,  $(G \ominus v) \ominus U = G \ominus (U \cup \{v\})$  is LCA-REL. However,  $U \subsetneq W \setminus \{v\}$  implies  $U \cup \{v\} \subsetneq W$ ; the latter two statements yield a contradiction to the uniqueness of  $W$ . Thus,  $u$  is not a  $k$ -LCA in  $G \ominus v$ . Now we can apply Lemma 5.3 to conclude that  $(G \ominus v) \ominus u$  is connected. Repeating the latter arguments until all vertices in  $W$  have been processed shows that  $G \ominus W$  is connected.

Finally, consider the runtime of Algorithm 2. The *if*-condition of the algorithm can be implemented to run in polynomial time, since the cluster  $\mathcal{C}_G(v)$  can be computed by a simple post-order traversal of  $G$  and due to Corollary 3.12. Note furthermore that with an adjacency list representation of  $G$ , computation of  $G \ominus v$  can be implemented in polynomial time for a given vertex  $v$ , as it amounts to adding at most  $|\text{child}_G(v)|$  entries to each list associated to the respective parent of  $v$  in  $G$  (and there are at most  $|V(G)| - 1$  parents of  $v$ ). In extension,  $G \ominus W$  can be computed in polynomial time. Since the remaining tasks are clearly possible to perform in constant time, we conclude the overall runtime to be polynomial.  $\square$


Although the set  $W$  of all non- $\{1, \dots, |X|\}$ -LCA vertices of  $G$  (as chosen in Algorithm 2) is the unique minimum-sized set such that  $G \ominus W$  is LCA-REL and satisfies (S1) – (S5), it is not necessarily the smallest set transforming  $G$  to an LCA-REL DAG, see Figure 7 for an example.

We next show that one can simplify a given DAG  $G$  to an lca-REL DAG  $H$  satisfying (S1) – (S4) in polynomial time. Recall that  $H$  is lca-REL if every vertex  $v$  in  $H$  is the unique least common ancestor for at least some set  $A \subseteq X$ . Unsurprisingly, a similar approach to that used in Algorithm 2 can be applied in the context of lca-REL DAGs as well. The reader may verify that by modifying the *if*-condition in Algorithm 2 to “*check if  $v \neq \text{lca}_G(\mathcal{C}_G(v))$* ”, one obtains an algorithm that, due to Lemma 3.5 and Theorem 5.4, outputs an lca-REL DAG that satisfies Properties (S1) – (S4). However, the output of this algorithm may be a disconnected DAG even if the initial input was connected, see Figure 5 for an example. In particular, the set  $W$  of all non-lca vertices in  $G$  is not necessarily of minimum-size, that is, there are cases where  $G \ominus W'$  is lca-REL for  $W' \subsetneq W$ , see Figure 6 for an example. Informally, the approach in Algorithm 2 can be overly destructive: it removes *all* non- $\{1, \dots, |X|\}$ -lca vertices, including those that are  $\{1, \dots, |X|\}$ -LCA vertices. To address this issue, we propose Algorithm 3 that, instead of taking all *all* non- $\{1, \dots, |X|\}$ -lca, repeats the process of removing vertices only until we end up with an lca-REL DAG.

**Proposition 5.6.** *For a given input DAG  $G$  on  $X$ , Algorithm 3 returns a DAG  $H$  on  $X$  that is lca-REL, phylogenetic and satisfies Properties (S1) – (S4) w.r.t.  $G$ . Moreover, if  $G$  is connected, then  $H$  is connected. If  $G$  satisfies (PCC) or (CL), then  $\mathcal{C}_H = \mathcal{C}_G$ . In addition, Algorithm 3 can be implemented to run in polynomial time.*

*Proof.* To keep track of the original DAG in this proof, we put  $G_{\text{orig}} := G$  for the DAG  $G = (V, E)$  on  $X$  that serves as input for Algorithm 3. We show, by induction on the number of calls of Line 3, that each updated DAG  $G$  satisfies (S1) – (S4) w.r.t.  $G_{\text{orig}}$ . As base case, if no calls appear,  $G$  trivially satisfies (S1) – (S4) w.r.t.  $G_{\text{orig}}$ .



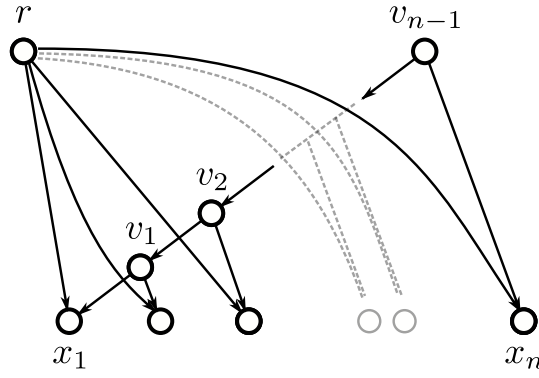

**Figure 6:** Consider the clustering system  $\mathcal{C} = \{\{x_1, x_2\}, \{x_1, x_2, x_3\}, \dots, X\} \cup \{\{x\} \mid x \in X\}$  on  $X = \{x_1, \dots, x_n\}$ ,  $n > 1$ . The DAG  $G$  on  $X$  as shown in the figure is obtained from  $H \doteq \mathcal{H}(\mathcal{C})$  by adding a second root  $r$  that is adjacent to each leaf  $x_i \in X$ . Here, for every non-empty  $A \subseteq X$ , we have  $\text{LCA}_G(A) = \{r, v_{i-1}\}$  where  $i$  is the maximal index such that  $x_i \in A$ . Consequently,  $G$  is LCA-REL but not lca-REL. The set  $W$  of all non-lca vertices of  $G$  is the set  $V(G) \setminus X$  of all inner vertices of  $G$ . Here,  $G \ominus W$  would be the disconnected DAG with vertex set  $X$  and no edges. The output of Algorithm 3 applied on  $G$  is always a connected DAG but heavily depends on the order in which the vertices have been considered. If  $r$  is processed first, i.e., before any of the  $v_i$ , then the output will be the lca-REL DAG  $G \ominus r \simeq H$ . In contrast, if  $r$  is processed last, i.e., after each  $v_i$ , then the lca-REL DAG  $G \ominus \{v_1, \dots, v_{n-1}\}$  is returned. Here,  $\mathcal{C}_{G \ominus r} = \mathcal{C}_G = \mathcal{C}$  while  $\mathcal{C}_{G \ominus \{v_1, \dots, v_{n-1}\}} = \{X, \{x_1\}, \dots, \{x_n\}\} \subsetneq \mathcal{C}$ .

Suppose the statement is true prior to the current call of Line 3. Since Line 3 is called,  $v \neq \text{lca}_G(\mathcal{C}_G(v))$  and Lemma 3.5 implies that  $v$  is not an  $\mathbb{J}^1$ -lca vertex in  $G$  for any  $\mathbb{J}^1$ . By Theorem 5.4,  $G \ominus v$  satisfies (S1) – (S4) w.r.t.  $G_{\text{orig}}$ . The algorithm terminates after all vertices in  $V$  have been processed. Let  $H$  denote the final DAG that is returned by Algorithm 3. By the latter arguments and induction,  $H$  satisfies (S1) – (S4) w.r.t.  $G_{\text{orig}}$ .

We show now that  $H$  is  $\mathbb{J}^1$ -lca-REL for  $\mathbb{J}^1 = \{1, 2, \dots, |X|\}$  and hence, that  $H$  is lca-REL. Let  $v$  be the last vertex in the *for*-loop for which Line 3 is called and let  $W$  be the subset of all vertices in  $V \setminus \{v\}$  for which Line 3 was called. By definition,  $H = (G_{\text{orig}} \ominus W) \ominus v$ . Assume, for contradiction, that  $H$  contains a vertex  $u$  that is not an  $\mathbb{J}^1$ -lca vertex. By Theorem 5.4,  $H$  satisfies (S4) w.r.t.  $G_{\text{orig}} \ominus W$  and thus, if  $w$  is an  $\mathbb{J}^1$ -lca vertex in  $G_{\text{orig}} \ominus W$  so it is in  $H$ . Contraposition of the latter statement implies that  $u$  is not an  $\mathbb{J}^1$ -lca vertex in  $G_{\text{orig}} \ominus W$ . Even more,  $u$  is not an  $\mathbb{J}^1$ -lca vertex in  $G_{\text{orig}} \ominus W'$  for any subset  $W' \subseteq W$ . Hence, if  $u$  comes before  $v$  in the *for*-loop, it would have resulted in a call of Line 3 and so,  $u \in W$ ; a contradiction. Therefore,  $u$  must come after  $v$  in the *for*-loop, i.e.,  $v$  is not the last vertex for which Line 3 is called; also a contradiction. Therefore, all vertices in  $G_{\text{orig}} \ominus (W \cup \{v\}) = H$  are  $\{1, 2, \dots, |X|\}$ -lca vertices of  $H$  and, thus,  $H$  is lca-REL.

By Lemma 3.10,  $H$  is phylogenetic. Furthermore, if  $G_{\text{orig}}$  is connected, then induction on the number of calls of Line 3 together with Lemma 5.3 implies that the output DAG  $H$  is connected.


Suppose now that  $G_{\text{orig}}$  is a DAG that satisfies (CL). Since  $H$  satisfies (S1) w.r.t.  $G_{\text{orig}}$ , we have  $\mathcal{C}_H \subseteq \mathcal{C}_{G_{\text{orig}}}$ . To see that  $\mathcal{C}_{G_{\text{orig}}} \subseteq \mathcal{C}_H$ , let  $C \in \mathcal{C}_{G_{\text{orig}}}$ . Since  $G_{\text{orig}}$  satisfies (CL),  $\text{lca}_{G_{\text{orig}}}(C)$  is well-defined, i.e.  $u = \text{lca}_{G_{\text{orig}}}(C)$  for some  $u \in V(G_{\text{orig}})$ . In particular,  $u$  is a  $|C|$ -lca vertex of  $G_{\text{orig}}$ . Since  $H$  satisfies (S4) w.r.t.  $G_{\text{orig}}$ ,  $u$  is thus also a vertex of  $H$ . By Observation 5.2,  $\mathcal{C}_H(u) = \mathcal{C}_{G_{\text{orig}}}(u)$  and by Lemma 4.2 we have  $\mathcal{C}_{G_{\text{orig}}}(u) = \mathcal{C}_{G_{\text{orig}}}(\text{lca}_{G_{\text{orig}}}(C)) = C$ . Thus  $\mathcal{C}_H(u) = C$  and  $C \in \mathcal{C}_H$ . In conclusion,  $\mathcal{C}_{G_{\text{orig}}} = \mathcal{C}_H$  must hold. By Lemma 4.2, (PCC) implies (CL). This together with the latter arguments implies that  $\mathcal{C}_{G_{\text{orig}}} = \mathcal{C}_H$  in case that  $G_{\text{orig}}$  is a DAG that satisfies (PCC).

For the runtime of Algorithm 3, note that with an adjacency list representation of  $G$ , computation of  $G \ominus v$  can be implemented in polynomial time for a given vertex  $v$ , as it amounts to adding at most  $|\text{child}_G(v)|$  entries to each list associated to the respective parent of  $v$  in  $G$  (and there are at most  $|V(G)| - 1$  parents of  $v$ ). Moreover, the *if*-condition of the algorithm can be implemented to run in polynomial time, since the cluster  $\mathcal{C}_G(v)$  can be computed by a simple post-order traversal of  $G$  and due to Corollary 3.12. Hence every step of the *for*-loop of Algorithm 3 takes polynomial time, concluding the overall runtime to be polynomial.  $\square$

While the set  $W$  of vertices used to transform a DAG  $G$  to an lca-REL DAG  $G \ominus W$  is, in general, not uniquely determined (cf. Figure 5 and 6), this situation changes whenever  $G$  satisfies (CL) or (PCC).

**Theorem 5.7.** *Let  $G$  be a DAG that satisfies (PCC) or (CL) and  $W \subseteq V(G)$  be the set of all vertices that are not  $\{1, \dots, |X|\}$ -lca vertices of  $G$ . Then,  $W$  is precisely the set of all vertices that are not  $\{1, \dots, |X|\}$ -LCA vertices of  $G$ . Moreover,  $W$  is the unique and, therefore, smallest subset of  $V(G)$  such that  $H := G \ominus W$  is lca-REL and satisfies (S1) – (S4) w.r.t.  $G$ .*

*Furthermore, it holds that  $\mathcal{C}_G = \mathcal{C}_H$  and  $H^- \simeq \mathcal{H}(\mathcal{C}_G)$ . In particular,  $H$  coincides with the DAG returned by Algorithm 3 with input  $G$ .*

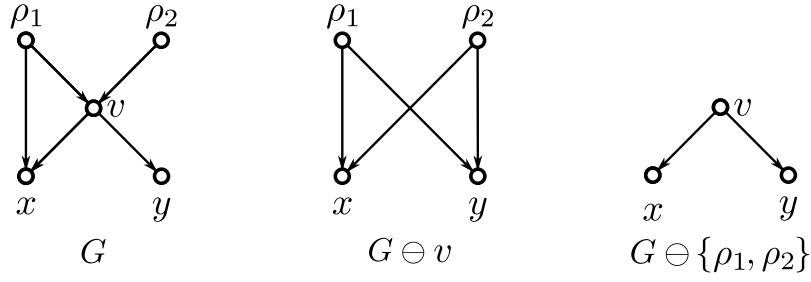

**Figure 7:** Shown are DAGs  $G$ ,  $G \ominus \{v\}$  and  $G \ominus \{\rho_1, \rho_2\}$ . The vertices  $\rho_1$  and  $\rho_2$  are not LCAs of any subset of leaves in  $G$ , while  $v = \text{lca}_G(\{x, y\})$ . According to Proposition 5.5,  $W = \{\rho_1, \rho_2\}$  is the unique and smallest set of vertices such that  $G \ominus W$  is LCA-REL and satisfies (S1) – (S5). Nevertheless, the set  $W' = \{v\}$  is the smallest set of vertices such that  $G \ominus W'$  is LCA-REL. However,  $G \ominus W'$  violates (S5) since  $\text{LCA}_G(\{x, y\}) = \{v\} \neq \text{LCA}_{G \ominus W'}(\{x, y\}) = \{\rho_1, \rho_2\}$ .

*Proof.* Let  $G$  be a DAG on  $X$  that satisfies (PCC) or (CL) and  $W \subseteq V(G)$  be the set of all vertices that are not  $\{1, \dots, |X|\}$ -lca vertices of  $G$ . By Theorem 5.4,  $H := G \ominus W$  is lca-REL and satisfies (S1) – (S4). By Theorem 4.5,  $H$  satisfies strong-(CL) and, thus, (CL). Hence, we can apply the same arguments as used in the proof of Proposition 5.6 to show that “ $\mathfrak{C}_{G_{\text{orig}}} = \mathfrak{C}_H$ ” to conclude that  $\mathfrak{C}_G = \mathfrak{C}_H$  holds. Since  $H$  satisfies strong-(CL) and  $\mathfrak{C}_G = \mathfrak{C}_H$ , we can apply Theorem 4.8 which implies that  $H^- \simeq \mathcal{H}(\mathfrak{C}_G)$ .

Now, let  $W'$  be the set of all vertices that are not  $\{1, \dots, |X|\}$ -LCA vertices of  $G$ . We show that  $W = W'$ . By definition,  $W' \subseteq W$ . Assume, for contradiction, that there is a vertex  $w \in W \setminus W'$ . Hence,  $w$  is a  $k$ -LCA vertex for some  $k$  and Lemma 3.4 together with Lemma 2.1 implies  $\mathfrak{C}_G(v) \subsetneq \mathfrak{C}_G(w)$  for all children  $v$  of  $w$ . By Lemma 3.1,  $w \in \text{LCA}_G(\mathfrak{C}_G(w))$ . By assumption,  $G$  satisfies (CL) or (PCC), where in the latter case, Lemma 4.2 implies that  $G$  satisfies (CL). Thus,  $|\text{LCA}_G(\mathfrak{C}_G(w))| = 1$  and, therefore,  $w = \text{lca}_G(\mathfrak{C}_G(w))$ ; a contradiction to  $w \in W$ . Consequently,  $W' = W$  holds.

We continue with showing that  $W$  is the uniquely determined set such that  $H$  is lca-REL and satisfies (S1) – (S4). To this end, assume that there is some set  $W'' \subseteq V(G)$  such that  $G \ominus W''$  is lca-REL and satisfies (S1) – (S4). Since  $G \ominus W''$  satisfies (S4) w.r.t.  $G$ , the set  $W''$  cannot contain any vertex that is  $k$ -lca vertex in  $G$  for some  $k$ , that is,  $W'' \subseteq W$ . Assume, for contradiction, that  $W'' \subsetneq W$ . Since  $W'' \subsetneq W = W'$ , the set  $W''$  is also a proper subset of vertices that are not  $\{1, \dots, |X|\}$ -LCA vertices of  $G$ . By Theorem 5.4,  $G \ominus W''$  satisfies (S1) – (S5). Moreover, since  $G \ominus W''$  is lca-REL, it is, in particular, LCA-REL. However, this contradicts Proposition 5.5 which states that  $W = W'$  is the unique and minimum-sized set such that  $G \ominus W'$  is LCA-REL and satisfies (S1) – (S5), enforcing  $W'' = W$ . Hence,  $W$  is the unique and, therefore, smallest subset of  $V(G)$  such that  $H$  is lca-REL and satisfies (S1) – (S4). It is now straightforward to verify that  $H$  coincides with the DAG returned by Algorithm 3 with input  $G$ .  $\square$


Although the set  $W$  of all non- $\{1, \dots, |X|\}$ -lca vertices of DAGs  $G$  with (PCC) or (CL) property is the unique and minimum-sized set such that  $G \ominus W$  is lca-REL and satisfies (S1) – (S4), it is not necessarily a unique set transforming  $G$  to an lca-REL DAG. By way of example, consider the DAG  $G$  in Figure 7. Here,  $G \ominus \{r_1, v\} \simeq G \ominus \{r_1, r_2\}$  is lca-REL, but since  $v = \text{lca}_G(\{x, y\}) \neq \text{lca}_{G \ominus \{r_1, v\}}(\{x, y\})$ , the DAG  $G \ominus \{r_1, v\}$  does not satisfy (S4).

By Proposition 5.5, Algorithm 2 always outputs a DAG  $H$  with the same set system as the input DAG  $G$ , i.e.,  $\mathfrak{C}_G = \mathfrak{C}_H$ . By Theorem 5.7, this property is also guaranteed whenever  $G$  satisfies (PCC) or (CL) when using Algorithm 3. In general, however, Algorithm 3 may return a DAG  $H$  with  $\mathfrak{C}_H \subsetneq \mathfrak{C}_G$  depending on the order in which the vertices are traversed; see Figure 6 for an illustrative example.

## 6 The $\ominus$ -Operator as Transformation to Simplify Networks

In a recent work, Heiss, Huson and Steel [17] proposed a general framework that every transformation  $\varphi(N)$  that “simplifies” a network  $N$  should satisfy, stated as three axioms. To be more precise, let  $\mathbb{N}(X)$  be the set of all networks on  $X$  and  $\mathbb{N}'(X) \subseteq \mathbb{N}(X)$  be some subset of networks that is closed under permuting the leaves, i.e., if  $N \in \mathbb{N}'(X)$  then  $N^\sigma \in \mathbb{N}'(X)$ , where  $N^\sigma$  is the network obtained from  $N$  by relabeling the leaves in  $X$  according to some permutation  $\sigma \in \Sigma^X$  in the group  $\Sigma^X$  of permutations on  $X$ . Let  $N|Y$  be a restriction of  $N$  to a subset of leaves  $Y \subseteq X$  that can be defined in different ways [12, 17, 38] (we will come to this point later again). A transformation is then a map

$$\varphi: \mathbb{N}(X) \rightarrow \mathbb{N}'(X) \subseteq \mathbb{N}(X)$$

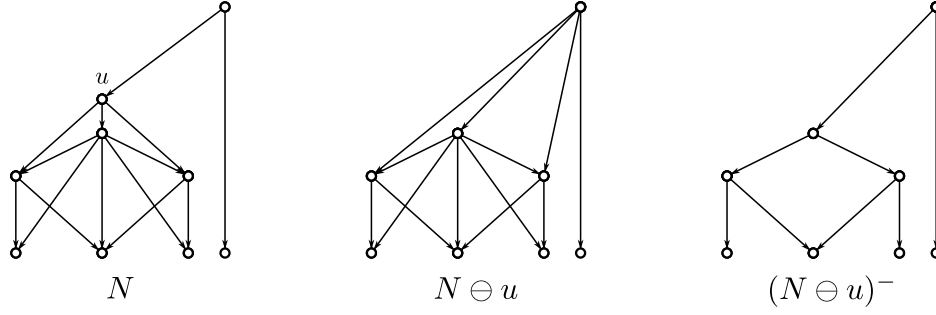

**Figure 8:** Shown are three phylogenetic networks  $N$ ,  $N \ominus u$  and  $(N \ominus u)^-$  having the same clustering system  $\mathfrak{C}_N = \mathfrak{C}_{N \ominus u} = \mathfrak{C}_{(N \ominus u)^-} =: \mathfrak{C}$ . Here  $(N \ominus u)^- \simeq N_1$  with  $N_1$  being the network as shown in Figure 2. In  $N$ , the vertex  $u$  is neither a  $k$ -lca nor a  $k$ -LCA vertex, for any  $k$ . In particular,  $u$  is the only vertex in  $N$  with this property. According to Proposition 5.5,  $N \ominus u$  is LCA-REL and satisfies (S1) – (S5). In addition, Proposition 5.6 implies that  $N \ominus u$  is lca-REL. Removal of all shortcuts in  $N \ominus u$  yields  $(N \ominus u)^-$  which is, by Corollary 4.11, regular and thus, isomorphic to the Hasse diagram  $\mathcal{H}(\mathfrak{C})$ . Still,  $(N \ominus u)^-$  is lca-REL and satisfies (S1) – (S4). Note that, in this example,  $\varphi_{\text{LCA}}(N) = \varphi_{\text{lca}}(N) = (N \ominus u)^- \simeq \mathcal{H}(\mathfrak{C}_N)$ , all satisfying (P1), (P2) and (P3).

that assigns to each  $N \in \mathbb{N}(X)$  a network  $\varphi(N) \in \mathbb{N}'(X)$ . Following Dress et al. [11], Heiss et al. [17] proposed three axioms that are desirable for such transformations, namely

- (P1)  $N \in \mathbb{N}'(X) \implies \varphi(N) = N$ , and
- (P2)  $\sigma \in \Sigma^X, N \in \mathbb{N}(X) \implies \varphi(N^\sigma) \simeq \varphi(N)^\sigma$ , and
- (P3)  $\emptyset \neq Y \subseteq X, N \in \mathbb{N}(X) \implies \varphi(N|Y) \simeq \varphi(N)|Y$ .

Property (P1) ensures that any transformation applied on  $N \in \mathbb{N}'(X)$  always yields  $N$  unchanged. This is justified by the fact that one usually wants to transform or simplify a network to some network with specific properties encoded by the subclass  $\mathbb{N}'(X)$ . If our network  $N$  is contained in  $\mathbb{N}'(X)$ , then it has the required properties and thus, no further transformation is required. Property (P2) ensures that transformations are invariant under permutation of leaf labels: transforming a network with permuted leaf labels results in the same network as when one transforms the original network first and then relabel the leaves. In other words, the transformation is not dependent on the leaf labels. Finally, Property (P3) ensures that transformations are invariant under restrictions: taking a restricted network  $N|Y$  on a subset of leaves  $Y$  and transforming it results in the same network as that obtained by applying the transformation  $\varphi(N)$  first on  $N$  and then taking the restriction  $\varphi(N)|Y$ . The latter two properties are mathematically sound but are also motivated from a biological point of view, see [11, 17] for further details. What we have not yet defined is the concept of the restriction  $N|Y$ . Due to the lack of an axiomatic framework for “restriction”, several approaches to defining  $N|Y$  are possible. In [17], Heiss et al. defined one such restriction in terms of subnetworks induced by so-called LSA vertices of  $N$  and their descendants. Using this definition, they demonstrated that the transformation  $\varphi_{\text{LSA}}$  of phylogenetic networks to a specific tree, called the LSA-tree, satisfies properties (P1), (P2) and (P3). In particular, this type of restriction enforces (P3), ensuring that if additional species are added to a phylogenetic network (without otherwise altering the original network), transforming the enlarged network into an LSA-tree induces the same LSA-tree on the original species set as transforming the original network. However, there are examples that show that such LSA-trees lack our desired property (S1), that is, the LSA-tree may contain clusters that are not contained in the original network  $N$ . As an example, the LSA-tree  $\varphi_{\text{LSA}}(N)$  for the network  $N$ , shown in Figure 9, includes a cluster containing *Rubellium*, *Chilenium* and *Erpetion* but not *Tridens*. This suggests that the first three taxa are more closely related evolutionarily compared to *Tridens*. However, such a cluster does not appear in  $\mathfrak{C}_N$ ; instead,  $\mathfrak{C}_N$  includes the cluster  $\{\textit{Chilenium}, \textit{Erpetion}, \textit{Tridens}\}$ . In particular, the LSA of subset of leaves has different properties than the LCA or lca as defined here. For example the LSA of a leaf  $x \in X$  with in-degree one is its parent [25], whereas  $\text{lca}_G(x) = x$  and  $\text{LCA}_G(x) = \{x\}$ . This makes their type of restriction not applicable to our developed methods. In particular, we want to show that the transformation of a network  $N$  into the network  $N \ominus W$  from which all shortcuts have been removed has all three desired properties. However, it can be shown that this transformation does not satisfy (P3) when using a restriction defined by LSAs.

Hence, we will consider a different type of restriction that is solely defined in terms of clusters of the DAGs under investigation. To be more precise, we define for a given DAG  $G$  on  $X$  and a subset  $Y \subseteq X$  the *cluster-restriction*

$$G \wr Y := \mathcal{H}(\mathfrak{C}_G \cap Y), \text{ where } \mathfrak{C}_G \cap Y := \{C \cap Y \mid C \in \mathfrak{C}_G, C \cap Y \neq \emptyset\}.$$

In other words,  $G \wr Y$  is the restriction of  $G$  to the Hasse diagram of all clusters  $C \cap Y$  where  $C$  has at least one vertex in  $Y$ . From a phylogenetic point of view,  $G \wr Y$  does not make further assumption on the structure than

what is provided by the clusters in  $\mathfrak{C}_G \cap Y$ .

In what follows, let  $\mathbb{G}(X)$  be the set of all DAGs on  $X$  and  $\mathbb{R}(X)$  be the set of regular networks on  $X$ . Moreover, denote with  $W(G)$  the set of all non-LCA vertices in the DAG  $G$ , i.e., the set of all vertices  $v \in V(G)$  with  $v \notin \text{LCA}_G(A)$  for all  $A \subseteq X$ . To recall,  $G^-$  denotes the DAG obtained from  $G \in \mathbb{G}(X)$  by removal of all shortcuts. We will show that the map

$$\varphi_{\text{LCA}}: \mathbb{G}(X) \rightarrow \mathbb{R}(X) \text{ defined by } \varphi_{\text{LCA}}(G) = (G \ominus W(G))^-$$

satisfies (P1), (P2) and (P3) when considering the cluster-restriction  $G \wr Y$ . Note that  $\mathbb{R}(X) \subseteq \mathbb{N}(X) \subseteq \mathbb{G}(X)$ .

**Proposition 6.1.** *The transformation  $\varphi_{\text{LCA}}$  satisfies (P1), (P2) and (P3) under the cluster-restriction for all DAGs. To be more precise, it holds that*

- (P1)  $G \in \mathbb{R}(X) \implies \varphi_{\text{LCA}}(G) = G$ , and
- (P2)  $\sigma \in \Sigma^X, G \in \mathbb{G}(X) \implies \varphi_{\text{LCA}}(G^\sigma) \simeq \varphi_{\text{LCA}}(G)^\sigma$ , and
- (P3)  $\emptyset \neq Y \subseteq X, G \in \mathbb{G}(X) \implies \varphi_{\text{LCA}}(G \wr Y) \simeq \varphi_{\text{LCA}}(G) \wr Y$ .

*Proof.* If  $G \in \mathbb{R}(X)$ , then Theorem 4.10 implies that  $G$  is shortcut-free and lca-REL and thus,  $W(G) = \emptyset$ . Hence,  $\varphi_{\text{LCA}}(G) = (G \ominus \emptyset)^- = G^- = G$  and (P1) holds. It is a straightforward but tedious task to verify that also (P2) is satisfied, which we leave to the reader. We continue with showing (P3). Let  $G \in \mathbb{G}(X)$  and  $\emptyset \neq Y \subseteq X$ . Since  $\mathfrak{C}_G$  is grounded and  $Y$  is nonempty,  $\mathfrak{C}_G \cap Y$  is grounded. Lemma 4.7 implies that  $G \wr Y = \mathcal{H}(\mathfrak{C}_G \cap Y)$  is regular. Again, Theorem 4.10 implies that  $W(G \wr Y) = \emptyset$  and that  $G \wr Y$  is shortcut-free. Hence,

$$\varphi_{\text{LCA}}(G \wr Y) = (G \wr Y \ominus W(G \wr Y))^- = (G \wr Y \ominus \emptyset)^- = (G \wr Y)^- = G \wr Y.$$

By repeated application of Lemma 2.5 to all shortcuts of  $H$ , it follows that  $\mathfrak{C}_H = \mathfrak{C}_{H^-}$  for every DAG  $H$ . This and Proposition 5.5 implies that  $\mathfrak{C}_G = \mathfrak{C}_{G \ominus W(G)} = \mathfrak{C}_{(G \ominus W(G))^-}$  and, therefore,  $\mathfrak{C}_{(G \ominus W(G))^-} \cap Y = \mathfrak{C}_G \cap Y$ . Consequently,

$$\varphi_{\text{LCA}}(G) \wr Y = (G \ominus W(G))^- \wr Y = \mathcal{H}(\mathfrak{C}_{(G \ominus W(G))^-} \cap Y) = \mathcal{H}(\mathfrak{C}_G \cap Y) = G \wr Y = \varphi_{\text{LCA}}(G \wr Y).$$

Thus,  $\varphi_{\text{LCA}}$  satisfies (P3). □

We now propose a second transformation which, considering the cluster-restriction, also satisfy (P1) – (P3). To this end, let  $\mathbb{G}^*(X) \subseteq \mathbb{G}(X)$  be the set of all DAGs that satisfy (CL). Note that  $\mathbb{G}^*(X)$  contains, in particular, all DAGs with (PCC) (cf. Lemma 4.2). For  $G \in \mathbb{G}^*(X)$ , let  $U(G)$  be the set of all non-lca vertices in  $G$ . Consider now the map

$$\varphi_{\text{lca}}: \mathbb{G}^*(X) \rightarrow \mathbb{R}(X) \text{ defined by } \varphi_{\text{lca}}(G) = (G \ominus U(G))^-.$$

Since all DAGs in  $\mathbb{G}^*(X)$  satisfy (CL), Theorem 5.7 implies that  $U(G) = W(G)$ , i.e.,  $\varphi_{\text{lca}}(G) = \varphi_{\text{LCA}}(G)$ . Hence, we obtain


**Proposition 6.2.** *The transformation  $\varphi_{\text{lca}}$  satisfies (P1), (P2) and (P3) under the cluster-restriction, for all DAGs with (CL) or (PCC) property. To be more precise it holds that*

- (P1)  $G \in \mathbb{R}(X) \implies \varphi_{\text{lca}}(G) = G$ , and
- (P2)  $\sigma \in \Sigma^X, G \in \mathbb{G}^*(X) \implies \varphi_{\text{lca}}(G^\sigma) \simeq \varphi_{\text{lca}}(G)^\sigma$ , and
- (P3)  $\emptyset \neq Y \subseteq X, G \in \mathbb{G}^*(X) \implies \varphi_{\text{lca}}(G \wr Y) \simeq \varphi_{\text{lca}}(G) \wr Y$ .

A simple example of the application of  $\varphi_{\text{LCA}}$  and  $\varphi_{\text{lca}}$  to a network is shown in Figure 8. While the transformation  $\varphi_{\text{LCA}}$  applied to any DAG satisfies (P1), (P2) and (P3), it is ensured that the transformation  $\varphi_{\text{lca}}$  satisfies (P1), (P2) and (P3) only for DAGs in  $\mathbb{G}^*(X)$  and thus, only for DAGs with the (CL) property. In general,  $\varphi_{\text{lca}}$  does not satisfy (P3). By way of example, consider the network  $G$  on  $X = \{x_1, \dots, x_n\}$  in Figure 6 for some  $n \geq 2$ , where  $U(G) = V(G) \setminus X$ . Consequently,  $G' := (G \ominus U(G))^-$  is the DAG  $(X, \emptyset)$  with no edges or inner vertices. Restricting the DAG  $G'$  to, say,  $Y = \{x_1, x_2\}$  thus also yield a DAG  $G' \wr Y = \mathcal{H}(\mathfrak{C}_{G'} \cap Y) = \mathcal{H}(\{\{x_1\}, \{x_2\}\})$  without edges. In contrast, we have

$$\varphi_{\text{lca}}(G \wr Y) = \varphi_{\text{lca}}(\mathcal{H}(\mathfrak{C}_G \cap Y)) = \mathcal{H}(\{\{x_1\}, \{x_2\}, \{x_1, x_2\}\}),$$

thus  $\varphi_{\text{lca}}(G) \wr Y \neq \varphi_{\text{lca}}(G \wr Y)$ . Nevertheless, the application of  $\varphi_{\text{lca}}$  to DAGs in  $\mathbb{G}(X) \setminus \mathbb{G}^*(X)$  can reveal meaningful insights, cf.  $\varphi_{\text{lca}}(N)$  in Figure 9 which is distinct from  $\varphi_{\text{lca}}(N \wr L(N)) = \mathcal{H}(\mathfrak{C}_N)$ .

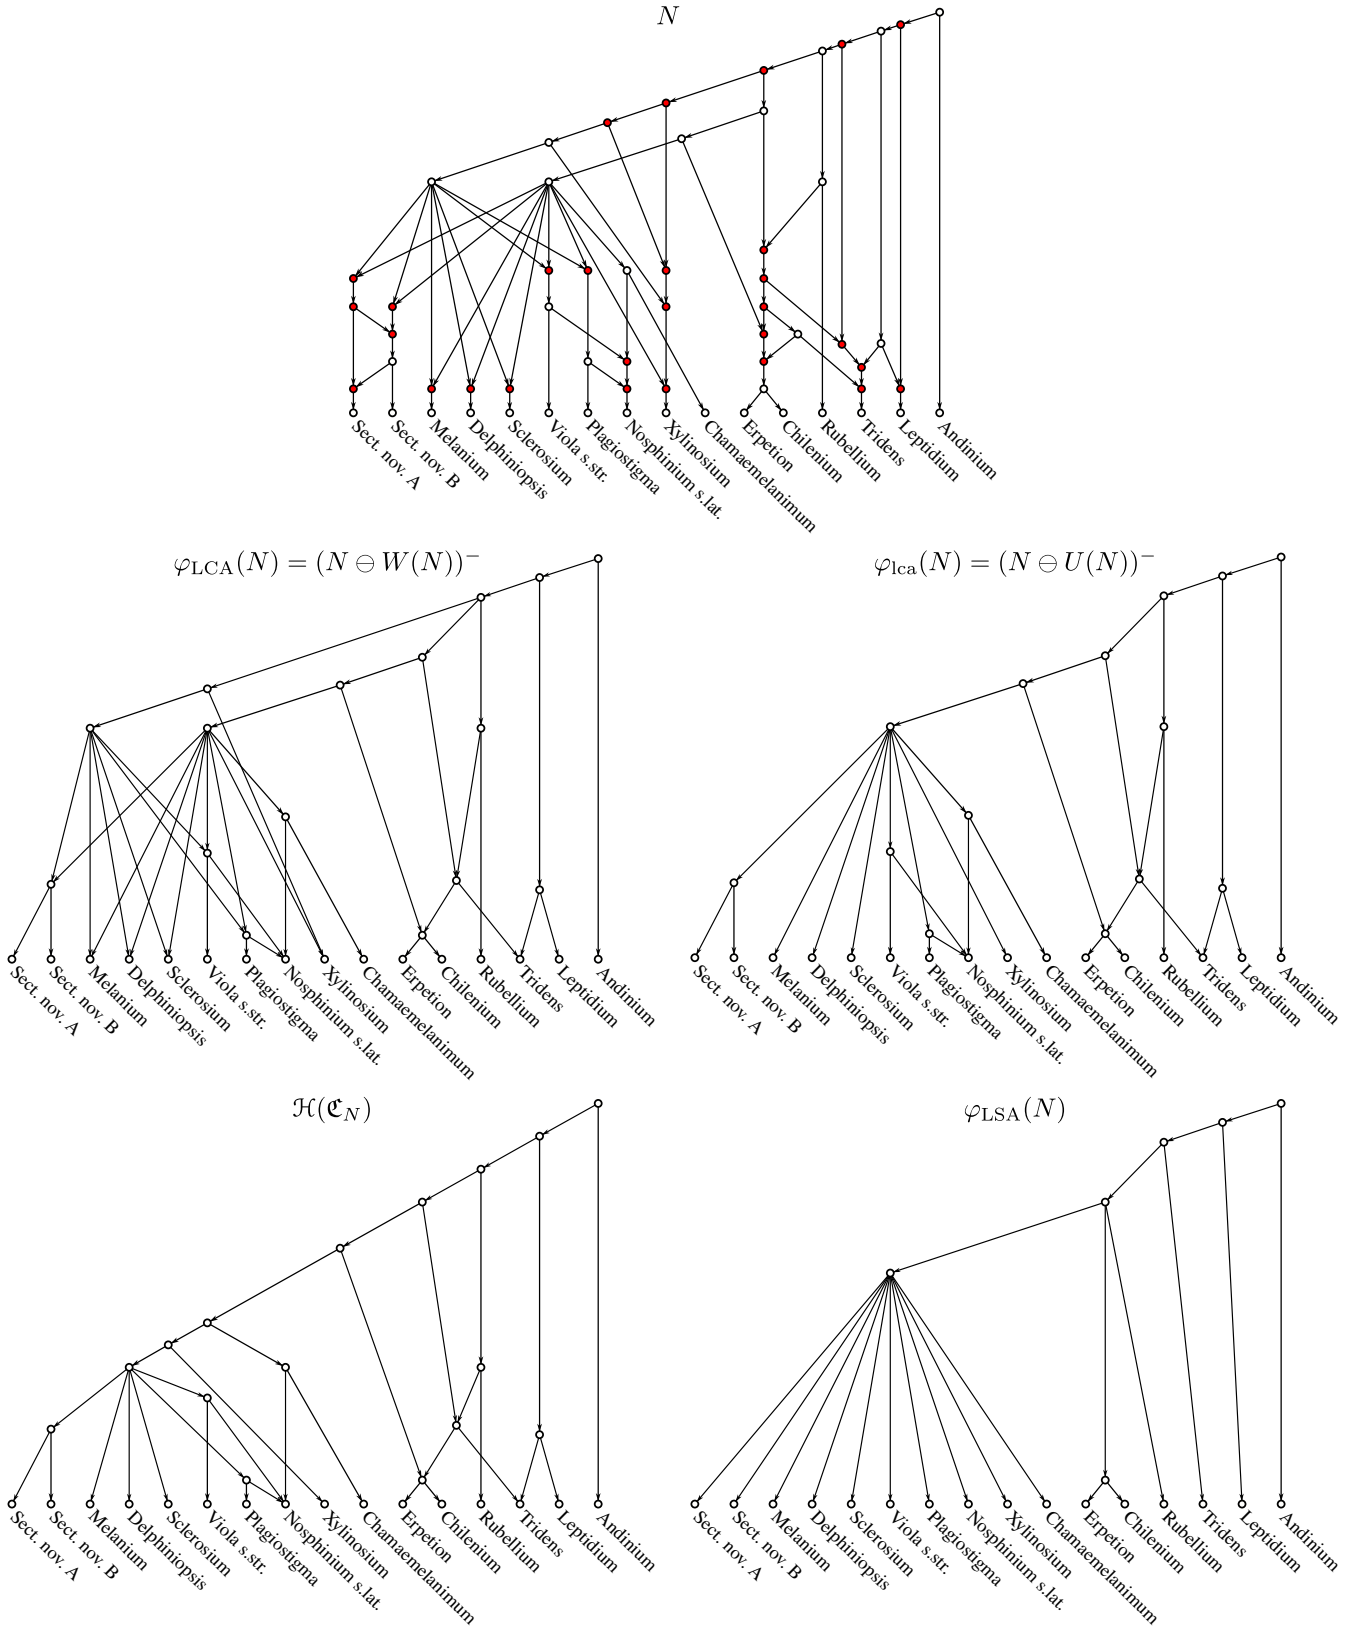

**Figure 9:** Shown is a network  $N$  based on a study from Marcussen et al. [33] and adapted from [25, 27] together with several simplified versions:  $\varphi_{\text{LCA}}(N)$ ,  $\varphi_{\text{lca}}(N)$ , the Hasse diagram  $\mathcal{H}(\mathcal{C}_N)$  and the LSA-tree  $\varphi_{\text{LSA}}(N)$ . The LSA-tree is adapted from [25, Fig. 3.1]. Non-LCA vertices in  $N$  are highlighted in red and are comprised in the set  $W(N)$ . The set  $U(N)$  comprises all non-lca vertices in  $N$ . Here,  $\varphi_{\text{LCA}}(N)$  satisfies (P1), (P2) and (P3). Since  $N$  does not satisfy (CL),  $\varphi_{\text{lca}}(N)$  satisfies only (P1) and (P2) and we have, therefore,  $\varphi_{\text{lca}}(N) \neq \mathcal{H}(\mathcal{C}_N)$ .

## 7 Computational Complexity Results for General and (N3O) DAGs

In Section 5, we have shown that it is possible to compute  $\mathcal{J}^1$ -lca-REL and  $\mathcal{J}^1$ -LCA-REL DAGs in polynomial time by stepwise removal of certain vertices using the  $\ominus$ -operator, given that  $\mathcal{J}^1 = \{1, \dots, |X|\}$ . However, this situation becomes more challenging when  $\mathcal{J}^1 \subsetneq \{1, \dots, |X|\}$ . As we shall see, determining as whether a vertex is a  $k$ -lca or  $k$ -LCA or verifying that a DAG or network is  $\mathcal{J}^1$ -lca-REL or  $\mathcal{J}^1$ -LCA-REL are, in general, NP-hard tasks. Nevertheless we provide polynomial time algorithms for the latter tasks for DAGs  $G$  whose set system  $\mathcal{C}_G$  satisfies (N3O), i.e.,  $\mathcal{C}_G$  does not contain three distinct pairwise overlapping clusters.

### 7.1 General DAGs

For the NP-hardness proofs, we use reductions from the well-known ‘‘Vertex Cover Problem’’, which is based on undirected graphs  $H$  where the edge set consists – unlike in directed graphs – of two-element subsets of  $V(H)$ .

**Problem (Vertex Cover).**

Input: An undirected graph  $H = (V, E)$  and a positive integer  $k \leq |V|$

Question: Is there a vertex cover of size  $k$  or less, that is, a subset  $W \subseteq V$  such that  $|W| \leq k$  and for each edge  $\{u, v\} \in E$ , at least one of  $u$  and  $v$  is contained in  $W$

**Theorem 7.1** ([14]). *Vertex Cover is NP-complete.*

For our NP-hardness proofs below we require that the graph  $H = (V, E)$  and the integer  $k$  that serve as input for the problem *Vertex Cover* satisfies certain constraints. To this end, we provide the following simple observation which is a direct consequence of the fact that  $W$  is a vertex cover of an instance  $(H, k)$  if and only if  $W' = W \cup \{v\}$  is a vertex cover of an instance  $(H', k')$  obtained from  $H$  by adding new vertices  $u, v, w$  and edges  $\{v, u\}$  and  $\{v, w\}$  and by putting  $k' = k + 1 > 1$ .

**Observation 7.2.** *Vertex Cover remains NP-complete if the input is restricted to  $k > 1$  and undirected graphs  $H = (V, E)$  such that  $|V| \geq 4$ ,  $|E| \geq 2$  and  $H$  is not star-graph, i.e., a connected graph which contains a unique vertex that is contained in all edges.*

For the upcoming proofs, the following simple result will come in handy.

**Lemma 7.3.** *A subset  $W \subseteq V$  is a vertex cover of  $H = (V, E)$  if and only if  $W \not\subseteq V \setminus \{u, v\}$  for all  $\{u, v\} \in E$ .*

*Proof.* If  $W \subseteq V \setminus \{u, v\}$  for some  $\{u, v\} \in E$ , then it can clearly be no vertex cover. Conversely, if  $W \subseteq V$  is not a vertex cover of  $H$ , then there is some edge  $\{u, v\} \in E$  such that  $u, v \notin W$ . This together with  $W \subseteq V$  implies  $W \subseteq V \setminus \{u, v\}$ .  $\square$

We now formally state the decision problems whose NP-completeness we intend to prove.

**Problem ( $k$ -lca (resp.,  $k$ -LCA)).**

Input: A DAG  $G = (V, E)$ , a vertex  $v \in V$  and a positive integer  $k$  with  $1 < k \leq |L(G)|$

Question: Is  $v$  a  $k$ -lca vertex (resp.,  $k$ -LCA vertex) in  $G$ ?

**Problem ( $\mathcal{J}^1$ -lca-Rel (resp.,  $\mathcal{J}^1$ -LCA-Rel)).**

Input: A DAG  $G = (V, E)$  and a set  $\mathcal{J}^1$

Question: Is  $G$  an  $\mathcal{J}^1$ -lca-REL (resp.,  $\mathcal{J}^1$ -LCA-REL) DAG?

We start with the three problems  $k$ -lca,  $k$ -LCA and  $\mathcal{J}^1$ -LCA-Rel.


**Theorem 7.4.** *The problems  $k$ -LCA,  $k$ -lca and  $\mathcal{J}^1$ -LCA-Rel are NP-complete, even if the input DAG  $G$  is a regular network and, thus satisfies (PCC), strong-(CL) and is lca-REL and shortcut-free.*

*Proof.* To see that  $k$ -LCA and  $k$ -lca are in NP, let  $A \subseteq X$  of size  $k = |A|$  be a given certificate. Now apply Corollary 3.12. To see that  $\mathcal{J}^1$ -LCA-Rel is in NP, we assume that as a certificate, we have for each vertex  $v \in V(G)$  a subset  $A_v \subseteq X$  with  $|A_v| \in \mathcal{J}^1$ . Verifying whether  $v \in \text{LCA}_G(A_v)$  can be done in polynomial time due to Corollary 3.12.

To prove NP-hardness, we use a reduction from *Vertex Cover*. Let  $(H, k)$  be an arbitrary instance of *Vertex Cover*. By Observation 7.2, we can assume that  $k > 1$ ,  $|V(H)| \geq 4$ ,  $|E(H)| \geq 2$  and that  $H$  is not a star-graph. Consider the following set system

$$\mathcal{C} := \left( \bigcup_{x \in V(H)} \{\{x\}\} \right) \cup \left( \bigcup_{e \in E(H)} \{V(H) \setminus e\} \right) \cup \{V(H)\}.$$

Since  $|V(H)| \geq 4$ , we have  $|V(H) \setminus e| \geq 2$  for all  $e \in E(H)$ . Thus,  $V(H) \setminus e$  appears as a non-singleton cluster in  $\mathcal{C}$ . It is now easy to verify that  $\mathcal{C}$  is a well-defined clustering system. Let  $G \doteq \mathcal{H}(\mathcal{C})$  be the DAG obtained from the Hasse diagram  $\mathcal{H}(\mathcal{C})$  by relabeling all vertices  $\{x\}$  by  $x$ . Hence,  $L(G) = V(H)$  and  $\mathcal{C}_G = \mathcal{C}$ . Since  $\mathcal{C}$  is a clustering system and  $G \simeq \mathcal{H}(\mathcal{C}_G)$ , Lemma 4.7 implies that  $G$  is a regular network. By Theorem 4.10,  $G$  is shortcut-free, lca-REL and satisfies the strong-(CL) property. An example of the constructed DAG  $G$  is shown in Figure 10.

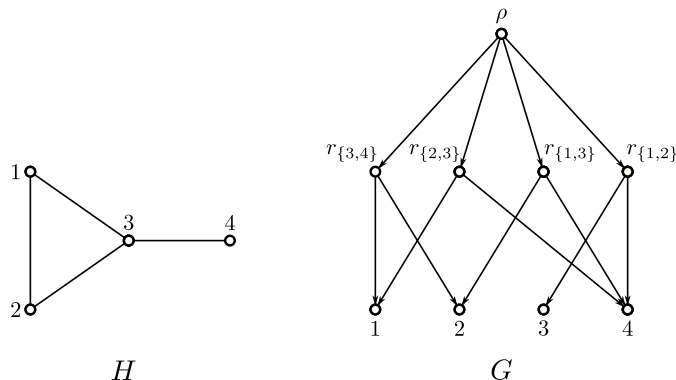

**Figure 10:** Reduction used in the proof of Theorem 7.4. In this example,  $H$  and  $k = 2$  serve as input for *Vertex Cover*. Here,  $W = \{1, 3\}$  and  $W = \{2, 3\}$  are the only vertex covers of  $H$  size  $|W| \leq 2$ . Moreover,  $\rho$  is a  $k$ -lca, resp.,  $k$ -LCA vertex for  $k = 2$  precisely for the two sets  $W = \{1, 3\}$  and  $W = \{2, 3\}$ . In particular,  $\rho$  is a  $k$ -lca, resp.,  $k$ -LCA in  $G$  precisely if  $H$  has a vertex cover of size  $k$ . We note that, in general, the vertices  $r_e$  are not 2-lca vertices but always 2-LCA vertices.

We show first NP-hardness of  $k$ -LCA and  $k$ -lca. Let us denote with  $\rho$  the unique root of  $G$  which results in the instance  $(G, \rho, k)$  of  $k$ -lca, as well as of  $k$ -LCA. By definition, the vertex set of  $G$  consists of the unique root  $\rho$ , the leaves in  $L(G) = V(H)$  and a vertex  $r_e$  that correspond to the cluster  $V(H) \setminus e$  for each  $e \in E(H)$ . Note that  $r_e$  does not correspond to a leaf in  $G$  since  $V(H) \setminus e$  is not a singleton cluster in  $\mathcal{C}$  and, since  $|E(H)| \geq 2$ , at least two such vertices  $r_e$  with  $e \in E(H)$  exist. Moreover, since  $H$  is not a star-graph, for each vertex  $v \in V(H)$  there is an edge  $e \in E(H)$  such  $v \notin e$ . Hence, each vertex  $v \in V(H)$  is contained in at least one set  $V(H) \setminus e$  for some  $e \in E(H)$ . The latter arguments imply that  $G$  has edges  $(\rho, r_e)$  for all  $e \in E(H)$  and edges  $(r_e, v)$  for all  $e \in E(H)$  and all vertices  $v \in V(H) \setminus e$ . No further edges exists. Thus, without explicit construction of the Hasse diagram based on the clustering system  $\mathcal{C}$ , we can instead directly construct  $G$  by adding  $1 + |E(H)| + |V(H)|$  vertices to  $G$  and the prescribed  $|E(H)|(|V(H)| - 2)$  edges to  $G$ . In summary,  $G$  and thus, the instance  $(G, \rho, k)$  of  $k$ -lca and  $k$ -LCA, can be constructed in polynomial time.

Suppose that  $(H, k)$  is a yes-instance of *Vertex Cover*. Thus, there is, in particular, a vertex cover  $W$  of  $H$  such that  $|W| = k > 1$ . By construction,  $\rho$  is a common ancestor of all vertices in  $L(G) = V(H)$  and thus, of all vertices in  $W$ . The vertex  $r_e$  is a common ancestor of  $A \subseteq L(G) = V(H)$  precisely if  $A \subseteq V(H) \setminus e$  and  $|A| > 1$ . By Lemma 7.3,  $W \not\subseteq V(H) \setminus e$  and thus,  $r_e$  is not a common ancestor of  $W$  for any  $e \in E(H)$ . Thus,  $\rho$  is the unique least common ancestor of  $W$  and therefore,  $\rho = \text{lca}_G(W)$ . Since  $|W| = k$ , the root  $\rho$  is a  $k$ -lca vertex and thus, in particular, a  $k$ -LCA vertex.


Suppose that  $(G, \rho, k)$  is a yes-instance of  $k$ -lca (resp.,  $k$ -LCA). Hence,  $\rho = \text{lca}_G(W)$  (resp.,  $\rho \in \text{LCA}_G(W)$ ) for some  $W \subseteq L(G) = V(H)$  with  $|W| = k > 1$ . If  $W \subseteq V(H) \setminus e$  for some edge  $e \in E(H)$ , then  $r_e$  is the unique least common ancestor of  $W$ ; contradicting  $\rho = \text{lca}_G(W)$  (resp.  $\rho \in \text{LCA}_G(W)$ ). Thus, it must hold that  $W \not\subseteq V(H) \setminus e$  for all  $e \in E(H)$  and Lemma 7.3 implies that  $W$  is a vertex cover of  $H$ . In summary,  $k$ -lca and  $k$ -LCA are NP-hard and, therefore, NP-complete.

To show NP-hardness of  $\mathcal{J}^1$ -LCA-Rel, we use the same DAG  $G$  and put  $\mathcal{J}^1 = \{1, 2, k\}$  which results in an instance  $(G, \mathcal{J}^1)$  of  $\mathcal{J}^1$ -LCA-Rel. By the arguments above, this reduction can be achieved in polynomial time. As shown above,  $\rho$  is a  $k$ -LCA vertex, that is  $\rho \in \text{LCA}_G(W)$  for some  $W \subseteq L(G) = V(H)$  with  $|W| = k$  if and only if  $W$  is a vertex cover of  $H$ . Moreover, since distinct  $r_e$  and  $r_f$  are  $\preceq_G$ -incomparable and since each  $r_e$  is adjacent to at least two leaves  $x, y \in V(H) \setminus e$ , it follows that  $r_e \in \text{LCA}_G(\{x, y\})$ , i.e.,  $r_e$  is a 2-LCA vertex for each  $e \in E(H)$ . In summary,  $(H, k)$  is a yes-instance of *Vertex Cover* if and only if  $(G, \mathcal{J}^1)$  is a yes-instance of  $\mathcal{J}^1$ -LCA-Rel. Therefore,  $\mathcal{J}^1$ -LCA-Rel is NP-hard and thus, NP-complete.  $\square$

The NP-hardness of  $k$ -lca and  $\mathcal{J}^1$ -LCA-Rel does not directly imply that  $\mathcal{J}^1$ -lca-REL is NP-hard as well. In particular, the vertices  $r_e$  in the instance  $G$  constructed in Theorem 7.4 are, in general, not 2-lca vertices. Moreover, verifying whether  $G$  is  $\mathcal{J}^1$ -lca-REL is equivalent to checking that *all* vertices  $v \in V(G)$  are  $\mathcal{J}^1$ -lca vertices, which imposes strong structural constraints on  $G$ . Nevertheless, it is not at all surprising that we arrive at the following

**Theorem 7.5.** *The problem  $\mathcal{J}^1$ -lca-Rel is NP-complete.*

*Proof.* Showing that  $\mathcal{J}^1$ -lca-Rel is in NP is done in the same way as showing that  $\mathcal{J}^1$ -LCA-Rel is in NP. To prove NP-hardness, we use a reduction from *Vertex Cover*. Let  $(H, k)$  be an arbitrary instance of *Vertex Cover*. By Observation 7.2, we can assume that  $k > 1$ ,  $|V(H)| \geq 4$  and  $|E(H)| \geq 2$ . We construct now an instance  $(G, \mathcal{J}^1)$  for  $\mathcal{J}^1$ -lca-Rel. First, put  $\mathcal{J}^1 = \{1, 2, k\}$ . Now construct a DAG  $G$  as follows. First, initialize  $G$  as the Hasse diagram  $G \doteq \mathcal{H}(\mathcal{C})$  of the set system  $\mathcal{C} := (\bigcup_{x \in V(H)} \{\{x\}\}) \cup (\bigcup_{e \in E(H)} \{V(H) \setminus e\})$ . Here,  $G$  is equivalently obtained from the DAG constructed in the proof of Theorem 7.4 by removal of the unique root  $\rho$ . For each  $e \in E(H)$ , let  $r_e$  denote the vertex in  $G$  that is adjacent to all  $x \in V(H) \setminus e$ . We now add to  $G$ , for all  $e \in E(H)$ , two new leaves  $x_1^e, x_2^e$  and edges  $(r_e, x_1^e)$  and  $(r_e, x_2^e)$ . Let us denote with  $Z$  the set comprising all leaves  $x_1^e$  and  $x_2^e$  for all  $e \in E(H)$ . Finally add to  $G$  a vertex  $r^*$  and edges  $(r^*, x)$  for all  $x \in V(H)$ . By construction,  $L(G) = V(H) \cup Z$ . This results in the instance  $(G, \mathcal{J}^1)$  for  $\mathcal{J}^1$ -lca-Rel, see Figure 11 for an illustrative example. By similar arguments as in the proof of Theorem 7.4, the instance  $(G, \mathcal{J}^1)$  can be constructed in polynomial time.

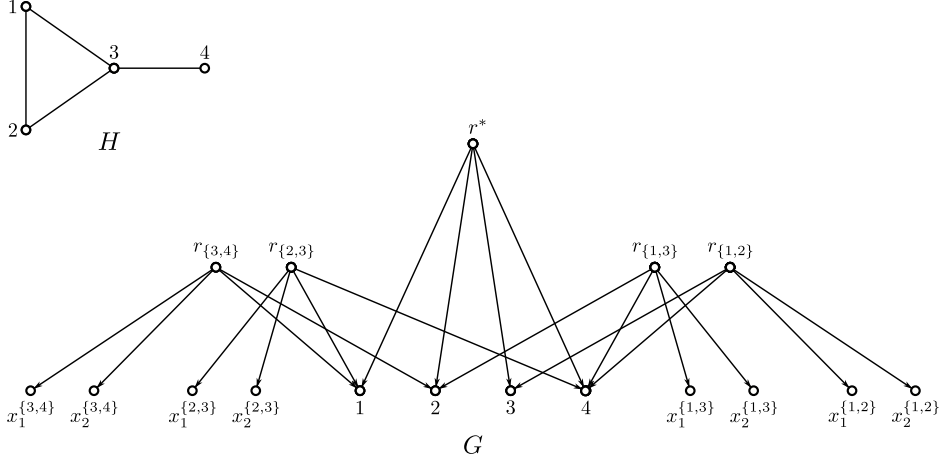

**Figure 11:** Reduction used in the proof of Theorem 7.5. In this example,  $H$  and  $k = 2$  serve as input for *Vertex Cover*. Here,  $W = \{1, 3\}$  and  $W = \{2, 3\}$  are the only vertex covers of  $H$  size  $|W| \leq 2$ . Each vertex  $v \neq r^*$  in  $G$  is, by construction, a  $\{1, 2\}$ -lca vertex: if  $v$  is a leaf it is a 1-lca vertex and, otherwise,  $r_e = \text{lca}_G(\{x_1^e, x_2^e\})$  with  $e \in E(H)$  is a 2-lca vertex. Moreover,  $r^*$  is a  $k$ -lca vertex for  $k = 2$  precisely for the two sets  $W = \{1, 3\}$  and  $W = \{2, 3\}$ . In particular,  $G$  is a  $\{1, 2, k\}$ -lca-REL precisely if  $H$  has a vertex cover of size  $k$ .

By construction, each  $r_e$  in  $G$  is precisely adjacent to the leaves in  $V(H) \setminus e$  and the two leaves  $x_1^e$  and  $x_2^e$ . In particular,  $r_e$  is the only ancestor of the leaves  $x_1^e$  and  $x_2^e$ . Hence,  $r_e = \text{lca}_G(\{x_1^e, x_2^e\})$  which implies that  $r_e$  is a 2-lca vertex for all  $e \in E(H)$ . Therefore, it is evident that  $(G, \mathcal{J}^1)$  is a yes-instance of  $\mathcal{J}^1$ -lca-Rel with  $\mathcal{J}^1 = \{1, 2, k\}$  if and only if  $r^*$  is a  $\{2, k\}$ -lca vertex in  $G$ . Although the DAG  $G$  constructed here slightly differs from the one in the proof Theorem 7.4 (in particular,  $r^*$  is not an ancestor of any  $r_e$  with  $e \in E(H)$ ),  $r^*$  is still an ancestor of all  $x \in V(H) = L(G) \setminus Z$  and of no other vertices.

Suppose that  $(H, k)$  is a yes-instance of *Vertex Cover*. Thus, there is a vertex cover  $W \subseteq V(H)$  of  $H$  such that  $|W| = k > 1$ . By construction,  $r^*$  is a common ancestor of all vertices in  $V(H) = L(G) \setminus Z$  and thus, of all vertices in  $W$ , but not of  $r_e$  for all  $e \in E(H)$ . Since  $W \subseteq V(H)$ , the vertex  $r_e$  is a common ancestor of  $W$  precisely if  $W \subseteq V(H) \setminus e$ . However, by Lemma 7.3, for all  $e \in E(H)$ ,  $W \not\subseteq V(H) \setminus e$  and thus,  $r_e$  is not a common ancestor of  $W$ . Thus,  $r^*$  is the unique least common ancestor of  $W$  and therefore,  $r^* = \text{lca}_G(W)$ . Since  $|W| = k$ , the vertex  $r^*$  is a  $k$ -lca vertex. In summary,  $(G, \mathcal{J}^1)$  is a yes-instance of  $\mathcal{J}^1$ -lca-Rel.

Suppose that  $(G, \mathcal{J}^1)$  is a yes-instance of  $\mathcal{J}^1$ -lca-Rel. Hence,  $r^* = \text{lca}_G(W)$  for some  $W \subseteq L(G) = V(H) \cup Z$  with  $|W| \in \{2, k\}$ . Since  $r^*$  is not an ancestor of any vertex in  $Z$ , it follows that  $W \subseteq V(H)$ . If  $W \subseteq V(H) \setminus e$  for some edge  $e \in E(H)$ , then  $r_e$  is a common ancestor of  $W$ . Since  $r_e$  and  $r^*$  are  $\preceq_G$ -incomparable, this would contradict  $r^* = \text{lca}_G(W)$ . Thus, it must hold that  $W \not\subseteq V(H) \setminus e$  for all  $e \in E(H)$  and Lemma 7.3 implies that  $W$  is a vertex cover of  $H$ . Hence,  $(H, k)$  is a yes-instance of *Vertex Cover*. Thus,  $\mathcal{J}^1$ -lca-Rel is NP-hard and, consequently, NP-complete.  $\square$

Although the problems  $k$ -lca and  $k$ -LCA as well as  $\mathcal{J}^1$ -lca-Rel and  $\mathcal{J}^1$ -LCA-Rel are NP-hard, we note in passing that these problems become polynomial-time solvable whenever  $k$  is treated as a constant, i.e.,  $k \in O(1)$ . To test if a vertex  $v$  is a  $k$ -lca or a  $k$ -LCA vertex in a DAG  $G = (V, E)$  can then be done by testing all  $O(|V|^k)$  subsets  $A \subseteq \mathcal{C}_G(v)$  with  $|A| = k$  using Algorithm 1. Hence, testing if  $v$  is  $k$ -lca or  $k$ -LCA can be done in polynomial time. Similarly, if in a given set  $\mathcal{J}^1$  the maximum integer  $k \in \mathcal{J}^1$  is treated as fixed and constant, we can repeat the latter arguments for all vertices in  $G$  and all  $O(|V|^k)$  subsets of size at most  $k$  to obtain a



polynomial time approach for verifying if  $G$  is  $\mathcal{J}^1$ -lca-REL or  $\mathcal{J}^1$ -LCA-REL or not. This approach is, in particular, feasible when we are interested in the special case that all  $v \in V$  satisfy  $v = \text{lca}(\{x, y\})$  or  $v \in \text{LCA}(\{x, y\})$  for some  $x, y \in X$ . This discussion together with Proposition 5.5 and 5.6 implies

**Observation 7.6.** *It can be tested in polynomial time if a vertex  $v \in V$  in a DAG  $G = (V, E)$  is a  $\{1, 2\}$ -lca or  $\{1, 2\}$ -LCA vertex. Moreover, it can be tested in polynomial time if a DAG is  $\{1, 2\}$ -lca-REL or  $\{1, 2\}$ -LCA-REL. Finally, every DAG  $G$  can be transformed in polynomial-time into a phylogenetic  $\{1, 2\}$ -lca-REL (resp.,  $\{1, 2\}$ -LCA-REL) DAG satisfying (S1) – (S4) (resp., (S1) – (S5)) w.r.t.  $G$  using straightforward modifications of Algorithm 3 (resp., Algorithm 2).*

We now summarize the complexity results presented in this paper so far. We have shown that it is tractable to decide whether a given vertex is the (unique) LCA of a *specified set*  $A$  (cf. Corollary 3.12) and whether a given vertex  $v$  is a  $k$ -lca (resp.  $k$ -LCA) vertex for *some* integer  $k$  (cf. Corollaries 3.12 and 3.6). However, if  $k$  is part of the input and not treated as constant, it is NP-complete to determine whether  $v$  is a  $k$ -lca or a  $k$ -LCA vertex. Similarly, deciding whether a DAG is  $\mathcal{J}^1$ -lca-REL (resp.  $\mathcal{J}^1$ -LCA-REL) is tractable when  $\mathcal{J}^1 = \{1, \dots, |L(G)|\}$  (cf. Corollary 3.12) but NP-complete otherwise.

## 7.2 DAGs with (N3O) property

Although the problems  $\mathcal{J}^1$ -lca-Rel and  $\mathcal{J}^1$ -LCA-Rel, as well as  $k$ -LCA and  $k$ -lca, are NP-complete, we show that they can be efficiently solved when the input DAGs  $G$  satisfy (N3O), i.e.,  $\mathcal{C}_G$  satisfies (N3O) and thus does not contain three distinct pairwise overlapping clusters. The interest into DAGs that satisfy (N3O) is two-fold. On the one hand, DAGs with (N3O) property include interesting and non-trivial classes of networks such as rooted trees or galled-trees [20], i.e., networks in which each connected component  $K$  is either a single vertex, an edge or  $K$  is composed of exactly two  $uv$ -paths that only have  $u$  and  $v$  in common. An example of a galled-tree is provided by the network  $N_1$  in Figure 2. In particular, galled-trees form a subclass of level-1 networks, i.e., networks  $N$  in which each biconnected component contains at most one vertex  $v$  with  $\text{indeg}_N(v) > 1$  [20]. On the other hand, it can be verified in polynomial time whether a given set system  $\mathcal{C}$  on  $X$  satisfies (N3O) or not, by checking, for all of the  $O(|\mathcal{C}|^3)$  distinct clusters  $C_1, C_2, C_3 \in \mathcal{C}$ , if they pairwise overlap or not in  $O(|X|^3)$  time. Since  $|\mathcal{C}_G| \leq |V|$  and since  $\mathcal{C}_G$  can, together with Lemma 2.2, be determined by a simple post-order traversal in polynomial time for every DAG  $G$ , this yields a polynomial time approach to test if  $G$  satisfies (N3O).

**Observation 7.7.** *DAGs with (N3O) property can be recognized in polynomial time.*

In what follows, we show that the problems  $\mathcal{J}^1$ -lca-Rel and  $\mathcal{J}^1$ -LCA-Rel, as well as  $k$ -LCA and  $k$ -lca can be solved in polynomial time on DAGs with (N3O) property. To this end, we start with the following results.

**Lemma 7.8.** *Let  $G$  be a DAG on  $X$  that satisfies (N3O) and let  $v \in V(G)$ . Then,  $v$  is a 2-LCA vertex in  $G$  if and only if (a)  $|\mathcal{C}_G(v)| \geq 2$  and (b)  $\mathcal{C}_G(u) \neq \mathcal{C}_G(v)$  for all  $u \in \text{child}_G(v)$ . In particular, the following statements are equivalent.*

- (1)  $v$  is a  $k$ -LCA vertex in  $G$  for some  $k \geq 2$ .
- (2)  $v$  is an  $\ell$ -LCA vertex in  $G$  for all  $\ell \in \{2, 3, \dots, |\mathcal{C}_G(v)|\}$ .

Hence,  $G$  is  $\mathcal{J}^1$ -LCA-REL for some  $\mathcal{J}^1$  with  $|\mathcal{J}^1| > 1$  if and only if each inner vertex of  $G$  is a 2-LCA vertex.

*Proof.* Let  $G$  be a DAG on  $X$  that satisfies (N3O) and let  $v \in V(G)$ . First suppose that  $v$  is a 2-LCA vertex in  $G$  and thus that  $v \in \text{LCA}_G(A)$  for some  $A \subseteq X$  with  $|A| = 2$ . Hence,  $A \subseteq \mathcal{C}_G(v)$  and  $|\mathcal{C}_G(v)| \geq 2$  must hold. By Lemma 3.1,  $\mathcal{C}_G(u) \neq \mathcal{C}_G(v)$  for all  $u \in \text{child}_G(v)$ . Conversely, assume that Condition (a) and (b) are satisfied for  $v$ . Assume, for contradiction, that  $v$  is not a 2-LCA vertex. Let  $\mathcal{C}^*$  be the set of all inclusion-maximal cluster in the set  $\{\mathcal{C}_G(u) \mid u \in \text{child}_G(v)\}$  of the clusters associated with the children of  $v$  in  $G$ . Since  $|\mathcal{C}_G(v)| \geq 2$ ,  $v$  must be an inner vertex and Lemma 2.2 implies that

$$\mathcal{C}_G(v) = \bigcup_{u \in \text{child}_G(v)} \mathcal{C}_G(u) = \bigcup_{C \in \mathcal{C}^*} C. \quad (\text{I})$$

Since  $v$  is not a leaf and not a 2-LCA vertex, Lemma 3.1 implies that, for all  $A \subseteq \mathcal{C}_G(v)$  with  $|A| = 2$ , there must be some child  $u \in \text{child}_G(v)$  such that  $A \subseteq \mathcal{C}_G(u)$ . Thus, for every  $A \subseteq \mathcal{C}_G(v)$  of size  $|A| = 2$  there is, in particular, some element  $C \in \mathcal{C}^*$  such that  $A \subseteq C$ . Note that any two clusters in  $\mathcal{C}^*$  are either disjoint or overlap. Condition (b) and Eq. (I) imply that  $|\mathcal{C}^*| \geq 2$ . Assume, first that the clusters in  $\mathcal{C}^*$  are pairwise disjoint. Let  $C_1, C_2$  be distinct elements in  $\mathcal{C}^*$  and  $x \in C_1$  and  $y \in C_2$ . Since  $C_1 \cap C_2 = \emptyset$ , we have  $x \neq y$ . However, as argued above, there exists a cluster  $C_3 \in \mathcal{C}^*$  such that  $\{x, y\} \subseteq C_3$  and, thus,  $C_1 \cap C_3 \neq \emptyset$ ; a contradiction. Hence, the clusters in  $\mathcal{C}^*$  cannot all be pairwise disjoint. Thus, there are clusters  $C_1, C_2 \in \mathcal{C}^*$  that overlap. Therefore, there are  $x \in C_1 \setminus C_2$  and  $y \in C_2 \setminus C_1$  and thus,  $x \neq y$ . Again, as argued above, there exists a cluster  $C_3 \in \mathcal{C}^*$  such that

$\{x, y\} \subseteq C_3$  and thus,  $C_3 \neq C_1, C_2$ . Consequently,  $C_3$  overlaps with both  $C_1$  and  $C_2$ , i.e.,  $\mathfrak{C}^*$  contains the three pairwise overlapping clusters  $C_1, C_2$  and  $C_3$ ; violating the fact that  $G$  satisfies (N3O). Hence, this case cannot occur. In summary,  $v$  must be a 2-LCA vertex.

We show now that Statements (1) and (2) are equivalent. Clearly (2) implies (1). Hence, assume that  $v$  is a  $k$ -LCA vertex in  $G$  for some  $k \geq 2$ . One easily observes that  $k \leq |\mathfrak{C}_G(v)|$  must hold as, otherwise, there is no  $A \subseteq X$  of size  $|A| = k$  such  $A \subseteq \mathfrak{C}_G(v)$  and, thus  $v \notin \text{LCA}_G(A)$  by Lemma 3.1. Moreover, there cannot be a child  $u$  of  $v$  in  $G$  such that  $\mathfrak{C}_G(u) = \mathfrak{C}_G(v)$  since, otherwise, Lemma 3.1 would imply that  $v$  is not a  $k$ -LCA vertex. Thus, we have shown that (a)  $|\mathfrak{C}_G(v)| \geq k \geq 2$  and (b)  $\mathfrak{C}_G(u) \neq \mathfrak{C}_G(v)$  for all  $u \in \text{child}_G(v)$  must hold. By the previous statement,  $v$  is a 2-LCA vertex. By Lemma 3.3,  $v$  is an  $\ell$ -LCA vertex in  $G$  for all  $\ell$  with  $2 \leq \ell \leq |\mathfrak{C}_G(v)|$ .

It is now an easy task to verify that  $G$  is  $\mathcal{J}^1$ -LCA-REL for some  $\mathcal{J}^1$  with  $|\mathcal{J}^1| > 1$  (which implies that  $\ell \in \mathcal{J}^1$  for some  $\ell > 1$ ) if and only if each inner vertex of  $G$  is a 2-LCA vertex.  $\square$

**Lemma 7.9.** *Let  $G$  be a DAG on  $X$  that satisfies (N3O) and let  $v \in V(G)$ . Then, the following statements are equivalent.*

- (1)  $v$  is a  $k$ -lca vertex in  $G$  for some  $k \geq 2$ .
- (2)  $v$  is an  $\ell$ -lca vertex in  $G$  for all  $\ell \in \{2, 3, \dots, |\mathfrak{C}_G(v)|\}$ .

Moreover, the following statements are equivalent.

- (3)  $G$  is  $\mathcal{J}^1$ -lca-REL for some  $\mathcal{J}^1$  with  $|\mathcal{J}^1| > 1$ .
- (4) Each inner vertex of  $G$  is a 2-lca vertex.
- (5)  $G$  has the strong-(CL) property.

*Proof.* Suppose first that  $v$  is a  $k$ -lca vertex in  $G$  for some  $k \geq 3$ . We start with showing that  $v$  is a  $(k-1)$ -lca vertex in  $G$ . Since  $v$  is a  $k$ -lca vertex, there is a subset  $A \subseteq X$  of size  $|A| = k$  such that  $\text{lca}_G(A) = v$ . Assume, for contradiction, that  $v$  is not a  $(k-1)$ -lca vertex in  $G$ . Since  $|A| \geq 3$  we can choose three distinct vertices  $x_1, x_2, x_3 \in A$ . Put  $A_i := A \setminus \{x_i\}$  for all  $i \in \{1, 2, 3\}$ . Note that  $|A_i| = k-1$  and thus,  $v \neq \text{lca}_G(A_i)$  for all  $i \in \{1, 2, 3\}$ . Since  $v$  is a common ancestor of every vertex in  $A_i$  but  $v \neq \text{lca}_G(A_i)$  it follows that there is a vertex  $v_i \prec_G v$  with  $v_i \in \text{LCA}_G(A_i)$  for all  $i \in \{1, 2, 3\}$ . By construction and since  $|A_i| \geq 3$ ,  $A_i \cap A_j \neq \emptyset$  and thus,  $\mathfrak{C}_G(v_i) \cap \mathfrak{C}_G(v_j) \neq \emptyset$  for all  $i, j \in \{1, 2, 3\}$ . Since  $v_i \prec_G v = \text{lca}_G(A)$  and  $A_i \subseteq \mathfrak{C}_G(v_i)$  and  $A_i \cup \{x_i\} = A$  it follows that  $x_i \notin \mathfrak{C}_G(v_i)$  for all  $i \in \{1, 2, 3\}$ . By construction,  $x_i \in \mathfrak{C}_G(v_j)$  for all distinct  $i, j \in \{1, 2, 3\}$ . Hence,  $\mathfrak{C}_G(v_i) \not\subseteq \mathfrak{C}_G(v_j)$  for all distinct  $i, j \in \{1, 2, 3\}$ . Consequently,  $\mathfrak{C}_G(v_1), \mathfrak{C}_G(v_2)$  and  $\mathfrak{C}_G(v_3)$  are three pairwise overlapping cluster; contradicting the fact that  $G$  satisfied (N3O). Hence,  $v$  is a  $(k-1)$ -lca vertex in  $G$ .

We are now in the position to prove the equivalence between (1) and (2). Clearly, Statement (2) implies (1). Suppose that  $v$  is a  $k$ -lca vertex in  $G$  for some  $k \geq 2$ . If  $k = 2$ , then Lemma 3.3 implies that  $v$  is an  $\ell$ -lca vertex in  $G$  for all  $\ell \in \{2, \dots, |\mathfrak{C}_G(v)|\}$ . If  $k \geq 3$ , then repeated application of the latter statement, i.e.,  $v$  is a  $(k-1)$ -lca shows that  $v$  is an  $\ell$ -lca vertex in  $G$  for all  $\ell \in \{2, 3, \dots, k\}$ . In addition, Lemma 3.3 implies that  $v$  is an  $\ell$ -lca vertex in  $G$  for all  $\ell \in \{k, \dots, |\mathfrak{C}_G(v)|\}$ . In summary,  $v$  is an  $\ell$ -lca vertex in  $G$  for all  $\ell \in \{2, \dots, |\mathfrak{C}_G(v)|\}$ .

It is now an easy task to verify that  $G$  is  $\mathcal{J}^1$ -lca-REL for some  $\mathcal{J}^1$  with  $|\mathcal{J}^1| > 1$  (which implies that  $\ell \in \mathcal{J}^1$  for some  $\ell > 1$ ) if and only if each inner vertex of  $G$  is a 2-lca vertex. Moreover, by the equivalence between (1) and (2), each inner vertex of  $G$  is a 2-lca vertex if and only if each inner vertex of  $G$  is a  $|\mathfrak{C}_G(v)|$ -lca vertex and thus, satisfies  $v = \text{lca}_G(\mathfrak{C}_G(v))$ . Consequently, each inner vertex of  $G$  is a 2-lca vertex if and only if  $G$  has the strong-(CL) property. In summary, Statements (3), (4) and (5) are equivalent.  $\square$

Based on the latter results, we derive the following simple characterization of lca-REL trees.

**Corollary 7.10.** *A tree is lca-REL if and only if it is phylogenetic. In particular, every inner vertex  $v$  in a phylogenetic tree  $G$  is an  $\ell$ -lca vertex for each  $\ell \in \{2, \dots, |\mathfrak{C}_G(v)|\}$ .*

*Proof.* By Lemma 3.10, every lca-REL DAG is phylogenetic. Suppose that  $G$  is a phylogenetic tree. It is well-known that every phylogenetic tree is isomorphic to the Hasse diagram of its clustering system [40]. Hence,  $G$  is regular. Theorem 4.10 implies that  $G$  is lca-REL. Since  $\mathfrak{C}_G$  is a hierarchy, i.e., a clustering system without overlapping clusters, we can conclude that  $G$  satisfies (N3O). By Lemma 7.9, every inner vertex  $v$  of  $G$  is an  $\ell$ -lca vertex for each  $\ell \in \{2, \dots, |\mathfrak{C}_G(v)|\}$ .  $\square$

Note that Corollary 7.10 cannot easily be generalized to other phylogenetic DAGs with the (N3O) property. For example, consider the galled tree  $G$  on  $X = \{x_1, x_2, x_3\}$ , which has a root  $\rho$  with two children  $u_1$  and  $u_2$ , an additional edge  $(u_1, u_2)$ , and such that  $u_1$  has only  $x_1$  as child, while  $u_2$  has precisely  $x_2$  and  $x_3$  as its children. It is easy to verify that  $G$  is phylogenetic, but  $\rho \neq \text{lca}_G(A)$  for any  $A \subseteq X$ , that is,  $G$  is not lca-REL. Adding a new leaf  $x_4$  and the edge  $(\rho, x_4)$  to  $G$  would result in an lca-REL galled tree.

Note that the DAG  $G$  in Figure 5 is a DAG with (N3O) property that is neither  $\mathcal{J}^1$ -LCA-REL nor  $\mathcal{J}^1$ -lca-REL for any  $\mathcal{J}^1$ . However, the results above allow us, together with the  $\ominus$ -operator, to transform a DAG  $G$  with (N3O)

property in polynomial time into a DAG  $G'$  that is  $\mathcal{J}^1$ -LCA-REL or  $\mathcal{J}^1$ -lca-REL for arbitrary  $\mathcal{J}^1$ . To this end, observe first that one can easily verify whether a given DAG with (N3O) property is an  $\mathcal{J}^1$ -lca-REL or  $\mathcal{J}^1$ -LCA-REL: Lemma 7.9 implies that we only need to verify if each inner vertex is a 2-lca-REL or 2-LCA-REL DAG; a task that can be achieved in polynomial time (cf. Observation 7.6). Even more, we can transform any DAG  $G$  with (N3O) into an  $\mathcal{J}^1$ -lca-REL, resp.,  $\mathcal{J}^1$ -LCA-REL DAG that satisfies (N3O) and properties (S1) – (S4), resp., (S1) – (S5) w.r.t.  $G$  by utilizing the following

**Lemma 7.11.** *Let  $G$  be a DAG and  $v$  be an inner vertex of  $G$ . If  $G$  satisfies (N3O), then  $G \ominus v$  satisfies (N3O).*

*Proof.* By contraposition, assume that  $G \ominus v$  does not satisfy (N3O) for some inner vertex  $v$  of the DAG  $G$ . Thus,  $\mathcal{C}_{G \ominus v}$  contains three clusters that are pairwise overlapping. By Observation 5.2 we have  $\mathcal{C}_{G \ominus v} \subseteq \mathcal{C}_G$ . Hence,  $\mathcal{C}_G$  contains three pairwise overlapping clusters and  $G$  does not satisfy (N3O).  $\square$

Thus, whenever we found a vertex  $v$  that is not an  $\mathcal{J}^1$ -lca vertex resp., an  $\mathcal{J}^1$ -LCA vertex in an (N3O) DAG  $G$ , we can compute  $G \ominus v$  in polynomial time, to derive a DAG that, by Lemma 7.11, satisfy (N3O) and, by Theorem 5.4, satisfies (S1) – (S4), resp., (S1) – (S5) w.r.t.  $G$ . Hence, we can reuse the latter arguments, for checking whether the remaining vertices are  $\mathcal{J}^1$ -lca or  $\mathcal{J}^1$ -LCA vertices or not and then repeat this process until no such vertices exist and always obtain a DAG satisfying (N3O) and (S1) – (S4), resp., (S1) – (S5) w.r.t.  $G$ . We summarize the latter discussion into

**Theorem 7.12.** *For a given DAG  $G$  that satisfies (N3O), a vertex  $v \in V(G)$  and a set  $\mathcal{J} \subseteq \{1, \dots, |X|\}$ , it can be verified in polynomial time if  $v$  is an  $\mathcal{J}$ -lca vertex or an  $\mathcal{J}$ -LCA vertex. In particular, every DAG  $G$  that satisfies (N3O) can be transformed in polynomial time into an  $\mathcal{J}^1$ -lca-REL, resp.,  $\mathcal{J}^1$ -LCA-REL DAG with (N3O)-property and that satisfies (S1) – (S4) resp., (S1) – (S5) w.r.t.  $G$ .*

## 8 Summary and Outlook

In this paper, we introduced  $\mathcal{J}^1$ -LCA-REL and  $\mathcal{J}^1$ -lca-REL DAGs, with focus on the case when  $\mathcal{J}^1 = \{1, 2, \dots, |L(G)|\}$ , resulting in the notion of LCA-REL and lca-REL DAGs. In particular, we have shown that one can efficiently transform any given DAG  $G$  into an LCA-REL and lca-REL DAG  $H$  by stepwise removal of vertices that are not LCAs, resp., unique LCAs of any subset of taxa with the help of the  $\ominus$ -operator. Importantly, the resulting DAG  $H$  maintains significant structural features of the original DAG  $G$  specified by the axioms (S1) – (S5). The simply defined and, in our opinion, rather inconspicuous  $\ominus$ -operator has been a somewhat surprisingly powerful tool in this paper, and may still prove to be helpful in related contexts. We characterized LCA-REL and lca-REL DAGs and showed their close relationship to regular DAGs. Moreover, we showed that our construction indeed “simplifies” a DAG  $G$ , formalized through three axioms (P1) – (P3). Although we have provided polynomial-time algorithms to recognize lca-REL or LCA-REL DAGs and to transform DAGs into lca-REL or LCA-REL ones, the problem of determining if a vertex  $v$  is a  $k$ -lca or  $k$ -LCA vertex for a given  $k$  and, recognizing  $\mathcal{J}^1$ -LCA-REL and  $\mathcal{J}^1$ -lca-REL DAGs for specified sets  $\mathcal{J}^1$  is an NP-complete task. The latter problems become tractable for DAGs that do not contain three pairwise overlapping clusters; a class of DAGs which includes rooted phylogenetic trees and galled-trees.

All questions posed in the introduction have been fully addressed. Question 1 is answered by the results in Section 3, where we demonstrate that it is possible to determine in polynomial time whether a given vertex is the (unique) LCA of a specific subset  $A \subseteq L(G)$ . The answer to Question 2 is two-fold. When the size of the unknown set  $A \subseteq L(G)$  is unspecified, Corollary 3.6 provides a characterization, allowing Question 2 to be answered in polynomial time. However, when the size  $|A|$  is specified but the set  $A$  itself is unknown, verifying if a vertex is the (unique) LCA of a subset of leaves of size  $|A|$  becomes NP-complete, as shown in Section 7. Nevertheless, the latter type of problem becomes tractable for DAGs with N3O property. The answer to Question 3 is provided by Theorems 4.4 and 4.5, while answers to Question 4 are presented in Sections 5 and 7.

The attentive reader may have noticed that some of the technical details introduced with the set  $\mathcal{J}^1$  in the definitions of  $\mathcal{J}^1$ -lca-REL and  $\mathcal{J}^1$ -LCA-REL DAGs could have been omitted, as we primarily focused on the special case where  $\mathcal{J}^1 = \{1, 2, \dots, |L(G)|\}$ . However, since  $\mathcal{J}^1$ -LCA-REL and  $\mathcal{J}^1$ -lca-REL DAGs are, in particular, LCA-REL and lca-REL DAGs, respectively, most of the results also hold for the more general  $\mathcal{J}^1$ -LCA-REL and  $\mathcal{J}^1$ -lca-REL DAGs. Specifically, Theorem 5.4 implies that the axioms (S1) – (S5), resp., (S1) – (S4) are preserved under the  $\ominus$ -operator when applied to non- $\mathcal{J}^1$ -LCA, resp., non- $\mathcal{J}^1$ -lca vertices. It is, therefore, of interest to explore in greater detail which classes of DAGs and networks allow for a polynomial-time solution to check the properties  $\mathcal{J}^1$ -lca-REL and  $\mathcal{J}^1$ -LCA-REL, as well as to transform the underlying DAGs into  $\mathcal{J}^1$ -lca-REL and  $\mathcal{J}^1$ -LCA-REL ones for specific sets  $\mathcal{J}^1$ . Further questions in this context include: Can we characterize DAGs and networks in which every inner vertex is a  $k$ -lca vertex for a specific  $k$ ? If such a  $k$  exists, what is the minimal

one? Similarly, if  $G$  is lca-REL or LCA-REL, what is the smallest integer  $k$  in a subset  $\mathcal{J} \subseteq \{1, 2, \dots, |L(G)|\}$  such that  $G$  is  $\mathcal{J}$ -lca-REL or  $\mathcal{J}$ -LCA-REL? By Observation 7.6, the latter task can be easily addressed when we consider whether  $G$  is  $\{1, 2\}$ -lca-REL or  $\{1, 2\}$ -LCA-REL.

We have shown that the set  $W$  of non-LCA vertices required to transform  $G$  into an LCA-rel DAG  $G \ominus W$ , satisfying conditions (S1) – (S5), is uniquely determined. This uniqueness property is preserved for DAGs that satisfy (CL) or (PCC), i.e., for such DAGs  $G$ , the set  $W$  of non-lca vertices in  $G$  that ensures  $G \ominus W$  is lca-rel while satisfying conditions (S1) – (S4) is also unique. In general, however, the set  $W$  of non-lca vertices in  $G$  that makes  $G \ominus W$  lca-rel with conditions (S1) – (S4) is not unique. This raises the question of the computational complexity involved in finding a minimum-sized set  $W$  of non-lca vertices to ensure the latter.

By Proposition 5.5, if  $G \ominus W$  is the LCA-rel version of  $G$ , we have  $\mathcal{C}_{G \ominus W} = \mathcal{C}_G$ . In contrast, if  $W$  is the set of all non-lca vertices of  $G$ , Observation 5.2 implies only that  $\mathcal{C}_{G \ominus W} \subseteq \mathcal{C}_G$ . In fact, the example in Figure 6 demonstrates that  $\mathcal{C}_{G \ominus W} \subsetneq \mathcal{C}_G$  is possible. This raises the question of how the set systems  $\mathcal{C}_G$  and  $\mathcal{C}_{G \ominus W}$  are related, and which clusters, if any, are contained in  $\mathcal{C}_G \setminus \mathcal{C}_{G \ominus W}$ . Moreover, instead of seeking a minimum-sized set  $W$  of non-lca vertices that ensures  $G \ominus W$  is lca-rel under conditions (S1) – (S4), one might consider finding a set  $W$  that minimizes the size of the difference  $\mathcal{C}_G \setminus \mathcal{C}_{G \ominus W}$ , thereby preserving as many clusters in  $\mathcal{C}_G$  as possible in  $G \ominus W$ .

A further interesting generalization is as follows. For a DAG  $G$ , define all leaves as *pertinent*. Recursively, a non-leaf vertex is considered *pertinent* if it serves as a least common ancestor (LCA) for a subset of pertinent vertices. For example, in the DAG  $G$  illustrated in Figure 5, the vertices  $v$  and  $w$  are pertinent because they are the LCA of the set  $\{x, y\}$ . Consequently, the non-LCA vertex  $\rho$  also becomes pertinent, as it is the unique LCA of the two pertinent vertices  $v$  and  $w$ . A characterization of networks and DAGs in which all vertices are pertinent, as well as operations to transform a DAG into such a type of DAG, might be an interesting avenue for future research.

## Acknowledgments

We thank Guillaume Scholz, Nicolas Wieseke and Peter F. Stadler for stimulating discussions on this topic. Moreover, we thank Daniel Huson for providing the data set of the *Viola* genus network.

## Statements and Declarations

The authors declare no conflict of interest. Both authors contributed equally to this work. The data used to generate the network  $N$  in Figure 9 is available at <https://github.com/husonlab/phylosketch> (Nov 1, 2024).

## References

- [1] Aho A, Hopcroft J, Ullman J (1983) Data structures and algorithms. Addison-Wesley Publishing Co.
- [2] Baroni M, Semple C, Steel M (2005) A framework for representing reticulate evolution. *Ann Comb* 8:391–408, DOI 10.1007/s00026-004-0228-0
- [3] Bender MA, Pemmasani G, Skiena S, Sumazin P (2001) Finding least common ancestors in directed acyclic graphs. In: SODA '01: Proceedings of the 12th Annual ACM-SIAM Symposium on Discrete Algorithms, Society for Industrial and Applied Mathematics, Washington, D.C., USA, pp 845–853, DOI 10.5555/365411.365795
- [4] Bender MA, Farach-Colton M, Pemmasani G, Skiena S, Sumazin P (2005) Lowest common ancestors in trees and directed acyclic graphs. *Journal of Algorithms* 57(2):75–94, DOI 10.1016/j.jalgor.2005.08.001
- [5] Bender MA, Farach-Colton M, Pemmasani G, Skiena S, Sumazin P (2005) Lowest common ancestors in trees and directed acyclic graphs. *Journal of Algorithms* 57(2):75–94, DOI <https://doi.org/10.1016/j.jalgor.2005.08.001>
- [6] Cock PJA, Antao T, Chang JT, Chapman BA, Cox CJ, Dalke A, Friedberg I, Hamelryck T, Kauff F, Wilczynski B, de Hoon MJL (2009) Biopython: freely available python tools for computational molecular biology and bioinformatics. *Bioinformatics* 25(11):1422–1423, DOI 10.1093/bioinformatics/btp163
- [7] Cormen TH, Leiserson CE, Rivest RL, Stein C (2022) Introduction to algorithms. MIT press

- [8] Czumaj A, Kowaluk M, Lingas A (2007) Faster algorithms for finding lowest common ancestors in directed acyclic graphs. *Theoretical Computer Science* 380(1):37–46, DOI 10.1016/j.tcs.2007.02.053
- [9] Dagan T, Martin W (2009) Getting a better picture of microbial evolution en route to a network of genomes. *Philosophical Transactions of the Royal Society B: Biological Sciences* 364(1527):2187–2196, DOI 10.1098/rstb.2009.0040
- [10] Döcker J, Linz S, Semple C (2019) Displaying trees across two phylogenetic networks. *Theoretical Computer Science* 796:129–146, DOI 10.1016/j.tcs.2019.09.003
- [11] Dress A, Moulton V, Steel M, Wu T (2010) Species, clusters and the 'tree of life': A graph-theoretic perspective. *Journal of Theoretical Biology* 265(4):535–542, DOI <https://doi.org/10.1016/j.jtbi.2010.05.031>, URL <https://www.sciencedirect.com/science/article/pii/S0022519310002742>
- [12] Francis A, Huson DH, Steel M (2021) Normalising phylogenetic networks. *Molecular Phylogenetics and Evolution* 163:107215, DOI 10.1016/j.ympev.2021.107215
- [13] Gambette P, Huber K, Kelk S (2017) On the challenge of reconstructing level-1 phylogenetic networks from triplets and clusters. *J Math Biol* 74:1729–1751, DOI 10.1007/s00285-016-1068-3
- [14] Garey MR, Johnson DS (1979) *Computers and Intractability: A Guide to the Theory of NP-Completeness*, vol 174. W. H. Freeman, San Francisco, US
- [15] Grandoni F, Italian GF, Łukasiewicz A, Parotsidis N, Uznański P (2021) All-Pairs LCA in DAGs: Breaking through the  $O(n^{2.5})$  barrier, pp 273–289. DOI 10.1137/1.9781611976465.18
- [16] Harel D, Tarjan RE (1984) Fast algorithms for finding nearest common ancestors. *SIAM Journal on Computing* 13(2):338–355, DOI 10.1137/0213024
- [17] Heiss J, Huson DH, Steel M (2024) Transformations to simplify phylogenetic networks. URL <https://arxiv.org/abs/2408.16156>, 2408.16156
- [18] Hellmuth M (2017) Biologically feasible gene trees, reconciliation maps and informative triples. *Algorithms for Molecular Biology* 12(1):23, DOI 10.1186/s13015-017-0114-z
- [19] Hellmuth M, Wieseke N, Lechner M, Lenhof HP, Middendorf M, Stadler PF (2015) Phylogenomics with paralogs. *Proceedings of the National Academy of Sciences* 112(7):2058–2063, DOI 10.1073/pnas.1412770112
- [20] Hellmuth M, Schaller D, Stadler PF (2023) Clustering systems of phylogenetic networks. *Theory in Biosciences* 142(4):301–358, DOI 10.1007/s12064-023-00398-w
- [21] Huber KT, Moulton V, Wu T (2016) Transforming phylogenetic networks: Moving beyond tree space. *Journal of Theoretical Biology* 404:30–39, DOI 10.1016/j.jtbi.2016.05.030
- [22] Huber KT, Moulton V, Scholz GE (2022) Forest-based networks. *Bull Math Biol* 84(10):119, DOI 10.1007/s11538-022-01081-9
- [23] Huson DH, Rupp R (2008) Summarizing multiple gene trees using cluster networks. In: Crandall KA, Lagergren J (eds) *Algorithms in Bioinformatics*, Springer Berlin Heidelberg, Berlin, Heidelberg, pp 296–305, DOI 10.1007/978-3-540-87361-7\_25
- [24] Huson DH, Scornavacca C (2011) A survey of combinatorial methods for phylogenetic networks. *Genome Biol Evol* 3:23–35, DOI 10.1093/gbe/evq077
- [25] Huson DH, Rupp R, Scornavacca C (2011) *Phylogenetic Networks: Concepts, Algorithms and Applications*. Cambridge University Press, DOI 10.1017/CBO9780511974076
- [26] van Iersel L, Kelk S, Rupp R, Huson D (2010) Phylogenetic networks do not need to be complex: using fewer reticulations to represent conflicting clusters. *Bioinformatics* 26(12):i124–i131, DOI 10.1093/bioinformatics/btq202
- [27] Jetten L, van Iersel L (2018) Nonbinary tree-based phylogenetic networks. *IEEE/ACM Transactions on Computational Biology and Bioinformatics* 15(1):205–217, DOI 10.1109/TCBB.2016.2615918

- [28] Kowaluk M, Lingas A (2005) LCA queries in directed acyclic graphs. In: Caires L, Italiano GF, Monteiro L, Palamidessi C, Yung M (eds) *Automata, Languages and Programming*, Springer Berlin Heidelberg, Berlin, Heidelberg, pp 241–248, DOI 10.1007/11523468\_20
- [29] Kowaluk M, Lingas A (2007) Unique lowest common ancestors in dags are almost as easy as matrix multiplication. In: Arge L, Hoffmann M, Welzl E (eds) *Algorithms – ESA 2007*, Springer Berlin Heidelberg, Berlin, Heidelberg, pp 265–274, DOI 10.1007/978-3-540-75520-3\_25
- [30] Lafond M, Dondi R, El-Mabrouk N (2016) The link between orthology relations and gene trees: a correction perspective. *Algorithms for Molecular Biology* 11(1):4, DOI 10.1186/s13015-016-0067-7
- [31] Lindeberg A (2024) <https://github.com/AnnaLindeberg/LeastCommonAncestor-relevant.git> (accessed Nov 1, 2024)
- [32] Linz S, Semple C (2020) Caterpillars on three and four leaves are sufficient to reconstruct binary normal networks. *Journal of Mathematical Biology* 81(4):961–980, DOI 10.1007/s00285-020-01533-7
- [33] Marcussen T, Heier L, Brysting AK, Oxelman B, Jakobsen KS (2014) From Gene Trees to a Dated Allopolyploid Network: Insights from the Angiosperm Genus *Viola* (Violaceae). *Systematic Biology* 64(1):84–101, DOI 10.1093/sysbio/syu071
- [34] Mathialagan S, Vassilevska Williams V, Xu Y (2022) Listing, Verifying and Counting Lowest Common Ancestors in DAGs: Algorithms and Fine-Grained Lower Bounds. In: Bojańczyk M, Merelli E, Woodruff DP (eds) *49th International Colloquium on Automata, Languages, and Programming (ICALP 2022)*, Schloss Dagstuhl – Leibniz-Zentrum für Informatik, Dagstuhl, Germany, Leibniz International Proceedings in Informatics (LIPIcs), vol 229, pp 94:1–94:20, DOI 10.4230/LIPIcs.ICALP.2022.94
- [35] Nakhleh L, Wang LS (2005) Phylogenetic networks: Properties and relationship to trees and clusters. In: Priami C, Zelikovsky A (eds) *Transactions on Computational Systems Biology II*, Springer, Berlin, Heidelberg, Lect. Notes Comp. Sci., vol 3680, pp 82–99, DOI 10.1007/11567752\_6
- [36] Nøjgaard N, El-Mabrouk N, Merkle D, Wieseke N, Hellmuth M (2018) Partial homology relations - satisfiability in terms of di-cographs. In: Wang L, Zhu D (eds) *Computing and Combinatorics*, Springer International Publishing, Cham, pp 403–415, DOI 10.1007/978-3-319-94776-1\_34
- [37] Nykänen M, Ukkonen E (1994) Finding lowest common ancestors in arbitrarily directed trees. *Information Processing Letters* 50(6):307–310, DOI 10.1016/0020-0190(94)00050-6
- [38] Pardi F, Scornavacca C (2015) Reconstructible phylogenetic networks: Do not distinguish the indistinguishable. *PLOS Computational Biology* 11(4):1–23, DOI 10.1371/journal.pcbi.1004135
- [39] Schaller D, Geiß M, Stadler PF, Hellmuth M (2021) Complete characterization of incorrect orthology assignments in best match graphs. *Journal of Mathematical Biology* 82(3):20, DOI 10.1007/s00285-021-01564-8
- [40] Semple C, Steel M (2003) *Phylogenetics*, Oxford Lecture Series in Mathematics and its Applications, vol 24. Oxford University Press, Oxford, UK
- [41] Shanavas A, Changat M, Hellmuth M, Stadler P (2024) Clusters and unique least common ancestors in directed acyclic graphs. DOI <https://doi.org/10.21203/rs.3.rs-3997739/v1>
- [42] Talevich E, Invergo BM, Cock PJ, Chapman BA (2012) Bio.phylo: A unified toolkit for processing, analyzing and visualizing phylogenetic trees in biopython. *BMC Bioinformatics* 13(1):209, DOI 10.1186/1471-2105-13-209