

---

# FISH-SPEECH: LEVERAGING LARGE LANGUAGE MODELS FOR ADVANCED MULTILINGUAL TEXT-TO-SPEECH SYNTHESIS

---

TECHNICAL REPORT

Shijia Liao<sup>1</sup>   Yuxuan Wang<sup>1</sup>   Tianyu Li<sup>1</sup>   Yifan Cheng<sup>1</sup>   Ruoyi Zhang<sup>1</sup>   Rongzhi Zhou<sup>1</sup>  
Yijin Xing<sup>1</sup>

<sup>1</sup>Fish Audio

{lengyue,honst,stardust}@fish.audio, yf\_cheng@hust.edu.cn,  
potato\_zhang@nuist.edu.cn, laziman@fish.audio, rcell1233@outlook.com

November 5, 2024

## ABSTRACT

Text-to-Speech (TTS) systems face ongoing challenges in processing complex linguistic features, handling polyphonic expressions, and producing natural-sounding speech - capabilities that are crucial for future AI applications. In this paper, we present Fish-Speech, a novel framework that implements a serial fast-slow Dual Autoregressive (Dual-AR) architecture to enhance the stability of Grouped Finite Scalar Vector Quantization (GFSQ) in sequence generation tasks. This architecture improves codebook processing efficiency while maintaining high-fidelity outputs, making it particularly effective for AI interactions and voice cloning.

Fish-Speech leverages Large Language Models (LLMs) for linguistic feature extraction, eliminating the need for traditional grapheme-to-phoneme (G2P) conversion and thereby streamlining the synthesis pipeline and enhancing multilingual support. Additionally, we developed FF-GAN through GFSQ to achieve superior compression ratios and near 100% codebook utilization.

Our approach addresses key limitations of current TTS systems while providing a foundation for more sophisticated, context-aware speech synthesis. Experimental results show that Fish-Speech significantly outperforms baseline models in handling complex linguistic scenarios and voice cloning tasks, demonstrating its potential to advance TTS technology in AI applications. The implementation is open source at <https://github.com/fishaudio/fish-speech>.

**Keywords** Text to Speech · LLM · Voice Cloning

## 1 Introduction

The past decade has seen remarkable progress in Text-to-Speech (TTS) systems, transforming applications from virtual assistants to educational tools. Current TTS architectures, such as VALL-E [Wang et al. [2023]], VITS [Kim et al. [2021]], FastSpeech [Ren et al. [2020]] typically rely on grapheme-to-phoneme (G2P) conversion [Klatt [1987]] to convert text into phonetic representations before synthesis. While effective, this approach struggles with context-dependent polyphonic words and cross-lingual generalization due to complex phonetic rules. Recent advances in zero-shot voice conversion such as YourTTS [Casanova et al. [2022]] and unified speech generation model UniAudio [Yang et al. [2023]] have shown the potential of neural architectures in handling various speech tasks. Additionally, flow-based models like CosyVoice [Du et al. [2024]], MatchaTTSM [Mehta et al. [2024]] have demonstrated promising results in natural speech synthesis. However, most solutions disentangled semantic and acoustic feature as a trade-off to improve stability, and reduce the voice cloning / bg understanding ability.

As demand grows for multilingual TTS systems, the limitations of G2P-based approaches become more apparent. The need for language-specific phonetic rules and lexicons hinders scalability and complicates system maintenance. Recent

research has explored the use of Large Language Models (LLMs) for direct linguistic feature extraction, eliminating the need for explicit G2P conversion. [Betker [2023]].

We introduce Fish-Speech, a novel TTS framework featuring a serial fast-slow dual autoregressive (Dual-AR) architecture. This design improves the stability of grouped finite scalar vector quantization (GFSQ) in sequence generation while maintaining high-quality output. By incorporating LLMs into the TTS pipeline, Fish-Speech simplifies the synthesis process and better handles polyphonic characters and multilingual text. The model trains on 720,000 hours of multilingual audio data, enabling it to learn diverse linguistic patterns and pronunciation variations.

To improve synthesis quality, we develop Firefly-GAN (FFGAN), a new vocoder architecture based on Grouped Finite Scalar Vector Quantization (GFSQ). FFGAN combines Finite Scalar Quantization (FSQ) [Mentzer et al. [2023]], and Group Vector Quantization (GVQ) to optimize compression ratios and codebook usage. Our evaluations show 100% codebook utilization, representing state-of-the-art performance in this field.

The primary contributions of this work are as follows:

- We introduce Fish-Speech, a novel TTS framework that leverages LLMs and a Dual-AR architecture to replace traditional G2P conversion, providing robust and scalable multilingual speech synthesis.
- We present FFGAN, an advanced vocoder that integrates multiple vector quantization techniques to achieve high-fidelity speech synthesis with optimized compression ratios and codebook utilization.
- We develop fish-tech acceleration methodologies, the system achieves real-time factors of approximately 1:5 on consumer-grade NVIDIA RTX 4060 mobile platforms and 1:15 on high-performance NVIDIA RTX 4090 configurations. And a latency of 150ms which is far less than other TTS system using DiT and Flow structure.

We encourage readers to listen to our samples on fish speech 1.4 sample. We also highly recommend that you go to our online synthesis site [fish.audio](https://fish.audio) to try out the different speakers of audio synthesized by the community.

## 2 Related Work

### 2.1 Text-to-Speech Systems

Text-to-Speech (TTS) systems have evolved dramatically from basic phoneme-based models to sophisticated end-to-end neural approaches that directly convert text to speech [Tan et al. [2021]]. This transformation, driven by advances in deep learning and increased computational power, has led to major improvements in speech naturalness, prosody control, and cross-language capability [Ren et al. [2019]]. Modern TTS systems now serve diverse applications, from intelligent assistants to accessibility tools and human-computer interfaces [Capes et al. [2017]].

### 2.2 Neural Vocoders

Neural vocoders have played a key role in improving speech synthesis quality. WaveNet [Van Den Oord et al. [2016]] first introduced autoregressive models for audio generation, followed by more efficient architectures like WaveRNN [Kalchbrenner et al. [2018]] and WaveGrad [Chen et al. [2020]]. HiFi-GAN [Kong et al. [2020]] later introduced adversarial training, setting new standards in audio quality and computational efficiency. EVA-GAN is a brand new GAN structure vocoder developed by NVIDIA [Liao et al. [2024]], it uses a Context Aware Module (CAM) for improved performance with minimal computational overhead. EVA-GAN shows superior performance over existing state-of-the-art vocoders in both objective and subjective metrics, particularly in spectral continuity and high-frequency reconstruction.

### 2.3 Vector Quantization in Speech Synthesis

Vector Quantization (VQ) has become essential in modern speech synthesis. VQ-VAE [Van Den Oord et al. [2017]] showed the effectiveness of discrete latent representations for audio generation, while SoundStream [Zeghidour et al. [2021]] and EnCodec [Défossez et al. [2022]] further improved these techniques for high-quality audio compression and synthesis.

### 2.4 Large Language Models in Speech Processing

Large Language Models (LLMs) are increasingly important in speech processing. Nowadays there are more and more models using BERT, huBERT as an intermediate structure for TTS, such as Parler TTS [Lacombe et al. [2024]], Melo

TTS [Zhao et al. [2023]], E3-TTS [Gao et al. [2023]], XTTS [Casanova et al. [2024]] and so on. They all achieve better synthesis effect.

## 2.5 Multilingual Speech Synthesis

Multilingual speech synthesis faces unique challenges in maintaining consistent quality across languages. Recent solutions include unified multilingual models [Liu and Mak [2019]], cross-lingual transfer learning [Nekvinda and Dušek [2020]], and language-agnostic representations [Li et al. [2019]].

## 3 Methods

Fish-Speech is a novel Text-to-Speech (TTS) framework that addresses key limitations of current non-grapheme-to-phoneme (non-G2P) TTS systems. The framework is specifically designed to handle multi-emotional and multilingual speech synthesis, with a focus on meeting the demands of advanced AI conversational agents.

Building on recent advances in vector quantization and condition representation [Kumar et al. [2024], Chen et al. [2023], Wang et al. [2019]], we introduce a Grouped Finite Scalar Vector Quantization (GFSQ) technique. This method efficiently encodes latent conditions, enabling better capture and reproduction of subtle speech variations. Our approach achieves 100% codebook utilization, maximizing the effectiveness of the quantization space.

We also develop a dual autoregressive (dual-AR) architecture that solves two major challenges in current TTS systems. First, it improves the stability of code generation, a common issue in existing frameworks. Second, it offers better generation efficiency compared to Diffusion Transformers (DiT), making it well-suited for real-time applications. Last, but most importantly, it is ready for Voice Agent, which we will release in near future.

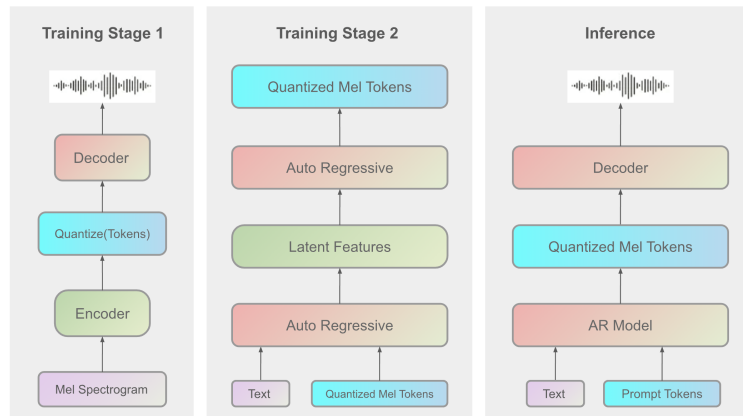


Figure 1: Fish Speech Architecture

### 3.1 Dual Autoregressive Architecture in Fish-Speech

This section describes the **Dual Autoregressive (Dual-AR) architecture** [Fig. 2] of Fish-Speech, a TTS system designed to handle complex linguistic features, polyphonic words, and natural-sounding multilingual synthesis. The Dual-AR architecture improves the stability and computational efficiency of codebook processing during sequence generation, particularly when using Grouped Finite Scalar Vector Quantization (GFSQ).

#### 3.1.1 Overview of the Dual-AR Architecture

The Dual-AR architecture consists of two sequential autoregressive transformer [Vaswani [2017], Subakan et al. [2021]] modules: a **Slow Transformer** and a **Fast Transformer** [Yang et al. [2023]]. This design processes both high-level and detailed aspects of speech synthesis efficiently.

##### Slow Transformer

The Slow Transformer processes input text embeddings to capture global linguistic structures and semantic content. It generates intermediate hidden states and predicts semantic tokens.

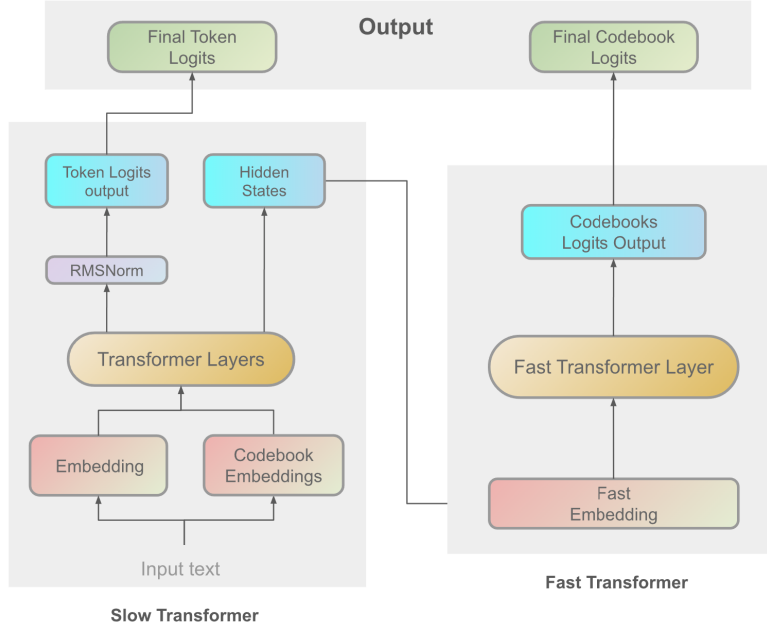


Figure 2: Architectural overview of the Dual Autoregressive (Dual-AR) framework in Fish-Speech.

The Slow Transformer functions at an elevated level of abstraction, processing input text embeddings to encode global linguistic structures and semantic content. This module is responsible for generating intermediate hidden states and predicting semantic tokens with high precision.

Given an input sequence of tokens  $\mathbf{x} = [x_1, x_2, \dots, x_T]$ , the Slow Transformer generates hidden states  $\mathbf{h} \in \mathbb{R}^{T \times D}$  and token logits  $\mathbf{z}$  through the following transformations:

$$\mathbf{h} = \text{SlowTransformer}(\mathbf{x}) \quad (1)$$

$$\mathbf{z} = \mathbf{W}_{\text{tok}} \cdot \text{Norm}(\mathbf{h}) \quad (2)$$

where  $\text{Norm}(\cdot)$  represents layer normalization, and  $\mathbf{W}_{\text{tok}}$  denotes the learnable parameters of the token prediction layer.

### Fast Transformer

The Fast Transformer refines the Slow Transformer’s output through codebook embedding processing, capturing detailed acoustic features needed for natural speech. It processes residual information and optimizes codebook usage.

The Fast Transformer takes as input the concatenated sequence of hidden states  $\mathbf{h}$  and codebook embeddings  $\mathbf{c}$  according to:

$$\tilde{\mathbf{h}} = [\mathbf{h}; \mathbf{c}], (\mathbf{h}^{\text{fast}}) \quad (3)$$

$$\mathbf{h}^{\text{fast}} = \text{FastTransformer}(\tilde{\mathbf{h}}, (\mathbf{h}^{\text{fast}})) \quad (4)$$

$$\mathbf{y} = \mathbf{W}_{\text{cbk}} \cdot \text{Norm}(\mathbf{h}^{\text{fast}}) \quad (5)$$

where  $[\mathbf{h}; \mathbf{c}]$  represents the concatenation operation of  $\mathbf{h}$  and  $\mathbf{c}$ ,  $\mathbf{W}_{\text{cbk}}$  comprises the learnable parameters of the codebook prediction layer, and  $\mathbf{y}$  denotes the resultant codebook logits.

### 3.1.2 Advantages of the Dual-AR Architecture

The Dual-AR architecture in Fish-Speech demonstrates several significant advantages:

1. **Enhanced Sequence Generation Stability:** The hierarchical processing of global and local information significantly improves the stability of GFSQ in sequence generation tasks.

2. **Optimized Codebook Processing:** The Fast Transformer implements an efficient mechanism for codebook embedding processing that achieves improved performance without significant computational overhead, particularly for models of scale 7B or larger.
3. **Superior Speech Synthesis Quality:** The synergistic interaction between Slow and Fast Transformers enables high-fidelity speech synthesis capable of handling complex linguistic phenomena.
4. **Advanced Multilingual Processing:** The integration with Large Language Models (LLMs) for linguistic feature generation eliminates traditional grapheme-to-phoneme conversion dependencies, thereby streamlining the synthesis pipeline and enhancing multilingual capabilities. By mixing text data the comprehension will be further enhanced.

### 3.2 Firefly-GAN

Firefly-GAN (FF-GAN) is an enhanced version of the EVA-GAN architecture with significant structural improvements. It replaces the traditional convolutional components of HiFi-GAN [Kong et al. [2020]] with a more efficient design, featuring a ParallelBlock instead of the Multi-Receptive Field (MRF) module. By incorporating Grouped Finite Scalar Vector Quantization (GFSQ), FF-GAN achieves better sequence generation stability and improved handling of linguistic variations, making it particularly effective for multilingual synthesis in AI applications.

Firefly-GAN (FF-GAN) is an enhanced version of the EVA-GAN architecture with significant structural improvements. The model implements an optimized structure that replace the conventional convolutional and transposed convolutional components found in HiFi-GAN [Kong et al. [2020]]. We use ParallelBlock to substitute for Multi-Receptive Field (MRF), which specifically engineered for typo-codebook vocoder applications. Through the integration of the Grouped Finite Scalar Vector Quantization (GFSQ) methodology, FF-GAN demonstrates enhanced sequence generation stability, effectively improving complex linguistic variations and facilitating natural multilingual synthesis. This architectural innovation distinguishes FF-GAN from traditional vocoders, particularly in text-to-speech synthesis and voice cloning applications within AI agent frameworks.

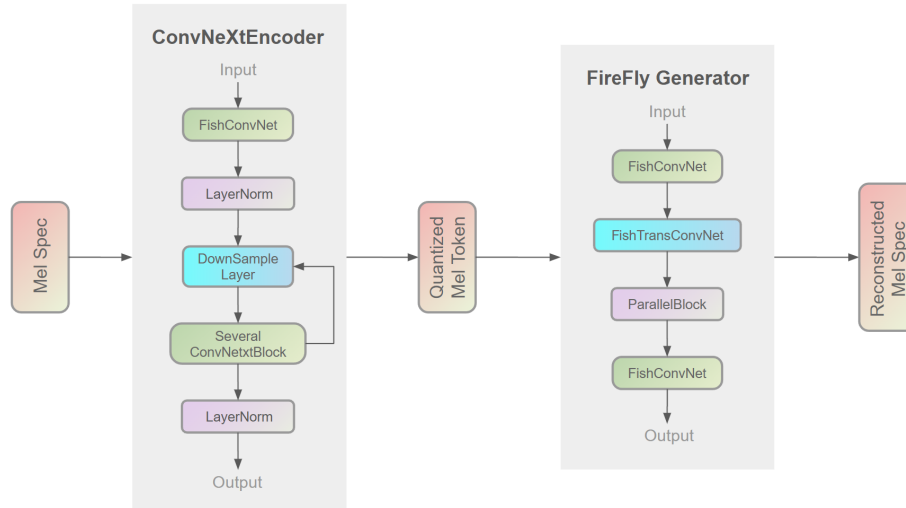


Figure 3: FireFly GAN Architecture

#### 3.2.1 Firefly Generator

FF-GAN use enhanced Conv structure including depth-wise separable convolution Howard [2017] and dilated convolutions Yu [2015], replacing conventional Conv1d layers. This architectural refinement enhances the model’s capacity to capture and synthesize complex audio features.

In our architecture, the conventional Multi-Receptive Field (MRF) module is replaced by a ParallelBlock, optimizing typo-codebook input processing efficiency. The ParallelBlock implements configurable convolution kernel sizes and dilation rates Yu [2015], utilizing stack-and-average mechanism for processing outputs from three ResBlocks, instead of directly addition operations. ParallelBlock Liao et al. [2024] offers enhanced receptive field coverage, superior feature extraction capabilities, and improved configurability, contributing to higher-quality audio synthesis.

### 3.2.2 Quantization Techniques

In order to fit the typo-codebook task, we use Grouped Finite Scalar Vector Quantization (GFSQ) to act as a vq codebook in our system. The text below will elaborately tell you how we develop the GFSQ.

Given an input tensor  $\mathbf{z} \in \mathbb{R}^{B \times C \times L}$ . The entire process includes the following steps:

#### Downsampling

Using a downsampling function  $f_{\text{down}}$  to downsample the input tensor  $\mathbf{z}$ , resulting in a downsampled tensor  $\mathbf{z}_d \in \mathbb{R}^{B \times C_d \times L_d}$ :

$$\mathbf{z}_d = f_{\text{down}}(\mathbf{z}) \quad (6)$$

#### GFSQ Process

- **Feature Grouping** Input feature matrix  $\mathbf{Z}$  is divided into  $G$  groups:

$$\mathbf{Z} = [\mathbf{Z}^{(1)}, \mathbf{Z}^{(2)}, \dots, \mathbf{Z}^{(G)}] \quad (7)$$

- **Scalar Quantization** For each scalar  $z_{b,c,l}^{(g)}$ :

$$\hat{z}_{b,c,l}^{(g)} = Q(z_{b,c,l}^{(g)}) \quad (8)$$

- **Index Generation** Each scalar maps to index  $k_{b,c,l}^{(g)}$
- **Decoding**

$$\hat{z}_{b,c,l}^{(g)} = \text{Codebook}^{(g)}[k_{b,c,l}^{(g)}] \quad (9)$$

#### Reconstruct the Quantized Downsampled Tensor

Concatenate the quantized vectors of all groups along the channel dimension to obtain the quantized downsampled tensor  $\mathbf{z}_{q_d} \in \mathbb{R}^{B \times C_d \times L_d}$ :

$$\mathbf{z}_{q_d}(b, :, l) = [\mathbf{z}_{q_d}^{(1)}(b, :, l); \mathbf{z}_{q_d}^{(2)}(b, :, l); \dots; \mathbf{z}_{q_d}^{(G)}(b, :, l)] \quad (10)$$

#### Upsampling

Use the upsampling function  $f_{\text{up}}$  to restore the quantized downsampled tensor to its original size, resulting in the final quantized tensor  $\mathbf{z}_q \in \mathbb{R}^{B \times C \times L}$ :

$$\mathbf{z}_q = f_{\text{up}}(\mathbf{z}_{q_d}) \quad (11)$$

The goal is to make  $\mathbf{z}_q$  approximate the original input  $\mathbf{z}$  as closely as possible:

$$\mathbf{z}_q \approx \mathbf{z} \quad (12)$$

### 3.2.3 Conclusion

Our implementation of using GFSQ techniques achieves nearly 100% codebook utilization, and gain better objective and subjective score in our inner ablation than other quantization techniques like RFSQ, RVQ and GRFSQ. FF-GAN significantly enhancing stability in typo-codebook operations and ensuring comprehensive intermediate variable information retention in multi-emotional and multilingual tasks.

FF-GAN’s innovative approach to typo-codebook stability has being already used in various song and music generation applications. The framework’s performance and architectural could make it position it as a reference model for future AI agent development.

## 4 Training and Inference

### 4.1 Training

Fish Speech uses a three-stage training approach: initial pre-training with large batches of standard data, followed by SFT using smaller batches of high-quality data, and finally DPO training using manually labeled positive and negative sample pairs.

The training infrastructure was split into two components Fig. 1: The AR training utilized an 8\*H100 80G GPUs for one week, while the vocoder training employed an 8\*4090 GPUs for an additional week. Note that these timelines exclude the DPO stage.

## 4.2 Inference

Our inference strategy follows the architecture in Fig. 1. Using fish-tech including KV-cache [Pope et al. [2023]], torch compile and other acceleration methodologies, the system achieves real-time factors of approximately 1:5 on consumer-grade NVIDIA RTX 4060 mobile platforms and 1:15 on high-performance NVIDIA RTX 4090 configurations. These architectural optimizations significantly improve latency in inferring, achieving a first-packet latency of 150ms.

Furthermore, the system can process information in flow, making it easy to work with modern AI tools and use them in different situations.

## 5 Dataset

Our training data includes a large collection of speech samples from both public sources and our own data collection process. The dataset contains about 720,000 hours of speech across different languages, with 300,000 hours each of English and Mandarin Chinese as the main components. We also included 20,000 hours each of other language families: Germanic (German), Romance (French, Italian), East Asian (Japanese, Korean), and Semitic (Arabic).

We carefully balanced the data across languages to help the model learn multiple languages at once. This approach helps the model perform well generating mixed-language content. The large size and variety of our dataset significantly improves the model’s ability to handle multiple languages naturally.

## 6 Experimental Evaluation

<sup>1</sup> We conducted an evaluation for the speaker cloning task to assess the effect of our architecture compared to the baseline models. The evaluation methodology includes both objective and subjective metrics: word error rate (WER) for intelligibility assessment, speaker embedding similarity measure for speech cloning fidelity assessment, and mean opinion score (MOS) for perceptual quality quantification. This evaluation framework aims to assess the model’s ability to preserve speaker identity while maintaining high fidelity speech synthesis.

### 6.1 Word Error Rate Analysis

Model Name	WER(%)
<b>Ground Truth</b>	<b>9.22</b>
<b>fish-speech</b>	<b>6.89</b>
rechoo	11.92
F5-TTS	13.98
CosyVoice	22.20

Table 1: Word Error Rate (WER) Results for Voice Cloning Tasks

Analysis of Table 1 shows that our model achieves a WER of 6.89% in voice cloning tasks, which is not only much lower than the baseline models, but also exceeds the ground truth recordings (9.22%). This performance provides strong evidence for the ability of our model in voice cloning scenarios. The gap between our model and competing models (ranging from 11.92% to 22.20%) underscores the improved synthetic stability and content fidelity of our methodology.

Model Name	Resemblyzer	SpeechBrain <sup>2</sup>
<b>Ground Truth</b>	<b>0.921</b>	<b>0.770</b>
CosyVoice	0.936	0.813
<b>fish-speech</b>	<b>0.914</b>	<b>0.762</b>
F5-TTS	0.905	0.787
rechoo	0.887	0.636

Table 2: Speaker similarity scores for different models, including ground truth.

## 6.2 Speaker Similarity Analysis

Table 2 shows the effect of our typo-codebook strategy on speaker similarity metrics. Our fish-speech model achieves similarity scores of 0.914 and 0.762 on Resemblyzer and SpeechBrain, respectively, which are remarkably close to the ground truth performance (0.921 and 0.770). The gap of only 0.76% from the ground truth in Resemblyzer and 1.04% in SpeechBrain evaluations shows the superior ability of our model to capture natural speech characteristics. The results strongly suggest that our typo-codebook architecture enables a more comprehensive capture of acoustic states, leading to improved timbral fidelity of synthesized speech. Our approach significantly outperforms baseline models such as F5-TTS (0.905 and 0.787) and rechoo (0.887 and 0.636). The consistent performance in both evaluation frameworks proves the validity of our method in preserving speaker features, which is crucial for high-quality text-to-speech synthesis and agent tasks.

## 6.3 Perceptual Quality Assessment

Model Name	MOS
<b>Ground Truth</b>	<b>5.00</b>
<b>fish-speech</b>	<b>4.05</b>
CosyVoice	3.80
F5-TTS	2.90
rechoo	3.76

Table 3: Five-scale Mean Opinion Score (MOS) Ratings of Cloned Voice Quality

To evaluate the perceptual quality of synthesized audio, we conducted a comprehensive Mean Opinion Score (MOS) listening test with naive listeners who had no prior experience with audio processing. The evaluation followed a double-blind, randomized method to ensure an unbiased evaluation. The results show that fish-speech achieved significantly higher subjective scores compared to other baseline models ( $p < 0.05$ ), demonstrating superior performance in terms of speech naturalness and speaker similarity. This evaluation in human perception metrics strongly suggests that fish-speech can better capture and reproduce the natural characteristics of human speech, especially in the context of voice cloning tasks.

## 7 Conclusion

Our research represents a significant advance in the field of text-to-speech (TTS) by introducing a novel multilingual and multi-emotional stabilization solution. The core innovation lies in our development of a typo-codebook vocoder integrated with a dual autoregressive (dual-AR) generation architecture. This architectural combination shows stability in the synthesis process while preserving acoustic features within the generated speech. Furthermore, our work utilizes a

<sup>1</sup>For experimental validation, we constrained our analysis to monolingual voice cloning scenarios, excluding cross-lingual synthesis tasks. The evaluation corpus comprised 10 distinct speaker (include different languages) identities, with 30 synthesized utterances per speaker, yielding a comprehensive evaluation set of 300 samples. It should be noted that cross-linguistic synthesis was not included in this evaluation.

<sup>1</sup>Results obtained using OpenAI Whisper-medium ASR model for transcription evaluation.

<sup>2</sup>Experiments were conducted using the SpeechBrain framework Ravanelli et al. [2024], version 1.0.1, as the underlying speech processing toolkit.



non-grapheme-to-phoneme (non-G2P) structure, an approach that effectively addresses limitations inherent in traditional phoneme-based systems and provides a robust foundation for cross-lingual and emotionally diverse TTS applications, particularly in the context of AI agent interactions.

## 8 Future Work

Building on these foundations, we propose several directions for future research. We plan to improve the performance of our model by integrating reinforcement learning techniques, focusing on improving cross-lingual generalization and emotional stability. We are also developing the Fish Agent application, an end-to-end language model based on our Fish-Speech framework. A preliminary demonstration of this system is currently available at [fish.audio/demo/live](https://fish.audio/demo/live). We remain committed to the open source community and will continue to maintain and extend our codebase to provide broader access to these technologies for researchers and developers.

## References

- Chengyi Wang, Sanyuan Chen, Yu Wu, Ziqiang Zhang, Long Zhou, Shujie Liu, Zhuo Chen, Yanqing Liu, Huaming Wang, Jinyu Li, et al. Neural codec language models are zero-shot text to speech synthesizers. *arXiv preprint arXiv:2301.02111*, 2023.
- Jaehyeon Kim, Jungil Kong, and Juhee Son. Conditional variational autoencoder with adversarial learning for end-to-end text-to-speech. In *International Conference on Machine Learning*, pages 5530–5540. PMLR, 2021.
- Yi Ren, Chenxu Hu, Xu Tan, Tao Qin, Sheng Zhao, Zhou Zhao, and Tie-Yan Liu. Fastspeech 2: Fast and high-quality end-to-end text to speech. *arXiv preprint arXiv:2006.04558*, 2020.
- Dennis H Klatt. Review of text-to-speech conversion for english. *The Journal of the Acoustical Society of America*, 82(3):737–793, 1987.
- Edresson Casanova, Julian Weber, Christopher D Shulby, Arnaldo Candido Junior, Eren Gölge, and Moacir A Ponti. Yourtts: Towards zero-shot multi-speaker tts and zero-shot voice conversion for everyone. In *International Conference on Machine Learning*, pages 2709–2720. PMLR, 2022.
- Dongchao Yang, Jinchuan Tian, Xu Tan, Rongjie Huang, Songxiang Liu, Xuankai Chang, Jiatong Shi, Sheng Zhao, Jiang Bian, Xixin Wu, et al. Uniaudio: An audio foundation model toward universal audio generation. *arXiv preprint arXiv:2310.00704*, 2023.
- Zhihao Du, Qian Chen, Shiliang Zhang, Kai Hu, Heng Lu, Yexin Yang, Hangrui Hu, Siqi Zheng, Yue Gu, Ziyang Ma, et al. Cosyvoice: A scalable multilingual zero-shot text-to-speech synthesizer based on supervised semantic tokens. *arXiv preprint arXiv:2407.05407*, 2024.
- Shivam Mehta, Ruibo Tu, Jonas Beskow, Éva Székely, and Gustav Eje Henter. Matcha-tts: A fast tts architecture with conditional flow matching. In *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 11341–11345. IEEE, 2024.
- James Betker. Better speech synthesis through scaling. *arXiv preprint arXiv:2305.07243*, 2023.
- Fabian Mentzer, David Minnen, Eirikur Agustsson, and Michael Tschannen. Finite scalar quantization: Vq-vae made simple. *arXiv preprint arXiv:2309.15505*, 2023.
- Xu Tan, Tao Qin, Frank Soong, and Tie-Yan Liu. A survey on neural speech synthesis. *arXiv preprint arXiv:2106.15561*, 2021.
- Yi Ren, Xu Tan, Tao Qin, Sheng Zhao, Zhou Zhao, and Tie-Yan Liu. Almost unsupervised text to speech and automatic speech recognition. In *International conference on machine learning*, pages 5410–5419. PMLR, 2019.
- Tim Capes, Paul Coles, Alistair Conkie, Ladan Golipour, Abie Hadjitarkhani, Qiong Hu, Nancy Huddlestone, Melvyn Hunt, Jiangchuan Li, Matthias Neeracher, et al. Siri on-device deep learning-guided unit selection text-to-speech system. In *Interspeech*, pages 4011–4015, 2017.
- Aaron Van Den Oord, Sander Dieleman, Heiga Zen, Karen Simonyan, Oriol Vinyals, Alex Graves, Nal Kalchbrenner, Andrew Senior, Koray Kavukcuoglu, et al. Wavenet: A generative model for raw audio. *arXiv preprint arXiv:1609.03499*, 12, 2016.
- Nal Kalchbrenner, Erich Elsen, Karen Simonyan, Seb Noury, Norman Casagrande, Edward Lockhart, Florian Stimberg, Aaron Oord, Sander Dieleman, and Koray Kavukcuoglu. Efficient neural audio synthesis. In *International Conference on Machine Learning*, pages 2410–2419. PMLR, 2018.

- Nanxin Chen, Yu Zhang, Heiga Zen, Ron J Weiss, Mohammad Norouzi, and William Chan. Wavegrad: Estimating gradients for waveform generation. *arXiv preprint arXiv:2009.00713*, 2020.
- Jungil Kong, Jaehyeon Kim, and Jaekyoung Bae. Hifi-gan: Generative adversarial networks for efficient and high fidelity speech synthesis. *Advances in neural information processing systems*, 33:17022–17033, 2020.
- Shijia Liao, Shiyi Lan, and Arun George Zachariah. Eva-gan: Enhanced various audio generation via scalable generative adversarial networks. *arXiv preprint arXiv:2402.00892*, 2024.
- Aaron Van Den Oord, Oriol Vinyals, et al. Neural discrete representation learning. *Advances in neural information processing systems*, 30, 2017.
- Neil Zeghidour, Alejandro Luebs, Ahmed Omran, Jan Skoglund, and Marco Tagliasacchi. Soundstream: An end-to-end neural audio codec. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 30:495–507, 2021.
- Alexandre Défossez, Jade Copet, Gabriel Synnaeve, and Yossi Adi. High fidelity neural audio compression. *arXiv preprint arXiv:2210.13438*, 2022.
- Yoach Lacombe, Vaibhav Srivastav, and Sanchit Gandhi. Parler-tts. <https://github.com/huggingface/parler-tts>, 2024.
- Wenliang Zhao, Xumin Yu, and Zengyi Qin. Melotts: High-quality multi-lingual multi-accent text-to-speech, 2023. URL <https://github.com/myshell-ai/MeloTTS>.
- Yuan Gao, Nobuyuki Morioka, Yu Zhang, and Nanxin Chen. E3 tts: Easy end-to-end diffusion-based text to speech. In *2023 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*, pages 1–8. IEEE, 2023.
- Edresson Casanova, Kelly Davis, Eren Gölge, Görkem Gökmar, Iulian Gulea, Logan Hart, Aya Aljafari, Joshua Meyer, Reuben Morais, Samuel Olayemi, et al. Xtts: a massively multilingual zero-shot text-to-speech model. *arXiv preprint arXiv:2406.04904*, 2024.
- Zhaoyu Liu and Brian Mak. Cross-lingual multi-speaker text-to-speech synthesis for voice cloning without using parallel corpus for unseen speakers. *arXiv preprint arXiv:1911.11601*, 2019.
- Tomáš Nekvinda and Ondřej Dušek. One model, many languages: Meta-learning for multilingual text-to-speech. *arXiv preprint arXiv:2008.00768*, 2020.
- Bo Li, Yu Zhang, Tara Sainath, Yonghui Wu, and William Chan. Bytes are all you need: End-to-end multilingual speech recognition and synthesis with bytes. In *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5621–5625. IEEE, 2019.
- Rithesh Kumar, Prem Seetharaman, Alejandro Luebs, Ishaan Kumar, and Kundan Kumar. High-fidelity audio compression with improved rvqgan. *Advances in Neural Information Processing Systems*, 36, 2024.
- Li-Wei Chen, Shinji Watanabe, and Alexander Rudnicky. A vector quantized approach for text to speech synthesis on real-world spontaneous speech. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 12644–12652, 2023.
- Xin Wang, Shinji Takaki, Junichi Yamagishi, Simon King, and Keiichi Tokuda. A vector quantized variational autoencoder (vq-vae) autoregressive neural  $f_0$  model for statistical parametric speech synthesis. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 28:157–170, 2019.
- A Vaswani. Attention is all you need. *Advances in Neural Information Processing Systems*, 2017.
- Cem Subakan, Mirco Ravanelli, Samuele Cornell, Mirko Bronzi, and Jianyuan Zhong. Attention is all you need in speech separation. In *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 21–25. IEEE, 2021.
- Andrew G Howard. Mobilenets: Efficient convolutional neural networks for mobile vision applications. *arXiv preprint arXiv:1704.04861*, 2017.
- F Yu. Multi-scale context aggregation by dilated convolutions. *arXiv preprint arXiv:1511.07122*, 2015.
- Reiner Pope, Sholto Douglas, Aakanksha Chowdhery, Jacob Devlin, James Bradbury, Jonathan Heek, Kefan Xiao, Shivani Agrawal, and Jeff Dean. Efficiently scaling transformer inference. *Proceedings of Machine Learning and Systems*, 5:606–624, 2023.
- Mirco Ravanelli, Titouan Parcollet, Adel Moumen, Sylvain de Langen, Cem Subakan, Peter Plantinga, Yingzhi Wang, Pooneh Mousavi, Luca Della Libera, Artem Ploujnikov, Francesco Paissan, Davide Borra, Salah Zaiem, Zeyu Zhao, Shucong Zhang, Georgios Karakasidis, Sung-Lin Yeh, Pierre Champion, Aku Rouhe, Rudolf Braun, Florian Mai, Juan Zuluaga-Gomez, Seyed Mahed Mousavi, Andreas Nautsch, Xuechen Liu, Sangeet Sagar, Jarod Duret, Salima Mdhaffar, Gaelle Laperriere, Mickael Rouvier, Renato De Mori, and Yannick Esteve. Open-source conversational ai with SpeechBrain 1.0, 2024. URL <https://arxiv.org/abs/2407.00463>.

## A Training Details

We trained our model on an NVIDIA H100 GPU with the following hyperparameters:

### Optimization:

- Optimizer: AdamW ( $\beta_1 = 0.9$ ,  $\beta_2 = 0.98$ ,  $\epsilon = 10^{-8}$ )
- LR:  $5 \times 10^{-4}$
- Weight decay: 0.01

### Training Config:

- Batch size: 1M tokens
- Training steps: 500K
- LR schedule: Cosine decay with warmup
- Warmup steps: 2K
- Final LR ratio: 0.1