

# SOLIDIFFY: AST Differencing for Solidity Smart Contracts

Mojtaba Eshghie\*, Viktor Åryd\*, Martin Monperrus\*, and Cyrille Artho\*

\*KTH Royal Institute of Technology, Stockholm, Sweden

Email: {eshghie, viktoraryd, monperrus, artho}@kth.se

**Abstract**—Smart contracts, primarily written in Solidity, are integral to blockchain software applications, yet precise analysis and maintenance are hindered by the limitations of existing differencing tools. We introduce SOLIDIFFY, a novel Abstract Syntax Tree (AST) differencing tool specifically designed for Solidity. SOLIDIFFY enables fine-grained analysis by generating accurate and concise edit scripts of smart contracts, making it ideal for downstream tasks such as vulnerability detection, automated code repair, and code reviews. Our comprehensive evaluation on a large dataset of real-world Solidity contracts demonstrates that SOLIDIFFY delivers shorter and more precise edit scripts compared to state-of-the-art tools, while performing consistently in complex contract modifications. SOLIDIFFY is made publicly available at <https://github.com/mojtaba-eshghie/SoliDiffy>.

**Index Terms**—AST Differencing, Solidity, Smart Contracts, Abstract Syntax Tree, Ethereum, Source Code Differencing

## I. INTRODUCTION

Smart contracts are self-executing programs that implement real-world contracts by encoding contract terms directly into code [1], [2]. These programs are deployed on blockchain platforms like Ethereum [3], allowing for automated and trustless transactions. Solidity, a statically-typed programming language, has become the most popular choice for developing these smart contracts [4].

Developers working with Solidity can greatly benefit from a fine-grained source code differencing in several scenarios. For instance, when updating a smart contract to patch a security vulnerability, Abstract Syntax Tree (AST)-based differencing allows developers to pinpoint specific changes in the code’s structure rather than sifting through line-by-line text changes, which might miss subtle yet crucial modifications. This precision is vital when reviewing updates for correctness and security implications before deployment on an immutable blockchain. Other examples are in automated debugging [5] and program repair [6]–[9], where tools need to detect bugs and vulnerabilities [10]–[14] and suggest changes at a syntactic level [15]; fine-grained differencing enables these tools to generate precise edit scripts that align with the semantic intentions of the code, helping with automated and context-aware fixes. Furthermore, in code clone detection [16]–[18], where identifying syntactically similar but not identical code blocks is necessary, AST differencing can accurately capture variations that line-based tools overlook, thus enhancing the detection of potential code reuse or duplication issues.

Traditional text and structural differencing tools [19]–[25] are insufficient for smart contracts due to their inability to

capture the semantic and structural details of smart contracts or their lack of support for Solidity. AST differencing for Solidity smart contracts provides a more granular approach at detection of changes at the syntactic level. To summarize, we problem we address in this paper is the fundamental limitations of existing differencing tools for Solidity developers.

In this paper, we introduce SOLIDIFFY, a novel AST differencing tool tailored for Solidity smart contracts. SOLIDIFFY contains key AST transformations specifically designed for Solidity smart contracts. SOLIDIFFY accurately processes and compares Solidity smart contracts, providing precise edit scripts that can be used for tasks such as vulnerability detection.

To evaluate the effectiveness of SOLIDIFFY, we conduct a comprehensive comparison on 354 187 pairs of smart contracts. This dataset is founded on real-world Solidity smart contracts, including a subset of modified controlled syntactic changes (simple to complex transformation) and another subset mined from commit history of a popular smart contract repository. We assess the performance of SOLIDIFFY in terms of edit script accuracy. The results clearly demonstrate that SOLIDIFFY outperforms the only existing tool for Solidity differencing, DiffTastic [21]. SOLIDIFFY maintains consistent effectiveness regardless of edit distance and code complexity, highlighting its suitability for advanced software engineering tasks in the blockchain domain.

To summarize, our contributions are:

- We introduce SOLIDIFFY, a novel AST differencing approach specifically designed for Solidity smart contracts, addressing the limitations of existing differencing tools in accurately capturing the syntactic and semantic changes within smart contracts.
- We design Solidity-specific AST transformation and pruning rules that enhance the precision and conciseness of edit scripts compared to a raw concrete syntax tree.
- We conduct a comprehensive evaluation of SOLIDIFFY on a dataset of 354 187 pairs of smart contracts to diff, demonstrating that it outperforms the state-of-the-art tool DiffTastic in terms of edit script length and accuracy. SOLIDIFFY maintains consistent effectiveness regardless of edit distance and code complexity.
- We make SOLIDIFFY publicly available as an open-source tool at <https://github.com/mojtaba-eshghie/SoliDiffy>, facilitating further research and applications in smart contract analysis.

This paper is structured as follows: Section II introduces the necessary background concepts, including ASTs and code differencing techniques. In Section III, we describe the architecture of SOLIDIFFY. Section IV outlines the experimental protocol including research questions that guide our investigation. Section V presents the results of our evaluation, comparing SOLIDIFFY with DiffTastic and exploring the impact of different types and severity of syntactic changes on the performance of these tools. Section VII reviews existing work related to AST differencing and identifies gaps that SOLIDIFFY addresses. Finally, Section VI elaborates the lessons learnt and threats to validity of our work, and Section VIII concludes the paper.

## II. BACKGROUND

This section provides the concepts essential for AST-based code differencing.

### A. Syntax Trees: Abstract vs. Concrete

Syntax trees, comprising abstract and concrete syntax trees (ASTs and CSTs), represent the hierarchical structure of source code. ASTs focus on the logical structure by abstracting away syntactic details, making them ideal for tasks like code analysis and transformation [26]. In contrast, CSTs retain all syntactic elements, including punctuation and keywords, capturing the exact format of the source code, which is essential for precise replication tasks like formatting and refactoring.

### B. Code Differencing

Code differencing is the process of identifying differences between two versions of a codebase. This is crucial for version control, collaborative development, and maintaining code quality. Traditional line-based differencing tools, such as those used in Git [27], compare code on a line-by-line basis, which can miss or misinterpret finer structural changes in the code.

1) *AST Differencing*: AST differencing enhances code comparison by utilizing the hierarchical structure of ASTs. Unlike line-based differencing, AST differencing can identify specific modifications within the code’s logical structure. For example, a small change within a line of code can be pinpointed precisely, rather than being treated as a completely new or altered line [19].

2) *Edit Scripts*: A common approach in AST differencing involves generating an edit script as a sequence of operations required to transform one AST into another (see Figure 3). The process typically involves two phases: generating mappings between unchanged nodes of the two ASTs and then deriving an edit script from these mappings. These edit actions—add, remove, update, and move—reflect modifications to source code. Although generating an optimal edit script is an NP-hard problem [28], this method provides a structured way to represent differences between code versions.

## III. SOLIDIFFY : AST DIFFERENCING FOR SOLIDITY

This section outlines the core components of SOLIDIFFY, a novel approach for fine-grained and precise AST differencing of Solidity smart contracts.

Figure 1 shows SOLIDIFFY’s architecture. SOLIDIFFY starts by receiving Solidity smart contracts and generating a optimized ASTs for the differencing task (Section III-A). The differencing subsystem then uses the mapping between the ASTs to perform the differencing (Section III-B).

### A. Pruning Rules

CSTs contain a wide range of unnecessary information that may pollute edit scripts. To create ASTs optimized for differencing, SOLIDIFFY employs a series of transformations on the initial CSTs. This involves flattening nodes, aliasing for consistency, and pruning unnecessary elements, as follows

- **Flattening**: Combines child nodes with their parent as a single node. In other words, we stop at one node in the AST and putting as value all the source string corresponding to this node and its children. As an example, the constant literal values with type and value are concatenated (first rule in under mapping rules and green sub-trees in Figure 1).
- **Aliasing**: Renames node types to facilitate a unified differencing process (second rule “aliased” in Figure 1).
- **Ignoring**: Removes extraneous nodes, such as formatting elements, that do not impact the logical structure of the code (third rule in Figure 1).

These transformation rules capture Solidity-specific constructs, and are implemented on top of pre-implemented transformation rules in Gumtree [19].

### B. Differencing Algorithm

The differencing algorithm of SOLIDIFFY generates mappings between nodes of the two ASTs to identify unchanged and modified elements. Utilizing the efficient algorithm of Gumtree [19], which has undergone extensive evaluation, SOLIDIFFY aligns nodes between two given ASTs. This process involves a two-phase mapping strategy:

- **Top-Down Mapping**: Identifies large, unmodified subtrees to serve as anchors, reducing the complexity of subsequent differencing.
- **Bottom-Up Mapping**: Refines the initial mappings by comparing smaller subtrees and individual nodes, ensuring that all modifications are accurately captured.

These mappings are then used to derive an edit script (Section III-C).

### C. Edit Script

SOLIDIFFY’s edit scripts include four standard operations: *add*, *delete*, *update*, and *move*. The differencing algorithm prioritizes producing edit scripts that are concise yet fully descriptive of the changes made.

To demonstrate edit scripts SOLIDIFFY generates, we use the smart contract in Figure 2. We change the identifier for a

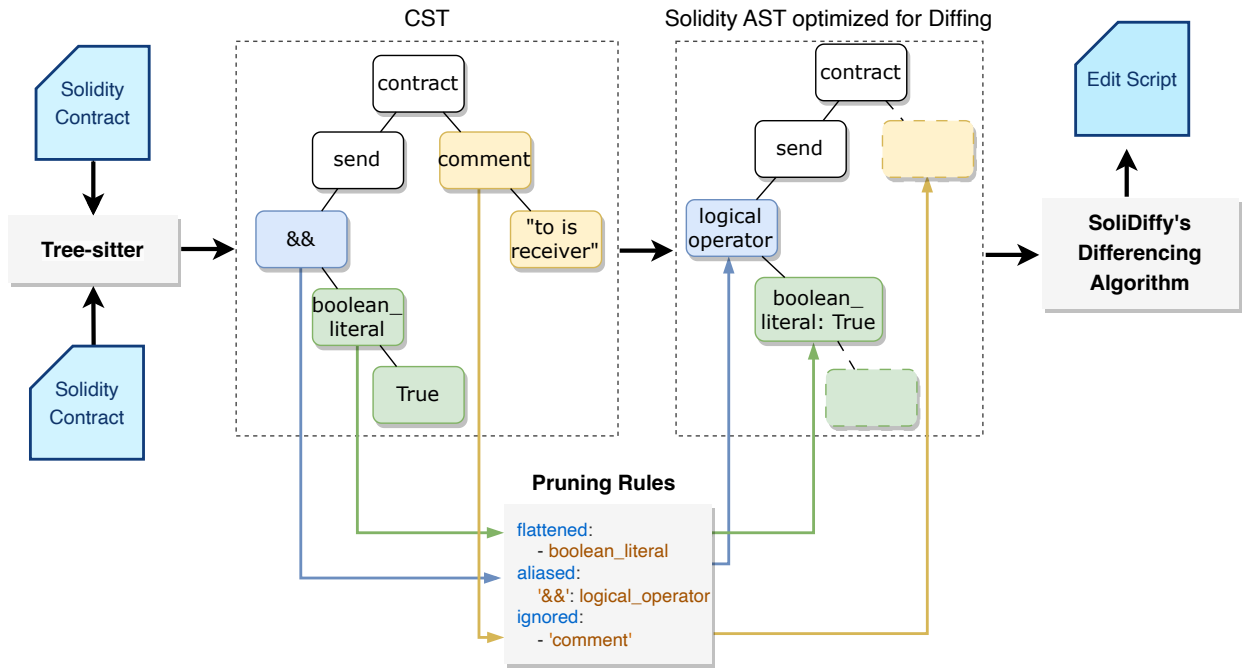


Fig. 1: The design of the SOLIDIFFY smart contract differencing tool.

storage variable and remove a function from the source code. SOLIDIFFY generates the edit script in Figure 3 by identifying one *update* and a *delete* action.

```

1 contract SimpleStorage {
2   - uint256 public num;
3   + uint256 public number_;
4   function set(uint256 _num) public {
5     num = _num;
6   }
7   - function get() public view returns (uint256) {
8     return num;
9   }
10 }

```

Fig. 2: Standard line diff of original and modified *SimpleStorage* contract, with added and removed lines highlighted.

#### D. Implementation

SOLIDIFFY uses Tree-sitter to parse Solidity source code into its syntax tree representation. Tree-sitter is an open-source parsing tool that generates CSTs for a wide range of programming languages using a modular grammar framework. We integrated the most recent version of Solidity grammar to the best of our knowledge [29]<sup>1</sup>.

#### IV. EXPERIMENTAL PROTOCOL

We outline the experimental setup to answer our research questions 1–4 in Section IV-A. Figure 4 demonstrates this ex-

<sup>1</sup><https://github.com/JoranHonig/tree-sitter-solidity/blob/a8ed2f5d600fed77f8ed3084d1479998c649bca1/grammar.js>

```

-----
update-node
---
identifier: num [44,47]
replace num by number_
-----
delete-tree
---
function_definition [121,193]
  function: function [121,129]
  identifier: get [130,133]
  visibility: public [136,142]
  state_mutability [143,147]
  view: view [143,147]
  return_type_definition [148,165]
  returns: returns [148,155]
  parameter [157,164]
  type_name: uint256 [157,164]

```

Fig. 3: Edit script generated as a result of the AST-based differencing of the code from Figure 2 using SOLIDIFFY. The edit actions are color-coded with *delete* actions presented as with red and *update* with orange.

perimental setup, and Section IV-B elaborates on the protocol to answer the research questions.

The experiment is structured as a pipeline that begins with the selection and preparation of our seed datasets of Solidity smart contracts. The seed datasets include 1) DAppSCAN, a large dataset of smart contracts [30] and seed dataset from commit history of the Uniswap smart contracts [31] (Sec-

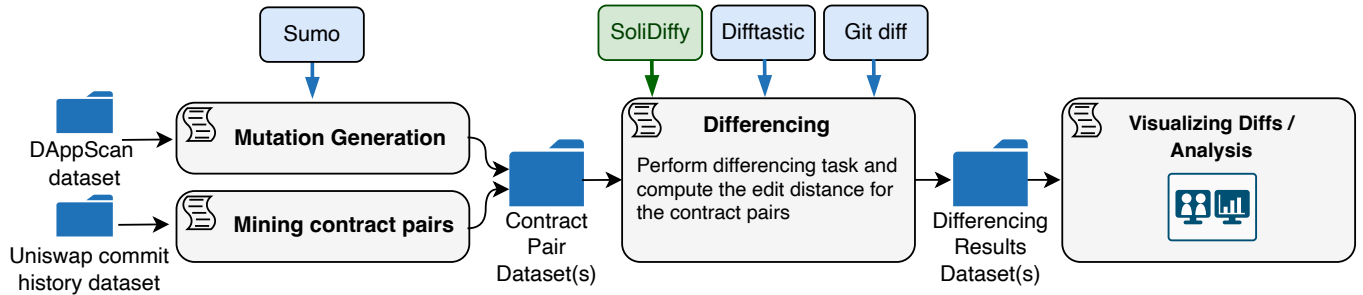


Fig. 4: Pipeline for large-scale generation of contract pair for differencing and subsequent analysis.

tion IV-C). In the next phase, the contract pairs are generated from our seed datasets. Finally, we run three tools in pairs SOLIDIFFY, Diffstastic, and Git line differencing tools according to our protocol for each research question on the generated contract pairs. The upcoming sections provide details of each stage of the experiment, including the dataset preparation, and the methodology for generating and processing source diff pairs.

#### A. Research Questions

The remaining sections of the paper address the following research questions:

- **RQ1:** How does the performance of SOLIDIFFY compare to the most-closely related tool, Diffstastic?
- **RQ2:** How does SOLIDIFFY perform when there are multiple changes in the smart contract source code?
- **RQ3:** How does the type of syntactic changes in file affect the performance of SOLIDIFFY?
- **RQ4:** How does SOLIDIFFY perform against line differencing on commit history of real-world smart contracts?

#### B. Protocol for Research Questions

1) *Protocol for RQ1:* To evaluate the effectiveness of SOLIDIFFY for AST differencing in Solidity code, we compare its performance against an existing open-source tool, Diffstastic. We focus on the key metric of edit script length and success of the differencing task.

2) *Protocol for RQ2:* In this RQ, we analyze the effect of number of code differences on the performance of Solidity AST differencing tools, on the same dataset as RQ1.

3) *Protocol for RQ3:* The mutations used to generate the evaluation dataset range from simple syntax modifications to complex structural changes on Solidity smart contracts. We investigate the relationship between different operators and their edit distance.

4) *Protocol for RQ4:* We follow the same protocol as RQ1 with the difference of using a dataset of real-world commits in a popular smart contract project.

#### C. Datasets

1) *Seed Datasets:* To follow the protocols of RQ1–3, we need a dataset with a large number of Solidity source code files. For this, we use the DAppScan-source dataset [30], [32],

[33]. This dataset consists of 39 904 real-world Solidity Solidity source code files. From these 39 904 files, 8102 files are used for our experiment in Figure 4, selected as follows: we remove all Solidity source files with duplicate names to ensure a more diverse dataset and reduce the potential for redundancy that could undermine the validity of our evaluation. The final dataset is available in a dedicated repository <sup>2</sup>.

For RQ4, we used commits of Uniswap v4 core smart contracts GitHub repository <sup>3</sup>.

2) *Contract Pair Generation:* To create contract pairs with varying levels of code alterations to the AST, one effective approach is to use a mutation testing tool [34]. Using code mutations for contract pair generation provides fine-grained code changes between versions, of better quality than what one may find in repositories.

For this, we use mutation tool SuMo [35], [36]. It contains 44 mutation operators that are useful for evaluating various aspects of SOLIDIFFY [37], [38].

We used a script to invoke SuMo from the command line, generating mutants for all files in the dataset using each available mutation operator. The process involved iterating through all 44 mutation operators, generating all possible mutations for each Solidity file, and creating up to 10 mutated versions per file. In some cases, the actual number of generated mutants is lower than 10 due to the limited mutation opportunities in some files.

We note that some files in the dataset are incompatible with SuMo, causing crashes and preventing contract pair generation. In total, we generated 353 262 contract pairs for differencing. The browsable version of these diff pairs is provided in our repository<sup>45</sup>.

To generate contract pairs for differencing task of RQ4, we processed the commit history of Uniswap v4 core project. The contract pair generation begins by retrieving the entire commit history in chronological order using `git log`, followed by identifying the specific Solidity files altered in each commit through `git diff-tree`. For each modified file, the script extracts the version of the file at both the current and previous

<sup>2</sup><https://github.com/SoliDiffy/SoliDiffyResults/tree/main/contracts/dataset>

<sup>3</sup><https://github.com/Uniswap/v4-core>

<sup>4</sup><https://github.com/SoliDiffy/SoliDiffyResults/tree/master/contracts/mutants>

<sup>5</sup><https://solidiffy.github.io/>

TABLE I: Effectiveness of Solidity differencing tools on our large dataset (Section IV-C1)

	SOLIDIFFY	Diffstastic
Total diffed pairs	353 262	
Successful diffed pairs	339 596	336 331

state and stores them. Then, a `git diff` between these two versions is computed using `git diff`, and the differences are saved to a file. This dataset of contract pairs and their differencing results are available publicly at our results repository <sup>6</sup>.

#### D. Execution Environment

We run the whole pipeline of the experiment on a system with an AMD EPYC 7742 64-core Processor and 528 GB RAM. The total run time of the experiment was 6h13m43s. The differencing is parallelized based on the available number of CPU cores on the server.

### V. EXPERIMENTAL RESULTS

#### A. Results for RQ1

**RQ1:** How does the performance of SOLIDIFFY compare to the most-closely related tool, Diffstastic?

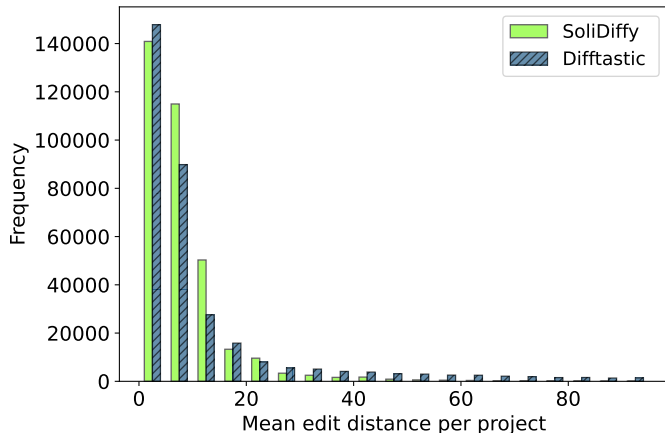


Fig. 5: RQ1: Histogram of mean edit script lengths per project for SOLIDIFFY and Diffstastic across all diff pairs of the project ( $n = 336\,331$ ). The long tail of Diffstastic’s distribution is trimmed at 100 to fit the plot as it continues to more than 500. Each pair of bars represents the frequency of projects falling within specific mean edit distance ranges.

We use SOLIDIFFY and Diffstastic to conduct a large-scale campaign of Solidity smart contract source code differencing (see Section IV). Figure 5 shows the results of running the experiment, averaged across all diff pairs of each project (with varying contract pair modification severity and different types of modifications). We present the results as a side-by-side

<sup>6</sup><https://github.com/SoliDiffy/SoliDiffyResults/tree/master/uniswap-v4-diffs>

histogram. The green bars represent SOLIDIFFY, while the blue bars with a hatched pattern represent Diffstastic. The y axis presents the frequency of edit script length that falls into a particular bin ( $x$  axis).

The key result is that SOLIDIFFY produces shorter edit scripts, as witnessed by the bars for SOLIDIFFY being consistently higher on the left side of the plot. Clearly, SOLIDIFFY produces fewer edit actions across most contracts of the dataset. In contrast, Diffstastic’s distribution is more spread out, with some edit scripts containing more than 80 changes and continuing to more than 500 which were trimmed to fit the plot. To ensure that the visual observations are statistically significant, we performed a Wilcoxon signed-rank test [39] ( $p < 0.001$ ) that shows difference between edit script length pairs over all projects is statistically significant.

Moreover, as shown in Table I, SOLIDIFFY is able to successfully analyze more diff pairs than Diffstastic (96.1% vs. 95.1%). The main root cause of the crashes was syntax errors that were due to invalid syntax in mutated contracts.

**Result for RQ1:** SOLIDIFFY outperforms Diffstastic by producing shorter edit scripts for Solidity smart contracts. Additionally, SOLIDIFFY successfully completed the analysis of a higher percentage of diffing tasks for contract pairs (96.1% vs. 95.1%).

#### B. Results for RQ2

**RQ2:** How does SOLIDIFFY perform when there are multiple changes in the smart contract source code?

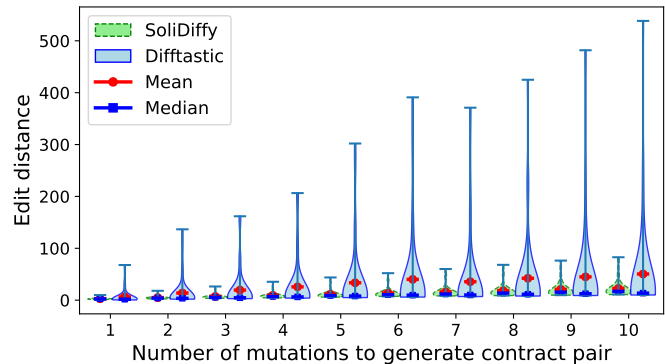


Fig. 6: RQ2: Edit distances of SOLIDIFFY and Diffstastic per initial number of mutations. Triangles annotate the average edit distance.

Figure 6 shows the results for the two differencing tools while running the diff pairs with the same operators repeatedly applied on the same Solidity contract (outlined in Section IV-C). The results are presented as a violin plot at which the width of the violin at different points shows the density of data. Key statistical markers, such as the mean and median in this plot highlight the skewness of the data. Peaks in the violin indicate where data clusters, and the tails represent outliers

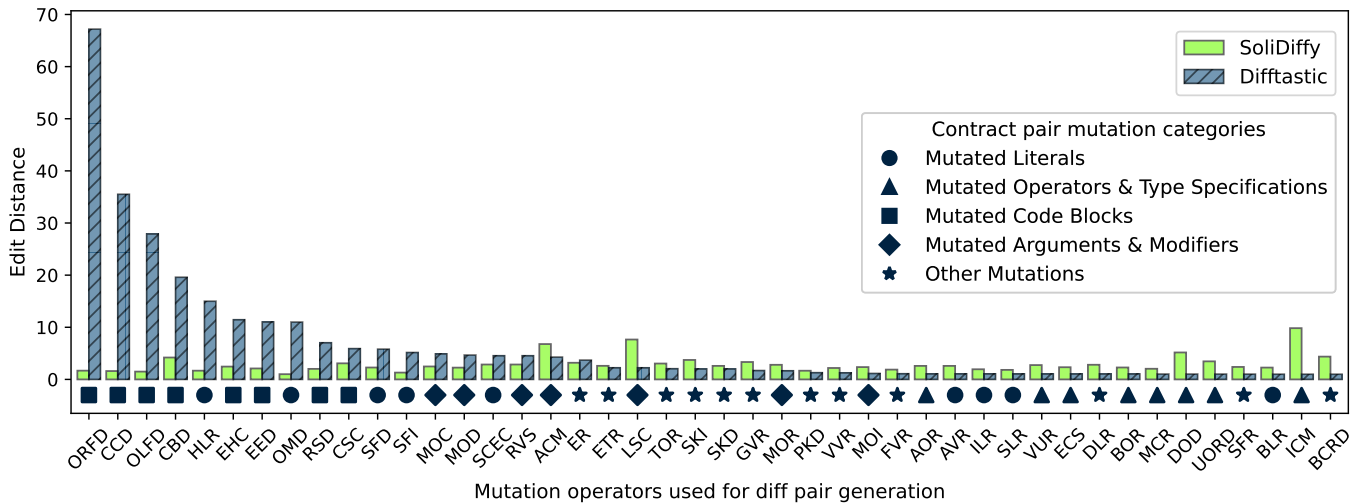


Fig. 7: RQ3: Comparison of SOLIDIFFY and DiffTastic edit distance split into different contract difference categories ( $n = 36\,331$ ). Different colors represent different numbers of mutations, ranging from 1 to 10. The bottom right legend describes the categories of modifications applied on each smart contract (Section IV-C).

or extreme values. As Figure 6 shows, SOLIDIFFY is more dense towards the lower values of edit scripts, especially for lower number of mutations used for contract pair generation. For instance, differencing task performed on contract pairs which were the result of one and two mutations are very dense towards very low values of edit scripts for SOLIDIFFY.

Furthermore, consistent extreme peaks in DiffTastic violins especially when having more number of mutations, shows it tends to generate very long edit scripts for at least a consistent proportion of differenced contract pairs especially when the number of modifications are increase.

While according to Figure 6 SOLIDIFFY exhibits lower values for the edit distance, we need a statistical test to confirm whether these differences are statistically significant. Given that the distributions represented in the violin plots are not normally distributed, we employed the Kolmogorov-Smirnov (K-S) test [40] to compare the two tools. The K-S test is suitable as it compares the entire cumulative distribution functions (CDFs) of two distributions, to detect differences not only in the central tendency but also in the overall shape, spread, and tails of the distributions. This is crucial because, as seen in the figure, DiffTastic results show more variability and heavier tails compared to the more concentrated SoliDiffy distributions. The K-S test revealed statistically significant differences in all 10 mutation severity comparisons, with p-values consistently below the conventional threshold of 0.05 with the highest p-value being 0.005. The results of the our K-S test align with the visual representation in Figure 6, where SOLIDIFFY shows tighter distributions across all parameters, with the means consistently lower than DiffTastic. SOLIDIFFY’s central tendency to lower edit distances, combined with the significantly different overall distribution shapes (as confirmed by the K-S test), provide compelling evidence of SoliDiffy’s superior performance.

**Result for RQ2:** SOLIDIFFY consistently produces smaller edit distances compared to DiffTastic, regardless of the number of modifications in the smart contracts to be diffed. The finding holds statistical significance.

### C. Results for RQ3

**RQ3:** How does the type of syntactic changes in file affect the performance of SOLIDIFFY?

We analyze the results of applying diverse set of 44 mutation operators on our dataset side-by-side for both SOLIDIFFY and DiffTastic. Figure 7 presents the performance difference between the two tools. The exact mutation operator and its category are written bellow each bar pair. The bars show the effect of mutation operator and its category used to create the smart contract pairs. Each bar represents the mean edit distance between the original smart contract and its respective modified version produced by applying the specific mutation operator only once. For instance, when diff pairs consist of mutated code blocks category, that is, when large blocks of code are added, moved, or removed from the code, the DiffTastic edit distances are significantly larger than SOLIDIFFY’s results or any other type of modification.

As Figure 7 presents, the performance of SOLIDIFFY and DiffTastic is considerably different in many cases. In most cases that SOLIDIFFY performs better, it outperforms DiffTastic by a great margin. For instance, in all differencing tasks belonging to the mutated code blocks category where full blocks of code are manipulated, SOLIDIFFY produces structurally meaningful edit scripts as opposed to DiffTastic which tends to produce edit scripts consisting of word-by-word additions or deletions. SOLIDIFFY demonstrates a stronger performance where it matters most: in the cases where DiffTastic falls short, the discrepancies are notably more pronounced, highlighting

the superior efficiency of SOLIDIFFY in handling more complex differences, which are typical in real-world use-cases.

For the cases where SOLIDIFFY visibly produces longer edit scripts. For instance in the case of the textually minor mutation operator ICM (Increments Mirror) that changes an incrementing operator by swapping their two characters, += becomes =+. The problem when representing this change in AST edit actions is that the ASTs generated from these two versions are very different. In the first (+=), an operator is applied to two values and the new value is written to one of them. In the other (=+), a value is simply set to a negative value. DiffTastic’s way of providing textual changes in this case provides a shorter edit distance as its edit script consists of adding + to an existing operand (=). Only the two characters that were swapped are displayed, and the resulting edit distance instead becomes the correct two per mutation. The same argument holds for all the instances that edit distances calculated by SOLIDIFFY is higher than DiffTastic.

For diff pairs belonging to argument/modifier and miscellaneous categories, SOLIDIFFY and DiffTastic inconsistently outperform each other. Our random sampling of diff pairs where DiffTastic producing smaller edit distance confirms that these belong to the cases where DiffTastic merely textually counts the number of add or removal of words in the Solidity contract.

We conducted a Wilcoxon signed-rank test [39] to assess the statistical significance of the observed differences between SOLIDIFFY and DiffTastic across the 44 mutation operators. The test results show that for all 44 operators, the differences between SOLIDIFFY and DiffTastic were statistically significant. This confirms that the visual performance differences seen in Figure 7 are not due to random chance.

**Result for RQ3:** SOLIDIFFY demonstrates superior performance in handling complex structural changes, particularly when large code blocks are modified. It can produce meaningful, concise edit scripts for diverse kinds of modification.

#### D. Results for RQ4

**RQ4:** How does SOLIDIFFY perform against line differencing on commit history of real-world smart contracts?

Comparing Git line differencing which works on smart contract source level and not perform any structural (syntax-level) differencing, allows benchmarking SOLIDIFFY against the most simplistic way of transforming one smart contract to another by merely removing lines and adding new lines. We define the edit distance of Git line differencing results as the total number of lines marked to remove and add.

Figure 8 shows the results of differencing task on 925 pairs of contract pairs with modifications from the commit history of Uniswap v4 core smart contracts. This figure visualizes SOLIDIFFY and Git line differencing results using a violin plot for each tool.

While the violin shapes indicate that the two tools perform similarly on the lower end of the distribution, the spread

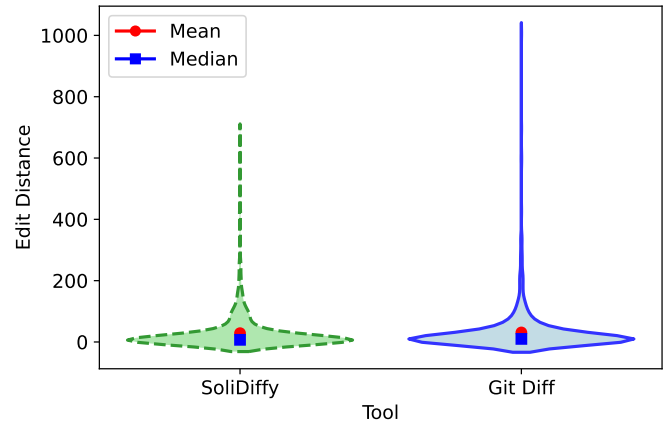


Fig. 8: RQ4: Edit distances of SOLIDIFFY and DiffTastic for 925 smart contract pairs extracted from the commit history of Uniswap v4 core.

of values—particularly the tail behavior—differs slightly between the tools. SOLIDIFFY seems to consistently exhibit more compact results, while `git diff` demonstrates broader variability, especially in the higher ranges.

To check the statistical significance of observation in Figure 8, we conducted a Wilcoxon signed-rank test [39] on edit script length of two tools generated on the same contract pairs (925 pairs of edit distances). The result proved that distributions are indeed significantly different with a p-value of 0.01 rejecting the null hypothesis that there is no statistically significant difference between these two edit script length distributions.

**Result for RQ4:** SOLIDIFFY works well to analyze open-source commits changing real-world Solidity smart contracts. SOLIDIFFY is readily usable by researchers and practitioners for advanced smart contract analysis tasks.

## VI. DISCUSSION

### A. Lessons Learned

Our experimental evaluation demonstrates that SOLIDIFFY offers significant improvements in edit script precision compared to DiffTastic, particularly when handling complex code modifications, such as those involving large code blocks. By delivering shorter and more precise edit scripts, SOLIDIFFY provides developers with a clearer view of structural changes, reducing the cognitive load required for code reviews and audits. This is essential in the blockchain domain, where the immutability of deployed contracts necessitates rigorous pre-deployment analysis.

Our findings also revealed situations where SOLIDIFFY produced longer edit scripts than DiffTastic. This was observed with certain low-impact syntax mutations where the distinction between AST nodes resulted in an increased edit distance. Such cases highlight that SOLIDIFFY’s more granular AST differencing may not always translate into shorter edit scripts,

especially when the syntactic differences are minimal. Future work could explore hybrid approaches that incorporate both text-based and AST-based differencing to handle such cases more effectively.

The use of mutants as our primary dataset allowed for controlled evaluations, but it also introduced some limitations. Real-world smart contract updates often involve non-uniform changes that go beyond single syntactic mutations. The results of RQ4, using real-world data from Uniswap v4, suggest that SOLIDIFFY remains effective even in diverse commit histories, which indicates its robustness for practical applications. Further studies with varied real-world datasets could provide deeper insights into how well SOLIDIFFY performs in other scenarios, such as contract refactoring or collaborative development environments.

### B. Threats to Validity

To evaluate SOLIDIFFY, we used mutants for generating diff pairs. This approach provided fine-grained control over the differences in the code, enabling us to systematically evaluate the tool (see Sections V-A, V-B, V-C). By using mutants instead of relying on the commit history of Solidity project repositories, we ensured that each diff pair was isolated and clearly attributable to specific types of syntactic changes. This level of control facilitated a more detailed analysis of the tools' behavior under specific conditions.

However, using mutants also introduces some potential problems. Firstly, the differences between the resulting files may be identical across some cases. Furthermore, many mutation operators generated minor changes, which, when analyzed individually, provided limited insight into the broader performance of the differencing tools. This could lead to an underestimation of the tools' effectiveness in handling more complex, real-world code changes.

Even in cases where the large-scale evaluation showed differences in edit distances between the tools, these differences were not always apparent in the visual representation of the diffs.

Statistical analysis on edit distances also may introduce potential threats to validity. First, while non-parametric tests like the Wilcoxon signed-rank and Kolmogorov-Smirnov (K-S) tests are suitable for our non-normal data distributions, they assume comparable scales across tools. Differences in edit script lengths between SOLIDIFFY and DiffTastic may partly reflect varying granularities rather than inherent tool efficacy. Second, the dataset's synthetic nature (using controlled mutants) could bias statistical comparisons, as the tool behaviors observed in a laboratory setting may not fully extend to real-world contract complexities. Finally, the choice of statistical significance alone may overlook practical differences. While the tests confirm tool distinctions, additional metrics such as effect size or real-world user studies could provide further insights into the impact of these differences on developer tasks.

## VII. RELATED WORK

As Solidity source code differencing is a contributing technical piece of many solutions such as version control [48],

automated debugging [5], and code repair [49], [50], we provide a detailed review of tools and research on source code differencing.

### A. Code Differencing

Tools such as srcML [25] and Dex [41] proposed ways to enhance code differencing, while UMLDiff [42] and Diff/TS [43] aimed at improving accuracy and efficiency. Meanwhile, OperV [20] explored varying levels of granularity in differencing.

The srcML tool converts source code into an XML-based intermediate representation, retaining both the syntax and textual elements, allowing for regenerating the original code [25]. Unlike AST-based tools, it uses the Unix diff command on these XML files.

Dex introduced the use of Abstract Semantic Graphs (ASGs) instead of ASTs for C code, linking related nodes like variable references and declarations [41]. Its differencing approach used graph rather than tree differencing, excluding the move operation from its edit scripts, but achieving a 95% accuracy in detecting correct edit actions.

UMLDiff [42] and Diff/TS [43] focused on enhancing the structural analysis of code changes. UMLDiff used class models reverse-engineered from Java source code to build change trees and calculated similarity scores to detect changes in the overarching class structure [42]. Diff/TS, on the other hand, combined tree differencing with configurable heuristics to improve runtime and accuracy, incorporating all standard edit actions in its scripts [43].

OperV sought to offer variable granularity in version control systems, combining line-based differencing with AST-based matching, though its evaluation was limited compared to more modern approaches [20].

The aforementioned tools do not provide the neither fine-grained differencing capabilities required for smart contract languages such as Solidity.

Recent AST differencing tools, including GumTree [19], MTDIFF [44], IJM [45], and the approach by Matsumoto et al. [46], focus on refining the generation of edit scripts (Section II-B2).

One common method for evaluating edit script quality is by measuring its length [19], [44], [46]. Shorter edit scripts are generally preferred because they tend to contain fewer redundant operations and more closely align with the actual code modifications. Another approach is to count the number of matched nodes in the initial differencing step, which are not included in the edit script, providing insight into the tool's effectiveness in detecting unchanged code structures. However, there are criticisms of these methods. For instance, focusing solely on reducing script length can sometimes lead to suboptimal results, as seen in tools like SrcDiff [22].

In addition to quantitative measures, qualitative evaluations through expert analysis are also commonly used. These smaller-scale assessments, as applied in studies of tools like GumTree [19], Matsumoto's approach [46], and the differen-



TABLE II: Summary of notable tools and research on Solidity source code differencing.

Tool/Approach	Key Features	Differencing Technique	Limitations	Solidity
srcML [25]	XML-based intermediate representation	Unix diff on XML	Limited evaluation and lacks structural analysis	✗
Dex [41]	Abstract Semantic Graphs (ASGs) instead of ASTs	Graph differencing	No move operation in edit scripts	✗
UMLDiff [42]	Reverse-engineered class models from Java code	Structural analysis with similarity scores	Limited to class structure, not applicable to all code changes	✗
Diff/TS [43]	Combines tree differencing with configurable heuristics	Tree differencing	No comparison to other similar tools in evaluation	✗
OperV [20]	Variable granularity using line and AST-based differencing	Line and AST differencing	Lacks comprehensive evaluation	✗
MTDIFF [44]	Optimizes edit script length	Improved GumTree algorithm	Comparable failure rates with other tools	✗
IJM [45]	Merges nodes, prunes sub-trees for faster differencing	Improved GumTree algorithm	Shorter, faster edit scripts	✗
Matsumoto’s Approach [46]	Splits AST nodes by line-based diff relevance	Line and AST-based differencing	Only focuses on improving specific troublesome actions	✗
Yang & Whitehead’s Pruning [47]	Pruning ASTs based on unchanged lines	Line-based pruning for AST	Pruning has negligible impact on diff results	✗
HyperAST [24]	Single AST representing multiple file versions	AST storage across versions	Limited to AST construction optimization	✗
CLDiff [23]	Groups and links related edit actions	AST differencing with grouping	More coarse-grained, focused on grouping related changes	✗
SrcDiff [22]	Heuristic-based matching, conversion rules	Heuristic-based differencing	Poor handling of complex updates in syntactic differencing	✗
Diffastic [21]	Supports Solidity	Text changes differencing	Lacks concrete evaluation, limited to text-based diffs, unsuitable for complex diff tasks, Supports only two edit actions	✓
SOLIDIFFY (current work)	Move operation in edit scripts, RTED algorithm, Solidity-specific differencing	Top-down and bottom-up AST traversal and mapping to generate edit script for a diff pair, supports four edit actions	Issues with visual representation of diffs, Edit script length for very small changes	✓

tial testing conducted by Fan et al. [51], provide insights into the real-world usefulness of AST differencing tools.

### B. Gumtree Family of AST Differencing.

The Changedistiller algorithm [52] is a foundational work in AST differencing, introducing a method to match identical nodes between two ASTs and generate an edit script. It built upon Chawathe’s 1996 algorithm [28], optimizing it for source code by reducing edit script length by 45%. This approach influenced many subsequent tools, including GumTree [19].

GumTree is particularly notable for its introduction of the move operation in edit scripts, which improves accuracy by grouping related changes. It uses a combination of top-down and bottom-up AST traversal and incorporates the RTED algorithm [53] for generating mappings in smaller sub-trees. However, GumTree has not integrated the more recent APTED algorithm [54], which could enhance its performance.

GumTree also supports hyperparameter tuning to optimize edit script length, as demonstrated by Martinez’s Diff Auto Tuning (DAT) technique, which reduced script length [55]. Additionally, GumTree can process general-purpose Tree-sitter CSTs by converting them into a format suitable for AST differencing [56].

MTDIFF [44] and Iterative Java Matcher (IJM) [45] introduced improvements on built on top of core GumTree algorithm but lack maturity and integration into the mainstream differencing code tool.

While the aforementioned tools offer improvements for general-purpose languages, they lack specific adaptations for Solidity. SOLIDIFFY builds on this line of work by building on top of Gumtree’s algorithms and ecosystem for Solidity smart contracts.

### C. Solidity Code Differencing

Research on code differencing specific to Solidity is limited. While line-based differencing can be used across languages, it lacks the precision needed for Solidity's unique syntax and semantics, as discussed in Section II-B.

The only dedicated Solidity differencing tool in the literature is part of the Solidity Instrumentation Framework (SIF) [57]. SIF uses AST-differencing, but its implementation is poorly documented and relies on an outdated AST format no longer supported by the Solidity compiler, making it unusable for newer code.

Outside academic literature, Smartdiffer [58] links Ethereum with a line-based differencing tool but does not perform AST differencing, limiting its relevance to more sophisticated analysis.

Diffstastic [21] is a more complete AST differencing tool that supports Solidity. It uses a tree-sitter parser to generate side-by-side diffs or JSON output. However, it does not use traditional edit script generation, instead focusing on concrete text changes, and lacks thorough research-based evaluation.

### VIII. CONCLUSION

We introduced SOLIDIFFY, a novel AST differencing tool for Solidity smart contracts. SOLIDIFFY provides fine-grained, accurate differencing, outperforming existing tools in both edit script quality and ability to handle complex syntactic changes. Our evaluation demonstrated that SOLIDIFFY supports AST differencing of complex changes and real world contracts. SOLIDIFFY also gives an intuitive diff representation for developers. SOLIDIFFY sets a solid foundation for future enhancements in the field of smart contract analysis, such as incorporating semantic analysis or extending support to other blockchain languages.

### REFERENCES

- [1] G. Wood, "Ethereum: A secure decentralised generalised transaction ledger," *Ethereum Project Yellow Paper*, vol. 151, pp. 1–32, 2014.
- [2] N. Szabo, "Smart Contracts." <https://www.fon.hum.uva.nl/rob/Courses/InformationInSpeech/CDROM/Literature/LOTwinterschool2006/szabo.best.vwh.net/smart.contracts.html>, 1994.
- [3] Ethereum, "Home." <https://ethereum.org/en/>, 2024.
- [4] S. Language, "Solidity — Solidity 0.8.23 documentation." <https://docs.soliditylang.org/en/v0.8.23/>, 2024.
- [5] G. Misherghi and Z. Su, "HDD: hierarchical delta debugging," in *Proceedings of the 28th International Conference on Software Engineering*, pp. 142–151, 2006.
- [6] T. D. Nguyen, L. H. Pham, and J. Sun, "Sguard: Towards fixing vulnerable smart contracts automatically," in *2021 IEEE Symposium on Security and Privacy (SP)*, p. 1215–1229, May 2021.
- [7] R. Huang, Q. Shen, Y. Wang, Y. Wu, Z. Wu, X. Luo, and A. Ruan, "ReenRepair: Automatic and semantic equivalent repair of reentrancy in smart contracts," *Journal of Systems and Software*, vol. 216, p. 112107, Oct. 2024.
- [8] X. L. Yu, O. Al-Bataineh, D. Lo, and A. Roychoudhury, "Smart contract repair," *ACM Transactions on Software Engineering and Methodology*, vol. 29, pp. 27:1–27:32, Sep 2020.
- [9] H. Jin, Z. Wang, M. Wen, W. Dai, Y. Zhu, and D. Zou, "Aroc: An automatic repair framework for on-chain smart contracts," *IEEE Transactions on Software Engineering*, vol. 48, p. 4611–4629, Nov 2022.
- [10] J. Feist, G. Grieco, and A. Groce, "Slither: a static analysis framework for smart contracts," in *2019 IEEE/ACM 2nd International Workshop on Emerging Trends in Software Engineering for Blockchain (WETSEB)*, pp. 8–15, IEEE, 2019.
- [11] M. Mossberg, F. Manzano, E. Hennenfent, A. Groce, G. Grieco, J. Feist, T. Brunson, and A. Dinaburg, "Manticore: A user-friendly symbolic execution framework for binaries and smart contracts," in *2019 34th IEEE/ACM International Conference on Automated Software Engineering (ASE)*, pp. 1186–1189, IEEE, 2019.
- [12] M. Eshghie, C. Artho, and D. Gurov, "Dynamic Vulnerability Detection on Smart Contracts Using Machine Learning," in *Evaluation and Assessment in Software Engineering, EASE 2021*, (New York, NY, USA), pp. 305–312, Association for Computing Machinery, June 2021.
- [13] M. Eshghie and C. Artho, "Oracle-guided vulnerability diversity and exploit synthesis of smart contracts using llms," in *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering*, pp. 2240–2248, 2024.
- [14] M. Eshghie, C. Artho, H. Stammer, W. Ahrendt, T. Hildebrandt, and G. Schneider, "Highguard: Cross-chain business logic monitoring of smart contracts," in *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering*, pp. 2378–2381, 2024.
- [15] E. Cruz, *An Initial Investigation of Automatic Program Repair for Solidity Smart Contracts with Large Language Models*. 2023.
- [16] Z. Gao, L. Jiang, X. Xia, D. Lo, and J. Grundy, "Checking smart contracts with structural code embedding," *IEEE Transactions on Software Engineering*, vol. 47, no. 12, pp. 2874–2891, 2020.
- [17] X. Chen, P. Liao, Y. Zhang, Y. Huang, and Z. Zheng, "Understanding code reuse in smart contracts," in *2021 IEEE International Conference on Software Analysis, Evolution and Reengineering (SANER)*, (Online), pp. 470–479, IEEE, 2021.
- [18] Z. Gao, V. Jayasundara, L. Jiang, X. Xia, D. Lo, and J. Grundy, "SmartEmbed: A tool for clone and bug detection in smart contracts through structural code embedding," in *2019 IEEE International Conference on Software Maintenance and Evolution (ICSME)*, pp. 394–397, IEEE, 2019.
- [19] J.-R. Falleri, F. Morandat, X. Blanc, M. Martínez, and M. Monperrus, "Fine-grained and accurate source code differencing," in *Proceedings of the 29th ACM/IEEE International Conference on Automated Software Engineering, ASE '14*, (New York, NY, USA), pp. 313–324, Association for Computing Machinery, Sept. 2014.
- [20] T. T. Nguyen, H. A. Nguyen, N. H. Pham, and T. N. Nguyen, "Operation-Based, Fine-Grained Version Control Model for Tree-Based Representation," in *Fundamental Approaches to Software Engineering* (D. S. Rosenblum and G. Taentzer, eds.), (Berlin, Heidelberg), pp. 74–90, Springer, 2010.
- [21] W. Hughes, "Diffstastic." <https://github.com/wilfred/diffstastic>, Mar. 2024. original-date: 2018-12-18T11:19:45Z.
- [22] M. J. Decker, M. L. Collard, L. G. Volkert, and J. I. Maletic, "srcDiff: A syntactic differencing approach to improve the understandability of deltas," *Journal of Software: Evolution and Process*, vol. 32, no. 4, p. e2226, 2020. eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/smr.2226>.
- [23] K. Huang, B. Chen, X. Peng, D. Zhou, Y. Wang, Y. Liu, and W. Zhao, "CIDiff: generating concise linked code differences," in *Proceedings of the 33rd ACM/IEEE International Conference on Automated Software Engineering, ASE '18*, (New York, NY, USA), pp. 679–690, Association for Computing Machinery, Sept. 2018.
- [24] Q. Le Dilavrec, D. E. Khelladi, A. Blouin, and J.-M. Jézéquel, "Hyperast: Enabling efficient analysis of software histories at scale," in *Proceedings of the 37th IEEE/ACM International Conference on Automated Software Engineering, ASE '22*, (New York, NY, USA), Association for Computing Machinery, 2023.
- [25] J. Maletic and M. Collard, "Supporting source code difference analysis," in *20th IEEE International Conference on Software Maintenance, 2004. Proceedings.*, pp. 210–219, Sept. 2004. ISSN: 1063-6773.
- [26] D. S. Wile, "Abstract syntax from concrete syntax," in *Proceedings of the 19th International Conference on Software Engineering*, pp. 472–480, 1997.
- [27] Y. S. Nugroho, H. Hata, and K. Matsumoto, "How different are different diff algorithms in git? use-histogram for code changes," *Empirical Software Engineering*, vol. 25, pp. 790–823, 2020.
- [28] S. S. Chawathe, A. Rajaraman, H. Garcia-Molina, and J. Widom, "Change detection in hierarchically structured information," in *Proceedings of the 1996 ACM SIGMOD International Conference on Management of Data, SIGMOD '96*, (New York, NY, USA), p. 493–504, Association for Computing Machinery, 1996.
- [29] Tree-sitter, "Tree-sitter Introduction." <https://tree-sitter.github.io/tree-sitter/>, 2024.

- [30] Z. Zheng, J. Su, J. Chen, D. Lo, Z. Zhong, and M. Ye, "DAppSCAN: Building Large-Scale Datasets for Smart Contract Weaknesses in DApp Projects." <http://arxiv.org/abs/2305.08456>, Nov. 2023. arXiv:2305.08456 [cs].
- [31] "Uniswap/v4-core." <https://github.com/Uniswap/v4-core>, Oct. 2024.
- [32] InPlusLab, "InPlusLab/DAppSCAN." <https://github.com/InPlusLab/DAppSCAN>, Mar. 2024. original-date: 2023-04-20T16:51:09Z.
- [33] G. Morello, M. Eshghie, S. Bobadilla, and M. Monperrus, "DISL: Fueling Research with A Large Dataset of Solidity Smart Contracts." <http://arxiv.org/abs/2403.16861>, Mar. 2024. arXiv:2403.16861 [cs].
- [34] A. J. Offutt, "Investigations of the software testing coupling effect," *ACM Trans. Softw. Eng. Methodol.*, vol. 1, pp. 5–20, Jan. 1992.
- [35] M. Barboni, A. Morichetta, and A. Polini, "SuMo: A mutation testing approach and tool for the Ethereum blockchain," *Journal of Systems and Software*, vol. 193, p. 111445, Nov. 2022.
- [36] M. Barboni, "MorenaBarboni/SuMo-SOLIDity-MUtor." <https://github.com/MorenaBarboni/SuMo-SOLIDity-MUtor>, Mar. 2024. original-date: 2021-02-01T15:04:47Z.
- [37] S. Phipathananunth, "Using Mutations to Analyze Formal Specifications," in *Companion Proceedings of the 2022 ACM SIGPLAN International Conference on Systems, Programming, Languages, and Applications: Software for Humanity, SPLASH Companion 2022*, (New York, NY, USA), pp. 81–83, Association for Computing Machinery, Dec. 2022.
- [38] Certora, "Certora/gambit." <https://github.com/Certora/gambit>, Mar. 2024. original-date: 2022-11-14T19:22:49Z.
- [39] F. Wilcoxon, "Individual comparisons by ranking methods," in *Breakthroughs in statistics: Methodology and distribution*, pp. 196–202, Springer, 1992.
- [40] F. J. Massey Jr, "The kolmogorov-smirnov test for goodness of fit," *Journal of the American statistical Association*, vol. 46, no. 253, pp. 68–78, 1951.
- [41] S. Raghavan, R. Rohana, D. Leon, A. Podgurski, and V. Augustine, "Dex: a semantic-graph differencing tool for studying changes in large code bases," in *20th IEEE International Conference on Software Maintenance, 2004. Proceedings.*, pp. 188–197, Sept. 2004. ISSN: 1063-6773.
- [42] Z. Xing and E. Stroulia, "UMLDiff: an algorithm for object-oriented design differencing," in *Proceedings of the 20th IEEE/ACM International Conference on Automated Software Engineering, ASE '05*, (New York, NY, USA), pp. 54–65, Association for Computing Machinery, Nov. 2005.
- [43] M. Hashimoto and A. Mori, "Diff/TS: A Tool for Fine-Grained Structural Change Analysis," in *2008 15th Working Conference on Reverse Engineering*, pp. 279–288, Oct. 2008. ISSN: 2375-5369.
- [44] G. Dotzler and M. Philippsen, "Move-optimized source code tree differencing," in *Proceedings of the 31st IEEE/ACM International Conference on Automated Software Engineering, ASE '16*, (New York, NY, USA), pp. 660–671, Association for Computing Machinery, Aug. 2016.
- [45] V. Frick, T. Grassauer, F. Beck, and M. Pinzger, "Generating Accurate and Compact Edit Scripts Using Tree Differencing," in *2018 IEEE International Conference on Software Maintenance and Evolution (ICSME)*, pp. 264–274, Sept. 2018. ISSN: 2576-3148.
- [46] J. Matsumoto, Y. Higo, and S. Kusumoto, "Beyond GumTree: A Hybrid Approach to Generate Edit Scripts," in *2019 IEEE/ACM 16th International Conference on Mining Software Repositories (MSR)*, pp. 550–554, May 2019. ISSN: 2574-3864.
- [47] C. Yang and E. J. Whitehead, "Pruning the ast with hunks to speed up tree differencing," in *2019 IEEE 26th International Conference on Software Analysis, Evolution and Reengineering (SANER)*, pp. 15–25, 2019.
- [48] R. Vemula, "Code Version Control Using GitHub Platform," in *Real-Time Web Application Development : With ASP.NET Core, SignalR, Docker, and Azure* (R. Vemula, ed.), pp. 425–487, Berkeley, CA: Apress, 2017.
- [49] M. Wyrich and J. Bogner, "Towards an Autonomous Bot for Automatic Source Code Refactoring," in *2019 IEEE/ACM 1st International Workshop on Bots in Software Engineering (BotSE)*, pp. 24–28, May 2019.
- [50] V. Alizadeh, M. A. Ouali, M. Kessentini, and M. Chater, "RefBot: Intelligent Software Refactoring Bot," in *2019 34th IEEE/ACM International Conference on Automated Software Engineering (ASE)*, pp. 823–834, Nov. 2019.
- [51] Y. Fan, X. Xia, D. Lo, A. E. Hassan, Y. Wang, and S. Li, "A Differential Testing Approach for Evaluating Abstract Syntax Tree Mapping Algorithms," in *2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE)*, pp. 1174–1185, May 2021. ISSN: 1558-1225.
- [52] B. Fluri, M. Wursch, M. Plnzer, and H. Gall, "Change Distilling: Tree Differencing for Fine-Grained Source Code Change Extraction," *IEEE Transactions on Software Engineering*, vol. 33, pp. 725–743, Nov. 2007. Conference Name: IEEE Transactions on Software Engineering.
- [53] M. Pawlik and N. Augsten, "RTED: a robust algorithm for the tree edit distance," *Proceedings of the VLDB Endowment*, vol. 5, pp. 334–345, Dec. 2011.
- [54] M. Pawlik and N. Augsten, "Tree edit distance: Robust and memory-efficient," *Information Systems*, vol. 56, pp. 157–173, Mar. 2016.
- [55] M. Martinez, J.-R. Falleri, and M. Monperrus, "Hyperparameter optimization for ast differencing," *IEEE Transactions on Software Engineering*, vol. 49, no. 10, pp. 4814–4828, 2023.
- [56] Gumtree, "GumTreeDiff/tree-sitter-parser." <https://github.com/GumTreeDiff/tree-sitter-parser>, Nov. 2023. original-date: 2022-01-25T14:43:47Z.
- [57] C. Peng, S. Akca, and A. Rajan, "SIF: A Framework for Solidity Contract Instrumentation and Analysis," in *2019 26th Asia-Pacific Software Engineering Conference (APSEC)*, pp. 466–473, Dec. 2019. ISSN: 2640-0715.
- [58] smartdiffer, "skalermo/smartdiffer: Tool to compare smart contracts source code." <https://github.com/skalermo/smartdiffer/tree/main>, 2024.