From Audio Deepfake Detection to AI-Generated Music Detection – A Pathway and Overview

Yupei Li, Manuel Milling, Lucia Specia, Björn W. Schuller, Senior Member, IEEE

Abstract—As Artificial Intelligence (AI) technologies continue to evolve, their use in generating realistic, contextually appropriate content has expanded into various domains. Music, an art form and medium for entertainment, deeply rooted into human culture, is seeing an increased involvement of AI into its production. However, despite the effective application of AI music generation (AIGM) tools, the unregulated use of them raises concerns about potential negative impacts on the music industry, copyright and artistic integrity, underscoring the importance of effective AIGM detection. This paper provides an overview of existing AIGM detection methods. To lay a foundation to the general workings and challenges of AIGM detection, we first review general principles of AIGM, including recent advancements in deepfake audios, as well as multimodal detection techniques. We further propose a potential pathway for leveraging foundation models from audio deepfake detection to AIGM detection. Additionally, we discuss implications of these tools and propose directions for future research to address ongoing challenges in the field.

Index Terms—AI Music Generation, AI detection, Multimodality, Musicology, Music production

I. INTRODUCTION

S large language models (LLMs) like GPT-4 [1] and Whisper [2] continue to evolve rapidly and are increasingly adopted by the public, artificial intelligence-generated content (AIGC) has gained considerable popularity. Among these advancements, deepfake audio has become particularly widespread, creating challenges in the form of potential spam through voice conversion (VC) that mimics intimate voices, as well as public misinformation via text-to-speech (TTS) models that can impersonate political figures.

AI-generated music (AIGM), which has overlap with deepfake audio generation, has seen rapid adoption with platforms like OpenAI's MuseNet [3], Jukedeck [4], and AIVA [5]. This technology carries profound implications for the music industry, sparking debates around originality, copyright, and artistic value [6] within the music community. For musicians, AI's rapid music production capabilities risk overshadowing artist-created works, which demand significant time, effort,

Yupei Li, GLAM team, Imperial College London, London, UK, email: yupei.li22@imperial.ac.uk

Manuel Milling, CHI – Chair of Health Informatics, Technical University of Munich, Munich, Germany, email: manuel.milling@tum.de

Lucia Specia, GLAM and Llama team, Imperial College London, London, UK, email: l.specia@imperial.ac.uk

Björn W. Schuller, GLAM / CHI – Chair of Health Informatics, Imperial College London / Technical University of Munich, London, UK / Munich, Germany, email: schuller@tum.de

This research was partially supported by the Munich Center for Machine Learning and the Munich Data Science Institute. and personal experience. Moreover, the pervasive influence of AI-generated patterns may diminish originality, as artists might unconsciously replicate repetitive AI-driven motifs, hindering innovation. Additionally, the prevalence of music plagiarism has led to numerous legal disputes, highlighting the need for standardised tools for AIGM detection [7]. For audiences, there is concern that the aesthetic landscape of music could shift in favour of styles driven by AI, potentially altering public taste. Given the subjective nature of musical judgment, there is a collective reluctance to let AIGM, which lacks authentic emotional depth and creativity, replace human artistry. Therefore, robust AIGM detection is essential to monitor and manage the influence of AI music production, safeguarding the creative integrity of the music community and preventing potential disruptions to both creators and consumers.

Amongst attempts to detect AI audio generation, by far the most attention has been given to deepfake audio detection; the detection of AIGM remains an underexplored area, with few comprehensive efforts available on its methodologies. Current surveys in audio deepfake detection, while highlighting promising advances, often present fragmented insights and lack in-depth, constructive considerations for the pros and cons. For example, Yi et al. [8] focus on differentiating types of deepfake audio and model performance using only the ASVspoof 2021 [9] and ADD 2023 [10] datasets. Masood et al. [11] and Lin et al. [12] emphasise multimodal deepfake detection, addressing audio in conjunction with other modalities, thus limiting the depth of audio-only methods. Dixit, Kaur, and Kingra [13] outline a pipeline for audio deepfake detection, but their review covers a limited range of techniques. Patel [14] provides an overview of audio deepfake detection from the perspective of generation methods and specific case studies, though it lacks a comprehensive survey of detection strategies as well. Almutairi and Elgibreen [15] offer a more coherent review, but their scope is limited to studies conducted up until 2022. To the best of our knowledge, no review currently exists that specifically addresses AIGM detection, indicating a significant gap in the literature.

Although AIGM detection, like other deepfake audio detection tasks, is fundamentally a binary classification problem aiming to determine whether a piece of music is humanor AI-generated, several key differences make AIGM detection uniquely challenging. Music, as an art form, is highly subjective, with interpretative elements that can vary widely across audiences and cultures [16]. Additionally, music theory introduces unique structures, harmonies, and compositional

© 2024 The Authors. This work is licensed under a Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 License.

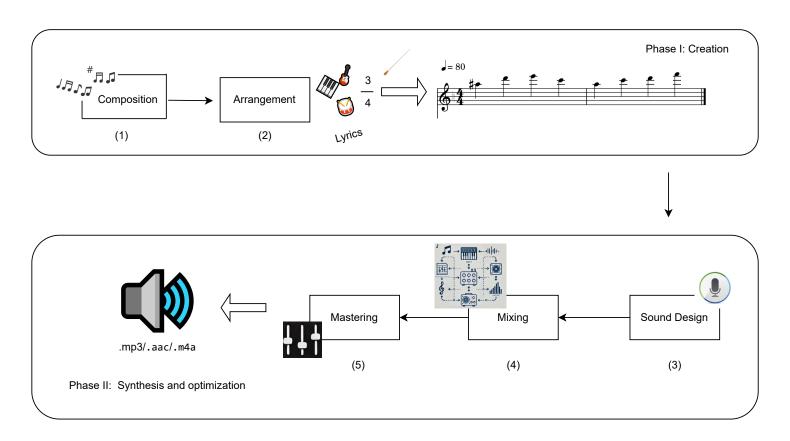


Fig. 1. Five steps of music production: **Composition**, some scattered melodies harmonies, and rhythms are created to form basic music components; **Arrangement**, these components are organised into complete pieces with selection of instruments and harmonic structures etc.; **Sound Design**, the pieces create and modify tones with synthesisers to achieve sound effects; **Mixing**, the balance of each audio track is adjusted to provide better overall coherence; **Mastering** is the final optimisation such as format preparation for different devices and final check with unintentional error.

techniques, offering distinctive features that are not typically present in other audio forms [17]. Furthermore, music often incorporates lyrics with poetic qualities [18], which introduces an additional layer of complexity and shifts AIGM detection tasks into the multimodal domain. These characteristics make AI-generated music detection a specialised task, requiring tailored approaches that account for the complexity and artistry inherent in music.

Therefore, we aim to fill this gap by providing an overview in AIGM detection. There are five essential steps to produce a piece of music: composition, arrangement, sound design, mixing, and master tape production [19], shown in Figure 1. We consider the first two phases, composition and arrangement, to have the most creativity and foundational stages in high-quality music production. These steps establish the basis upon which later stages, such as sound design, mixing, and mastering, build. The influence of the first two stages extends further as they shape the core of the music in ways that persist beyond technical refinement. Consequently, the focus in AIGM detection is directed at these initial creative stages. The latter stages, while essential for enhancing the auditory quality, primarily serve as aesthetic enhancements rather than altering the essence of the music. Although we leverage automated tools for them to improve final output quality, they are not the focus of AIGM detection as considered here.

The structure of our paper is as follows: Section II focuses on unique music feature understanding methods, specifically those that are fundamental components for AIGM and its detection. Section III provides a review of existing AIGM detection tools, as well as foundational and recent deepfake audio detection methodologies, noting areas of overlap with AIGM detection and potential future directions of the latter. Section IV explores applications of AIGM along with the broader implications for the field. Finally, Section V outlines future research directions and key challenges.

In summary, our contributions are as follows:

- To the best of our knowledge, we present the first comprehensive review of AIGM detection methods.
- We highlight the importance of focusing on intrinsic music features for AIGM and its detection, moving beyond surface-level techniques like watermarking.
- We distinguish between audio and multimodal deepfake detection and AIGM detection, discussing potential adaptations and transfers between the domains.
- Our work addresses existing gaps in deepfake audio detection reviews by providing comprehensive coverage and critical analysis of each approach.

II. MUSIC FEATURES AND GENERATION

This section provides an overview of fundamental music components and the core application of AI in generating

musical segments, establishing a basis for discussing detection techniques. By emphasising musicological features, we focus on identifying unique characteristics that go beyond basic acoustic frequency features, enabling us to capture the subtleties necessary for distinguishing genuine compositions from AI-generated ones. While prior surveys have reviewed foundational methods across the music field [20], they cover a broad scope without a targeted focus, leaving behind the need for a more specialised analysis.

Generally speaking, most AI methods for the processing of music, including its generation, are based on an abstraction of music in the form of features. These features are typically catagorised into three primary approaches. The first method involves models, which mimic the necessary abstractions that humans apply for composition through methods such as supervised learning, implicitly learning musical patterns representation in embedding space for understanding some music features. For example, Arpita et al. design a deep network for genre recognition to understand the features [21]. However, it remains challenging to determine whether the model has genuinely internalised meaningful features or simply memorised familiar structures. Another type of approaches conditions the model on specific features, such as generating harmony based on a given melody, which enhances explainability and reliability but requires careful model design. The third, more advanced method aims to integrate musicological understanding, where the model directly comprehends the theoretical aspects of music, offering a more refined and promising direction for AI-driven music generation. Musif, an existing Python package for feature extraction is based on this method [22]. It extracts features based on algorithms designed by musicians, thought it is a bit out-dated. We aim to focus our efforts on advancing models capable of achieving a comprehensive understanding of musicology through the integration of music features. In the following sections, we outline specific levels of music feature abstraction from a musicological perspective, alongside the corresponding AI models designed to interpret these features effectively.

a) Content-based features: In the composition stage, four primary features convey content, emotion, and stories: melody, harmony, rhythm, and lyrics.

Melody, a sequence of musical notes organised in a rhythmic pattern [23], serves as a prominent feature in musical works. For example, in "Twinkle, Twinkle, Little Star" [24], the melody follows the pattern C C G G A A G. Melodies are often cohesive and memorable, sometimes forming a recognisable 'hook' that can garner widespread appeal. Being a key component in musical theory, the concept of melodies has also been proven a helpful tool in automatic deciphering of music. For instance, deep learning techniques have shown effectiveness in extracting and interpreting melodies from audio, outputting melody feature representation using F0 or feature maps [25]. Another particular approach involves leveraging frequency-temporal acoustic features combined with attention networks to enhance melody extraction. This method creates representations enriched with semantic information through weighted feature fusion [26]. Other elements, such as tone and octave, can be incorporated as additional conditions to improve

melody comprehension. By rearranging the input representation across frequency bins, researchers generate tone, octave, and salience maps that facilitate downstream fusion processes, achieving strong results on melody recognition metrics such as overall accuracy (OA) and raw pitch accuracy (RPA) [27].

As a central component of music, melody has shown significant utility in applications such as AIGM. For instance, alignment of melody with raw audio enables its use as a condition in generative diffusion models [28]. This method also led to the creation of the MusicNet dataset, a publicly available resource [28]. Additionally, melody can support detection tasks, where similarity metrics like the Szymkiewicz-Simpson Coefficient measure melodic resemblance. In summary, the melodic feature establishes a fundamental tone in music, with high potential for AIGM and detection applications.

Harmony is generally defined as the combination of chords and chord progressions [23]. It serves as a bridge between melody and song structure, linking musical elements with semantic and structural meanings. For instance, in the song "Twinkle, Twinkle, Little Star," harmonies such as *C major*, *G major*, or *F major* may be used to support the melody. In extended musical forms, structures such as verse-chorus help to organise thematic material, balancing repetition and contrast. The A section (verse) introduces thematic content, while the B section (chorus or refrain) reinforces the main message with a memorable, repeated idea.

Harmony extraction has been an active research area, with early efforts utilising traditional methods such as harmonic change detection functions and distance calculations [29]. Recently, advanced approaches have incorporated ontological representations of chord progressions, enhancing the understanding of harmonic relationships [30]. Harmony has also proven valuable in music generation, where it is adopted as a conditioning factor in models such as the Harmony-Aware Hierarchical Music Transformer (HAT) [31].

Also, harmony understanding plays a crucial role in emotion detection in music as well. Minor chords are commonly associated with sadness, while major chords convey excitement; even slight alterations in chord choices can shift the emotional tone of an entire piece [32]. Emotional cues themselves can be utilised to deepen harmony understanding [33]. In summary, harmony drives the progression of music in close association with melody, holding significant potential for applications in AIGM and detection.

Rhythm is typically defined as a pattern of sounds and silences that highlights strong and weak beats [23]. For example, in Twinkle, Twinkle, Little Star, the rhythm often follows a $\frac{4}{4}$ time signature, with the 1st and 3rd beats emphasised as strong beats. Rhythm also influences the speed of musical progression, known as *tempo* [34]. Tempo detection serves as a way to represent rhythm and provides a method for deeper rhythm comprehension.

Advanced models for rhythm analysis include cadence detection, where graph neural networks can be used to detect Perfect Authentic Cadence (PAC) [35]. Additionally, rhythm, alongside melody and harmony, plays a vital role in music generation models such as MrBERT [36] and MusiConGen [37]. As a core element, rhythm forms the foundational

structure of music, making it an indispensable feature for enhanced performance in music generation and analysis.

Lyrics, as the name implies, serve as the most direct and natural language medium for expressing content in music. As the majority of the information present in lyrics is accessible in written text form, it can be seen as a different modality to audio, requiring different approaches for processing. Numerous models in Natural Language Understanding (NLU) address this textual modality. However, a holistic understanding of lyrics requires multimodal processing, as elements like emphasis, pauses, and other auditory features, which are comprehensible only when combined with the music, are crucial for fully interpreting the meaning of the lyrics. Notable applications in the music domain include exploring the relationship between lyrics and emotions such as LyEmoBERT [38].

In the domain of generation, lyrics creation aligns with established text-to-speech (TTS) methodologies. These include models employing various attention-masking strategies [39], large language models (LLMs) [40], and traditional controllable TTS frameworks [41]. Beyond generation, lyrics can also be leveraged for detection tasks. Techniques based on Transformer models facilitate innovation detection in lyrics [42], while CNN-based approaches address authorship attribution [43]. LLMs have also shown promise in detecting AI-generated lyrics [44].

Although substantial progress has been made in the generation and analysis of lyrics, challenges remain. One major issue is aligning the lyrics with the audio: determining the precise timing of singing within the musical progression. Additionally, lyrics often follow a poetic, stylised form that diverges from conventional natural language, requiring a more specialised model design.

b) Decoration-based features: Beyond content-rich features, musical arrangements involve various processes such as selecting timbre, instrument, main emotion tone, genre, etc. **Timbre** refers to the unique quality or colour of a sound that distinguishes one sound producer (instrument or human voice) from another, such as a warm timbre. **Instrument** denotes the device used to produce musical sounds, for instance, a piano. The main **emotion tone** is the dominant emotions conveyed by the music, such as joy or sadness. **Genres** categorise music by shared style, such as jazz [23].

These characteristics not only differentiate between various musical tasks but also serve as classification criteria for the analysis of musical pieces. Additionally, they act as guiding elements in music generation and as key features in music detection tasks. For instance, Hong et al. propose a timbre style transfer model that uses CQT features and a diffusion model to generate different types of musical timbre [45]. Instrument and genre are also used as conditions in Transformer-based music generation models, providing greater flexibility to the generation process [46]. Emotion serves as an essential factor for generating music, enriching music information retrieval [47]. These features, which mainly enhance the expressive aspects of music, can also play a role in the semantics of the music.

c) Traditional music generation: Even though there might be further features relevant to the greater context of

music analysis, we focus on this selection, which commonly helps to retrieve music information, thereby improving the music production process. Beyond human-produced music, the concepts presented above also represent the general flow, in which AIGM is created. Besides condition-based generation models based on the concepts described above, we will summarise the purely model-based music generation tools to provide a broader scope on what types of AIGM corresponding detection techniques are facing.

Foundational purely model-driven architecture Many existing generative models, such as encoder-decoder models and Generative Adversarial Networks (GANs) [48], have demonstrated high quality in their generated output. Applying these models to music generation tasks is a promising approach. MuseNet [49], launched by OpenAI, is an encoder-decoder model similar to the Music Transformer [50], which is based on attention mechanisms and can generate smooth musical sequences. Other architectures like MusicVAE [51] and MuseGAN [52] leverage Variational Autoencoders (VAEs) [53] and GANs, respectively, to produce coherent musical phrases. With the emergence of diffusion models, DiffWave [54] has also been applied to music synthesis, achieving impressive results. Each of these models brings unique strengths to music generation and can deliver high-quality outputs.

Commercial tools Beyond foundational traditional models, AIGM has advanced to various commercial applications. These systems are capable of producing high-quality music conditioned on specific prompts, such as genre specifications or lyrical themes. Notable examples include OpenAI's Jukebox¹, which utilises a VQ-VAE architecture, Suno AI [?], and AIVA (Artificial Intelligence Virtual Artist)². Typically, these commercial platforms do not disclose their base models or training corpora to protect intellectual property rights. Nonetheless, these tools offer valuable capabilities that merit exploration for music generation research and applications.

Certainly, many modern AIGM models are designed with specific focuses, such as generating music in various formats (e.g., MIDI files or raw audio) or incorporating specially tailored loss functions. Various methods have been proposed for generating melodies based on existing modalities as well, including text-to-audio approaches (e.g., generating melodies from lyrics) by extracting music themes from the textual content [55], or techniques such as lyrics-melody alignment [56]. Additionally, audio-to-audio methods (e.g., melody-tomelody generation) leverage reinterpretation and continuation of existing compositions [57], [58]. Some approaches, like SongComposer [59], work in both directions. These methods typically focus on extracting core elements, such as emotional content, but often fail to fully exploit the holistic structure, complexity of the input data and their musicology. This limitation provides a unique opportunity to distinguish and detect specific AIGM-generated content based on its distinct characteristics.

¹https://openai.com/index/jukebox/

²https://www.aiva.ai/

III. DETECTION METHODS

A. AIGM detection

In addition to the social imperative to detect AIGM, technical challenges highlight the urgent need for robust detection models. Both Afchar [60] and Cooke [61] observe that, although detection models can achieve high accuracy within specific domains, their performance degrades significantly in out-of-domain scenarios. This decline in accuracy highlights the inherent complexity of the task and underscores the need for more robust models capable of capturing deeper, more intricate features. Consequently, few dedicated AIGM detectors have been developed, accompanied by the proposal of new datasets aimed at enhancing detection capabilities and robustness.

a) Datasets: Currently, only two datasets are specifically designed for AIGM detection: FakeMusicCaps [62] and SONICS [63], with the latter yet to be publicly released. FakeMusicCaps is structured to distinguish the authorship of music, whether created by humans or generated by AI. Its human-made content is derived from the MusicCaps dataset [64], while AI-generated content is prompted from MusicCaps captions using five different large language models (LLM). SONICS, in contrast, is a multimodal dataset that contains lyrics and melodies. Human-produced songs are sourced from the Genius Lyrics Dataset [65], with accompanying audio retrieved from YouTube. AIGM in SONICS utilises technologies such as Suno AI³ for melody generation and GPT models for lyrics. A detailed comparison of these datasets is presented in Table I.

Although dedicated AIGM detection datasets remain scarce, several public datasets in music analysis and AIGM exist, albeit without specific gathering and labelling for AIGM detection. Notable recent examples of datasets containing humangenerated music include DALI [66], which provides aligned melodies and lyrics, FMA [67], a genre-diverse dataset, MAE-STRO [68] focused on piano performances, MSD [69], which offers metadata on one million songs, MusicNet [70], intended for instrument recognition, and MTG-Jamendo [71], which includes classification of instruments, mood, and genre.

In the realm of AIGM, datasets such as SunoCaps [72] offer emotional annotations, while the AI Song Contest⁴ provides around ten finalised AI-assisted songs per year as part of a music creation competition. Furthermore, Afchar's deepfake dataset [60] offers a number of songs for study based on FMA, though not published yet. Although there are music generation tools, few comprehensive AIGM datasets have been published to date. A comparative summary of these datasets is presented in Table I.

b) Detectors: The detection process for the binary task of AIGM typically follows one of two common approaches: an end-to-end method or a feature-based method. In the end-to-end approach, raw audio are directly fed into the model, which outputs a classification prediction. Alternatively, in a cascade design, existing deep learning models can be leveraged to extract features, which are then input separately into a

TABLE I
MUSIC DATASETS WITH AI AND HUMAN-GENERATED CONTENT

Dataset	Source	Clips	Modality	Year	Genre
FMA	Human	106,574	Audio	2017	Diverse
DALI	Human	5,358	Audio&Text	2019	Karaoke
MAESTRO	Human	1,276	Audio	2018	Piano
MSD	Human	1 million	Audio	2011	Diverse
MusicNet	Human	330	Audio	2016	Classical
MTG-Jamendo	Human	55,000	Audio	2019	Diverse
SunoCaps	AI	256	Audio	2024	Diverse
Afchar's	AI	250,000	Audio	2024	Diverse
AISongContest	AI	10	Audio	2024	Diverse
FakeMusicCaps	Mixed	33,105	Audio	2024	Diverse
SONICS	Mixed	97,164	Audio&Text	2024	Diverse

classifier for final categorisation. One might argue that each method has its own strengths, with end-to-end models often capturing more holistic patterns in audio, while feature-based approaches allow for more interpretability and customisation of feature selection.

Given the small amount of AIGM detection studies, only a few types of detectors have been explored in this setting. One example is the Spectro-Temporal Tokens Transformer (SpecTTTra) [63], which addresses two-dimensional Melspectrum features separately through a 1D convolutional tokeniser. The resulting representations are then passed through a Transformer encoder followed by a classifier. This approach is designed to manage long-range temporal dependencies and demonstrates strong performance when compared to methods such as Vision Transformer [73] and ConvNeXt [74]. Afchar [60] employs traditional convolutional methods to evaluate detection performance, with an emphasis on the importance of out-of-domain testing and discussions on output probability for improved explainability.

Another related detector, focused on music plagiarism rather than AIGM, is proposed by Malandrino et al. [7]. This method utilises text-similarity and clustering algorithms to detect similarities and includes a novel representation of melody based on the high and low intervals between consecutive notes, which aids in similarity calculations. Additionally, the Digital Drug Music Detector (DDMD), a detector for drug-related music content, applies a Random Forest-based approach [75] and achieves high accuracy on its own dataset.

These detectors share several common limitations, including a lack of robust and explainable outcomes, weak performance in out-of-domain testing, dependence on surface-level features for classification, and architectures that are insufficiently adapted to capture the unique complexities of music. These limitations align with findings from non-technical sides such as social-side experiments that also highlight similar challenges [76]. In the following subsection, we will review existing research in audio deepfake detection to explore potential future avenues such as utilising foundational models for AIGM detection.

B. Audio deepfake detection tools

Previous research in this field has produced a wide array of models. In this section, we will review the most foundational and classic models-promising applicability for AIGM

³https://suno.com/about

⁴https://www.aisongcontest.com/the-2024-finalists

detection-, as well as a selection of recent advancements to address gaps in prior surveys. This approach will provide a comprehensive overview of essential models while highlighting the most recent innovations that have not been fully reviewed in existing reviews.

In the general domain of audio deepfake detection, a vast amount of research has emerged in recent years. The most popular datasets include specialised resources across various subdomains. For pure audio deepfake detection, WaveFake [77], FakeOrReal [78], FakeAVCelebV2 [79], and the ADD series from 2022 and 2023 [80], [81] are prominent datasets. Datasets focusing on spoofing and speaker verification include the ASVspoof series (2015, 2019, and 2021) [82]-[84] and CVoice [85]. For speech-focused data, resources like the Conversational AMI-Corpus [86], Baidu Silicon Valley AI Lab dataset [87], and VCC [88] are well established benchmark datasets. Multimodal deepfake detection benefits from datasets such as MLAAD [89], while environmental sound detection is supported by datasets like sound8k [90] and In-the-Wild [91]. These datasets cater to a wide range of research needs and have been extensively utilised in ongoing studies.

Beyond the raw waveform version of audio data, various representations can facilitate more effective processing by models. Audio features can be broadly categorised into handcrafted and deep learning-based features. Handcrafted features include both perceptual and physical attributes. Perceptual features, which are closely aligned with music theory, encompass pitch, notes, onset strength (OS), Harmonics-to-Noise Ratio (HNR), intensity, chromagram, F0 (fundamental frequency), etc. These features capture perceptual aspects directly linked to how listeners interpret music. Physical features, on the other hand, emphasise the frequency domain and include representations such as Mel-Frequency Cepstral Coefficients (MFCC), Mel spectrograms (Mel), derived from sound intensity on the Mel scale, logarithmic spectrograms (LogSpec), representing spectrogram amplitude on a logarithmic scale, Linear-Frequency Cepstral Coefficients (LFCC), the Constant-Q Transform (CQT), etc. In contrast, deep learningbased features are extracted using pre-trained models, which process the raw audio and output task-relevant representations. These deep features are often tailored to specific downstream applications, enhancing the convenience and relevance of feature extraction.

Basic audio deepfake detection models leverage dataset challenges and specific audio representations to identify generated audio. Generally, there are three primary categories of detectors: traditional machine learning methods, traditional deep learning models, and Transformer-based deep learning models [92].

Traditional machine learning methods often utilise classifiers such as Q-SVM [93] and Gaussian Mixture Models (GMM) [94], which directly use feature embeddings to classify audio deepfake. Additionally, some machine learning approaches integrate deep feature embeddings extracted from front-end models, forming combined architectures for improved performance [95].

Traditional deep learning models commonly rely on convolutional neural networks (CNNs) [96] due to their ability

to process audio spectrograms, which represent audio features in the time and frequency domains. Different CNN variants provide varied levels of adaptability: Light CNN (LCNN) [97] is a lighter CNN variant optimised for deep feature extraction, while models such as RawNet2 [98], ResNet-based architectures [99], [100], and SeNet-based frameworks [101], [102] employ more complex architectures to capture intricate audio characteristics.

Transformer-based deep learning models, including AA-SIST [103], which incorporates attention mechanisms, have shown particular strength in extracting complex dependencies within sequential data. Vision Transformer-based models [104], [105] and Wav2Vec2 [106] further capitalise on these capabilities, leveraging Transformers' ability to model sequential dependencies and yielding high performance in audio deepfake detection tasks. A comparison of the models presented above is shown in Table II.

Building on these foundational detection methods, recent research has introduced several innovative approaches worth mentioning. Traditional models have been systematically compared in Müller et al. (2022) [117], which highlighted their limited generalisation capabilities. To address this, Self-Adaptive Continual Learning models [118] were developed, providing continuous learning to enhance generalisability. Other works have drawn on traditional architectures, combining them for improved performance, such as hybrid architectures like Capsule Networks (CapsNets) with attention blocks [119] and CNNs with LSTMs [120]. These hybrids capitalise on the strengths of each model, better capturing the temporal and spatial dependencies inherent in audio data.

Beyond combining previous models, new architectural innovations have emerged. For example, Pianese et al. [121] proposed a similarity-based clustering algorithm for speaker verification to assess audio authenticity. Since speaker features alone may be insufficient, the Breathing-Talking-Silence Encoder (BTS-E) [122] leverages breathing and silence as distinguishing features, as AI-generated audio often struggles to replicate these low-information segments. Similarly, the Aggregation and Separation Domain Generalisation (ASDG) model [123] implicitly focuses on distinct feature variations by grouping real audio while categorising fake songs across different domains. Style-focused models, like the Style-Linguistics Mismatch (SLIM) model [124], aim to capture dependencies between linguistic and stylistic attributes. In this area, perceptual features are valuable, although physical features remain essential.

Physical features such as pitch [125] and harmonics, a series of frequencies [126] have shown significant utility in detection tasks, with comparative studies [127], [128] examining their relative importance among acoustic features. However, the interactions between different features and their combined effects remain areas of exploration. In addition to improving model performance, some studies focus on privacy and environmental concerns related to deepfake detection. For instance, SafeEar [85] obfuscates content to protect privacy during detection, while GreenAI [129] seeks to reduce computational costs by leveraging pre-trained models. Detection applications also extend to multi-speaker verification tasks,

Model	Input Features	Comments	Compared Baseline	Year	Classification	
Q-SVM [93]	Spec & Mel	Supports high-dimensional data; sim-	Logistic Regression	2021	Traditional Machine	
		ple with few parameters; Feature-based	[107], Decision Trees		Learning	
		method	[108], SVM [109]			
GMM [94]	CQCC & LFCC	Unsupervised learning methods for	RawNet2 [98],	2022	Traditional Machine	
		deepfake audio classification; Feature-	ResNet [99]		Learning	
		based method, i.e., with MobileNet				
		[95]				
LCNN [97]	Raw audio & Spec etc.	Lightweight version of traditional	CNN [110], LSTM	2020	Traditional Deep	
		CNNs; used for producing front-end	[111]		Learning	
		deep learning features				
RawNet2 [98]	Raw audio & CQCC &	Process raw waveforms; Combined	CNN [110], GMM	2021	Traditional Deep	
	LFCC	with other features, based on CNN.	[94]		Learning	
ResNet [99],	Deep learning features	Deep residual learning approach; Vari-	VGG [113], AlexNet	2022	Traditional Deep	
[100]		ants Res2Net [112]	[114], GMM [94]		Learning	
SeNet [101],	STFT	Attention mechanisms for important	LCNN [97], AASIST	2023	Traditional Deep	
[102]		features	[103]		Learning	
AASIST [103]	Raw audio	AASIST is focused on integrated spec-	RawGAT-ST [115]	2021	Transformer-based	
		tral and temperal attention				
Vision-	Raw audio & Mel etc.	Process image-based features and	CNN [110], LSTM	2021	Transformer-based	
Transformer		utilise Transformers [92] architecture	[111]			
[104], [105]						
Wav2Vec2 [106]	Raw audio	Pre-trained model; Achieves robust per-	DeepSpeech [116]	2020	Transformer-based	
		formance in unsupervised speech fea-				
		ture learning.				

TABLE II
TRADITIONAL AUDIO DEEPFAKE DETECTION MODELS

such as detecting deepfakes in group conversations [130].

All recent advances in audio deepfake detection are summarised in Table III. Opportunities remain to innovate new models through the fusion of acoustic, physical, and perceptual features. Furthermore, enhancing model explainability and improving the robustness of generalisation are possible future work directions.

Audio deepfake detection has developed significantly, yet new attack methods continue to emerge, testing the robustness of existing systems and highlighting areas for improvement. For example, Malik et al. [134] demonstrated how attackers can exploit detectors' reliance on watermarking, a technique that has since been intentionally avoided by deepfake generators. In response, Rabhi et al. [135] reviewed alternative techniques and countermeasures, while Shih et al. [136] identified artifacts that further challenge detection systems. Notably, their work introduced the Balanced Environment Audio-Deepfake Reevaluation (BEAR) framework, which incorporates Gaussian noise to disrupt detectors. This underscores the need for future research to go beyond surface-level features in deepfake detection.

The domain overlap between deepfake audio detection and AIGM detection becomes clear through the transfer of techniques from one to the other. Recent advances, such as audio transfer learning demonstrated in Spectrogram Transformers [137], highlight the feasibility of transferring deepfake audio detection techniques to the AIGM domain. This direction offers promising opportunities to adapt established audio deepfake detection methods to the nuanced requirements of detecting AIGM.

C. Multimodal detection tools

While audio is traditionally considered the primary component of music, lyrics play a crucial role in shaping its composition and emotional depth. Although multimodal tools and feature extraction techniques have been explored in music research, dedicated frameworks for audio-text-based deepfake detection in AIGM scenarios remain absent. Research on audio-text multimodal models for deepfake detection is also limited, prompting us to seek inspiration from existing studies on multimodal feature extraction.

Therefore, this section reviews foundational multimodal tools that focus on audio and text, along with recent advancements in feature extraction techniques in the context of music. By integrating these two modalities, we aim to highlight potential pathways that could serve as a basis for the development of more effective methodologies, tailored specifically for AIGM detection, leveraging the complementary strengths of audio and textual modalities.

Multimodal models can be classified into three categories based on their fusion strategies: early fusion, late fusion, and intermediate fusion. Early fusion integrates features from multiple modalities at the input stage, creating a unified representation before independent processing begins. Examples include the Gated Multimodal Unit (GMU) [138], which uses a gating mechanism to dynamically weight each modality's contribution; SpeechT5 [139], which employs a specialised encoder with prompts; and ST-BERT [140], which combines the strengths of two pre-trained models. They often then concatenate the features of each modality for downstream task. These approaches enable effective feature alignment without additional network layers, even when handling high-dimensional inputs.

In contrast, late fusion processes each modality independently using dedicated models, merging their outputs only at the final stage to perform downstream tasks. This approach is akin to a random forest, where final decisions are based on the "votes" of individual modalities. While late fusion allows for specialized processing of each modality, it can lead to a loss of nuanced modality-specific information.

 $\label{eq:table_iii} \textbf{TABLE III} \\ \textbf{Summary of Recent Audio Deepfake Detection Models}$

Model	Architecture	Dataset(s)	Input Features	Advantages	Limitations	Baseline Com- parison	Year
Wije- thunga et al. [130]	CNN, RNN	Sound8K, AMI-Corpus, FakeOrReal	MFCC, Mel, STFT	Utilises speaker diarisation to distinguish speakers, analyses deepfakes involving multiple speakers	Lack of SOTA compar- isons; speaker diarisa- tion is inherently chal- lenging; proposed model underperforms	CNN; deep neural network	2020
Müller et al. [117]	LSTM, LCNN, Meso-net, ResNet18, Transformer, CRNN, RawNet, GAT	ASVspoof2019, In-the-Wild	CQT, LogSpec, Mel, Raw Au- dio	Curated a new dataset; demonstrates that deep- fakes do not generalise well	Lacks analysis on model-specific performance drivers	Between models	2022
Pianese et al. [121]	Centroid-Based, Multi-Similarity	ASVSpoof2019, FakeAVCelebV2, In-the-Wild	Mel, Spectrogram, Speaker ID	Proposes novel speaker ID identification methods;	Speaker recognition is inherently difficult	ResNet, Cosine Similarity	2022
Xue et al. [125]	SeNet	ASVspoof2019	F0, Real and Imaginary Spectrogram	Incorporates F0 and phase angle features	Mathematical clarity required; fusion methods need refinement	ResNet, AASIST, GMM	2022
Li et al. [127]	GMM, RawNet2, SeNet	ADD 2022	MFCC, CQCC, Mel, Spec, Pitch, OS, HNR, Intensity, Chromagram	Emphasises perceptual features; clarifies feature importance	Unclear if performance gains arise from combi- nation or individual fea- tures	Between features	2022
Doan et al. [122]	CNN2S2 [131]; RNN	ASVspoof2019, ASVspoof2021	LFCC, Breath Talk Silence Features	Incorporates breathing, talking, and silence de- tection, challenging gen- erators	Limited comparisons; human speech variation in breath and silence needs analysis	ResNet2	2023
Xie et al. [123]	LCNN	ASVspoof2019, WaveFake, FakeAVCeleb	LFCC, Raw Audio	Strong baseline comparisons; innovative real-fake separation in music	Variability in real audio samples may impact re- sults	GMM, Inception-based [132], ResNet, RawNet, RawGAT-ST, AASIST	2023
Chitale et al. [120]	CNN, LSTM	WaveFake, In- the-Wild	MFCC	Combines temporal and spatial dependencies	Lacks SOTA comparisons; unexplained use of spectral features	CNN	2024
Yang et al. [128]	ResNet	ASVspoof2019, In-the-Wild	Mel, MFCC, LogSpec, LFCC, CQT, Deep Features	Designs feature selec- tion and fusion; op- timises feature impor- tance	Limited generalisation analysis; effectiveness of feature combinations unclear	RawNet2, AASIST, ResNet34, LCNN, Res2Net	2024
Li et al. [85]	Residual Vector Quantisers (RVQs), Encoder-Decoder, Threat Model	ASVspoof2019, ASVspoof2021, CVoice	Raw Audio	Introduces a dataset; uses decoupling for privacy; demonstrates security	Privacy retention unclear; lack of mathematical validation	AASIST, Rawformer, Wav2Vec2	2024
Saha et al. [129]	CNN	ASVspoof2019	Deep Learning Features	Lowers training costs; emphasises resource ef- ficiency	Limited innovation	RawGAT-ST, SeNet, LCNN, AASIST, Wav2Vec2	2024
Liu et al. [126]	Conformer [133]	ADD 2023	F0, Deep Learning Features	Integrates novel handcrafted features; balances dataset with custom loss	Few baseline comparisons	LCNN	2024
Zhu et al. [124]	MLP	MLAAD, In-the-Wild, ASVspoof2019, 2021	Style- Linguistic Features, Deep Features	New method with unique features; high interpretability	Misclassifies speech with unusual style- linguistic dependencies	AASIST	2024
Zhang et al. [118]	ResNet	ASVspoof2019, ASVspoof2015, In-the-Wild	Deep Features	Novel method with Ra- dian Weight Modifica- tion; provides continual learning benchmark	Gradient modification angle may not be optimal	Deep neural network	2024
Wani et al. [119]	Attention, Capsule Network, ResNet	ASVspoof2019, FakeOrReal	Mel, Deep Fea- tures	Effective combination of classical models	Lacks comparisons with classical baselines	Capsule Network	2024

Intermediate fusion offers a more adaptable approach by integrating modalities at different stages within the network, tailored to the application or context. For example, the Multimodal Transformer (MMT) [141] processes them through an attention mechanism. Similarly, models like SpeechBERT [142] and wav2vec2 [106] preprocess raw audio to extract representative features. While these models are more complex, they provide greater flexibility for handling diverse multimodal tasks.

The application of multimodal models in music deepfake detection requires the development of specialised models capable of extracting and fusing music features effectively. For example, in emotional classification, Chen et al. [143] employed a CNN-LSTM architecture for audio feature extraction and Word2Vec for text feature extraction, demonstrating improved performance compared to single-modality approaches. Similarly, Das et al. [144] utilised handcrafted audio and text features to classify music mood. Wang et al. [145] introduced a cross-processing approach that accounts for the intrinsic structure of music, such as verses and choruses, using a hierarchical model. In the domain of music information retrieval, Won et al. [146] utilised a metric learning approach to integrate text and audio features, leveraging descriptive tags to enhance music recommendation systems. For genre classification, Agrawa et al. [147] proposed hierarchical multimodal models that incorporate lyrics and spectrograms to identify musical genres. Furthermore, for general-purpose multimodal model evaluation, Weck et al. [148] compared different multimodal frameworks built on foundational models, providing insights into their relative strengths and applications.

These studies highlight promising approaches for feature extraction and multimodal integration in music-related applications. By building on these foundational models and techniques, there is significant potential to develop advanced models tailored for AIGM detection.

IV. APPLICATION AND IMPLICATION

AIGM detection has significant societal impact and offers broad application potential. Similar to text detection tools, AIGM detection could play a crucial role in safeguarding the integrity of the music industry. The effects of AIGM tools are increasingly recognised, with concerns about potential longterm implications for the music community [149]. Notably, 82% of music creators express concern that AIGM may threaten their livelihoods [150]. Additionally, critics argue that AI-generated music may lack the quality associated with human-made compositions, which are often valued for their subjectivity [151]. Additionally, though current AI techniques can generate musically sophisticated outputs based on some objective measurements such as music theory like Circle of Fifths, we argue that these pieces frequently lack the emotional resonance and depth found in compositions that reflect the artist's personal experiences, such as Beethoven's expressions of struggle. This raises concerns about the potential for massproduced music that compromises artistic authenticity. With effective monitoring and responsible usage, AIGM tools can be leveraged in a way that preserves the value and essence of true musical artistry.

Beyond monitoring the misuse of AIGM tools to prevent harm to the music community, as well as to possibly protect privacy and to ensure fairness in competitions, another application lies in enhancing AIGM tool development. We deem that current AIGM tools often lack the depth of emotional expression, a quality fundamental to human-created music. Future detection tools could potentially assess and identify this emotional deficit, guiding the refinement of generative models in an adverserial manner as a likely GAN method. In this sense, detection and generation exist in a dynamic cycle, continuously driving advancements in each field [152].

The integration of AIGM technology with human creativity has the potential to significantly enhance the music production process. By offering inspiration, providing structural frameworks, and suggesting instrumental arrangements, AI systems can serve as valuable tools for musicians, facilitating the creation of higher-quality compositions [153]. Furthermore, AIGM applications extend to diverse domains, including music-based psychological interventions [154] and personalized soundtracks [155]. However, effectively balancing the benefits of AIGM technology while mitigating potential risks remains a critical challenge. Addressing this balance highlights the importance of developing robust AIGM detection mechanisms to navigate the trade-offs involved.

V. CHALLENGES AND FUTURE DIRECTION

With the limited scope of existing research on AIGM detection, several challenges need to be overcome to further advance the field. First, there is a lack of benchmarks and high-quality databases. Existing datasets are often unsystematic and lack scalability, covering only limited types of music and frequently omitting lyrics. Additionally, many datasets remain inaccessible. Therefore, establishing a benchmark baseline and developing comprehensive datasets should be a priority for future research.

Second, although some deepfake audio detection methods are promising candidates for application in AIGM, fundamental differences exist between music and generic audio. Music, as an art form, incorporates numerous musicological restrictions and subjective qualities. Direct transfer learning or fine-tuning of existing models is insufficient for these complex requirements. Thus, there is a need for domain-specific methods tailored explicitly to music analysis.

Moreover, existing detectors in audio, text, and image domains often rely on superficial features, such as watermarking. However, as reviewed in Section II, intrinsic features unique to music are essential and should be prioritised as core detection features.

Furthermore, given that music inherently integrates melody as an audio feature and lyrics as a text feature, the development of multimodal models is imperative for detection tasks to achieve improved accuracy and performance.

Finally, while the task, detecting whether a piece of music is generated by human or AI, might appear to be a simple binary classification, a single output is often insufficiently convincing. Explainability is crucial to make the decision-making process more transparent and reliable, enhancing trust in the detector's results.

In conclusion, AIGM detection represents a crucial and underexplored research area, with substantial potential for further development. We have reviewed the progression from audio deepfake detection to AIGM detection, highlighting key challenges and emerging research domains. Despite the proliferation of general AI detection models, there remains a notable gap in models specifically designed to address the detection of AI-generated music, particularly from a musicological perspective. Given the increasing significance of AI-generated content in the music industry and beyond, we emphasize the need for more dedicated research and advancements in this field. Further efforts in this direction are essential to enhance the robustness and accuracy of detection models, ultimately contributing to more reliable and comprehensive AIGM detection systems.

REFERENCES

- [1] OpenAI, "Gpt-4 technical report," 2023.
- [2] A. Radford, J. W. Kim, T. Xu, G. Brockman, C. McLeavey, and I. Sutskever, "Robust speech recognition via large-scale weak supervision," 2022. [Online]. Available: https://github.com/openai/ whisper
- [3] OpenAI, "MuseNet: Ai-generated music with deep learning models," https://openai.com/research/musenet, 2019, capable of composing music with up to 10 different instruments in various styles and genres, MuseNet uses deep learning models to generate harmonies, melodies, and full compositions.
- [4] Jukedeck, "Jukedeck: Background music generation," https://jukedeck. com, 2020, focuses on generating background music for videos, allowing users to specify genre, mood, and tempo, with auto-composition tools to streamline music production. Acquired by TikTok.
- [5] A. Technologies, "Aiva: Artificial intelligence virtual artist," https:// www.aiva.ai, 2016, aIVA is a tool for creating music in various genres and can compose pieces for soundtracks or game development. It allows users to select instruments and provides sheet music.
- [6] A. Henry, V. Wiratama, A. Afilipoaie, H. Ranaivoson, and E. Arrivé, "Impacts of ai on music consumption and fairness," *Emerging Media*, p. 27523543241269047, 2024.
- [7] D. Malandrino, R. De Prisco, M. Ianulardo, and R. Zaccagnino, "An adaptive meta-heuristic for music plagiarism detection based on text similarity and clustering," *Data Mining and Knowledge Discovery*, vol. 36, no. 4, pp. 1301–1334, 2022.
- [8] J. Yi, C. Wang, J. Tao, X. Zhang, C. Y. Zhang, and Y. Zhao, "Audio deepfake detection: A survey," arXiv preprint arXiv:2308.14970, 2023.
- [9] X. Liu, X. Wang, M. Sahidullah, J. Patino, H. Delgado, T. Kinnunen, M. Todisco, J. Yamagishi, N. Evans, A. Nautsch et al., "Asvspoof 2021: Towards spoofed and deepfake speech detection in the wild," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 31, pp. 2507–2522, 2023.
- [10] J. Yi, J. Tao, R. Fu, X. Yan, C. Wang, T. Wang, C. Y. Zhang, X. Zhang, Y. Zhao, Y. Ren et al., "Add 2023: the second audio deepfake detection challenge," arXiv preprint arXiv:2305.13774, 2023.
- [11] M. Masood, M. Nawaz, K. M. Malik, A. Javed, A. Irtaza, and H. Malik, "Deepfakes generation and detection: State-of-the-art, open challenges, countermeasures, and way forward," *Applied intelligence*, vol. 53, no. 4, pp. 3974–4026, 2023.
- [12] L. Lin, N. Gupta, Y. Zhang, H. Ren, C.-H. Liu, F. Ding, X. Wang, X. Li, L. Verdoliva, and S. Hu, "Detecting multimedia generated by large ai models: A survey," arXiv preprint arXiv:2402.00045, 2024.
- [13] A. Dixit, N. Kaur, and S. Kingra, "Review of audio deepfake detection techniques: Issues and prospects," *Expert Systems*, vol. 40, no. 8, p. e13322, 2023.
- [14] Y. Patel, S. Tanwar, R. Gupta, P. Bhattacharya, I. E. Davidson, R. Nyameko, S. Aluvala, and V. Vimal, "Deepfake generation and detection: Case study and challenges," *IEEE Access*, 2023.
- [15] Z. Almutairi and H. Elgibreen, "A review of modern audio deepfake detection methods: challenges and future directions," *Algorithms*, vol. 15, no. 5, p. 155, 2022.
- [16] B. Taylor, Music, Subjectivity, and Schumann. Cambridge University Press, 2022.

[17] B. Sturm, E. Benetos *et al.*, "Music composition with deep learning: A review," *arXiv preprint arXiv:2108.12290*, 2021.

- [18] D. Irvine, "Poetic discourse in popular song lyrics: An analysis of the linguistic features of a selection of popular songs," *International Journal of Language and Linguistics*, vol. 2, no. 2, pp. 74–81, 2015.
- [19] J. Kwiecień, P. Skrzyński, W. Chmiel, A. Dąbrowski, B. Szadkowski, and M. Pluta, "Technical, musical, and legal aspects of an ai-aided algorithmic music production system," *Applied Sciences*, vol. 14, no. 9, p. 3541, 2024.
- [20] Y. Ma, A. Øland, A. Ragni, B. M. D. Sette, C. Saitis, C. Donahue, C. Lin, C. Plachouras, E. Benetos, E. Shatri, F. Morreale, G. Zhang, G. Fazekas, G. Xia, H. Zhang, I. Manco, J. Huang, J. Guinot, L. Lin, L. Marinelli, M. W. Y. Lam, M. Sharma, Q. Kong, R. B. Dannenberg, R. Yuan, S. Wu, S.-L. Wu, S. Dai, S. Lei, S. Kang, S. Dixon, W. Chen, W. Huang, X. Du, X. Qu, X. Tan, Y. Li, Z. Tian, Z. Wu, Z. Wu, Z. Ma, and Z. Wang, "Foundation models for music: A survey," 2024. [Online]. Available: https://arxiv.org/abs/2408.14340
- [21] A. Roy, N. Ippili, and D. K. Teja, "Deep learning for music genre recognition," in 2023 International Conference on Communication, Security and Artificial Intelligence (ICCSAI), 2023, pp. 744–748.
- [22] A. Llorens, F. Simonetta, M. Serrano, and Á. Torrente, "musif: a python package for symbolic music feature extraction," arXiv preprint arXiv:2307.01120, 2023.
- [23] B. Benward and M. Saker, Music in Theory and Practice, 8th ed. Boston: McGraw-Hill, 2009, vol. 1.
- [24] W. A. Briggs, "Twinkle, twinkle, little star," Retrieved from the Library of Congress, Boston, 1880, [Notated Music]. [Online]. Available: https://www.loc.gov/item/2023838232/
- [25] K. S. Rao, P. P. Das et al., "Melody extraction from polyphonic music by deep learning approaches: A review," arXiv preprint arXiv:2202.01078, 2022.
- [26] S. Yu, X. Sun, Y. Yu, and W. Li, "Frequency-temporal attention network for singing melody extraction," in ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2021, pp. 251–255.
- [27] K. Chen, S. Yu, C.-i. Wang, W. Li, T. Berg-Kirkpatrick, and S. Dubnov, "Tonet: Tone-octave network for singing melody extraction from polyphonic music," in *ICASSP 2022-2022 IEEE International Conference* on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2022, pp. 621–625.
- [28] S. Wei, M. Wei, H. Wang, Y. Zhao, and G. Kou, "Melody is all you need for music generation," arXiv preprint arXiv:2409.20196, 2024.
- [29] C. Harte, "Towards automatic extraction of harmony information from music signals," Ph.D. dissertation, 2010.
- [30] S. Kantarelis, E. Dervakos, N. Kotsani, and G. Stamou, "Functional harmony ontology: Musical harmony analysis with description logics," *Journal of Web Semantics*, vol. 75, p. 100754, 2023.
- [31] X. Zhang, J. Zhang, Y. Qiu, L. Wang, and J. Zhou, "Structure-enhanced pop music generation via harmony-aware learning," in *Proceedings* of the 30th ACM International Conference on Multimedia, ser. MM '22. ACM, Oct. 2022, p. 1204–1213. [Online]. Available: http://dx.doi.org/10.1145/3503161.3548084
- [32] A. Gobinath, A. K. SNS, M. Athithyan, M. Anandan, P. Rajeswari et al., "Emotional harmony through deep learning: A facial expression-based music therapy," in 2024 Third International Conference on Intelligent Techniques in Control, Optimization and Signal Processing (INCOS). IEEE, 2024, pp. 1–5.
- [33] J. Huang and Y.-H. Yang, "Emotion-driven melody harmonization via melodic variation and functional representation," arXiv preprint arXiv:2407.20176, 2024.
- [34] S. Gulati and P. Rao, "Rhythm pattern representations for tempo detection in music," in *Proceedings of the First International Conference on Intelligent Interactive Technologies and Multimedia*, ser. IITM '10. New York, NY, USA: Association for Computing Machinery, 2011, p. 241–244. [Online]. Available: https://doi.org/10. 1145/1963564.1963606
- [35] E. Karystinaios and G. Widmer, "Cadence detection in symbolic classical music using graph neural networks," 2022. [Online]. Available: https://arxiv.org/abs/2208.14819
- [36] S. Li and Y. Sung, "Mrbert: Pre-training of melody and rhythm for automatic music generation," *Mathematics*, vol. 11, no. 4, p. 798, 2023.
- [37] Y.-H. Lan, W.-Y. Hsiao, H.-C. Cheng, and Y.-H. Yang, "Musicongen: Rhythm and chord control for transformer-based text-to-music generation," arXiv preprint arXiv:2407.15060, 2024.
- [38] V. Revathy, A. S. Pillai, and F. Daneshfar, "Lyemobert: Classification of lyrics' emotion and recommendation using a pre-trained model," *Procedia Computer Science*, vol. 218, pp. 1196–1208, 2023.

[39] S. Lei, Y. Zhou, B. Tang, M. W. Lam, F. Liu, H. Liu, J. Wu, S. Kang, Z. Wu, and H. Meng, "Songcreator: Lyrics-based universal song generation," arXiv preprint arXiv:2409.06029, 2024.

- [40] S. Ding, Z. Liu, X. Dong, P. Zhang, R. Qian, C. He, D. Lin, and J. Wang, "Songcomposer: A large language model for lyric and melody composition in song generation," arXiv preprint arXiv:2402.17645, 2024.
- [41] Z. Zhang, Y. Yu, and A. Takasu, "Controllable lyrics-to-melody generation," *Neural Computing and Applications*, vol. 35, no. 27, pp. 19805– 19819, 2023.
- [42] M. Balluff, P. Mandl, and C. Wolff, "Innovations in cover song detection: A lyrics-based approach," arXiv preprint arXiv:2406.04384, 2024.
- [43] T. Yılmaz and T. Scheffler, "Song authorship attribution: a lyrics and rhyme based approach," *International Journal of Digital Humanities*, vol. 5, no. 1, pp. 29–44, 2023.
- [44] Y. Labrak, G. Meseguer-Brocal, and E. V. Epure, "Detecting synthetic lyrics with few-shot inference," arXiv preprint arXiv:2406.15231, 2024.
- [45] H. Huang, J. Man, L. Li, and R. Zeng, "Musical timbre style transfer with diffusion model," *PeerJ Computer Science*, vol. 10, p. e2194, 2024.
- [46] P. Sarmento, A. Kumar, Y.-H. Chen, C. Carr, Z. Zukowski, and M. Barthet, "Gtr-ctrl: instrument and genre conditioning for guitar-focused music generation with transformers," in *International Conference on Computational Intelligence in Music, Sound, Art and Design (Part of EvoStar)*. Springer, 2023, pp. 260–275.
- [47] H.-T. Hung, J. Ching, S. Doh, N. Kim, J. Nam, and Y.-H. Yang, "Emopia: A multi-modal pop piano dataset for emotion recognition and emotion-based music generation," arXiv preprint arXiv:2108.01374, 2021.
- [48] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, "Generative adversarial nets," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2014, pp. 2672–2680. [Online]. Available: https://papers.nips.cc/paper/ 2014/hash/5ca3e9b122f61f8f06494c97b1afccf3-Abstract.html
- [49] C. Payne, "Musenet," https://openai.com/research/musenet, 2019, https://openai.com/research/musenet.
- [50] C.-Z. A. Huang, A. Vaswani, J. Uszkoreit, N. Shazeer, I. Simon, C. Hawthorne, A. M. Dai, M. D. Hoffman, M. Dinculescu, and D. Eck, "Music transformer," 2018. [Online]. Available: https://arxiv.org/abs/1809.04281
- [51] A. Roberts, J. Engel, C. Raffel, C. Hawthorne, and D. Eck, "A hierarchical latent vector model for learning long-term structure in music," in *Proceedings of the 35th International Conference* on *Machine Learning (ICML)*, 2018. [Online]. Available: https: //proceedings.mlr.press/v80/roberts18a.html
- [52] H.-W. Dong, W.-Y. Hsiao, L.-C. Yang, and Y.-H. Yang, "Musegan: Multi-track sequential generative adversarial networks for symbolic music generation and accompaniment," *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 32, no. 1, 2018. [Online]. Available: https://ojs.aaai.org/index.php/AAAI/article/view/11827
- [53] D. P. Kingma and M. Welling, "Auto-encoding variational bayes," arXiv preprint arXiv:1312.6114, 2013. [Online]. Available: https://arxiv.org/abs/1312.6114
- [54] Z. Kong, W. Ping, J. Huang, K. Zhao, and B. Catanzaro, "Diffwave: A versatile diffusion model for audio synthesis," 2021. [Online]. Available: https://arxiv.org/abs/2009.09761
- [55] Y. Chen and A. Lerch, "Melody-conditioned lyrics generation with seqgans," in 2020 IEEE International Symposium on Multimedia (ISM), 2020, pp. 189–196.
- [56] Y. Yu, A. Srivastava, and S. Canales, "Conditional lstm-gan for melody generation from lyrics," ACM Transactions on Multimedia Computing, Communications, and Applications (TOMM), vol. 17, no. 1, pp. 1–20, 2021.
- [57] S. Yazawa, M. Hamanaka, and T. Utsuro, "Melody generation system based on a theory of melody sequence," in 2014 International Conference of Advanced Informatics: Concept, Theory and Application (ICAICTA). IEEE, 2014, pp. 336–341.
- [58] K. Chen, G. Xia, and S. Dubnov, "Continuous melody generation via disentangled short-term representations and structural conditions," in 2020 IEEE 14th International Conference on Semantic Computing (ICSC). IEEE, 2020, pp. 128–135.
- [59] S. Ding, Z. Liu, X. Dong, P. Zhang, R. Qian, C. He, D. Lin, and J. Wang, "Songcomposer: A large language model for lyric and melody composition in song generation," 2024. [Online]. Available: https://arxiv.org/abs/2402.17645

[60] D. Afchar, G. M. Brocal, and R. Hennequin, "Detecting music deep-fakes is easy but actually hard," arXiv preprint arXiv:2405.04181, 2024.

- [61] D. Cooke, A. Edwards, S. Barkoff, and K. Kelly, "As good as a coin toss human detection of ai-generated images, videos, audio, and audiovisual stimuli," arXiv preprint arXiv:2403.16760, 2024.
- [62] L. Comanducci, P. Bestagini, and S. Tubaro, "Fakemusiccaps: a dataset for detection and attribution of synthetic music generated via text-tomusic models," arXiv preprint arXiv:2409.10684, 2024.
- [63] M. A. Rahman, Z. I. A. Hakim, N. H. Sarker, B. Paul, and S. A. Fattah, "Sonics: Synthetic or not-identifying counterfeit songs," arXiv preprint arXiv:2408.14080, 2024.
- [64] A. Agostinelli, T. I. Denk, Z. Borsos, J. Engel, M. Verzetti, A. Caillon, Q. Huang, A. Jansen, A. Roberts, M. Tagliasacchi, M. Sharifi, N. Zeghidour, and C. Frank, "Musiclm: Generating music from text," 2023. [Online]. Available: https://arxiv.org/abs/2301.11325
- [65] C. G. D. C. J., "Genius song lyrics with language information," 2023, accessed: 2024-07-05. [Online]. Available: https://www.kaggle.com/ datasets/carlosgdcj/genius-song-lyrics-with-language-information
- [66] G. Meseguer-Brocal, A. Cohen-Hadria, and G. Peeters, "Dali: A large dataset of synchronized audio, lyrics and notes, automatically created using teacher-student machine learning paradigm." 2018. [Online]. Available: https://zenodo.org/record/1492443
- [67] M. Defferrard, K. Benzi, P. Vandergheynst, and X. Bresson, "Fma: A dataset for music analysis," 2017. [Online]. Available: https://arxiv.org/abs/1612.01840
- [68] C. Hawthorne, A. Stasyuk, A. Roberts, I. Simon, C.-Z. A. Huang, S. Dieleman, E. Elsen, J. Engel, and D. Eck, "Enabling factorized piano music modeling and generation with the MAESTRO dataset," in *International Conference on Learning Representations*, 2019. [Online]. Available: https://openreview.net/forum?id=r11YRjC9F7
- [69] T. Bertin-Mahieux, D. Ellis, B. Whitman, and P. Lamere, "The million song dataset." 01 2011, pp. 591–596.
- [70] J. Thickstun, Z. Harchaoui, and S. M. Kakade, "Learning features of music from scratch," in *International Conference on Learning Representations (ICLR)*, 2017.
- [71] D. Bogdanov, M. Won, P. Tovstogan, A. Porter, and X. Serra, "The mtg-jamendo dataset for automatic music tagging," in *Machine Learning for Music Discovery Workshop, International Conference on Machine Learning (ICML 2019)*, Long Beach, CA, United States, 2019. [Online]. Available: http://hdl.handle.net/10230/42015
- [72] M. Civit, V. Drai-Zerbib, D. Lizcano, and M. J. Escalona, "Sunocaps: A novel dataset of text-prompt based ai-generated music with emotion annotations," *Data in Brief*, vol. 55, p. 110743, 2024.
- [73] A. Dosovitskiy, M. Berman, A. Puri, S. Schröger, J. Cummings, M. Müller, J. Kühl, M. Dürr, and V. Hager, "Image transformers," in *Proceedings of the International Conference on Machine Learning* (ICML), 2020, https://arxiv.org/abs/2010.11929. [Online]. Available: https://arxiv.org/abs/2010.11929
- [74] Z. Liu, Y. Lin, Y. Cao, H. Hu, Y. Wei, Z. Zhang, S. Lin, J. Cao, Q. Lu, F. Wei et al., "Convnext: Revisiting convolutional neural networks for vision," in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2022, pp. 5578–5588, https://arxiv.org/abs/2201.03545. [Online]. Available: https://arxiv.org/abs/2201.03545
- [75] L. Breiman, "Random forests," Machine learning, vol. 45, no. 1, pp. 5–32, 2001. [Online]. Available: https://doi.org/10.1023/A: 1010933404324
- [76] A. Ahuja et al., "Melodic deception: Exploring the complexities of deepfakes of music generated by generative adversarial networks (gans)." Sangeet Galaxy, vol. 13, no. 2, 2024.
- [77] J. Frank and L. Schönherr, "Wavefake: A data set to facilitate audio deepfake detection," arXiv preprint arXiv:2111.02813, 2021.
- [78] R. Reimao and V. Tzerpos, "For: A dataset for synthetic speech detection," in 2019 International Conference on Speech Technology and Human-Computer Dialogue (SpeD). IEEE, 2019, pp. 1–10.
- [79] H. Khalid, S. Tariq, M. Kim, and S. S. Woo, "Fakeavceleb: A novel audio-video multimodal deepfake dataset," arXiv preprint arXiv:2108.05080, 2021.
- [80] J. Yi et al., "Add 2022: The first audio deepfake detection challenge," in ICASSP, 2022.
- [81] H. Zhang et al., "Add 2023: Audio deepfake detection challenge," in ICASSP, 2023.
- [82] Z. Wu et al., "Asvspoof 2015: The first automatic speaker verification spoofing and countermeasures challenge," in *Interspeech*, 2015.
- [83] M. Todisco et al., "Asvspoof 2019: Automatic speaker verification spoofing and countermeasures challenge evaluation," in *Interspeech*, 2019.

[84] J. Yamagishi et al., "Asvspoof 2021: Automatic speaker verification spoofing and countermeasures challenge evaluation," in ASVspoof Workshop, 2021.

- [85] X. Li, K. Li, Y. Zheng, C. Yan, X. Ji, and W. Xu, "Safeear: Content privacy-preserving audio deepfake detection," arXiv preprint arXiv:2409.09272, 2024.
- [86] J. Carletta et al., "The ami meeting corpus: A pre-announcement," in International Workshop on Machine Learning for Multimodal Interaction, 2006.
- [87] D. Amodei, S. Ananthanarayanan, R. Anubhai, J. Bai, E. Battenberg, C. Case, J. Casper, B. Catanzaro, Q. Cheng, G. Chen et al., "Deep speech 2: End-to-end speech recognition in english and mandarin," in *International conference on machine learning*. PMLR, 2016, pp. 173–182
- [88] J. Lorenzo-Trueba et al., "The voice conversion challenge 2018: Promoting development of parallel and non-parallel methods," in Odyssey: The Speaker and Language Recognition Workshop, 2018.
- [89] N. M. Müller, P. Kawa, W. H. Choong, E. Casanova, E. Gölge, T. Müller, P. Syga, P. Sperl, and K. Böttinger, "Mlaad: The multi-language audio anti-spoofing dataset," arXiv preprint arXiv:2401.09512, 2024.
- [90] J. Salamon, C. Jacoby, and J. P. Bello, "A dataset and taxonomy for urban sound research," in 22nd ACM International Conference on Multimedia (ACM-MM'14), Orlando, FL, USA, Nov. 2014, pp. 1041– 1044.
- [91] N. M. Müller, P. Czempin, F. Dieckmann, A. Froghyar, and K. Böttinger, "Does audio deepfake detection generalize?" *Interspeech*, 2022.
- [92] A. Vaswani, "Attention is all you need," Advances in Neural Information Processing Systems, 2017.
- [93] A. K. Singh and P. Singh, "Detection of ai-synthesized speech using cepstral & bispectral statistics," in 2021 IEEE 4th International Conference on Multimedia Information Processing and Retrieval (MIPR). IEEE, 2021, pp. 412–417.
- [94] D. A. Reynolds et al., "Gaussian mixture models." Encyclopedia of biometrics, vol. 741, no. 659-663, 2009.
- [95] Y. Wen, Z. Lei, Y. Yang, C. Liu, and M. Ma, "Multi-path gmmmobilenet based on attack algorithms and codecs for synthetic speech and deepfake detection." in *INTERSPEECH*, 2022, pp. 4795–4799.
- [96] K. O'Shea and R. Nash, "An introduction to convolutional neural networks," 2015. [Online]. Available: https://arxiv.org/abs/1511.08458
- [97] H. Bagherinezhad, M. Rastegari, and A. Farhadi, "Lcnn: Lookup-based convolutional neural network," 2017. [Online]. Available: https://arxiv.org/abs/1611.06473
- [98] H. Tak, J. Patino, M. Todisco, A. Nautsch, N. Evans, and A. Larcher, "End-to-end anti-spoofing with rawnet2," 2021. [Online]. Available: https://arxiv.org/abs/2011.01108
- [99] Z. X. R. S. He, K. and J. Sun, "Deep residual learning for image recognition," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2015, pp. 770–778.
- [100] Z. Li et al., "Detecting synthetic audio with resnet architecture," in IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), 2020. [Online]. Available: https://ieeexplore.ieee.org
- [101] J. Hu, L. Shen, S. Albanie, G. Sun, and E. Wu, "Squeeze-and-excitation networks," 2019. [Online]. Available: https://arxiv.org/abs/1709.01507
- [102] Y. Zhang, J. Lu, Z. Li, Z. Shang, W. Wang, and P. Zhang, "Improving the robustness of deepfake audio detection through confidence calibration." in *DADA@ IJCAI*, 2023, pp. 70–75.
- [103] J. weon Jung, H.-S. Heo, H. Tak, H. jin Shim, J. S. Chung, B.-J. Lee, H.-J. Yu, and N. Evans, "Aasist: Audio anti-spoofing using integrated spectro-temporal graph attention networks," 2021. [Online]. Available: https://arxiv.org/abs/2110.01200
- [104] A. Dosovitskiy, L. Beyer, A. Kolesnikov, D. Weissenborn, X. Zhai, T. Unterthiner, M. Dehghani, M. Minderer, G. Heigold, S. Gelly, J. Uszkoreit, and N. Houlsby, "An image is worth 16x16 words: Transformers for image recognition at scale," 2021. [Online]. Available: https://arxiv.org/abs/2010.11929
- [105] D. Wodajo and S. Atnafu, "Deepfake video detection using convolutional vision transformer," 2021. [Online]. Available: https://arxiv.org/abs/2102.11126
- [106] Z. Y. Baevski, A. et al., "Wav2vec 2.0: A framework for self-supervised learning of speech representations," in *Proceedings of the NeurIPS Conference*. NeurIPS, 2020, pp. 12449–12460.
- [107] D. R. Cox, "The regression analysis of binary sequences," *Journal of the Royal Statistical Society: Series B (Methodological)*, vol. 20, no. 2, pp. 215–232, 1958.

[108] F. J. O. R. Breiman, L. and C. Stone, Classification and Regression Trees. Wadsworth & Brooks, 1986.

- [109] M. Hearst, S. Dumais, E. Osuna, J. Platt, and B. Scholkopf, "Support vector machines," *IEEE Intelligent Systems and their Applications*, vol. 13, no. 4, pp. 18–28, 1998.
- [110] S. I. Krizhevsky, A. and G. E. Hinton, "Imagenet classification with deep convolutional neural networks," *Advances in Neural Information Processing Systems (NeurIPS)*, vol. 25, pp. 1097–1105, 2012.
- [111] S. Hochreiter and J. Schmidhuber, "Long short-term memory," Neural Computation, vol. 9, no. 8, pp. 1735–1780, 1997.
- [112] L. W. S. X. Gao, X. et al., "Res2net: A new multi-scale backbone architecture," in Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV). IEEE, 2019, pp. 1–9.
- [113] K. Simonyan and A. Zisserman, "Very deep convolutional networks for large-scale image recognition," in *Proceedings of the International Conference on Neural Information Processing Systems (NeurIPS)*. MIT Press, 2014, pp. 1–9.
- [114] S. I. Krizhevsky, A. and G. E. Hinton, "Imagenet classification with deep convolutional neural networks," *Advances in Neural Information Processing Systems (NeurIPS)*, vol. 25, pp. 1097–1105, 2012.
- [115] H. Tak, J. weon Jung, J. Patino, M. Kamble, M. Todisco, and N. Evans, "End-to-end spectro-temporal graph attention networks for speaker verification anti-spoofing and speech deepfake detection," in *Proc.* 2021 Edition of the Automatic Speaker Verification and Spoofing Countermeasures Challenge, 2021, pp. 1–8.
- [116] A. Hannun *et al.*, "Deep speech: Scaling up end-to-end speech recognition," *Proceedings of the International Conference on Machine Learning (ICML)*, pp. 1–12, 2014. [Online]. Available: http://arxiv.org/abs/1412.5567
- [117] N. M. Müller, P. Czempin, F. Dieckmann, A. Froghyar, and K. Böttinger, "Does audio deepfake detection generalize?" arXiv preprint arXiv:2203.16263, 2022.
- [118] X. Zhang, J. Yi, C. Wang, C. Y. Zhang, S. Zeng, and J. Tao, "What to remember: Self-adaptive continual learning for audio deepfake detection," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 38, no. 17, 2024, pp. 19569–19577.
- [119] T. M. Wani, R. Gulzar, and I. Amerini, "Abc-capsnet: Attention based cascaded capsule network for audio deepfake detection," in Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, 2024, pp. 2464–2472.
- [120] M. Chitale, A. Dhawale, M. Dubey, and S. Ghane, "A hybrid conlistm approach for deepfake audio detection," in 2024 3rd International Conference on Artificial Intelligence For Internet of Things (AIIoT). IEEE, 2024, pp. 1–6.
- [121] A. Pianese, D. Cozzolino, G. Poggi, and L. Verdoliva, "Deepfake audio detection by speaker verification," 12 2022, pp. 1–6.
- [122] T.-P. Doan, L. Nguyen-Vu, S. Jung, and K. Hong, "Bts-e: Audio deepfake detection using breathing-talking-silence encoder," in ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2023, pp. 1–5.
- [123] Y. Xie, H. Cheng, Y. Wang, and L. Ye, "Domain generalization via aggregation and separation for audio deepfake detection," *IEEE Transactions on Information Forensics and Security*, 2023.
- [124] Y. Zhu, S. Koppisetti, T. Tran, and G. Bharaj, "Slim: Style-linguistics mismatch model for generalized audio deepfake detection," arXiv preprint arXiv:2407.18517, 2024.
- [125] J. Xue, C. Fan, Z. Lv, J. Tao, J. Yi, C. Zheng, Z. Wen, M. Yuan, and S. Shao, "Audio deepfake detection based on a combination of f0 information and real plus imaginary spectrogram features," in Proceedings of the 1st international workshop on deepfake detection for audio multimedia, 2022, pp. 19–26.
- [126] L. Liu, H. Wei, D. Liu, and Z. Fu, "Harmonet: Partial deepfake detection network based on multi-scale harmof0 feature fusion," in *Proc. Interspeech* 2024, 2024, pp. 2255–2259.
- [127] M. Li, Y. Ahmadiadli, and X.-P. Zhang, "A comparative study on physical and perceptual features for deepfake audio detection," in Proceedings of the 1st International Workshop on Deepfake Detection for Audio Multimedia, 2022, pp. 35–41.
- [128] Y. Yang, H. Qin, H. Zhou, C. Wang, T. Guo, K. Han, and Y. Wang, "A robust audio deepfake detection system via multi-view feature," in ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2024, pp. 13131– 13135.
- [129] S. Saha, M. Sahidullah, and S. Das, "Exploring green ai for audio deepfake detection," arXiv preprint arXiv:2403.14290, 2024.
- [130] R. Wijethunga, D. Matheesha, A. Al Noman, K. De Silva, M. Tissera, and L. Rupasinghe, "Deepfake audio detection: a deep learning based

solution for group conversations," in 2020 2nd International conference on advancements in computing (ICAC), vol. 1. IEEE, 2020, pp. 192–197.

- [131] J. Gehring, M. Auli, D. Grangier, D. Yarats, and Y. N. Dauphin, "Convolutional sequence to sequence learning," 2017. [Online]. Available: https://arxiv.org/abs/1705.03122
- [132] C. Szegedy, W. Liu, Y. Jia, P. Sermanet, S. Reed, D. Anguelov, D. Erhan, V. Vanhoucke, and A. Rabinovich, "Going deeper with convolutions," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2015, pp. 1–9.
- [133] A. Gulati, J. Qin, C.-C. Chiu, N. Parmar, Y. Zhang, J. Yu, W. Han, S. Wang, Z. Zhang, Y. Wu, and R. Pang, "Conformer: Convolution-augmented transformer for speech recognition," 2020. [Online]. Available: https://arxiv.org/abs/2005.08100
- [134] H. Malik, "Fighting ai with ai: fake speech detection using deep learning," in 2019 AES INTERNATIONAL CONFERENCE ON AUDIO FORENSICS (June 2019), 2019.
- [135] M. Rabhi, S. Bakiras, and R. Di Pietro, "Audio-deepfake detection: Adversarial attacks and countermeasures," *Expert Systems with Applications*, vol. 250, p. 123941, 2024.
- [136] T.-H. Shih, C.-Y. Yeh, and M.-S. Chen, "Does audio deepfake detection rely on artifacts?" in ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2024, pp. 12446–12450.
- [137] U. Cappellazzo, D. Falavigna, A. Brutti, and M. Ravanelli, "Parameter-efficient transfer learning of audio spectrogram transformers," 2024. [Online]. Available: https://arxiv.org/abs/2312.03694
- [138] J. Arevalo, T. Solorio, M. M. y Gómez, and F. A. González, "Gated multimodal units for information fusion," 2017. [Online]. Available: https://arxiv.org/abs/1702.01992
- [139] J. Ao, R. Wang, L. Zhou, C. Wang, S. Ren, Y. Wu, S. Liu, T. Ko, Q. Li, Y. Zhang, Z. Wei, Y. Qian, J. Li, and F. Wei, "Speecht5: Unified-modal encoder-decoder pre-training for spoken language processing," 2022. [Online]. Available: https://arxiv.org/abs/2110.07205
- [140] M. Kim, G. Kim, S.-W. Lee, and J.-W. Ha, "St-bert: Cross-modal language model pre-training for end-to-end spoken language understanding," 2021. [Online]. Available: https://arxiv.org/abs/2010. 12283
- [141] Y.-H. H. Tsai, S. Bai, P. P. Liang, J. Z. Kolter, L.-P. Morency, and R. Salakhutdinov, "Multimodal transformer for unaligned multimodal language sequences," in *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Florence, Italy: Association for Computational Linguistics, 7 2019.
- [142] Y.-S. Chuang, C.-L. Liu, H.-Y. Lee, and L. shan Lee, "Speechbert: An audio-and-text jointly learned language model for end-toend spoken question answering," 2020. [Online]. Available: https: //arxiv.org/abs/1910.11559
- [143] C. Chen and Q. Li, "A multimodal music emotion classification method based on multifeature combined network classifier," *Mathematical Problems in Engineering*, vol. 2020, no. 1, p. 4606027, 2020.
- [144] S. Das and S. Satpathy, "Multimodal music mood classification framework for kokborok music," *Solid State Technology*, vol. 63, no. 6, pp. 9209–9219, 2020.
- [145] J. Wang, A. Sharifi, T. R. Gadekallu, and A. Shankar, "MMD-MII Model: A Multilayered Analysis and Multimodal Integration Interaction Approach Revolutionizing Music Emotion Classification," *International Journal of Computational Intelligence Systems*, vol. 17, p. 99, 2024. [Online]. Available: https://link.springer.com/article/10. 1007/s44196-024-00489-6
- [146] M. Won, S. Oramas, O. Nieto, F. Gouyon, and X. Serra, "Multimodal metric learning for tag-based music retrieval," in *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Pro*cessing (ICASSP). IEEE, 2021, pp. 591–595.
- [147] M. Agrawal and A. Nandy, "A novel multimodal music genre classifier using hierarchical attention and convolutional neural network," 2020. [Online]. Available: https://arxiv.org/abs/2011.11970
- [148] B. Weck, I. Manco, E. Benetos, E. Quinton, G. Fazekas, and D. Bogdanov, "Muchomusic: Evaluating music understanding in multimodal audio-language models," arXiv preprint arXiv:2408.01337, 2024.
- [149] E. Deruty, M. Grachten, S. Lattner, J. Nistal, and C. Aouameur, "On the development and practice of ai technology for contemporary popular music production." *Transactions of the International Society for Music Information Retrieval*, vol. 5, no. 1, pp. 35–50, 2022.
- [150] APRA AMCOS, "Largest report on ai music reveals potentially devastating impact on australian and new zealand music creators," 2024.
- [151] T. Atlantic, "Generative ai and the future of music: Quality and authenticity concerns," 2024, accessed: 2024-11-13.

- [Online]. Available: https://www.theatlantic.com/technology/archive/2024/07/generative-ai-music-suno-udio/679114/
- [152] U. of Pennsylvania School of Engineering and A. Science, "Detecting machine-generated text: An arms race with the advancements of large language models," 2023.
- [153] G. Hadjeres, F. Pachet, and F. Nielsen, "Deepbach: a steerable model for bach chorales generation," 2017. [Online]. Available: https://arxiv.org/abs/1612.01010
- [154] J. Bradt, C. Dileo, K. Myers-Coffman, and J. Biondo, "Music interventions for improving psychological and physical outcomes in people with cancer," *Cochrane Database of Systematic Reviews*, no. 10, 2021.
- [155] J. Webster, "The promise of personalisation: Exploring how music streaming platforms are shaping the performance of class identities and distinction," New Media & Society, vol. 25, no. 8, pp. 2140–2162, 2023