

Sprite Sheet Diffusion: Generate Game Character for Animation

Cheng-An Hsieh*
chengan2@andrew.cmu.edu

Jing Zhang*
jingzha4@andrew.cmu.edu

Ava Yan*
lany2@andrew.cmu.edu

<https://chenganhsieh.github.io/spritesheet-diffusion/>

1 Introduction

Creating character animations is a cornerstone of 2D game development, requiring illustrators to design a main character image and then manually draw multiple keyframes depicting actions such as running or jumping. This process is both time-consuming and labor-intensive, as maintaining consistency in style, proportions, and details across frames demands meticulous effort (Figure 2).

Existing generative AI methods primarily focus on single image generation or video synthesis, overlooking the specific challenges of conditional image sequence generation for sprites. Additionally, this task involves conditioning on both a reference image for appearance and a pose sequence for intended actions, significantly increasing its complexity. Furthermore, while related methods have shown success in human-centered domains, they rarely address the sprite domain, where limited high-quality training data further complicates the problem. In this work, we make an attempt to address these challenges and our contributions are summarized as follows:

1. **Propose a New Task:** We define the sprite sheet generation task, introducing evaluation methods to benchmark models on consistency, pose alignment, and sequence quality.
2. **Curate a Specialized Dataset:** We create a high-quality sprite-domain dataset with **150+** paired reference images, pose sequences, and target action sequences.
3. **Explore Two Baselines and Propose a Method:** We explore using two existing methods in conditional image and video generation domain respectively and creatively adapt one of them, Animate Anyone [Hu, 2024].
4. **Obtain a Capable Model:** We successfully train a model that generates faithful, consistent, and high-quality sprite action sequences and conduct extensive experiments to analyze key factors affecting its performance.

This work demonstrates how generative diffusion models can streamline 2D game development by reducing manual effort and enabling efficient sprite animation. Beyond games, the framework extends to virtual avatars, storytelling, and education, offering tools and insights for advancing creative industries and interactive media.

2 Dataset and Task

The proposed task involves generating an **action sequence** of a game character conditioned on an initial **game character reference image** (Figure 3a), a specified **pose sequence** (Figure 3b), and the resulting **action sequence** (Figure 3c). The reference image defines the character’s appearance, while the pose sequence outlines the intended actions. The goal is to create a sequence of images that depict the character performing these actions, maintaining consistency with the reference image. Formally, let C denote the reference image of the game character, $P = \{p_1, p_2, \dots, p_n\}$ denote the pose sequence, where each p_i represents a specific pose in the sequence, and $\hat{I} = \{\hat{i}_1, \hat{i}_2, \dots, \hat{i}_n\}$ denote the generated image sequence, where \hat{i}_i corresponds to the character in pose p_i . The model learns a mapping $f : (C, P) \rightarrow \hat{I}$ such that each $\hat{i}_i = f(C, p_i)$.

We curate a sprite dataset by collecting sprite sheets from two sources: (1) GameArt2D*, which provides high-quality and uniform sprites with limited diversity, and (2) SpriteDatabase*, which offers diverse styles and poses but exhibits inconsistent quality. From each sprite, one frame was selected as the reference image, while the poses for the remaining

*These authors contributed equally to this work

*GameArt2D: <https://www.gameart2d.com/>.

*SpriteDatabase: <https://spritedatabase.net/>.

frames were annotated using pose detection models or manual labeling. Each sprite typically includes 3 to 8 frames per action sequence. See Figure 3 for an example. We split the dataset into training, validation, and two test sets (in-sample and out-sample) at the action sequence level. In-sample test set includes unseen action sequences of characters present in the training set, while out-sample test set contains motion sequences from entirely unseen characters. In total, the dataset comprises 152 paired action sequences and 916 paired frame sequences. See Table 3 for dataset statistics.

We evaluate the generated results with both qualitative and quantitative assessments. For qualitative analysis, we manually evaluate four examples to verify alignment with conditioned images and detail consistency across frames. For quantitative analysis, we evaluate the generated motion frames based on: (1) similarity to ground truth action sequence; and (2) subject consistency within a generated sequence. For (1), we use Structural Similarity Index Measure (SSIM) [Wang et al., 2004] to assess structural similarity in luminance and contrast, Peak Signal-to-Noise Ratio (PSNR) [Horé and Ziou, 2010] to evaluate the pixel-wise difference, and Learned Perceptual Image Patch Similarity (LPIPS) [Zhang et al., 2018] to measure perceptual differences aligned with human judgment. For (2), we utilize the subject consistency score proposed by Huang et al. [2024], which is calculated based on the DINO feature similarity [Ruiz et al., 2023].

3 Related Work

3.1 Image-to-Pose: Foundation for Pose Conditioning

Image-to-pose techniques are fundamental for sprite generation, providing the necessary pose information from reference images and enabling pose constraints during synthesis. 2D human pose estimation (HPE) is a well-studied task focusing on predicting keypoint coordinates from images [Zheng et al., 2023]. Regression-based methods, such as DeepPose [Toshev and Szegedy, 2014], directly predict joint positions, while heatmap-based approaches like DW-Pose [Tian et al., 2021] improve spatial precision through probability maps. Multi-person estimators, such as OpenPose [Cao et al., 2017], handle more complex scenarios. However, existing pose estimation models struggle with game sprites, as game sprites often feature exaggerated proportions, occluding costumes, and non-standard poses. The transfer learning approach by Chen and Zwicker [2022] adapts human pose models for illustrations but is limited in generalizability. Given these challenges, we manually annotate poses for difficult cases to ensure data reliability.

3.2 Pose-to-Image: Conditional Image Generation

Our task can be treated as a conditional image generation problem, where each frame is conditioned on both a reference image for appearance and a specific pose for structure. Diffusion-based models, such as Latent Diffusion [Rombach et al., 2022], are widely used in image generation tasks [Dhariwal and Nichol, 2021]. For pose conditioning, models like ControlNet [Zhang et al., 2023] enable spatial guidance by integrating pose maps, while methods like IP-Adapter [Ye et al., 2023] ensure style and content consistency with reference images. These techniques excel at generating single images aligned with pose or style constraints. However, our task adds the complexity of producing multiple frames that maintain coherence in appearance and motion. While single-frame conditional models offer effective solutions for isolated generations, they lack mechanisms to ensure consistency across sequential outputs.

3.3 Pose-to-Video: Temporal Consistency in Animation

Pose-to-video synthesis extends pose-to-image tasks by introducing temporal coherence, generating realistic video sequences from pose inputs. This task is central to applications like animation, virtual reality, and game development, where smooth and consistent motion is essential. Hu [2024] proposed Animate Anyone, a diffusion-based framework that leverages ReferenceNet for appearance conditioning, a Pose Guider for structural alignment, and temporal modeling to produce smooth transitions between frames. Similarly, Wei et al. [2024] developed AniPortrait, which integrates audio and reference portraits to generate temporally consistent facial animations. Although these approaches emphasize sequence-level temporal smoothness, our task differs as it involves discrete frames. Moreover, their results often exhibit noticeable artifacts when applied to anime that significantly differs from human figures.

4 Methods

4.1 Baseline Approaches

Stable Diffusion with ControlNet and IP-Adapter Integration (SD-IPCN): First, we employ a method from the domain of conditional image generation, leveraging pose and character images as prompts to guide the process. We follow IP-Adapter [Ye et al., 2023]’s method to integrate the appearance adaptor with SD-v1.5 [Rombach et al., 2022] and ControlNet [Zhang et al., 2023]. For testing with IP-Adapter’s given weights, we generate all frames of an action sequence as a single concatenated image to improve frame-to-frame consistency of this baseline. For fine-tuning, we adapt IP-Adapter’s given training code to fine-tune with ControlNet.

Animate Anyone: Second, we refer to Animate Anyone [Hu, 2024], which differs from IP-Adapter [Ye et al., 2023] in two key aspects. First, Animate Anyone focuses on conditional video generation, introducing an additional layer of consistency to image generation. Our approach adapts Animate Anyone’s framework to address sequential image generation by treating it as a video generation problem. Second, Animate Anyone employs a more complex image encoder compared to IP-Adapter, which only leverages the semantics of the reference image. Building on Animate Anyone [Hu, 2024], we further extend it to develop our main method.

4.2 Main Method

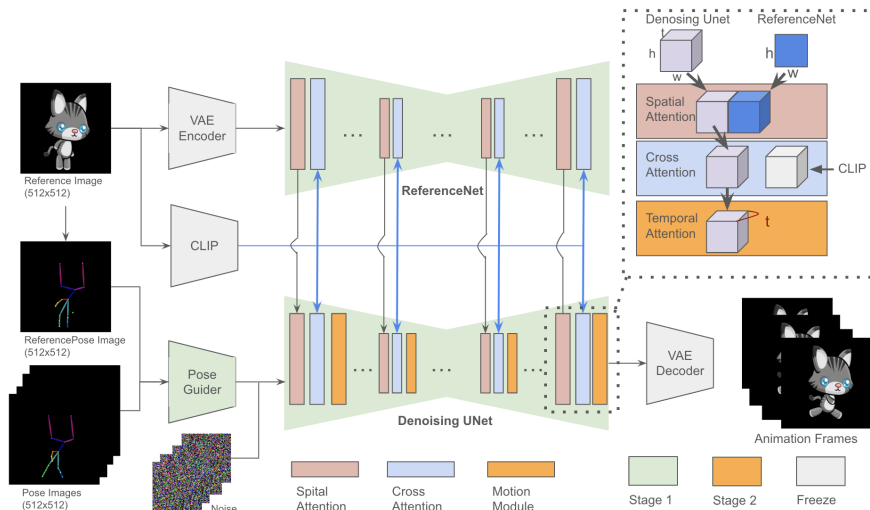


Figure 1: Framework

We adapt the framework from Wei et al. [2024] for portrait animation, enhancing Animate Anyone with a Pose Guider that adds pose features to the noise latent during downsampling. The pipeline of our method is illustrated in Figure 1 and comprises three key components: ReferenceNet, Pose Guider, and Motion Module. ReferenceNet encodes appearance features using an SD model with spatial-attention layers, while IP-Adapter [Ye et al., 2023] uses a CLIP image encoder with limited resolution (224x224). Cross-attention, driven by the CLIP image encoder, enhances feature integration between ReferenceNet and the denoising network. The Pose Guider encodes motion information using four convolutional layers to align the pose image to the same resolution as the noise latent, which is then added to the noisy latent before being input into the denoising network. To ensure smooth frame transitions, the Motion Module is embedded within the Res-Trans block after attention layers.

The training process consists of two stages aimed at optimizing both pose conditioning and temporal consistency. In Stage 1 (Pose-to-Image), ReferenceNet, the denoising network, and the Pose Guider are trained to generate individual character images based on input poses. ReferenceNet encodes the reference image, while the Pose Guider encodes pose information, allowing the denoising network to integrate these features and produce accurate character representations. In Stage 2 (Pose-to-Sprite), the Motion Module is trained for temporal consistency while the weights of ReferenceNet, the denoising network, and the Pose Guider are frozen from Stage 1. This stage focuses on achieving smooth and coherent transitions between animation frames.

5 Experiments

To showcase the superiority of our fine-tuned Animate Anyone model, we assess its performance on the in-sample and out-sample test dataset we crafted, aiming to demonstrate its ability to handle both seen and unseen characters. We also establish three baseline methods for comparison: Animate Anyone with its vanilla weights, SD-IPCN, and a fine-tuned version of SD-IPCN trained on our training set. Results are analyzed using the metrics described in Section 2, focusing on the quality of generated images as well as their subject consistency.

5.1 Implementation Details

We trained IP-Adapter model for 40 epochs (approximately 5,000 steps) on an NVIDIA A10G GPU (24GB), taking around 2 hours. The training loss gradually saturates after 10 epochs, and we report results at epoch 20 to avoid overfitting.

Fine-tuned Animate Anyone model has two training stages. In the first stage, we train the PoseGuider, ReferenceNet, and DenoisingNet, which require over 30GB of GPU memory. Therefore, we use an NVIDIA L40S (42GB) GPU for 30,000 steps (10 hours). In the second stage, only the temporal layers are trained, allowing us to use a single NVIDIA 4090 GPU (24GB) for 20,000 steps (2 hours).

5.2 Qualitative Comparison

We randomly sampled four test set examples: two in-sample and two out-sample, to manually evaluate the generated motion frames (Appendix C). Our fine-tuned Animate Anyone model successfully recreates the reference image’s appearance and follows the corresponding pose image to generate appropriate motion frames, while also generalizing to unseen characters. However, it is still underperforming with finer details like hairstyles (Figure 4) and props (Figures 5, 6). The vanilla-weight version performs worse, producing garbled outputs failing to match reference or pose. For SD-IPCN, the vanilla model generates acceptable results, with fine-tuning offering limited improvement. Nonetheless, both models fail to accurately replicate the reference image, producing only stylistically similar outputs.

5.3 Quantitative Comparison

Tables 1 and 2 present the quantitative comparison between our fine-tuned Animate Anyone model and baseline approaches. Our fine-tuned model demonstrates remarkable improvements in SSIM, PSNR, and LPIPS compared to other baseline methods, which aligns with our quantitative analysis and highlights its effectiveness in maintaining fidelity to reference images. Notably, it achieved significant improvements over the version with vanilla weights. This is because the original Animate Anyone model was trained to generate realistic animated videos, where the training dataset consisted of characters with clear, human-like pose structures. Sprite images, however, lack such clear pose structures, making it challenging for the original model to generate accurate sequences. Through the fine-tuning of Animate Anyone, our tailored model effectively learns the relationship between these specialized sprite images and their corresponding pose images, enabling it to produce results that are highly aligned with the reference images and follow the given pose image structure.

The SD-IPCN model with vanilla weights achieves a similar Subject Consistency score as fine-tuned Animate Anyone. After fine-tuning, SD-IPCN surpasses fine-tuned Animate Anyone in subject consistency and shows an improved SSIM score over its vanilla-weight counterpart, indicating enhanced subject identity preservation. However, its SSIM, PSNR, and LPIPS scores remain lower, suggesting that it struggles to align with the detailed appearance of the reference images. The primary difference lies in how these methods approach image condition modeling. SD-IPCN relies solely on CLIP embeddings, which can preserve some image similarity but fail to effectively transfer fine-grained details. In contrast, the ReferenceNet in our fine-tuned Animate Anyone model leverages a UNet structure to capture the spatial details of the reference images, enabling superior preservation of appearance details.

	SSIM \uparrow	PSNR \uparrow	LPIPS \downarrow	Subject Consistency \uparrow
SD-IPCN	0.294 \pm 0.074	10.752 \pm 2.187	0.412 \pm 0.127	0.885 \pm 0.044
SD-IPCN (finetuned)	0.421 \pm 0.157	10.060 \pm 2.984	0.401 \pm 0.108	0.910 \pm 0.039
Animate Anyone	0.330 \pm 0.143	9.786 \pm 2.159	0.557 \pm 0.184	- *
Animate Anyone (finetuned)	0.659 \pm 0.250	18.405 \pm 5.280	0.125 \pm 0.088	0.901 \pm 0.064

Table 1: Quantitative Comparison (In-Sample).

	SSIM \uparrow	PSNR \uparrow	LPIPS \downarrow	Subject Consistency \uparrow
SD-IPCN	0.308 \pm 0.098	10.919 \pm 2.316	0.386 \pm 0.079	0.892 \pm 0.038
SD-IPCN (finetuned)	0.385 \pm 0.124	10.298 \pm 3.045	0.393 \pm 0.111	0.932 \pm 0.025
Animate Anyone	0.236 \pm 0.055	8.957 \pm 1.908	0.694 \pm 0.083	- *
Animate Anyone (finetuned)	0.655 \pm 0.195	18.809 \pm 4.806	0.139 \pm 0.090	0.893 \pm 0.038

Table 2: Quantitative Comparison (Out-Sample).

5.4 Ablation Study

To identify which fine-tuned components are crucial for adapting the Animate Anyone model to sprite sheet generation, we conducted an ablation study by selectively fine-tuning components while freezing others. The experiments include: (1) fine-tuning only the Pose Guider (Pose Guider Only), (2) fine-tuning the Pose Guider and denoising UNet (Pose

*Due to Animate Anyone’s limited pose adaptation capability without fine-tuning, the generated frames show minimal variation. Therefore, subject consistency evaluation was not conducted for this baseline method.

Guider + Denoising UNet), (3) fine-tuning all Stage 1 components (Stage 1 Only), and (4) fine-tuning both Stage 1 and Stage 2 components, which is the same as the fine-tuned Animate Anyone mentioned earlier (Fully Fine-Tuned).

Tables 4 and 5 in the Appendix D.1 show the quantitative comparison of the performance across different configurations. We also randomly sampled four examples for manual evaluation (see Appendix D.1). Results show that fine-tuning only the Pose Guider allows the model to reconstruct most appearance details, while incorporating additional components during Stage 1 training, such as the reference network and denoising UNet, consistently improves the model’s performance across all evaluation metrics. However, the fully fine-tuned model underperforms "Stage 1 Only" on some metrics, revealing the need to adjust Stage 2 training configuration. While Stage 2 is critical for ensuring the generated character’s poses align closely with the given pose images, overfitting at this stage can potentially lead to the loss of important details. For example, as shown in Figure 10, the character’s gun disappears in the output generated by the fully fine-tuned model.

6 Code Overview

Dataset Creation: Our data pipeline consists of the following steps: (1) for uncropped sprite action sequences, we split the sprite sheet into separate rows, adjust the height, define the width of each frame, save cropped frames (2) label each frame manually or use OpenPose/DW-Pose. The detailed code is available on Appendix E.1.

IP-Adapter: For testing with the IP-Adapter [Ye et al., 2023] repo’s provided weights, we adapt dataset loading part of IP-Adapter repo’s provided `ip_adapter_controlnet_demo_new.ipynb`. For fine-tuning the IP-Adapter, we reference the `train_tutorial.py` script from the IP-Adapter repo that originally only trains on text-image pairs and adapt it to train with ControlNet on our reference image, pose image and target action image triplet pairs. Appendix E.2.

Animate Anyone: We adapt Animate Anyone [Hu, 2024] and fine-tune the models for our specific domains. Most of the code is based on [Moore-Animate Anyone](#), but we made several modifications: (1) rewriting the script for loading our sprite sheet dataset (Figure 21), (2) adding data augmentation by flipping images (Figure 19), (3) integrating Wandb to track the training process (Figure 20), and (4) rewriting the inference code to generate frames without requiring video format output (Figure 22). Appendix E.3.

Experiment Scripts: To streamline evaluation and analysis, we implemented two scripts for automated assessment. Each script could process inputs and generate a Markdown file with overall and per-character/motion statistics. The first script (Appendix E.4.1) evaluates similarity between ground truth and generated frames using SSIM, PSNR, and LPIPS. The second (Appendix E.4.2) assesses subject consistency using the Subject Consistency Score from the `vbench` library [Huang et al., 2024].

7 Research Log and Timeline (Detailed Timeline: Table 6)

7.1 Task Definition and Dataset Creation, 50 hrs

We grouped early in the semester to brainstorm our topic of interest. After deciding to work on game character sequence generation, our first challenge was finding a suitable dataset. Websites like SpriteDatabase contained many sprite sheets, but none provided paired action and pose sequences. We wrote labeling pipeline scripts to manually crop action sequences from sprite sheets and annotate poses using pose detection models such as DW-Pose and OpenPose. While these models worked well for humanoid sprites, they performed poorly on characters with exaggerated proportions or non-standard anatomy, conflicting with our goal of building a diverse dataset. To address this, we manually annotated challenging cases, balancing automation with manual correction to ensure quality. (32 hrs)

Later, we discovered GameArt2D, a website that provides pre-cropped action sequences. Although these lacked pose diversity, they were consistent, high-resolution and easier to annotate. For these sprites, since they are all disproportional with human figure and pose detection models do not perform well on them, we wrote a manual annotation script inspired by OpenPose’s outputs. We then supplemented our dataset with several more non-human-like sprites from SpriteDatabase to ensure the dataset’s diversity and representativeness. (18 hrs)

7.2 Literature Review and Refining Focus, 20 hrs

Parallel to dataset creation, we also explored the broader literature on diffusion-based image and video generation. After recognizing the significance of pose conditioning, we narrowed our focus to works on conditional pose generation. Initially, we tested AniPortrait, a facial video generation framework, on our dataset. However, without pretrained weights, training required substantial time and was prone to overfitting. We later discovered that AniPortrait’s codebase was derived from Animate Anyone, which targets character video generation and aligns more closely with our task. This realization prompted us to pivot to Animate Anyone, leveraging its pretrained weights for sprite sequence generation.

Our exploration also revealed layered relationships between image and video generation research. Image generation methods like IP-Adapter focus on single-frame fidelity, while video generation emphasizes temporal coherence. Our task lies somewhere in the middle and can take existing methods from those two lines of work as baselines.

7.3 Method Implementation, 45 hrs

We selected IP-Adapter for image generation and Animate Anyone for video generation as our baseline approaches. Each re-implementation presented some unique challenges.

IP-Adapter provided a notebook for testing, where we explored two strategies: generating all frames in an action sequence simultaneously or treating each frame independently. The single-pass approach showed slightly better consistency and was used for reporting. However, its **training logic**, originally designed for style adaptation with text-image pairs, was incompatible with our pose-conditioned task. And repository defines two different classes for the core component `ip-adapter`, leading to ambiguity in understanding. We extensively modified the training script to align with our needs and tested both fine-tuning pre-trained weights and training from scratch. Fine-tuning performed significantly better, likely due to the limited size of our dataset, and was used in the final results. (15 hrs)

For Animate Anyone, the official authors of the paper did not release the source code. Initially, we adapted **AniPortrait**, but later discovered that its codebase originated from **Moore-Animate Anyone**, an open-source work that tries to re-implement Animate Anyone. Upon comparing the two, we found the only difference was in the Pose Guider structure. AniPortrait enhances the Pose Guider by adding more convolution layers, incorporating the reference pose image, and integrating the pose image features into the denoising downsampling process. After evaluating the results, we found that the improved Pose Guider generated images closer to the reference image. We made minimal changes to their code, only adding functions for loading the dataset, data augmentation, and inference. (30 hrs)

7.4 Evaluation and Experimental Design, 24 hrs

Defining evaluation metrics was an iterative process due to the novelty of our task, which lacked prior research for reference. We initially used common image generation metrics (SSIM, PSNR, and LPIPS) to evaluate the similarity between ground truth and generated frames. However, these metrics focused solely on frame-to-frame similarity and proved insufficient for assessing subject consistency across frames. Given the limited research in this area, we conducted a thorough literature review and incorporated the Subject Consistency Score proposed by VBench [Huang et al., 2024] into our evaluation framework. (6 hrs)

For the experimental design, we first created an in-sample and out-sample test set to evaluate the method’s performance from two perspectives: seen characters with unseen motion and unseen characters. Our initial results showed significant improvements in the fine-tuned Animate Anyone compared to its vanilla weights, which motivated us to conduct an ablation study (Section 5.4) to analyze the impact of each component and understand the key factors driving the performance gains. The ablation study revealed that the Pose Guider was critical in achieving these improvements, but it also exposed potential overfitting issues in our Stage 2 training. Unfortunately, due to computational constraints, we could not run additional experiments to optimize the Stage 2 training settings. Nevertheless, this highlights a promising direction for future work to improve subject consistency. (18 hrs)

8 Conclusion

In this work, we address a critical yet overlooked task in game development: sprite sheet generation. We creatively adapted the video generation framework Animate Anyone for this task and conducted comprehensive experiments alongside baselines to validate the effectiveness of our fine-tuned model. An ablation study further evaluated the contribution of each component during training. To tackle the lack of datasets in this field, we created a high-quality sprite-domain dataset with 150+ paired reference images, pose sequences, and target action sequences, laying a foundation for future research.

Both quantitative and qualitative results show that our fine-tuned model could effectively generate motion frames aligned with the reference image and the pose structure, which addresses the original Animate Anyone’s inability to connect the sprite image with the pose image and overcomes the IP-Adapter-based methods’ limitations in transferring image details. However, our model still struggles with overfitting during Stage 2 training and maintaining subject consistency and finer details. Future work will focus on refining the framework and optimizing fine-tuning configuration.

References

- Zhe Cao, Tomas Simon, Shih-En Wei, and Yaser Sheikh. Realtime multi-person 2d pose estimation using part affinity fields. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7291–7299, 2017.
- Shuhong Chen and Matthias Zwicker. Transfer learning for pose estimation of illustrated characters. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, 2022.
- Prafulla Dhariwal and Alexander Nichol. Diffusion models beat gans on image synthesis. *Advances in neural information processing systems*, 34:8780–8794, 2021.
- Alain Horé and Djemel Ziou. Image quality metrics: Psnr vs. ssim. In *2010 20th International Conference on Pattern Recognition*, pages 2366–2369, 2010. doi: 10.1109/ICPR.2010.579.
- Li Hu. Animate anyone: Consistent and controllable image-to-video synthesis for character animation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8153–8163, 2024.
- Ziqi Huang, Yinan He, Jiashuo Yu, Fan Zhang, Chenyang Si, Yuming Jiang, Yuanhan Zhang, Tianxing Wu, Qingyang Jin, Nattapol Chanpaisit, et al. Vbench: Comprehensive benchmark suite for video generative models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21807–21818, 2024.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman. Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 22500–22510, 2023.
- Yuliang Tian, Xu Li, Weixin Wang, and Lianwen Zhang. Dw-pose: Deep whole-body pose estimation with dense regression. *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 11808–11817, 2021.
- Alexander Toshev and Christian Szegedy. Deeppose: Human pose estimation via deep neural networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1653–1660, 2014.
- Zhou Wang, A.C. Bovik, H.R. Sheikh, and E.P. Simoncelli. Image quality assessment: from error visibility to structural similarity. *IEEE Transactions on Image Processing*, 13(4):600–612, 2004. doi: 10.1109/TIP.2003.819861.
- Huawei Wei, Zejun Yang, and Zhisheng Wang. Aniportrait: Audio-driven synthesis of photorealistic portrait animation. *arXiv preprint arXiv:2403.17694*, 2024.
- Hu Ye, Jun Zhang, Sibio Liu, Xiao Han, and Wei Yang. Ip-adapter: Text compatible image prompt adapter for text-to-image diffusion models. *arXiv preprint arXiv:2308.06721*, 2023.
- Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023.
- Richard Zhang, Phillip Isola, Alexei A Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 586–595, 2018.
- Cheng Zheng, Wenbing Wu, Chen Chen, Tong Yang, Siyu Zhu, Jianbing Shen, and Mubarak Shah. Deep learning-based human pose estimation: A survey. *ACM Computing Surveys*, 56(1):1–37, 2023.

A Visual Illustration

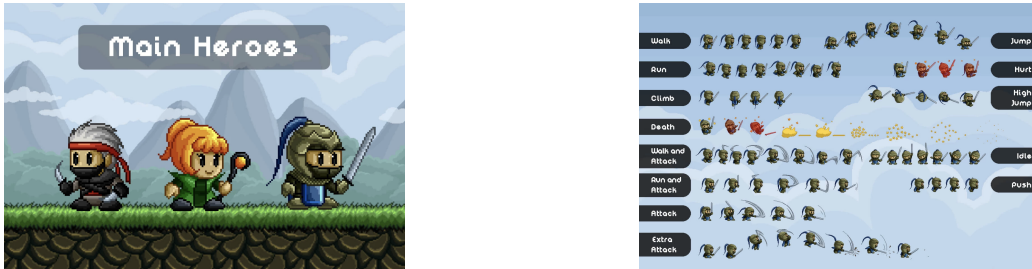


Figure 2: A sprite in game development is a 2D bitmap graphic representing a character, object, or visual element. A sprite sheet is a single image file containing multiple sprites. The left image shows three game character sprites, while the right displays the sprite sheet of one character's action sequences. Image source: <https://craftpix.net/product/pixel-art-characters-for-platformer-games/>.

B Dataset

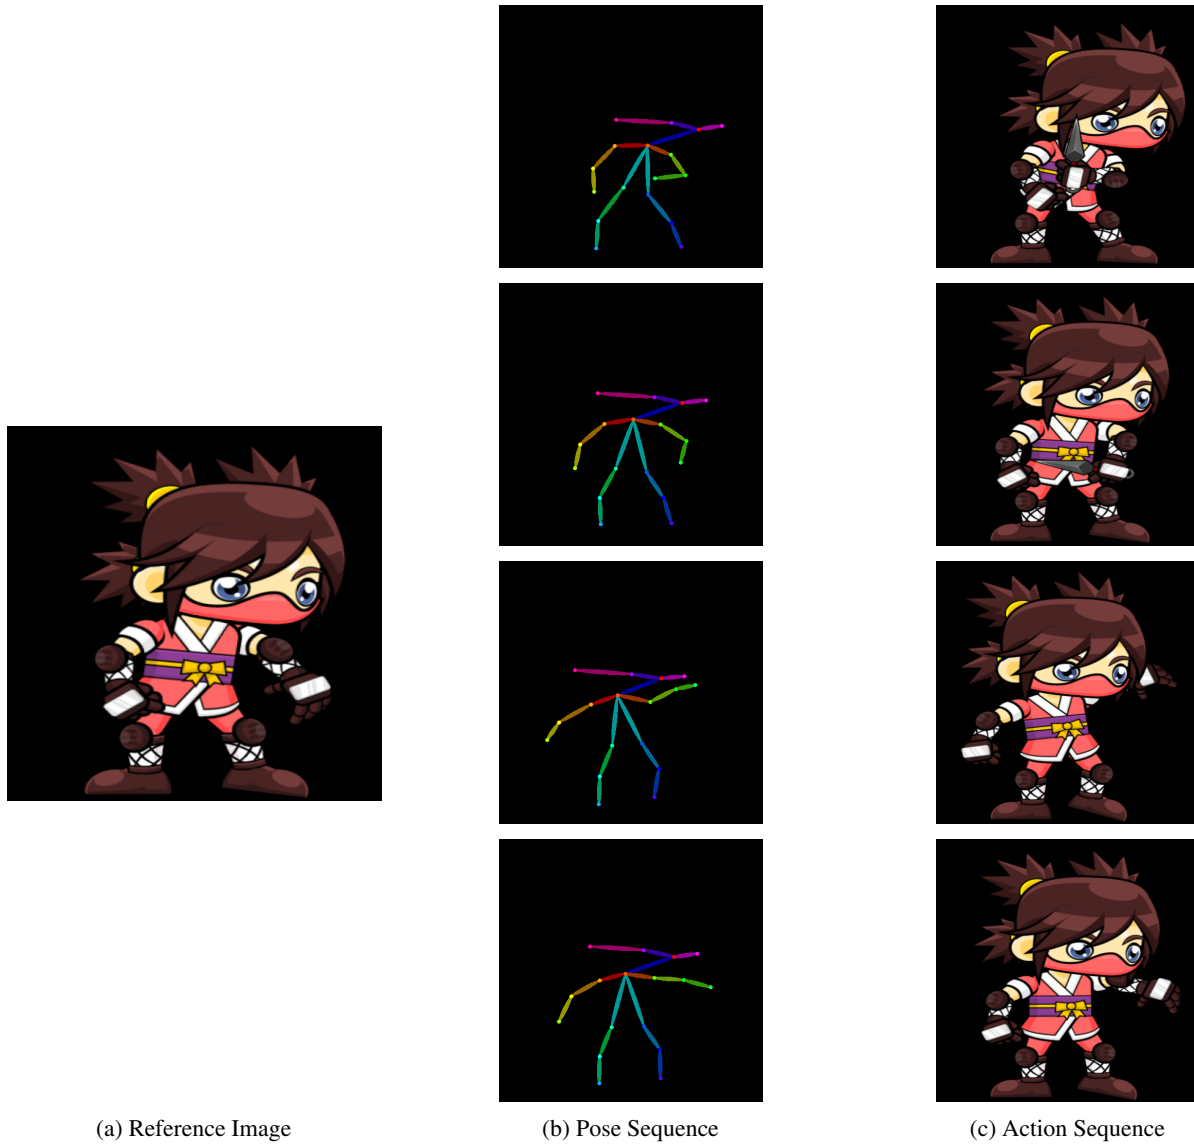


Figure 3: An example of an action sequence for one character.

	Train	Val	Test (in-sample)	Test (out-sample)
Character Count	28	28	28	12
(GameArt2D)	12	12	12	4
(SpriteDatabase)	16	16	16	8
Action Seq Count	84	28	28	12
Frame Seq Count	533	174	157	52

Table 3: Dataset Summary.

C Qualitative Comparison

C.1 In-Sample

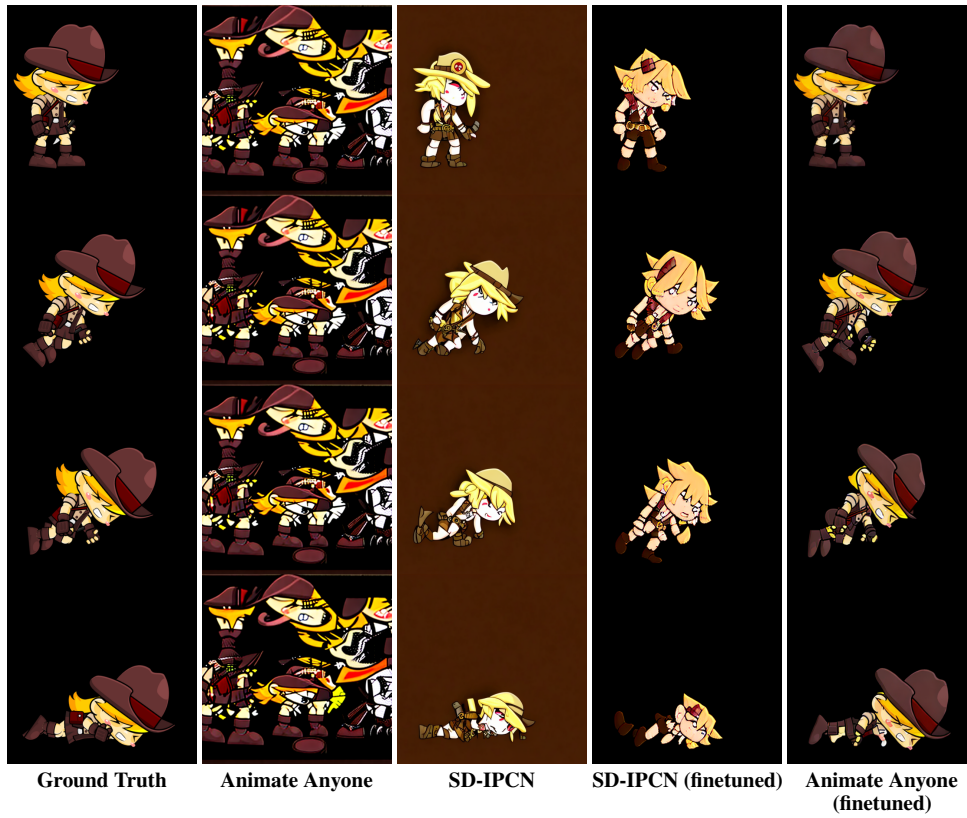


Figure 4: Qualitative Comparison (In-Sample - Adventure Girl - Dead)

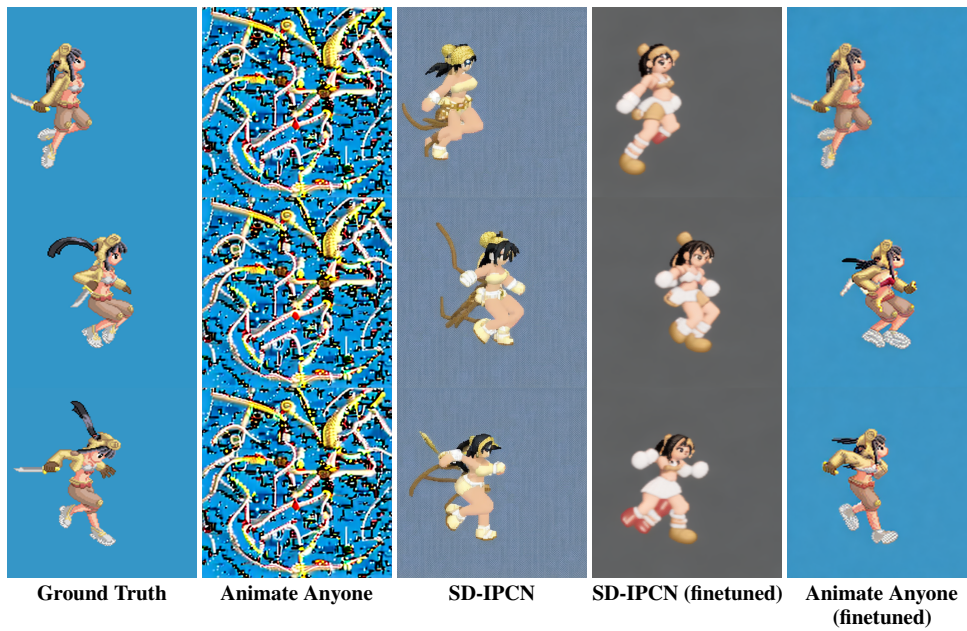


Figure 5: Qualitative Comparison (In-Sample - Thief - Jump)

C.2 Out-Sample

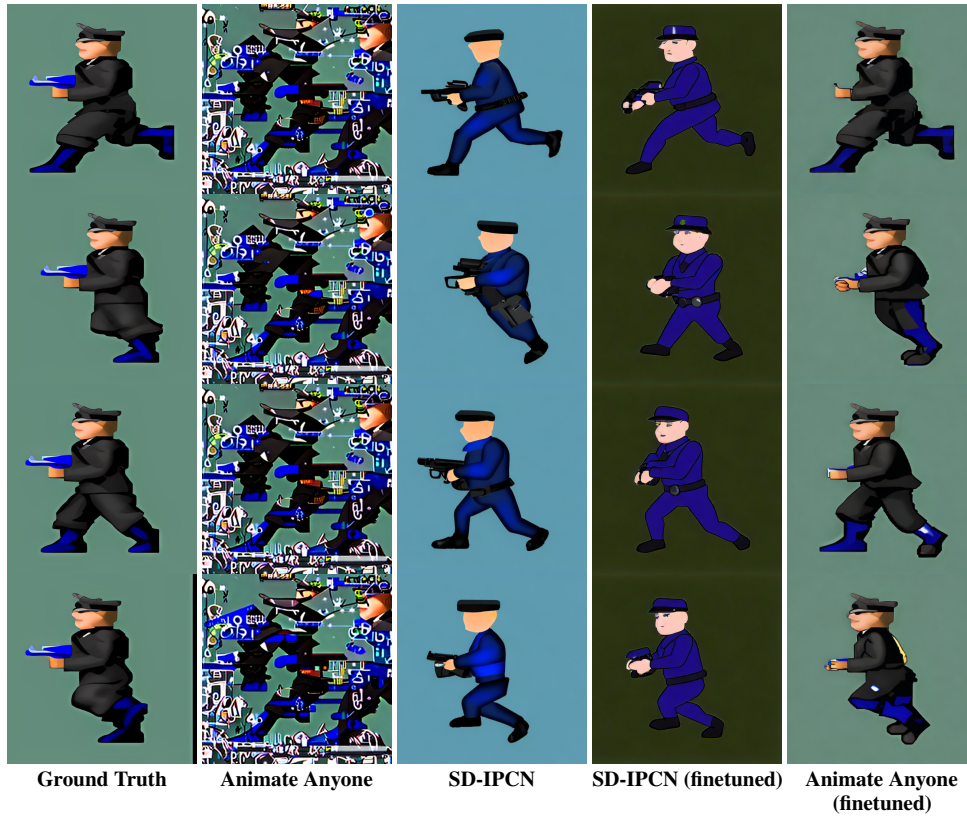


Figure 6: Qualitative Comparison (Out-Sample - SS - Run)

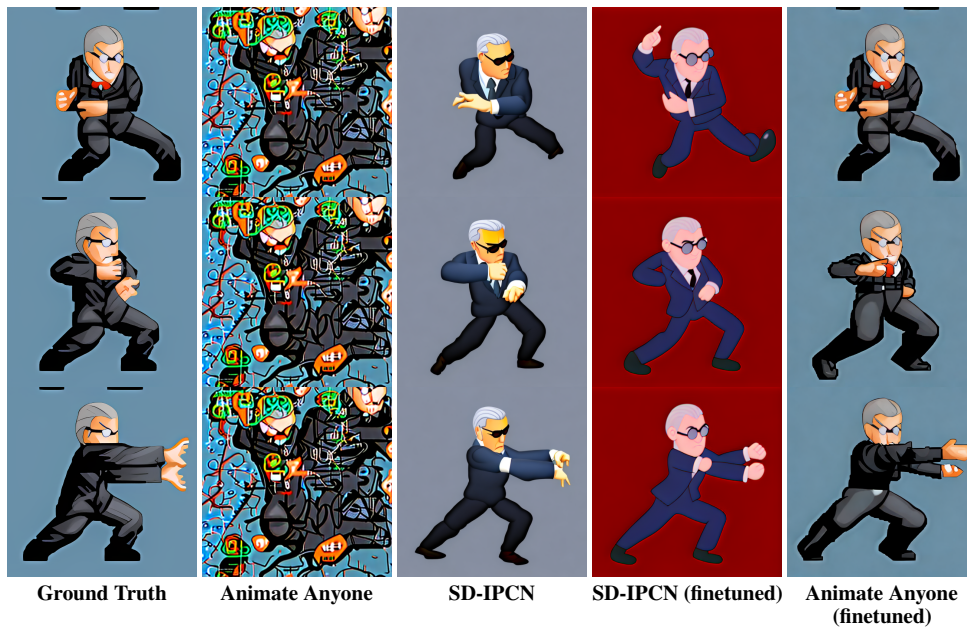


Figure 7: Qualitative Comparison (Out-Sample - Enemies Miscellaneous - Attack)

D Ablation Study

D.1 Quantitative Comparison

Method	SSIM \uparrow	PSNR \uparrow	LPIPS \downarrow	Subject Consistency \uparrow
Pose Guider Only	0.535 ± 0.226	15.716 ± 4.503	0.211 ± 0.132	0.901 ± 0.064
Pose Guider + Unet	0.606 ± 0.238	17.304 ± 5.769	0.165 ± 0.114	0.914 ± 0.058
Stage 1 Only	0.619 ± 0.239	17.883 ± 6.226	0.153 ± 0.108	0.920 ± 0.051
Fully Fine-Tuned	0.659 ± 0.250	18.405 ± 5.280	0.125 ± 0.088	0.901 ± 0.064

Table 4: Ablation Study Results (In-Sample).

Method	SSIM \uparrow	PSNR \uparrow	LPIPS \downarrow	Subject Consistency \uparrow
Pose Guider Only	0.574 ± 0.182	16.966 ± 4.042	0.178 ± 0.099	0.911 ± 0.038
Pose Guider + Unet	0.599 ± 0.169	18.429 ± 5.314	0.158 ± 0.096	0.929 ± 0.035
Stage 1 Only	0.644 ± 0.194	19.491 ± 5.884	0.137 ± 0.091	0.931 ± 0.035
Fully Fine-Tuned	0.655 ± 0.195	18.809 ± 4.806	0.139 ± 0.090	0.893 ± 0.038

Table 5: Ablation Study Results (Out-Sample).

D.2 Qualitative Comparison

D.2.1 In-Sample

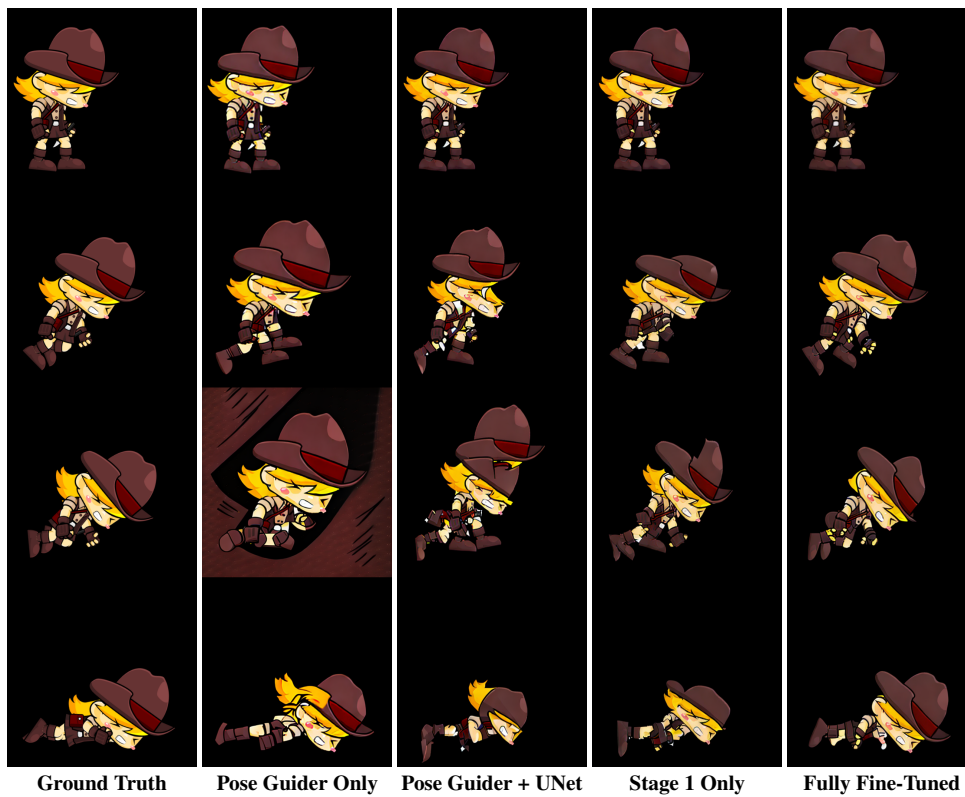


Figure 8: Ablation Study Qualitative Comparison (In-Sample - Adventure Girl - Dead)

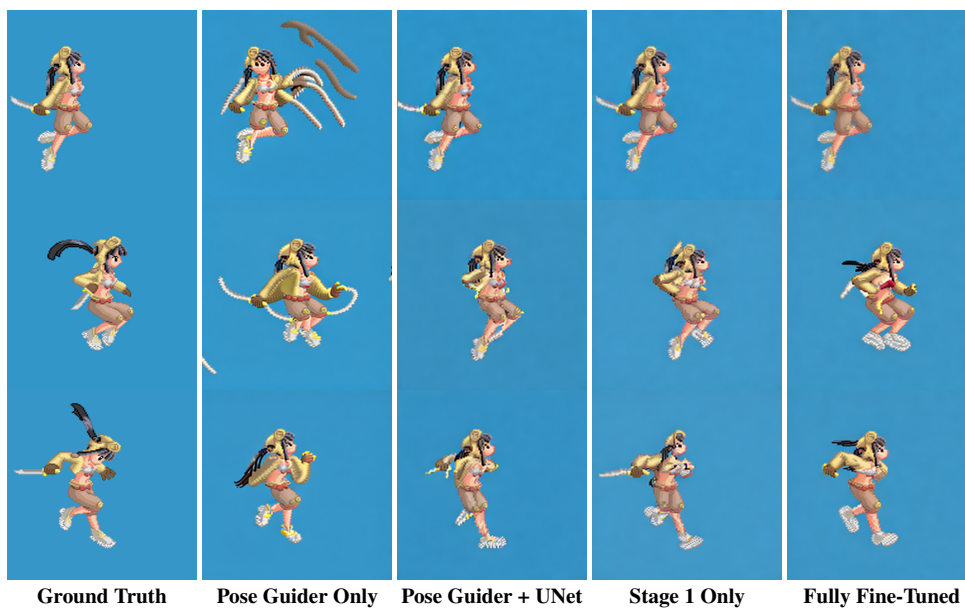


Figure 9: Ablation Study Qualitative Comparison (In-Sample - Thief - Jump)

D.2.2 Out-Sample

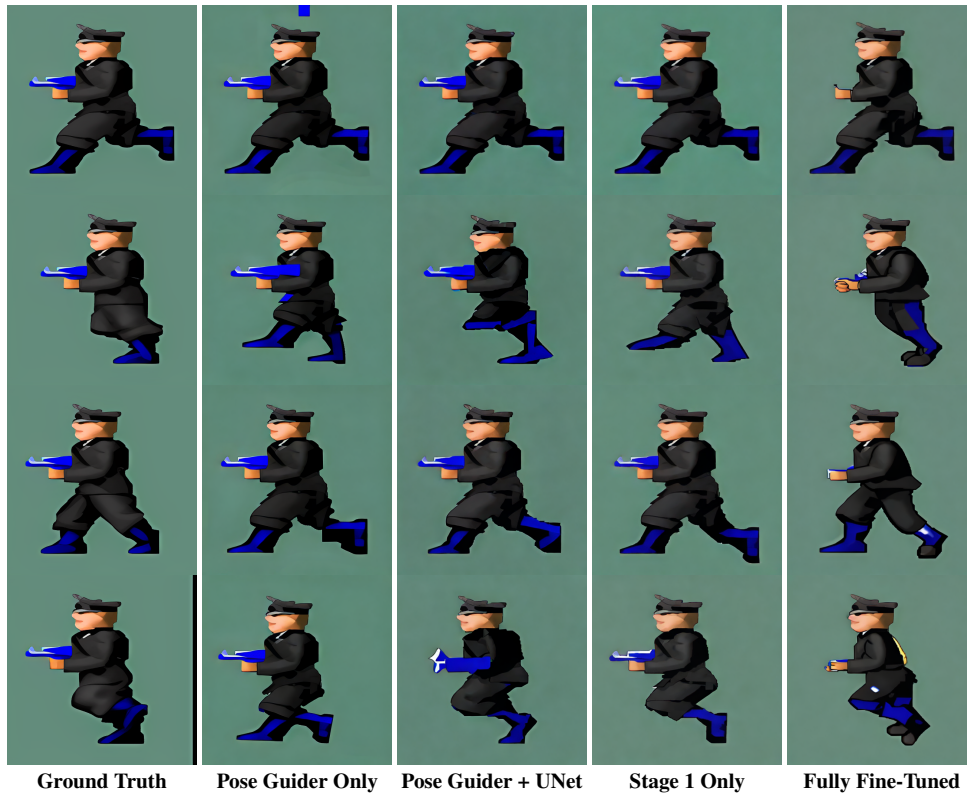


Figure 10: Ablation Study Qualitative Comparison (Out-Sample - SS - Run)

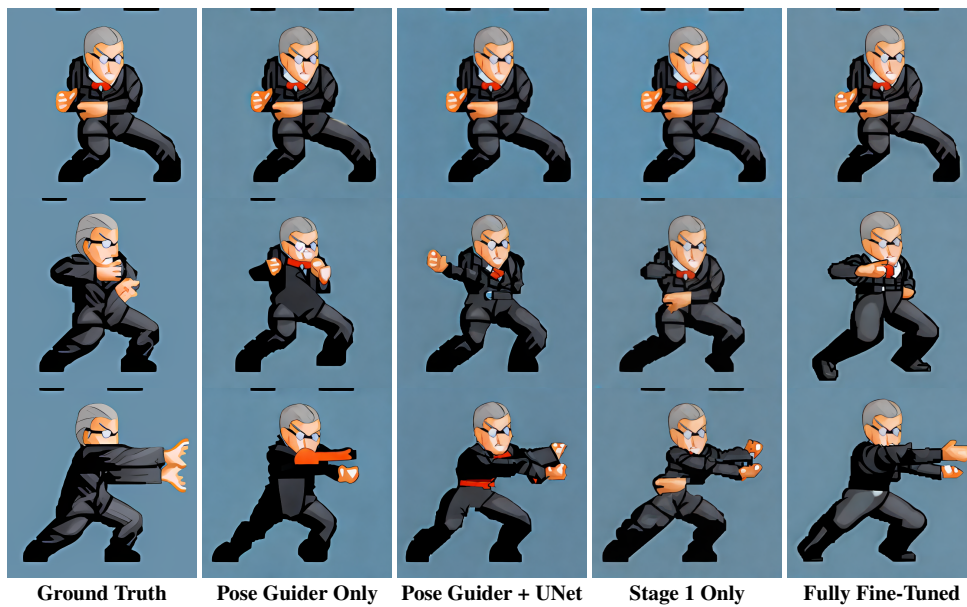


Figure 11: Ablation Study Qualitative Comparison (Out-Sample - Enemies Miscellaneous - Attack)

E Code Overview

E.1 Labeling Pipeline

```
while True:
    print("Please define the motion part rectangle.")
    try:
        # Prompt for y and h only
        y = int(input("Enter y (top coordinate): "))
        h = int(input("Enter height of motion part: "))
    except ValueError:
        print("Invalid input. Please enter integers.")
        continue

    # Crop the image directly based on the entered coordinates
    cropped_image = image.copy().crop((x, y, x + w, y + h))

    # Show the cropped image preview
    plt.imshow(cropped_image)
    plt.axis('off') # Hide axis for a cleaner look
    plt.show()

    confirm = input("Is this selection correct? Type 'ok' to confirm or 'retry' to re-enter: ")
    if confirm.lower() == 'ok':
        break

rows = int(input("How many rows does it have?"))
return x, y, w, h, rows
```

Figure 12: Split sprite sheet into different rows

```
def segment_frames(motion_part, num_rows):
    w, h = motion_part.size
    y_offset = 0
    row_heights = []
    rows = []
    default_height = h // num_rows

    print(f"Total image height: {h}")
    top_height = 0
    bottom_height = default_height
    finish = False
    for row in range(num_rows):
        top_offset = 0
        bottom_offset = 0
        while bottom_height <= h:
            img_copy = motion_part.copy()
            row_image = motion_part.crop((0, top_height + top_offset, w, bottom_height + bottom_offset))
            fig, ax = plt.subplots(1)
            ax.imshow(row_image)
            plt.title(f"Preview of Row {row + 1}")
            plt.show()
            confirm = input("Is this row height correct? Type 'ok' to confirm or 'done' to finish or '' to re-enter: ")
            if confirm.lower() == 'ok':
                rows.append(row_image)
                top_height += default_height
                bottom_height += default_height
                break
            elif confirm.lower() == 'done':
                finish = True
                break
            else:
                try:
                    top_offset = int(input(f"Enter the offset for top coordinate (+/-)"))
                    bottom_offset = int(input(f"Enter the offset for bottom coordinate (+/-)"))
                    temp_top = top_offset + top_height
                    temp_bottom = bottom_height + bottom_offset
                    if temp_top <= 0 or temp_bottom > h:
                        print(f"Invalid height. Your height: ({temp_top}, {temp_bottom}). Must be between 1 and {h}.")
                        top_offset = 0
                        bottom_offset = 0
                        continue
                except ValueError:
                    print("Invalid input. Please enter integers.")
                    continue
```

Figure 13: Adjust height and segment each frame

```

def segment_frames(motion_part, num_rows):
    w, h = motion_part.size
    y_offset = 0
    row_heights = []
    rows = []
    default_height = h // num_rows

    print(f"Total image height: {h}")
    top_height = 0
    bottom_height = default_height
    finish = False
    for row in range(num_rows):
        top_offset = 0
        bottom_offset = 0
        while bottom_height <= h:
            img_copy = motion_part.copy()
            row_image = motion_part.crop((0, top_height + top_offset, w, bottom_height + bottom_offset))
            fig, ax = plt.subplots(1)
            ax.imshow(row_image)
            plt.title(f"Preview of Row {row + 1}")
            plt.show()
            confirm = input("Is this row height correct? Type 'ok' to confirm or 'done' to finish or '' to re-enter: ")
            if confirm.lower() == 'ok':
                rows.append(row_image)
                top_height += default_height
                bottom_height += default_height
                break
            elif confirm.lower() == 'done':
                finish = True
                break
            else:
                try:
                    top_offset = int(input(f"Enter the offset for top coordinate (+/-)"))
                    bottom_offset = int(input(f"Enter the offset for bottom coordinate (+/-)"))
                    temp_top = top_offset + top_height
                    temp_bottom = bottom_height + bottom_offset
                    if temp_top <= 0 or temp_bottom > h:
                        print(f"Invalid height. Your height: ({temp_top}, {temp_bottom}). Must be between 1 and {h}.")
                        top_offset = 0
                        bottom_offset = 0
                        continue
                except ValueError:
                    print("Invalid input. Please enter integers.")
                    continue

```

Figure 14: Crop images and label the human pose for each frame

```

18 # Keypoints for the OpenPose COCO model and their respective colors (in BGR format)
19 keypoints = ["nose", "neck", "right_shoulder", "right_elbow", "right_wrist",
20             "left_shoulder", "left_elbow", "left_wrist", "right_hip",
21             "right_knee", "right_ankle", "left_hip", "left_knee", "left_ankle",
22             "right_eye", "left_eye", "right_ear", "left_ear"]
23
24 # Colors for each keypoint (Hex converted to BGR)
25 keypoint_colors = [
26     (0, 0, 255), (1, 85, 255), (1, 170, 255), (0, 255, 255),
27     (3, 255, 170), (0, 255, 86), (0, 255, 3), (85, 255, 3),
28     (171, 255, 3), (255, 255, 3), (255, 170, 5), (255, 85, 0),
29     (255, 0, 0), (255, 0, 84), (255, 0, 170), (255, 0, 255),
30     (169, 0, 255), (85, 0, 255)
31 ]
32
33 # Skeleton connections and their respective colors (in BGR format)
34 skeleton_with_colors = [
35     ((0, 1), (154, 0, 0)), # neck to nose
36     ((1, 2), (0, 0, 153)), # neck to right shoulder
37     ((1, 5), (1, 51, 153)), # neck to left shoulder
38     ((1, 8), (153, 153, 0)), # neck to right hip
39     ((1, 11), (153, 153, 0)), # neck to left hip
40     ((2, 3), (0, 101, 153)), # right shoulder to right elbow
41     ((3, 4), (0, 153, 153)), # right elbow to right wrist
42     ((5, 6), (0, 153, 101)), # left shoulder to left elbow
43     ((6, 7), (0, 153, 51)), # left elbow to left wrist
44     ((8, 9), (51, 153, 0)), # right hip to right knee
45     ((9, 10), (102, 153, 0)), # right knee to right ankle
46     ((11, 12), (153, 102, 0)), # left hip to left knee
47     ((12, 13), (153, 51, 0)), # left knee to left ankle
48     ((0, 14), (153, 0, 51)), # nose to right eye
49     ((0, 15), (153, 0, 153)), # nose to left eye
50     ((14, 16), (102, 0, 153)), # right eye to right ear
51     ((15, 17), (102, 0, 153)) # left eye to left ear
52 ]
53
54 # Define diameter for keypoints and thickness for limbs
55 point_diameter = 8
56 limb_thickness = point_diameter

```

Figure 15: Follow openpose output's format


```

99 # Define the callback function for mouse click event
100 def on_click(event):
101     global current_keypoint_index
102     if current_keypoint_index < len(keypoints):
103         keypoint_name = keypoints[current_keypoint_index]
104         annotations[keypoint_name] = (event.x, event.y)
105
106         # Display the clicked point
107         canvas.create_oval(event.x - 3, event.y - 3, event.x + 3, event.y + 3, fill="red", outline="")
108         canvas.create_text(event.x, event.y - 10, text=keypoint_name, fill="red")
109
110         current_keypoint_index += 1
111         # Update the instruction label to show the next keypoint name
112         if current_keypoint_index < len(keypoints):
113             instruction_label.config(text=f"Click to annotate: {keypoints[current_keypoint_index]} or press S to skip")
114         else:
115             instruction_label.config(text="All keypoints annotated! You may close the window and save the data.")
116
117 # Bind the click event to the canvas
118 canvas.bind("<Button-1>", on_click)
119 # Bind the skip event to the 'S' key
120 root.bind("<Key-s>", skip_keypoint)
121
122 # Start the Tkinter main loop
123 root.mainloop()
124
125 # Create a black background image
126 black_background = np.zeros((img_pil.height, img_pil.width, 3), dtype=np.uint8)
127
128 # Draw limbs on the black background
129 for (start_end, color) in skeleton_with_colors:
130     start, end = start_end
131     # Check if keypoints have been annotated and not skipped
132     if keypoints[start] in annotations and keypoints[end] in annotations:
133         point_a = annotations[keypoints[start]]
134         point_b = annotations[keypoints[end]]
135         # Draw limb as an ellipse, with short axis equal to the diameter of keypoints
136         center = ((point_a[0] + point_b[0]) // 2, (point_a[1] + point_b[1]) // 2)
137         axis_length = (int(np.linalg.norm(np.array(point_a) - np.array(point_b)) / 2), limb_thickness // 2)
138         angle = np.degrees(np.arctan2(point_b[1] - point_a[1], point_b[0] - point_a[0]))
139         cv2.ellipse(black_background, center, axis_length, angle, 0, 360, color, thickness=-1)
140
141 # Draw keypoints
142 for idx, (keypoint_name, position) in enumerate(annotations.items()):
143     color = keypoint_colors[idx]
144     cv2.circle(black_background, position, point_diameter // 2, color, -1)

```

Figure 16: Use tinker library to hand-draw keypoints and limbs of the pose

E.2 IP-Adpater

```
IP-Adapter > ip_adapter_controlnet_demo_new.ipynb > ...
+ Code + Markdown | ▶ Run All ⌂ Restart Clear All Outputs | Variables Outline ... ip (Python 3.11.9)

# loop through all, first frame as reference, generate all frames at once
import os
from PIL import Image

# Helper function to concatenate images horizontally
def horizontal_concat(images, resize_to=None):
    widths, heights = zip(*(img.size for img in images))
    total_width = sum(widths)
    max_height = max(heights)

    if resize_to:
        images = [img.resize(resize_to) for img in images]

    concat_image = Image.new('RGB', (total_width, max_height))
    x_offset = 0
    for img in images:
        concat_image.paste(img, (x_offset, 0))
        x_offset += img.width
    return concat_image

# Helper function to split a concatenated image back into frames
def split_horizontal_image(image, num_frames, frame_width=512, frame_height=512):
    frames = []
    for i in range(num_frames):
        left = i * frame_width
        right = left + frame_width
        frame = image.crop((left, 0, right, frame_height))
        frames.append(frame)
    return frames

# Paths
base_path = "/home/ubuntu/ssd_high_quality/test/characters"
output_folder_name = "ipadaptor_combinedgenerate"
resize_dim = (512, 512)

# Loop through each character folder
for character_name in os.listdir(base_path):
    character_path = os.path.join(base_path, character_name)
    if not os.path.isdir(character_path):
        continue

    # Loop through each motion folder
    motions_path = os.path.join(character_path, "motions")
    for motion_name in os.listdir(motions_path):
        motion_path = os.path.join(motions_path, motion_name)
        if not os.path.isdir(motion_path):
            continue

        # Paths for ground_truth, poses, and output folders
        ground_truth_path = os.path.join(motion_path, "ground_truth")
        poses_path = os.path.join(motion_path, "poses")
        output_path = os.path.join(motion_path, output_folder_name)

        os.makedirs(output_path, exist_ok=True)
```

```
IP-Adapter > ip_adapter_controlnet_demo_new.ipynb > ...
+ Code + Markdown | ▶ Run All ⏪ Restart ⌵ Clear All Outputs | 📄 Variables 📄 Outline ... ip (Python 3.11.9)
▶ ▾
# Load reference image (first frame in ground_truth)
ref_image_path = os.path.join(ground_truth_path, "frame_1.png")
if not os.path.exists(ref_image_path):
    print(f"Reference image not found: {ref_image_path}")
    continue
ref_image = Image.open(ref_image_path).resize(resize_dim)

# Load all pose images and concatenate them
pose_images = []
for pose_image_name in sorted(os.listdir(poses_path)):
    if not pose_image_name.endswith(".png"):
        continue
    pose_image_path = os.path.join(poses_path, pose_image_name)
    pose_images.append(Image.open(pose_image_path).resize(resize_dim))

if not pose_images:
    print(f"No pose images found in: {poses_path}")
    continue

concat_pose_image = horizontal_concat(pose_images)

# Generate combined output using ipadapter
generated_image = ip_model.generate(
    pil_image=ref_image,
    image=concat_pose_image,
    width=concat_pose_image.width, # Total width of the concatenated image
    height=concat_pose_image.height, # Height remains 512
    num_samples=1,
    num_inference_steps=100,
    seed=42
)[0]

# Split the generated image back into individual frames
num_frames = len(pose_images)
generated_frames = split_horizontal_image(
    generated_image,
    num_frames=num_frames,
    frame_width=resize_dim[0],
    frame_height=resize_dim[1]
)

# Save each frame to the output folder
for i, frame in enumerate(generated_frames, start=1):
    output_image_path = os.path.join(output_path, f"generated_{i}.png")
    frame.save(output_image_path)

print(f"Processed motion: {motion_name} for character: {character_name}")
```

Figure 17: Use Ip-Adapter repo SD-IPCN notebook for testing with out customed dataset

```
IP-Adapter > tutorial_train.py > main
100 def main():
101     def main():
102         args = parse_args()
103         accelerator = Accelerator(mixed_precision=args.mixed_precision)
104         if accelerator.is_main_process:
105             os.makedirs(args.output_dir, exist_ok=True)
106
107         # 初始化 wandb
108         if accelerator.is_main_process:
109             wandb.init(
110                 project="IP-Adapter-ControlNet", # 替换为你的项目名称
111                 config={
112                     "pretrained_model": args.pretrained_model_name_or_path,
113                     "controlnet_model": args.controlnet_model_path,
114                     "image_encoder": args.image_encoder_path,
115                     "batch_size": args.train_batch_size,
116                     "resolution": args.resolution,
117                     "learning_rate": args.learning_rate,
118                     "weight_decay": args.weight_decay,
119                     "num_epochs": args.num_train_epochs,
120                 }
121             )
122
123         vae = AutoencoderKL.from_pretrained(args.pretrained_model_name_or_path, subfolder="vae")
124         unet = UNet2DConditionModel.from_pretrained(args.pretrained_model_name_or_path, subfolder="unet")
125         controlnet = ControlNetModel.from_pretrained(args.controlnet_model_path)
126         noise_scheduler = DDPMScheduler.from_pretrained(args.pretrained_model_name_or_path, subfolder="scheduler")
127         image_encoder = CLIPVisionModelWithProjection.from_pretrained(args.image_encoder_path)
128
129         vae = vae.to(accelerator.device)
130         unet = unet.to(accelerator.device) Loading...
131         controlnet = controlnet.to(accelerator.device)
132         image_encoder = image_encoder.to(accelerator.device)
133
134         image_proj_model = ImageProjModel(
135             cross_attention_dim=unet.config.cross_attention_dim,
136             clip_embeddings_dim=image_encoder.config.projection_dim,
137             clip_extra_context_tokens=4,
138         ).to(accelerator.device)
139
140         attn_procs = {}
141         for name in unet.attn_processors.keys():
142             cross_attention_dim = None if name.endswith("attn1.processor") else unet.config.cross_attention_dim
143             if name.startswith("mid_block"):
144                 hidden_size = unet.config.block_out_channels[-1]
```

```
IP-Adapter > tutorial_train.py > main
100 def main():
144     elif name.startswith("up_blocks"):
145         block_id = int(name[len("up_blocks.")])
146         hidden_size = list(reversed(unet.config.block_out_channels))[block_id]
147     elif name.startswith("down_blocks"):
148         block_id = int(name[len("down_blocks.")])
149         hidden_size = unet.config.block_out_channels[block_id]
150
151     if cross_attention_dim is None:
152         attn_procs[name] = AttnProcessor()
153     else:
154         processor = IPAttnProcessor(
155             hidden_size=hidden_size,
156             cross_attention_dim=cross_attention_dim,
157             scale=1.0,
158             num_tokens=4,
159         )
160         attn_procs[name] = processor.to(accelerator.device)
161
162 unet.set_attn_processor(attn_procs)
163 adapter_modules = torch.nn.ModuleList(list(unet.attn_processors.values()))
164
165 optimizer = torch.optim.AdamW(
166     itertools.chain(
167         image_proj_model.parameters(),
168         adapter_modules.parameters()
169     ),
170     lr=args.learning_rate,
171     weight_decay=args.weight_decay
172 )
173
174 train_dataset = MyDataset(args.data_json_file, size=args.resolution, image_root_path=args.data_root_path)
175 train_dataloader = torch.utils.data.DataLoader(
176     train_dataset,
177     shuffle=True,
178     collate_fn=collate_fn,
179     batch_size=args.train_batch_size,
180     num_workers=args.dataloader_num_workers
181 )
182
183 image_proj_model, adapter_modules, optimizer, train_dataloader = accelerator.prepare(
184     image_proj_model, adapter_modules, optimizer, train_dataloader
185 )
186
187 # tqdm
```

```

IP-Adapter > tutorial_train.py > main
100 def main():
188     for epoch in range(args.num_train_epochs):
189         progress_bar = tqdm(
190             enumerate(train_data_loader),
191             desc=f"Epoch {epoch+1}/{args.num_train_epochs}",
192             total=len(train_data_loader),
193             disable=not accelerator.is_main_process
194         )
195         for step, batch in progress_bar:
196             with accelerator.accumulate(image_proj_model):
197                 reference_images = batch["reference_images"].to(accelerator.device, dtype=torch.float32)
198                 pose_images = batch["pose_images"].to(accelerator.device, dtype=torch.float32)
199                 target_images = batch["target_images"].to(accelerator.device, dtype=torch.float32)
200                 clip_images = batch["clip_images"].to(accelerator.device, dtype=torch.float32)
201
202                 with torch.no_grad():
203                     clip_image_embeds = image_encoder(clip_images).image_embeds
204                     image_prompt_embeds = image_proj_model(clip_image_embeds)
205
206                 with torch.no_grad():
207                     latents = vae.encode(target_images).latent_dist.sample()
208                     latents = latents * vae.config.scaling_factor
209                     noise = torch.randn_like(latents)
210                     timesteps = torch.randint(0, noise_scheduler.config.num_train_timesteps, (latents.size(0),))
211                     noisy_latents = noise_scheduler.add_noise(latents, noise, timesteps)
212
213                     controlnet_output = controlnet(
214                         sample=noisy_latents,
215                         timestep=timesteps,
216                         encoder_hidden_states=image_prompt_embeds,
217                         controlnet_cond=pose_images,
218                         return_dict=False,
219                     )
220
221                     noise_pred = unet(
222                         sample=noisy_latents,
223                         timestep=timesteps,
224                         encoder_hidden_states=image_prompt_embeds,
225                         down_block_additional_residuals=controlnet_output[0],
226                         mid_block_additional_residual=controlnet_output[1],
227                     ).sample
228
229                     loss = F.mse_loss(noise_pred, noise)
230                     accelerator.backward(loss)
231                     optimizer.step()

```

```

IP-Adapter > tutorial_train.py > main
100 def main():
232     optimizer.zero_grad()
233
234     progress_bar.set_postfix({"loss": loss.item()})
235
236     if accelerator.is_main_process:
237         wandb.log({"loss": loss.item()})
238
239     if step % args.save_steps == 0 and accelerator.is_main_process:
240         save_path = os.path.join(args.output_dir, f"checkpoint-{epoch}-{step}")
241         os.makedirs(save_path, exist_ok=True)
242         state_dict = {
243             "image_proj": accelerator.unwrap_model(image_proj_model).state_dict(),
244             "ip_adapter": accelerator.unwrap_model(adapter_modules).state_dict(),
245         }
246         torch.save(state_dict, os.path.join(save_path, "ip_adapter.bin"))
247         print(f"Epoch {epoch}, Step {step}, Loss: {loss.item()}")
248
249     # end wandb
250     if accelerator.is_main_process:
251         wandb.finish()

```

Figure 18: Adapt Ip-Adapter repo train_tutorial.py to finetune with Controlnet

E.3 Animate Anyone

```
def get_batch_wo_pose(self, index):
    unique_id = self.data_dic_name_list[index]
    sample_info = self.data_dic[unique_id]
    flip_horizontal = random.choice([True, False])

    # Ground Truth Images
    ground_truth_paths = sample_info['ground_truth']
    pixel_values = [cv2.imread(path) for path in ground_truth_paths]
    pixel_values = [cv2.cvtColor(img, cv2.COLOR_BGR2RGB) for img in pixel_values]
    pixel_values = [self.contrast_normalization(img) for img in pixel_values]
    if flip_horizontal:
        pixel_values_flip = [cv2.flip(img, 1) for img in pixel_values]
        pixel_values_flip = np.array(pixel_values_flip)
        pixel_values = pixel_values_flip
    else:
        pixel_values = np.array(pixel_values)
        pixel_values_flip = pixel_values
    pixel_values = torch.from_numpy(pixel_values).permute(0, 3, 1, 2).contiguous()
    pixel_values = pixel_values / 255.0 # Normalize to [0,1]

    # Pose Images for Ground Truth
    poses_paths = sample_info['poses']
    pixel_values_pose = [cv2.imread(path) for path in poses_paths]
    pixel_values_pose = [cv2.cvtColor(img, cv2.COLOR_BGR2RGB) for img in pixel_values_pose]
    pixel_values_pose = [self.contrast_normalization(img) for img in pixel_values_pose]
    if flip_horizontal:
        pixel_values_pose_flip = [cv2.flip(img, 1) for img in pixel_values_pose]
        pixel_values_pose_flip = np.array(pixel_values_pose_flip)
        pixel_values_pose = pixel_values_pose_flip
    else:
        pixel_values_pose = np.array(pixel_values_pose)
        pixel_values_pose_flip = pixel_values_pose
    pixel_values_pose = torch.from_numpy(pixel_values_pose).permute(0, 3, 1, 2).contiguous()
    pixel_values_pose = pixel_values_pose / 255.0 # Normalize to [0,1]
```

Figure 19: Randomly flip images

```

os.environ['WANDB_API_KEY'] = 'fb90c4be27e6001e6538acffd2e1314b634d4e7a'
logger = get_logger(__name__, log_level="INFO")

warnings.filterwarnings("ignore")
check_min_version("0.10.0.dev0")

def main(cfg):
    kwargs = DistributedDataParallelKwargs(find_unused_parameters=True)
    unique_id = datetime.datetime.now().strftime("%Y.%m.%d_%H.%M.%S")
    exp_name = cfg.exp_name + "_" + unique_id

    accelerator_config = ProjectConfiguration(
        project_dir=os.path.join(cfg.output_dir, cfg.exp_name),
        automatic_checkpoint_naming=True,
        total_limit=cfg.num_checkpoint_limit,
    )

    accelerator = Accelerator(
        log_with="wandb",
        gradient_accumulation_steps=cfg.solver.gradient_accumulation_steps,
        mixed_precision=cfg.solver.mixed_precision,
        project_config=accelerator_config,
        kwargs_handlers=[kwargs],
    )

```

Figure 20: Wandb as the logging method

```

with open(json_name, 'r') as f:
    data_dic = json.load(f)

data_dic_name_list = []
for character in data_dic['characters']:
    character_name = character['name']
    if character['main_reference']:
        main_reference = os.path.join(data_path, character['main_reference'])
        main_reference_pose = os.path.join(data_path, character['main_reference_pose'])
    else:
        main_reference = None
        main_reference_pose = None
    for motion in character['motions']:
        motion_name = motion['motion_name']
        # check file exists:
        if len(motion['ground_truth']) < 1:
            print(f"Character {character_name}, motion {motion_name}")
            continue
        first_img = motion['ground_truth'][0]
        first_img_path = os.path.join(data_path, first_img)
        if not os.path.exists(first_img_path):
            print(first_img_path)
            continue
        # Create a unique identifier for each (character, motion)
        unique_id = f"{character_name}_{motion_name}"
        data_dic_name_list.append(unique_id)
        # Store the corresponding data
        data_dic[unique_id] = {
            'character_name': character_name,
            'motion_name': motion_name,
            'reference': main_reference,
            'poses': [os.path.join(data_path, img_path) for img_path in motion['poses']],
            'ground_truth': [os.path.join(data_path, img_path) for img_path in motion['ground_truth']],
            'reference_pose': main_reference_pose,
        }

```

Figure 21: Load our dataset


```
elif config.output_format == "image":
    # Save each frame as an image
    num_frames = video.shape[2] # Assuming video shape is (1, c, f, h, w)
    for frame_idx in range(num_frames):
        frame_tensor = video[0, :, frame_idx, :, :] # (c, h, w)
        frame_array = frame_tensor.cpu().numpy()
        frame_array = np.transpose(frame_array, (1, 2, 0)) # (h, w, c)
        frame_array = (frame_array * 255).astype(np.uint8)
        frame_array = cv2.cvtColor(frame_array, cv2.COLOR_RGB2BGR)
        frame_filename = save_dir_pred / f"frame_{(1+frame_idx)}.png"
        cv2.imwrite(str(frame_filename), frame_array)
```

Figure 22: Output the result

E.4 Evaluation and Experimental Design

E.4.1 experiment/eval_img_quality.py

```
import os
import numpy as np
import cv2
import lpips
import argparse
import torchvision.transforms as transforms
from tqdm import tqdm
import pandas as pd
from ssim import SSIM, Image
import PIL.Image

def ssim_score(input_image_path: str, target_image_path: str) -> float:
    """
    Calculate the Structural Similarity Index (SSIM) between two images.
    Higher SSIM score means the images are more similar.
    """
    input_image = Image.open(input_image_path)
    target_image = Image.open(target_image_path)
    score = SSIM(input_image).cw_ssim_value(target_image)
    # print("SSIM Score: ", score)
    return score

def psnr_score(input_image_path: str, target_image_path: str) -> float:
    """
    Calculate the Peak Signal-to-Noise Ratio (PSNR) between two images.
    Higher PSNR score means the images are more similar.
    """
    input_image = cv2.imread(input_image_path)
    target_image = cv2.imread(target_image_path)
    score = cv2.PSNR(input_image, target_image)
    # print("PSNR Score: ", score)
    return score

def lpips_score(input_image_path: str, target_image_path: str, loss_fn: object, transform: object) -> float:
    """
    Calculate the Learned Perceptual Image Patch Similarity (LPIPS) between two images.
    Lower LPIPS score means the images are more similar.
    """
    input_image = transform(PIL.Image.open(input_image_path).convert('RGB')).unsqueeze(0)
    target_image = transform(PIL.Image.open(target_image_path).convert('RGB')).unsqueeze(0)
    score = loss_fn(input_image, target_image).item()

    return score
```

Figure 23: eval_img_quality.py - Part 1

```

def evaluate(input_images_folder: str, target_images_folder: str, lpips_loss_fn: object, lpips_transform: object) -> dict:
    """
    Evaluate the similarity between input and target images using SSIM, PSNR, and LPIPS metrics.
    """
    metrics = {}
    "SSIM": [],
    "PSNR": [],
    "LPIPS": []

    input_files = sorted(os.listdir(input_images_folder))
    target_files = sorted(os.listdir(target_images_folder))

    if len(input_files) != len(target_files):
        raise ValueError("Mismatch in the number of images between input and target folders.")

    with tqdm(total=len(input_files), desc="Processing Images", leave=False) as image_pbar:
        for input_file, target_file in zip(input_files, target_files):
            input_path = os.path.join(input_images_folder, input_file)
            target_path = os.path.join(target_images_folder, target_file)

            metrics["SSIM"].append(ssim_score(input_path, target_path))
            metrics["PSNR"].append(psnr_score(input_path, target_path))
            metrics["LPIPS"].append(lpips_score(input_path, target_path, lpips_loss_fn, lpips_transform))

            image_pbar.update(1)

    return metrics

def summarize_metrics(metrics: dict) -> dict:
    """
    Calculate the average, standard deviation, minimum, and maximum of the given metrics.
    """
    summary = {}
    for metric, scores in metrics.items():
        summary[metric] = {
            "Avg": np.mean(scores),
            "Std": np.std(scores),
            "Min": np.min(scores),
            "Max": np.max(scores),
        }
    return summary

```

Figure 24: eval_img_quality.py - Part 2

```

def save_results(overall_summary: dict, character_motion_summaries: dict, detailed_scores: dict, output_file_path: str) -> None:
    """
    Save the evaluation results to a markdown file.
    """
    overall_summary_df = pd.DataFrame(overall_summary).T
    overall_summary_df.columns = ["Avg", "Std", "Min", "Max"]

    with open(output_file_path, "w") as f:
        # Write overall evaluation results
        f.write("# Overall Evaluation Results\n\n")
        f.write(overall_summary_df.to_markdown())
        f.write("\n\n")

        # Write detailed evaluation results for each character motion
        for character_motion, summary in character_motion_summaries.items():
            f.write(f"## {character_motion}\n\n")
            summary_df = pd.DataFrame(summary).T
            summary_df.columns = ["Avg", "Std", "Min", "Max"]
            f.write(summary_df.to_markdown())
            f.write("\n\n")

        # Write detailed scores for each frame in the motion
        detailed_scores_df = pd.DataFrame(detailed_scores[character_motion])
        f.write(detailed_scores_df.to_markdown(index=False))
        f.write("\n\n")

```

Figure 25: eval_img_quality.py - Part 3

```

if __name__ == "__main__":
    parser = argparse.ArgumentParser(description="Evaluate image similarity metrics and save results.")
    parser.add_argument("--result_dir", type=str, required=True, help="Path to the experiment results directory.")
    parser.add_argument("--reference_img", type=str, required=True, help="Reference image folder name.")
    parser.add_argument("--generated_img", type=str, required=True, help="Generated image folder name.")
    parser.add_argument("--output_file", type=str, required=True, help="Path to the output markdown file.")
    args = parser.parse_args()

    result_dir = args.result_dir
    output_file_path = args.output_file
    reference_img_folder = args.reference_img
    generated_img_folder = args.generated_img

    characters = os.listdir(result_dir)

    overall_metrics = {
        "SSIM": [],
        "PSNR": [],
        "LPIPS": []
    }

    character_motion_summaries = {}
    detailed_scores = {}

    # Initialize LPIPS loss function and transformation
    lpips_loss_fn = lpips.LPIPS(net='alex')
    lpips_transform = transforms.Compose([transforms.ToTensor()])

    with tqdm(characters, desc="Processing Characters") as character_pbar:
        for character in characters:
            character_path = os.path.join(result_dir, character)
            if not os.path.isdir(character_path):
                character_pbar.update(1)
                continue

            motions_path = os.path.join(character_path, "motions")
            motions = os.listdir(motions_path)

            with tqdm(motions, desc=f"Processing Motions for {character}", leave=False) as motion_pbar:
                for motion in motions:
                    ground_truth_path = os.path.join(motions_path, motion, reference_img_folder)
                    generated_img_path = os.path.join(motions_path, motion, generated_img_folder)

                    if not os.path.exists(ground_truth_path) or not os.path.exists(generated_img_path):
                        print(f"Skipping motion '{motion}' for character '{character}' due to missing folders.")
                        motion_pbar.update(1)
                        continue

                    print(f"Evaluating '{motion}' motion for character '{character}'...")
                    metrics = evaluate(ground_truth_path, generated_img_path, lpips_loss_fn, lpips_transform)

                    for metric in overall_metrics.keys():
                        overall_metrics[metric].extend(metrics[metric])

                    summary = summarize_metrics(metrics)
                    character_motion_key = f"{character} - {motion}"
                    character_motion_summaries[character_motion_key] = summary

                    detailed_scores[character_motion_key] = {
                        "Frame": [f"Frame {i+1}" for i in range(len(metrics["SSIM"]))],
                        "SSIM": metrics["SSIM"],
                        "PSNR": metrics["PSNR"],
                        "LPIPS": metrics["LPIPS"]
                    }

                    motion_pbar.update(1)

            character_pbar.update(1)

    overall_summary = summarize_metrics(overall_metrics)
    save_results(overall_summary, character_motion_summaries, detailed_scores, output_file_path)

    print(f"Evaluation completed. Results saved to {output_file_path}")

```

Figure 26: eval_img_quality.py - Part 4

E.4.2 experiment/eval_sub_consistency.py

```
import cv2
import os
import argparse
from tqdm import tqdm
import torch
from vbench import VBench
import json
import pandas as pd

def frames_to_video(frame_dir: str, output_video: str, frame_rate: int = 30) -> None:
    """
    Convert motion frames to a video file.
    """
    # Check if the video already exists
    if os.path.exists(output_video):
        print(f"Video already exists: {output_video}")
        return

    frames_list = sorted([os.path.join(frame_dir, f) for f in os.listdir(frame_dir)])

    # Read the first frame to get video dim
    first_frame = cv2.imread(frames_list[0])
    height, width, _ = first_frame.shape

    # Initialize video writer
    fourcc = cv2.VideoWriter_fourcc(*'mp4v')
    video_writer = cv2.VideoWriter(output_video, fourcc, frame_rate, (width, height))

    # Write frames to video
    print(f"Writing frames from {frame_dir} to video...")
    for frame_file in frames_list:
        frame = cv2.imread(frame_file)
        video_writer.write(frame)

    video_writer.release()
    print(f"Video saved as: {output_video}")
```

Figure 27: eval_sub_consistency.py - Part 1

```
def save_results(json_file: str, readme_file: str) -> None:
    """
    Save evaluation results to a README file.
    """
    # Load the subject consistency result
    with open(json_file, "r") as file:
        data = json.load(file)

    subject_consistency = data["subject_consistency"][0]

    df = pd.DataFrame(subject_consistency)
    df["Character-Motion"] = df["video_path"].apply(lambda x: x.split("/")[-1].replace(".mp4", ""))
    df = df[["Character-Motion", "video_results"]]

    # Calculate overall statistics
    overall_stats = {
        "Subject Consistency": {
            "Avg": df["video_results"].mean(),
            "Std": df["video_results"].std(),
            "Min": df["video_results"].min(),
            "Max": df["video_results"].max()
        }
    }

    with open(readme_file, "w") as readme:
        # Write overall statistics
        readme.write("# Subject Consistency Evaluation\n\n")
        readme.write(f"Subject Consistency | Avg | Std | Min | Max | \n\n")
        readme.write(f"-----|-----|-----|-----|-----| \n\n")
        readme.write(f"({overall_stats['Subject Consistency']['Avg']+0.1,0f} | {overall_stats['Subject Consistency']['Std']+0.1,0f} | {overall_stats['Subject Consistency']['Min']+0.1,0f} | {overall_stats['Subject Consistency']['Max']+0.1,0f}) \n\n")

        # Write detailed results
        readme.write("# Detailed Results\n\n")
        readme.write(f"Character-Motion | Result | \n\n")
        readme.write(f"-----|-----| \n\n")
        for _, row in df.iterrows():
            readme.write(f"({row['Character-Motion']+0.2} | {row['video_results']+0.1,0f}) \n\n")

    print(f"Results saved to: {readme_file}")
```

Figure 28: eval_sub_consistency.py - Part 2

```

if __name__ == "__main__":
    parser = argparse.ArgumentParser(description="Evaluate subject consistency in generated frames.")
    parser.add_argument("--result_dir", type=str, required=True, help="Path to the experiment results directory.")
    parser.add_argument("--generated_img", type=str, required=True, help="Generated image folder name.")
    parser.add_argument("--output_video_dir", type=str, required=True, help="Directory to save output videos.")
    parser.add_argument("--eval_dir", type=str, required=True, help="Directory to save evaluation results.")
    parser.add_argument("--tag", type=str, required=True, help="Tag for the evaluation results.")
    args = parser.parse_args()

    generated_img_folder = args.generated_img
    output_video_dir = args.output_video_dir
    result_dir = args.result_dir
    tag = args.tag
    eval_dir = args.eval_dir

    os.makedirs(output_video_dir, exist_ok=True)
    characters = os.listdir(result_dir)

    evaluate_lists = []

    device = torch.device("cuda" if torch.cuda.is_available() else "cpu")
    eval_sub_consistency = VBench(device, "VBench_full_info.json", eval_dir)

    with tqdm(characters, desc="Processing Characters") as character_pbar:
        for character in characters:
            character_path = os.path.join(result_dir, character)
            if not os.path.isdir(character_path):
                character_pbar.update(1)
                continue

            motions_path = os.path.join(character_path, "motions")
            motions = os.listdir(motions_path)

            with tqdm(motions, desc=f"Processing Motions for {character}", leave=False) as motion_pbar:
                for motion in motions:
                    generated_img_path = os.path.join(motions_path, motion, generated_img_folder)

                    if not os.path.exists(generated_img_path):
                        print(f"Skipping motion '{motion}' for character '{character}' due to missing folders.")
                        motion_pbar.update(1)
                        continue

                    output_video_path = os.path.join(output_video_dir, f"{character}_{motion}.mp4")
                    frames_to_video(generated_img_path, output_video_path)
                    # evaluate_lists.append(output_video_path)

                    motion_pbar.update(1)

            character_pbar.update(1)

    eval_sub_consistency.evaluate(output_video_dir, name=tag, dimension_list=["subject_consistency"], mode="custom_input")

    # Save evaluation results to MARKDOWN file
    save_results(os.path.join(eval_dir, f"{tag}_eval_results.json"), os.path.join(eval_dir, f"RESULTS_sub_consistency_{tag}.md"))

```

Figure 29: eval_sub_consistency.py - Part 3

F Appendix: Detailed Timeline and Task Breakdown

Task Category	Task Description	Time Spent (hrs)
Reading Papers/Dataset Websites	<ul style="list-style-type: none"> - Exploring literature on diffusion-based image and video generation. - Researching existing datasets (SpriteDatabase, GameArt2D). 	12
Reading Code Documentation	<ul style="list-style-type: none"> - Understanding IP-Adapter’s code - Reviewing AniPortrait and Animate Anyone repositories. 	12
Dataset Creation	<ul style="list-style-type: none"> - Writing labeling pipeline for action sequences from sprite sheets. - Annotating poses using DW-Pose and OpenPose, and manually annotating challenging cases. - Annotating GameArt2D sprites and supplementing dataset with non-human sprites. 	50
Understanding Existing Code	<ul style="list-style-type: none"> - Studying IP-Adapter’s testing notebook and training logic. - Analyzing Pose Guider modifications in AniPortrait and Moore-Animate Anyone. 	14
Modifying Existing Code	<ul style="list-style-type: none"> - Adapting IP-Adapter’s training script for pose-conditioned tasks. - Adding dataset loading, augmentation, and inference functions to Animate Anyone. - Run training experiments 	30
Writing Scripts for Experiments	<ul style="list-style-type: none"> - Writing scripts for training and evaluation of IP-Adapter and Animate Anyone. - Implementing dataset augmentation and evaluation pipelines. 	8
Running Experiments	<ul style="list-style-type: none"> - Testing frame generation strategies with IP-Adapter. - Conducting ablation studies. 	12
Compiling Results	<ul style="list-style-type: none"> - Analyzing and visualizing evaluation metrics (SSIM, PSNR, LPIPS). - Calculating Subject Consistency Scores. - Summarizing results for ablation study. 	12
Writing Report	<ul style="list-style-type: none"> - Documenting project phases, methodology, and findings. - Preparing detailed timeline and writing key sections. 	18
Preparing Presentation and Paper	<ul style="list-style-type: none"> - Designing and writing the project paper. - Preparing slides and rehearsing presentation. 	15
Total Hours		183

Table 6: Detailed timeline and task breakdown.