

Recursively Extended Permutation Codes under Chebyshev Distance

Tomoya Hirobe, *Non-Member, IEEE*, and Kenta Kasai, *Member, IEEE*

Abstract

This paper investigates the construction and analysis of permutation codes under the Chebyshev distance. The direct product group permutation (DPGP) codes, introduced independently by Kløve et al. and Tamo et al., represent the best-known permutation codes in terms of both size and minimum distance. These codes possess algebraic structures that facilitate efficient encoding and decoding algorithms. In particular, this study focuses on recursively extended permutation (REP) codes, which were also introduced by Kløve et al. We examine the properties of REP codes and prove that, in terms of size and minimum distance, the optimal REP code is equivalent to the DPGP codes. Furthermore, we present efficient encoding and decoding algorithms for REP codes.

Index Terms

permutation codes, Chebyshev distance, ℓ_∞ distance, recursively extended permutation codes

I. INTRODUCTION

In this paper, we explore the subject of *permutation codes*, which are subsets of all permutations of a fixed length n . The concept of permutation codes originated in the 1960s [1]. Vinck et al. later applied permutation codes to power-line communication and m -ary frequency shift keying (FSK) modulation systems [2], [3], renewing interest in permutation codes [4], [5], [6]. In m -ary FSK systems, individual frequencies are assigned to time slots to represent permutation symbols. The use of time and frequency diversity helps reduce the impact of various types of noise, such as background noise, impulse noise, and persistent frequency interference commonly seen in power-line communication systems.

For multilevel flash memory applications, the ℓ_∞ norm, known as the Chebyshev distance, is effective for managing issues related to recharging and error correction. Among the distance metrics employed for permutation codes, Chebyshev distance has been thoroughly examined, covering aspects like the Gilbert–Varshamov bound and ball-packing bound [7], [8], [9], efficient encoding and decoding algorithms [10], [7], and systematic code construction methods [11], [12].

T. Hirobe was with Department of Information and Communications Engineering, School of Engineering, Tokyo, 152-8550 Japan.

K. Kasai was with Department of Information and Communications Engineering, School of Engineering, Tokyo, 152-8550 Japan.

Kløve et al. [10, Sec. III.A] and Tamo et al. [7, Construction 1] independently introduced a construction of permutation codes based on the Chebyshev distance. In [7], the coordinates are partitioned into $\mathbb{Z}/d\mathbb{Z}$, and the construction is viewed as a direct product of sub-groups over the symmetric group \mathcal{S}_n , with d symmetric groups acting as constituent groups. Based on this framework, these codes are termed direct product group permutation (DPGP) codes in this paper. Efficient algebraic encoding and decoding algorithms for DPGP codes have been proposed [7], [10].

DPGP codes demonstrate strong asymptotic normalized minimum distance for permutation codes. As far as the authors are aware, DPGP codes provide the largest code size for a given code length and minimum distance [7, Fig. 1], except for codes derived using the methods from the Gilbert–Varshamov (GV) bound proof [7, Thm. 26] and short-length codes obtained through greedy algorithms [10, Sec. IV.B]. DPGP codes form the foundation for various extended code constructions and are thus of significant importance. For example, [7, Construction 2] extends DPGP codes, while [11] employs right coset codes of (n, M, d) DPGP codes in \mathcal{S}_n to construct an alternative structured permutation code distinct from the one proposed in [13].

Kløve et al. introduced code extension methods in [10, Sec. III.C], referred to here as recursively extended codes (REP). When a code is extended, its size increases by a factor of q , with q distinct leading elements. For the case $q = 2$, a simple encoding and decoding method was designed [10, Sec. III.C]. Because the factor graph connecting the input and output of this encoder forms a tree, MAP decoding becomes feasible using this graph. Kawasumi and Kasai enhanced decoding performance by concatenating this code with LDPC codes [14], [15]. However, for the general case with $q > 2$, no specific encoding and decoding scheme has been proposed.

The rest of this paper is organized as follows. Section II introduces the necessary notation and fundamental concepts related to the construction of general permutation codes and DPGP codes. Section III describes the properties of extended codes and provides several lemmas that will be used in the proofs in subsequent sections. Section IV discusses REP code properties and presents key theorems regarding optimal REP codes. Section V covers encoding algorithms for REP codes, including both natural and recursive methods, and introduces decoding methods for optimal REP codes.

II. NOTATION AND PRELIMINARIES

For a positive integer n , we define $[n]$ as the set $\{0, 1, \dots, n-1\}$. We denote the set $\{x_0, \dots, x_{n-1}\}$ by $\{x_j\}_{j=0}^{n-1}$, or simply by $\{x_j\}$ when the context makes the range of j clear. We denote the array (x_0, \dots, x_{n-1}) by x_0^{n-1} .

Let \mathcal{S}_n be the symmetric group on $[n]$. More precisely, let $\mathcal{S}_{[n]}$, or simply \mathcal{S}_n , denote the set of permutations over $[n]$, which can be defined as the set of bijective functions $f : [n] \rightarrow [n]$. To represent a permutation $f \in \mathcal{S}_n$ as an array, we use $\underline{f} = [f(0), \dots, f(n-1)]$. Let us represent arrays with an underlined variable such as \underline{x} . We write the j -th element of the array \underline{x} as an array of square brackets: $x_j: \underline{x} = [x_0, x_1, \dots, x_{n-1}]$.

A subset $C \subset \mathcal{S}_n$ of the symmetric group \mathcal{S}_n is called a *permutation code* of length n , or simply a code of length n . The elements of C are called *codewords*. Let C be a code of length n with $C \subset \mathcal{S}_n$, and let \underline{c} and \underline{c}' be two codewords in C . The Chebyshev distance between \underline{c} and \underline{c}' is defined as $d_\infty(\underline{c}, \underline{c}') = \max_{j \in [n]} |c_j - c'_j|$. The minimum distance between different codewords in C is referred to as the minimum distance of C and is denoted by $d_\infty(C)$:

$d_\infty(C) := \min_{\underline{c}, \underline{c}' \in C: \underline{c} \neq \underline{c}'} d_\infty(\underline{c}, \underline{c}')$. For a code C containing only one codeword, the minimum distance is defined as infinity. We call a code $C \subset \mathcal{S}_n$ and (n, M, d) code if C is of length n , of size M and of minimum distance at least d .

A. Direct Product Group Permutation Codes

In this section, we review a simple permutation code independently discovered by Kløve et al. [10, Explicit Construction] and Tamo et al. [7, Construction 1]. In this paper, we will refer to the codes as *direct product group permutation* (DPGP) codes based on the properties of the fact described below [7]. The DPGP code G of length n and minimum distance d is defined as a set of permutations $(\pi_0, \dots, \pi_{n-1}) \in \mathcal{S}_n$ that satisfy the following condition: $\pi_i \equiv i \pmod{d}$ for all $i \in [n]$. Let A_i be the set of integers in $[n]$ congruent to i modulo d . For all $i \in [d]$, we define A_i as follows: $A_i = (d\mathbb{Z} + i) \cap [n] = \{j \in [n] \mid j \equiv i \pmod{d}\}$. Then, we can express G as the direct product of symmetric groups on A_i : $G = \mathcal{S}_{A_0} \times \mathcal{S}_{A_1} \times \dots \times \mathcal{S}_{A_{d-1}}$. The size of A_i is $\lfloor \frac{n}{d} \rfloor$ when $i \geq (n \bmod d)$, and $\lceil \frac{n}{d} \rceil$ when $i < (n \bmod d)$. Consequently, the size of the code $|G| = |A_0| \cdots |A_{d-1}|$ can be expressed as $|G| = (\lceil \frac{n}{d} \rceil!)^{n \bmod d} (\lfloor \frac{n}{d} \rfloor!)^{d - (n \bmod d)}$. This expression simplifies to $|G| = \left(\frac{n!}{d!}\right)^d$ when d divides n .

We offer an alternative expression for $|G|$. The size of G can be represented as the product of n factors, as shown below: $|G| = \prod_{j=0}^{n-1} (\lfloor j/d \rfloor + 1)$. Now, let us proceed with proving this. First, express n in terms of the quotient q and remainder r when divided by d , i.e., $n = qd + r$. The product $\prod_{j=0}^{n-1} \left(\lfloor \frac{j}{d} \rfloor + 1\right)$ can be rewritten as follows:

$$\begin{aligned} & \prod_{j=0}^{qd-1} (\lfloor j/d \rfloor + 1) \times \prod_{j=qd}^{qd+r-1} (\lfloor j/d \rfloor + 1). \\ &= \prod_{p=0}^{q-1} \prod_{s=0}^{d-1} \left(\left\lfloor \frac{pd+s}{d} \right\rfloor + 1\right) \times \prod_{s=0}^{r-1} \left(\left\lfloor \frac{qd+s}{d} \right\rfloor + 1\right) \\ &= \left(\prod_{p=0}^{q-1} (p+1)^d\right) \times (q+1)^r \\ &= \underbrace{(1 \cdots 1)}_{d \text{ times}} \underbrace{(2 \cdots 2)}_{d \text{ times}} \cdots \underbrace{(q \cdots q)}_{d \text{ times}} \times (q+1)^r \\ &= (q!)^d \times (q+1)^r \\ &\stackrel{(a)}{=} (\lceil n/d \rceil!)^r (\lfloor n/d \rfloor!)^{d-r} = |G|. \end{aligned}$$

The validity of (a) becomes evident upon considering that $\lceil j/d \rceil$ is $\lfloor n/d \rfloor$ if $r = 0$ and is $\lfloor n/d \rfloor + 1$, otherwise.

III. CODE EXTENSION

In Section [10, III. C], Kløve et al. introduced the concept of code extension. In this section, we provide a comprehensive overview of these codes, followed by a discussion of their encoding methods in the subsequent section. The properties of code extension detailed here are either directly derived from or previously established in [10]. While the original work in presents several valuable insights regarding code extension, its presentation is somewhat fragmented, making it challenging to cite relevant points clearly. Therefore, the goal of this section is to systematically consolidate the key findings on code extension. By organizing the material in a more cohesive manner, we aim to

clarify the relationships and properties associated with code extension, enabling a more straightforward understanding and application of these ideas in further research.

A. Definition

The concept of an *extension of a permutation* was introduced in [10, Section III.C]¹. Let $\underline{\pi} = (\pi_0, \dots, \pi_{n-1}) \in \mathcal{S}_n$ be a permutation of length $n \geq 1$. The *extended permutation* of $\underline{\pi}$ with a *head* $s \in [n + 1]$ is defined as a permutation of length $n + 1$:

$$\underline{\pi}^s := [s, \pi_0^s, \pi_1^s, \dots, \pi_{n-1}^s], \quad (1)$$

where $x^s := \phi_s(x) := x + \mathbb{1}[x \geq s]$. Here, the indicator function $\mathbb{1}[P]$ equals 1 if the proposition P is true, and 0 otherwise.

Next, we introduce the extension of permutation codes. For $C \subset \mathcal{S}_n$ and a set $S \subset [n + 1]$, which we refer to as the *head set*, the *extended code* with head set S is defined by

$$C^S := \{\underline{\pi}^s \in \mathcal{S}_{n+1} \mid s \in S, \underline{\pi} \in C\}.$$

Since C^S is empty if S is empty, we assume throughout this paper, unless otherwise noted, that the head set is non-empty. This code is the set of permutations obtained by extending each codeword $\underline{\pi} \in C$ with a head $s \in S$.

To facilitate a more concise definition, we introduce a formal codeword of length zero, denoted as $\underline{\varepsilon}$, which satisfies the condition:

$$\underline{\varepsilon}^0 = [0].$$

For a subset $S \subset [n + 1]$, we define the *minimum distance* of S as the smallest difference between distinct elements, formally given by:

$$d_{\min}(S) \stackrel{\text{def}}{=} \min\{|s - s'| : s, s' \in S, s \neq s'\}.$$

For sets containing only a single distinct element, the minimum distance is defined to be ∞ .

Example 1. The extended codeword of [0123] with head 2 is $[0123]^2 = [20134]$. For $C = \{[0123]\}$ and $S = \{0, 2, 4\}$, we have $C^S = \{[01234], [20134], [40123]\}$.

B. Some Properties on Extensions

In this section, we derive several useful properties related to extensions for $n \geq 1$.

Lemma 1. For $\pi, \sigma \in [n]$ and $s \in [n + 1]$, i) $\pi < \sigma$ implies $\pi^s < \sigma^s$. ii) $\pi \leq \sigma$ implies $\pi^s \leq \sigma^s$.

¹Note that the definition provided in [10, Section III.C] contains a minor error, using a strict inequality, specifically defining $\phi_s(x) := x + \mathbb{1}[x > s]$. This formulation fails to yield a valid permutation for the subsequently defined $\underline{\pi}^s$.

Proof: i). In the case where $s \leq \pi < \sigma$: $\pi^s = \pi + 1 < \sigma + 1 = \sigma^s$. In the case where $\pi < \sigma < s$: $\pi^s = \pi < \sigma = \sigma^s$. In the case where $\pi < s \leq \sigma$: $\pi^s = \pi < \sigma + 1 = \sigma^s$. From i) and the fact that $\pi^s = \sigma^s$ when $\pi = \sigma$, ii) is evident. ■

The following theorem gives a lower bound on $|S|$ in terms of $d_{\min}(S)$.

Theorem 1. For any subset $S \subset [n + 1]$ such that $d_{\min}(S) \geq d$, the following inequality holds: $d(|S| - 1) \leq n$. From this, it follows that: $|S| \leq \lfloor \frac{n}{d} + 1 \rfloor$. Conversely, by setting $S = \{0, d, 2d, \dots, (|S| - 1)d\} \subset [n + 1]$, we achieve $|S| = \lfloor \frac{n}{d} + 1 \rfloor$ and $d_{\min}(S) = d$.

Proof: Consider the set of integers with the following inclusion:

$$\{s_1\} \cup \bigcup_{i=1}^{|S|-1} (s_i, s_{i+1}] \subset [n + 1]$$

Each constituent set on the left-hand side is disjoint. Considering the sizes of both sides, we have:

$$1 + \sum_{i=1}^{|S|-1} |(s_i, s_{i+1}]| \leq n + 1$$

Moreover, since $d \leq |s_i - s_{i+1}| = |(s_i, s_{i+1}]|$, it follows that:

$$1 + d(|S| - 1) \leq 1 + \sum_{i=1}^{|S|-1} |(s_i, s_{i+1}]| \leq n + 1$$

This concludes the proof. ■

Example 2. For $n = 5$, $S = \{0, 3, 5\}$, we have $d_{\min}(S) = 2$, $|S| = 3$, $\lfloor (n + 1)/d_{\min}(S) + 1 \rfloor = \lfloor 5/2 + 1 \rfloor = 3$. For $n = 6$, $S = \{0, 3, 6\}$, we have $d_{\min}(S) = 2$, $|S| = 3$, $\lfloor (n + 1)/d_{\min}(S) + 1 \rfloor = \lfloor 6/3 + 1 \rfloor = 3$.

Lemma 2. For a permutation $\underline{\pi} \in \mathcal{S}_n$ and $s, t \in [n + 1]$, we have:

$$d_{\infty}(\underline{\pi}^s, \underline{\pi}^t) = |s - t|.$$

Proof: The result is clear when $s = t$, as both sides are zero. Now, consider the case when $s \neq t$. We have $d_{\infty}(\underline{\pi}^s, \underline{\pi}^t) = \max_{j \in [n+1]} |(\underline{\pi}^s)_j - (\underline{\pi}^t)_j| = \max\{|s - t|, |\pi_j^s - \pi_j^t| \text{ for } j \in [n]\} = |s - t|$. ■

Lemma 3. For $n > 0$, $s \in [n + 1]$, and $\pi, \sigma \in [n]$, we have:

$$|\pi^s - \sigma^s| = |\pi - \sigma| + \mathbb{1}[s \in (\pi, \sigma]].$$

Proof: The following equation provides the proof for the claim. $|\pi^s - \sigma^s| = |\phi_s(\pi) - \phi_s(\sigma)| = |(\pi - \sigma) + (\mathbb{1}\{\pi \geq s\} - \mathbb{1}\{\sigma \geq s\})| = |\pi - \sigma| + \mathbb{1}[\sigma < s \leq \pi \text{ or } \pi < s \leq \sigma] = |\pi - \sigma| + \mathbb{1}[s \in (\pi, \sigma]]$. ■

Lemma 4. Let C be a code of length n . For distinct codewords $\underline{\pi}, \underline{\sigma} \in C$ and $s \in [n + 1]$, it holds that $d_{\infty}(\underline{\pi}, \underline{\sigma}) \leq d_{\infty}(\underline{\pi}^s, \underline{\sigma}^s) \leq d_{\infty}(\underline{\pi}, \underline{\sigma}) + 1$.

Proof: The 0-th element of both $\underline{\pi}^s$ and $\underline{\sigma}^s$ is s . From Lem. (1), we have $d_{\infty}(\underline{\pi}^s, \underline{\sigma}^s) = \max_{j \in [n+1]} |\pi_j^s - \sigma_j^s|$. From Lem. 3, it follows that $|\pi_j - \sigma_j| \leq |\pi_j^s - \sigma_j^s| \leq |\pi_j - \sigma_j| + 1$. The equality in the second inequality holds if and only if $s \in (\pi_j^s, \sigma_j^s]$. Taking the maximum over all $j \in [n]$, we derive the assertion of the lemma. ■

Lemma 5 (ϕ is expansive w.r.t. its second argument). For a permutation code C of length n and a subset $S \subset [n + 1]$, for arbitrary $\underline{\pi}, \underline{\sigma} \in C$ and $s, t \in S$, the following inequality holds true: $d_\infty(\underline{\pi}^s, \underline{\sigma}^t) \geq |s - t|$. Equality holds when $\underline{\pi} = \underline{\sigma}$.

Proof: The claim is evident from the following inequality:

$$d_\infty(\underline{\pi}^s, \underline{\sigma}^t) = \max_{j \in [n+1]} |(\underline{\pi}^s)_j - (\underline{\sigma}^t)_j| \geq |(\underline{\pi}^s)_0 - (\underline{\sigma}^t)_0| = |s - t|.$$

From Lem. 2, it is clear that equality holds when $\underline{\pi} = \underline{\sigma}$. ■

Lemma 6. $\phi : (\mathcal{S}_n \times [n + 1]) \rightarrow \mathcal{S}_{n+1}$ is a one-to-one mapping.

Proof: It is sufficient to show $(\underline{\pi}, s) \neq (\underline{\sigma}, t)$ implies $\underline{\pi}^s \neq \underline{\sigma}^t$. First, let's consider the case when $s \neq t$. From Lem. 5, $s \neq t$ implies $\underline{\pi}^s \neq \underline{\sigma}^t$. Next, let's consider the case when $\underline{\pi} \neq \underline{\sigma}$ and $s = t$. There exists $i \in [n]$ such that $\pi_i \neq \sigma_i$. According to Lem. 3, we have $|\phi_s(\pi_i) - \phi_s(\sigma_i)| \geq |\pi_i - \sigma_i|$, which in turn implies $\underline{\pi}^s \neq \underline{\sigma}^t$. ■

From these lemmas, the following theorem is immediately derived.

Theorem 2. For a code C of length n and a subset $S \subset [n + 1]$, we have: $|C^S| = |C| \times |S|$.

C. Lower Bounds on Minimum Distance Through Extension

In this section, we provide several lower bounds on minimum distance through extension.

Theorem 3. For any permutation code $C \subset \mathcal{S}_n$ and any head set $S \subset [n + 1]$,

$$d_{\min}(C^S) \geq \min(d_{\min}(S), d_{\min}(C))$$

Proof: First, consider the case where $|S| = 1$, for which $d_{\min}(S) = \infty$. Let $S = \{s\}$. Any distinct pair of codewords from C^S can be expressed as $(\underline{\pi}^s, \underline{\sigma}^s)$, with $\underline{\pi}$ and $\underline{\sigma}$ being distinct elements of C . We then have $d_\infty(\underline{\pi}^s, \underline{\sigma}^s) \stackrel{(a)}{\geq} d_\infty(\underline{\pi}, \underline{\sigma}) \geq d_{\min}(C)$, which leads to the inequality $d_{\min}(C) = \min\{d_{\min}(S), d_{\min}(C)\}$. The result follows from Lemma 4 as used in (a).

Now, consider the case where $|S| \geq 2$. For any distinct codewords $\underline{\pi}^s \neq \underline{\sigma}^t \in C^S$, we aim to show that $d_\infty(\underline{\pi}^s, \underline{\sigma}^t) \geq \min(d_{\min}(S), d_{\min}(C))$. We examine the following two cases:

- If $s \neq t$: From Lemma 5, we know that $d_\infty(\underline{\pi}^s, \underline{\sigma}^t) \geq |s - t| \geq d_{\min}(S)$.
- If $\underline{\pi} \neq \underline{\sigma}$ and $s = t$: According to Lemma 4, for distinct $\underline{\pi}$ and $\underline{\sigma}$ in C , we have $d_\infty(\underline{\pi}^s, \underline{\sigma}^s) \geq d_\infty(\underline{\pi}, \underline{\sigma}) \geq d_{\min}(C)$.

In either case, it follows that $d_\infty(\underline{\pi}^s, \underline{\sigma}^t) \geq \min\{d_{\min}(S), d_{\min}(C)\}$. ■

The following theorem provides sufficient conditions on C and S to construct an extended code C^S while ensuring the minimum distance remains at least d .

Theorem 4 ([10, Theorem 4]). For a code C of length n and a subset $S \subset [n + 1]$, the following holds: $d_{\min}(S) \geq d$ and $d_{\min}(C) \geq d$ implies $d_{\min}(C^S) \geq d$.

Proof: The assumption is equivalent to $\min(d_{\min}(S), d_{\min}(C)) \geq d$. By applying Theorem 3, we conclude that $d_{\min}(C^S) \geq d$. ■

D. Upper Bounds on Minimum Distance Through Extension

The following two theorems give upper bound of the minimum distance of the extended code.

Theorem 5 (Upper bound on $d_{\min}(C^S)$). Let C be a code of length n and $S \subset [n + 1]$ be a head set.

$$d_{\min}(C^S) \leq d_{\min}(S).$$

Proof: If $|S| = 1$, the claim of the theorem would be $d_{\infty}(C^S) \leq \infty$, which renders the claim meaningless. Therefore, we consider the case where $|S| \geq 2$. It suffices to show that there exists a pair of codeword C^S , whose distance is $d_{\min}(S)$. Select $s, t \in S$ such that $|s - t| = d_{\min}(S)$. For any $\underline{\pi} \in C$, by Lem. 2, we have $d_{\infty}(\underline{\pi}^s, \underline{\pi}^t) = |s - t| = d_{\min}(S)$. ■

Theorem 6. Let C be a code of length n and $S \subset [n + 1]$ be a head set. Then, it holds that $d_{\infty}(C^S) \leq d_{\min}(C) + 1$.

Proof: When $|C| = 1$, $d_{\min}(C) = \infty$, so the claim is true. Consider the case where $|C| \geq 2$. It is sufficient to show that there exists a pair of codewords in C^S whose distance is less than or equal to $d_{\min}(C) + 1$. Select distinct $\underline{\pi}, \underline{\sigma} \in C$ such that $d_{\infty}(\underline{\pi}, \underline{\sigma}) = d_{\min}(C)$. From Lemma 6, we observe that for any $s \in S$, $\underline{\pi}^s$ and $\underline{\sigma}^s$ are distinct codewords in C^S . Hence, it follows that $d_{\infty}(\underline{\pi}^s, \underline{\sigma}^s) \stackrel{4}{\leq} d_{\infty}(\underline{\pi}, \underline{\sigma}) + 1 = d_{\min}(C) + 1$, where the inequality is derived using Lemma 4. ■

For $C \subset \mathcal{S}_n$ and $S \subset [n + 1]$, consider the extension $C \rightarrow C^S$. When $|S| = 1$, the size remains unchanged after the extension, i.e., $|C| = |C^S|$, as stated in Theorem 2. Such an extension is referred to as *size-preserving*. In cases where $|C| < |C^S|$, the extension is called *size-increasing*. If $d_{\min}(C) < d_{\min}(C^S)$, we describe the extension as distance-increasing.

We provide an example of an extension that is both size-preserving and distance-increasing.

Example 3. Let $C = \{0123, 3012\}$ and $S = \{1\}$. Then, $C^S = \{10234, 14023\}$, with $d_{\min}(S) = \infty$, $d_{\min}(C) = 3$ and $d_{\min}(C^S) = 4$. This is a size-preserving and distance-increasing extension.

For $C = \{0123, 1032\}$ and $S = \{1, 3\}$, we have $C^S = \{10234, 30124, 12043, 31042\}$, $d_{\min}(S) = 2$, $d_{\min}(C) = 1$ and $d_{\min}(C^S) = 2$. This is a size-increasing and distance-increasing extension.

E. Codeword Pairs, Interval Sets, and Maximum Intervals

In this subsection, we derive the lemmas on extensions that are used in the proof of the theorem in Section IV.

For integers $x, y \geq 0$, we define *interval* between y and x and denoted it by $(y, x]$ as follows: $(y, x]$ is defined as $\{a \in \mathbb{Z} \mid y < a \leq x\}$ if $y < x$, as $\{a \in \mathbb{Z} \mid x < a \leq y\}$ if $x < y$, and as an empty set if $x = y$. The length of interval $I = (x, y]$ is defined as $|x - y|$ and denoted by $|I|$. For an interval $I = (x, y] \subset [n]$ and $s \in [n + 1]$, we define $I^s := \{a^s : a \in I, s \in S\} = (x^s, y^s]$.

Lemma 7. For an interval $I \subset [n + 1]$, it holds that $|I^s| = |I| + \mathbb{1}[s \in I]$.

Proof: Let $I = (x, y] \subset [n + 1]$. The claim is obvious from the following: $|I^s| = |(x^s, y^s)| = |x^s - y^s| \stackrel{(a)}{=} |x - y| + \mathbb{1}[s \in (x, y)] = |I| + \mathbb{1}[s \in I]$. In (a), we used 3. ■

In this section, we define interval sets and maximum intervals for codeword pairs and provide sufficient conditions for increasing the distance when the codeword pairs are extended, using the maximum intervals of the codeword pairs.

Lemma 8. If intervals I and J are disjoint, then I^s and J^s are disjoint.

Proof: Without loss of generality, we can write $I = (\pi_1, \sigma_1]$ and $J = (\pi_2, \sigma_2]$ using $\pi_1 < \sigma_1 \leq \pi_2 < \sigma_2$. From Lem. 1, we have $\pi_1^s < \sigma_1^s \leq \pi_2^s < \sigma_2^s$, so I^s and J^s are disjoint. ■

Lemma 9. If intervals I and J satisfy $I \subset J$, then $I^s \subset J^s$.

Proof: Without loss of generality, we can write $I = (\pi_1, \sigma_1]$ and $J = (\pi_2, \sigma_2]$ using $\pi_1 \leq \pi_2 < \sigma_2 \leq \sigma_1$. From Lem. 1, we have $\pi_1^s \leq \pi_2^s < \sigma_2^s \leq \sigma_1^s$, so $I^s \subset J^s$ holds. ■

For a pair of permutations $\underline{\pi}, \underline{\sigma}$ of length n , we define the following:

- 1) The set of intervals $(\pi_j, \sigma_j]$ for $j = 0, \dots, n - 1$ of non-zero length is called the *interval set* between $\underline{\pi}$ and $\underline{\sigma}$, or simply the interval set, and is denoted by $(\underline{\pi}, \underline{\sigma}]$. To be precise, $(\underline{\pi}, \underline{\sigma}] \stackrel{\text{def}}{=} \{(\pi_j, \sigma_j] \mid \pi_j \neq \sigma_j, j = 0, \dots, n - 1\}$.
- 2) For a pair of codewords $\underline{\pi}, \underline{\sigma}$, if an interval $(\pi_j, \sigma_j] \in (\underline{\pi}, \underline{\sigma}]$ contains all other intervals $(\pi_i, \sigma_i] \in (\underline{\pi}, \underline{\sigma}]$, i.e., $(\pi_j, \sigma_j] \supset (\pi_i, \sigma_i]$, then $(\pi_j, \sigma_j]$ is called the *maximum interval* of the pair $\underline{\pi}, \underline{\sigma}$. From the definition, we see that if a maximum interval exists for $\underline{\pi}, \underline{\sigma}$, it is unique.

From the definition, the following holds: $(\underline{\pi}^s, \underline{\sigma}^s) = \{(\pi^s, \sigma^s) \mid (\pi, \sigma) \in (\underline{\pi}, \underline{\sigma}]\}$. Furthermore, the maximum length of the intervals in the interval set $(\underline{\pi}, \underline{\sigma}]$ is equal to the distance between $\underline{\pi}$ and $\underline{\sigma}$: $d_\infty(\underline{\pi}, \underline{\sigma}) = \max_{J \in (\underline{\pi}, \underline{\sigma}]} \ell(J)$.

For a pair of permutations $\mathbf{P} := (\underline{\pi}, \underline{\sigma})$ in \mathcal{S}_n and a head $s \in [n + 1]$, we denote a pair of permutations $(\underline{\pi}^s, \underline{\sigma}^s)$ in \mathcal{S}_{n+1} by \mathbf{P}^s .

Lemma 10. For a pair of permutations $\mathbf{P} := (\underline{\pi}, \underline{\sigma})$ in \mathcal{S}_n of length n that has a maximum interval I , the following holds:

- i) The permutation pair \mathbf{P}^s has maximum interval I^s .
- ii) $d_\infty(\underline{\pi}, \underline{\sigma}) = |I|$
- iii) $d_\infty(\underline{\pi}^s, \underline{\sigma}^s) = d_\infty(\underline{\pi}, \underline{\sigma}) + \mathbb{1}[s \in I]$
- iv) $|I^s| = |I| + \mathbb{1}[s \in I]$

Proof: First, we prove i). Since I is maximum, we have $J \subset I$ for any interval $J \in (\underline{\pi}, \underline{\sigma}]$. From this and Lem. 9, it follows that $J^s \subset I^s$. Therefore, I^s is maximum in the permutation pair \mathbf{P}^s .

The fact that I is the unique interval of length $d_\infty(\underline{\pi}, \underline{\sigma})$ contained in $(\underline{\pi}^s, \underline{\sigma}^s)$, together with Lem. 7, makes iii) evident. ■

Lemma 11. Let $\underline{\pi}$ be a codeword of length n , and let $s < t$ for $s, t \in [n + 1]$. Then the following holds:

- i) $(\underline{\pi}^s, \underline{\pi}^t] = \{(s, t], (s, s + 1], \dots, (t - 1, t]\}$
- ii) $\#(\underline{\pi}^s, \underline{\pi}^t] = |s - t| + 1$
- iii) The codeword pair $(\underline{\pi}^s, \underline{\pi}^t)$ has the largest interval $(s, t]$.

Proof: We will prove i). Without loss of generality, we can assume that $\underline{\pi}$ is the identity permutation $\underline{t} = [0, 1, \dots, n-1]$. From the definition of extension (1), we have the following:

$$\begin{aligned}\underline{t}^s &= [s, 0, 1, \dots, s-1, s+1, s+2, \dots, t, t+1, \dots, n], \\ \underline{t}^t &= [t, 0, 1, \dots, s-1, s, s+1, \dots, t-1, t+1, \dots, n].\end{aligned}$$

The remaining claims follow from this. ■

IV. RECURSIVELY EXTENDED PERMUTATION CODES

In the previous section, we investigated the changes in minimum distance and size resulting from a single code extension. In this section, we investigate permutation codes that repeatedly extended.

For each $j = 0, \dots, n-1$, let $S^{(j)}$ be a non-empty subset of $[j+1]$. The construction method for the permutation code $C^{(n)}$ of length n is as follows: First, we define $C^{(0)} := \{\underline{\epsilon}\}$. Next, for $j = 1, \dots, n$, we recursively construct $C^{(j)}$ from $C^{(j-1)}$ using the equation: $C^{(j)} = \phi(C^{(j-1)}; S^{(j-1)})$. We refer to $C^{(n)}$ constructed in this manner as a *recursively extended permutation* (REP) code generated by $\{S^{(j)}\}_{j=0}^{n-1}$. We denote it by $C^{(n)} = \langle \{S^{(0)}, \dots, S^{(n-1)}\} \rangle$. From Thm. 2, we obtain the following: $|C^{(n)}| = \prod_{j=0}^{n-1} |S^{(j)}|$.

Example 4. In [10, III. D], a construction of $(n, q^{n-(q-1)d}, d)$ REP code with head sets $S^{(j)} \subset [j+1]$ for $j \in [n]$ is proposed as follows. For integers n, d, q with $q \geq 2$ and $(q-1)d < n$, set $S^{(j)} = \{0\}$ for $0 \leq j < (q-1)d$. Set $S^{(j)} = \{\lfloor j/(q-1) \rfloor x : x = 0, \dots, q-2\} \cup \{j\}$ for $(q-1)d \leq j \leq n-1$. We can interpret such $S^{(j)}$ as the positioning of q points within $[j+1]$, ensuring a minimum spacing of d between each point. We observe that $|S^{(j)}|$ is 1 and $d_{\min}(S^{(j)}) = \infty$ for $0 \leq j < (q-1)d$ and $|S^{(j)}| = q$ and $d_{\min}(S^{(j)}) \geq d$ for $(q-1)d \leq j \leq n-1$. The size of the code is given by $|C^{(n)}| = \prod_{j=0}^{n-1} |S^{(j)}| = q^{n-(q-1)d}$. Since $C^{(0)} = \{\underline{\epsilon}\}$, it follows that $d_{\min}(C^{(0)}) = \infty$. By repeatedly applying Thm. 4, it holds that $d_{\min}(C^{(n)}) \geq d$.

As seen in the example above, from Thm. 4, if $d_{\min}(S^{(j)}) \geq d$ for $j = 0, 1, \dots, n-1$, then $d_{\min}(C^{(n)}) \geq d$. The converse is not true. To achieve $d_{\min}(C^{(n)}) \geq d$, it is not necessary that $d_{\min}(S^{(j)}) \geq d$ for $j = 0, 1, \dots, n-1$. For instance, consider $S^{(0)} = 0, 1$ and $S^{(1)} = 1$, where $d_{\min}(S^{(0)}) = 1$. Then, we have, $C^{(0)} = \{0\}$, $C^{(1)} = \{01, 10\}$, $C^{(2)} = \{102, 120\}$, and thus $d_{\min}(C^{(2)}) = 2$.

A. The necessary number of size-preserving extensions for increasing minimum distance

A code with a minimum distance of at least d and a length of n is referred to an $[n, d]$ code. In this subsection, we identify the $[n, d]$ code with the largest possible size. From the results of the previous section, it is clear that the minimum distance can increase with extensions. It is difficult to derive a tight upper bound on the size of an $[n, d]$ code from the conventional bounds derived in previous section. We need to evaluate the number of size-preserving extensions required to increase the minimum distance through extensions.

Let C_0 be a permutation code of some code length. In this subsection, we investigate the number of size-preserving extensions, denoted as $c_1(C_0; d)$, required to increase the minimum distance of extended code of C_0 to d . We provide both lower and upper bounds on $c_1(C_0; d)$. These bounds will be used in the proof for the optimal REP codes in the next

subsection. The code C_0 is extended with head set S_j as $C_{j+1} = C_j^{S_j}$ for $j \geq 0$. In this context, we denote the minimum number of size-preserving extension needed for C_k to achieve a minimum distance of d as $c_1^{(k)}(C_0; S_0, \dots, S_{k-1})$. Formally, this can be written as follows:

$$c_1(C_0; d) \stackrel{\text{def}}{=} \min_{k \geq 0} c_1^{(k)}(C_0; d) \tag{2}$$

$$c_1^{(k)}(C_0; d) \stackrel{\text{def}}{=} \min_{S_0, \dots, S_{k-1}: d_{\min}(C_k) \geq d} \#\{0 \leq l \leq k-1 : |S_l| = 1\}$$

The following lemma provides an upper bound for $c_1(C^{(n)}; d)$.

Lemma 12 (Upper bound on c_1). Let $n > d \geq 1$. For any REP code $C^{(n)}$ such that $d_{\min}(C^{(n)}) \geq d$, for any $1 \leq k \leq n$, the following holds:

$$c_1(C^{(k)}; d) \leq n - k \tag{3}$$

Proof: First, since $d_{\min}(C^{(n)}) \geq d$, we have $c_1(C^{(n)}; d) = 0$. Next, we show that $c_1(C^{(n-1)}; d) \leq 1$. From the assumption: $S^{(n)} = (C^{(n-1)})^{S^{(n-1)}}$, we have $c_1(C^{(n-1)}; d) = 1$ if $|S^{(n-1)}| = 1$, and $c_1(C^{(n-1)}; d) = 0$, otherwise. Continuing this process, we obtain (3). ■

In (2), we defined $c_1(C; d)$ for a code $C \subset S_n$. Below, with a slight abuse of notation, we define $c_1(S; d)$ for a head set $S \subset [n+1]$. First, for S with $|S| = 1$, we define $c_1(S; d) = 0$. Next, for S with $|S| \geq 2$, let us write $S = \{s_1, s_2, \dots\}$ with $s_1 < s_2 < \dots$. We define $c_1(S; d)$ as the minimum number of increments required to extend the length of each interval $(s_i, s_{i+1}]$ of length less than d to length d . More precisely, it is defined as follows:

$$c_1(S; d) \stackrel{\text{def}}{=} \sum_{j: |s_j - s_{j+1}| < d} (d - |s_j - s_{j+1}|)$$

This gives a lower bound for $c_1(C^{S_0}; d)$ in Thm. 8.

The following lemma generalizes Thm. 1, which provides an upper bound for $|S|$. By setting $c = 0$, it reduces to Thm. 1.

Lemma 13. For $S \subset [n]$, suppose $c \geq c_1(S; d)$. Then, the following holds:

$$|S| \leq \frac{n-1+c}{d} + 1 \tag{4}$$

Proof: Let $J := \{1, \dots, |S| - 1\}$. Define $\underline{J} := \{j \in J : |s_j - s_{j+1}| < d\}$ and $\overline{J} := \{j \in J : |s_j - s_{j+1}| \geq d\}$. We have $|\underline{J}| + |\overline{J}| = |S| - 1$. The following holds:

$$\begin{aligned} n &\stackrel{(a)}{\geq} 1 + \sum_{j \in J} |s_j - s_{j+1}| \\ &= 1 + \sum_{j \in \underline{J}} |s_j - s_{j+1}| + \sum_{j \in \overline{J}} |s_j - s_{j+1}| \\ &\stackrel{(b)}{\geq} 1 + |\underline{J}|d - c + |\overline{J}|d \\ &= 1 - c + (|S| - 1)d \end{aligned}$$

In (a), we used the union bound for the inclusion $[n] \supset \{s_1\} \cup \bigcup_{j \in J} (s_j, s_{j+1}]$, we obtain: In (b), we used the assumption: $c \geq c_1(S; d) = \sum_{j \in \underline{J}} (d - |s_j - s_{j+1}|)$ and the fact that $\sum_{j \in \overline{J}} |s_j - s_{j+1}| \geq |\overline{J}|d$. This inequality immediately gives (4). ■

Theorem 7. For a code $C_0 \subset \mathcal{S}_n$ and a head set $S \subset [n + 1]$, let $C_1 = C_0^{S_0}$. For $d \geq 1$, the following holds:
i) $c_1(C_0; d) \leq c_1(C_1; d) + 1$ ii) $c_1(C_0; d) = c_1(C_1; d) + 1$ implies $|S_0| = 1$.

Proof: i). Suppose $c_1(C_0; d) > c_1(C_0^{S_0}; d) + 1$ and derive a contradiction. Then, there exist $k > 0$ and $k - 1$ head sets $S_i \subset [n + 1 + i]$ ($i = 1, 2, \dots, k - 1$) of which at most $c_1(C_0; d) - 2$ head sets are of size one, that satisfy $d_{\min}(C_k = C_1^{S_1 \dots S_{k-1}}) \geq d$. This implies $d_{\min}(C_k = C_0^{S_0 \dots S_{k-1}}) \geq d$ which contradicts the minimality of $c_1(C_0; d)$.

ii). Suppose $|S_0| \neq 1$ and derive a contradiction. There exist head sets $S_i \subset [n + 1 + i]$ ($i = 1, 2, \dots, k - 1$) of which $c_1(C_1; d)$ head sets are of size one, that satisfy $d_{\min}(C_k = C_1^{S_1 \dots S_{k-1}}) \geq d$. From the fact that $d_{\min}(C_k = C_0^{S_0 \dots S_{k-1}}) \geq d$ and the assumption $|S_0| \neq 1$, we see that this contradicts the minimality of $c_1(C_0; d)$. ■

For a codeword pair $(\underline{\pi}, \underline{\sigma}) =: P$, we denote $(\underline{\pi}^s, \underline{\sigma}^s)$ by P^s . We can rewrite Lem. 10 as $d_{\infty}(P^s) = d_{\infty}(P) + \mathbb{1}[s \in J]$. From this, when $(\underline{\pi}, \underline{\sigma})$ has maximum interval I , it holds that $|I^s| = |I| + \mathbb{1}[s \in I]$.

Lemma 14. For a code C of length n , suppose there are k codeword pairs P_1, P_2, \dots, P_k each having maximum intervals I_1, I_2, \dots, I_k that are mutually disjoint. For $S \subset [n + 1]$, there exist k codeword pairs Q_1, \dots, Q_k in the extended code C^S each having mutually disjoint maximum intervals J_1, J_2, \dots, J_k satisfying the following: when $|S| = 1$, $|J_1| \leq |I_1| + 1$, and $|J_i| \leq |I_i|$ for $i \neq 1$ and when $|S| \geq 2$, $|J_i| \leq |I_i|$ for $1 \leq i \leq k$.

Proof: First, we prove the case with $|S| = 1$. Let $S = \{s\}$ and $Q_i := P_i^s$ for $1 \leq i \leq k$. From Lem. 10 i) and Lem. 8, each Q_i has a mutually disjoint maximum interval $J_i := I_i^s$ satisfying $|J_i| = |I_i| + \mathbb{1}[s \in I_i]$. Since $\{I_i\}$ are mutually disjoint, s can be contained in at most one of the intervals I_i .

Next, we prove the case with $|S| \geq 2$. Let s and t be distinct elements in S . Since I_1, \dots, I_k are disjoint, it suffices to consider the following three cases without loss of generality:

i) If s and t are contained in the same interval: let $s, t \in I_1$. For $i \neq 1$, since I_1 and I_i are disjoint, $s, t \notin I_i$. For any $\underline{\pi} \in C$, let $Q_1 = (\underline{\pi}^s, \underline{\pi}^t)$. From Lem. 11, Q_1 has the maximum interval $J_1 = (s, t] \subseteq I_1$. This inequality implies $|J_1| < |I_1|$. For $i \neq 1$, let $Q_i = P_i^s$. From Lem. 8 and the fact that $s \notin I_i$, the pairs $\{Q_i\}_{i \neq 1}$ are mutually disjoint. From Lem. 10 i), each Q_i has the maximum interval $J_i = I_i^s = I_i$, hence we have $|J_i| = |I_i|$. Thus, the intervals $\{J_i\}$ are disjoint.

ii) If s is not contained in any interval: There is no i such that $s \in I_i$. For $1 \leq i \leq k$, let $Q_i = P_i^s$. By the same argument as above, Q_i has the maximum interval J_i with $|J_i| = |I_i|$ and these intervals are disjoint.

iii) If s and t are contained in different intervals: let $s \in I_1$ and $t \in I_2$. Let $Q_1 = P_2^s$, $Q_2 = P_1^t$, and $Q_i = P_i^s$ for $i \geq 2$. By the same argument as above, $\{Q_i\}$ are mutually disjoint, each of which has the maximum interval J_i with $|J_i| = |I_i|$. ■

Theorem 8. For a code $C_0 \subset \mathcal{S}_n$ and a head set $S_0 \subset [n + 1]$, let $C_1 := C_0^{S_0}$. Then, $c_1(C_1; d) \geq c_1(S_0; d)$ holds.

Proof: For head sets $S_j \subset [j + 1]$ for $j = 1, 1, 2, \dots$, define $C_{j+1} := C_j^{S_j}$. It is sufficient to show that there are at least $c_1(S_0; d)$ head set of size one among S_1, \dots, S_{m-1} for any $m \geq 1$ and S_0, \dots, S_{m-1} such that $d_{\min}(C_m) \geq d$.

Let the elements of S_0 be $s_1 < \dots < s_{k+1}$. Denote $k := |S_0| - 1$. Choose some $\underline{\pi} \in C_0$ and denote k codeword pairs $(\underline{\pi}^{s_i}, \underline{\pi}^{s_{i+1}})$ in C_1 by P_i^0 . Each codeword pair P_i^0 has a maximum interval $I_i^0 := (s_i, s_{i+1}]$, and these intervals are mutually disjoint. According to Lem. 14, there exist k corresponding codeword pairs in C_1 , each with a mutually disjoint maximum interval. Let these pairs be denoted as $\{P_i^1\}$. Continue this procedure for C_{i+1} for $i = 1, \dots, m-1$. Consequently, there will be k corresponding codeword pairs in C_m , each with a mutually disjoint maximum interval, denoted as $\{P_i^m\}_{i=1}^k$. Since $d_{\min}(C_m) \geq d$, the length of the intervals for the codeword pairs $\{P_i^m\}_{i=1}^k$ must be at least d . From Lem. 14, it follows that during each extension, at most one corresponding interval increases in length, and the increase is by at most one. Therefore, to increment the size of one of these k disjoint intervals during the j -th extension by S_j , we need $|S_j| = 1$. By definition, $c_1(S_0; d)$ represents the total number of increments needed to increase the length of each interval $(s_i, s_{i+1}]$ from less than d to d . Hence, the number of j such that $|S_j| = 1$ is at least $c_1(S_0; d)$, which completes the proof. ■

B. Optimal REP codes

In this subsection, we prove the following for any $n > d \geq 1$: 1) An upper bound on the size of an $[n, d]$ REP code. 2) There exists an $[n, d]$ REP code whose size achieves the upper bound. 3) The upper bound matches the size of an $[n, d]$ DPGP code.

Some readers might conclude from these results that the REP code and DPGP code share the same structure. However, as far as the authors have investigated, no such structure has been found.

Theorem 9. Let $C^{(n)}$ be an $[n, d]$ REP code. Then it holds that $|C^{(n)}| \leq \prod_{j=0}^{n-1} \lfloor j/d + 1 \rfloor$.

Proof: To simplify notation, we write $c^{(k)} := c_1(C^{(k)}; d)$ for $0 \leq k < n$. We denote the sets of non-decreasing and decreasing points in the sequence $\{c^{(k)}\}$ by K and K^c , respectively. Formally, $K \stackrel{\text{def}}{=} \{0 \leq k < n : c^{(k)} \leq c^{(k+1)}\}$, $K^c \stackrel{\text{def}}{=} \{0 \leq k < n : c^{(k)} > c^{(k+1)}\}$. For $k \in K^c$, from Thm. 7, we have $c^{(k)} = c^{(k+1)} + 1$ and $|S^{(k)}| = 1$. Therefore, the following holds: $|C^{(n)}| = \prod_{k=0}^{n-1} |S^{(k)}| = \prod_{k \in K} |S^{(k)}|$. Furthermore, we can express it as follows:

$$\begin{aligned} \prod_{k \in K} |S^{(k)}| &\stackrel{(a)}{\leq} \prod_{k \in K} \left\lfloor \frac{k + c^{(k+1)}}{d} + 1 \right\rfloor \\ &\stackrel{(b)}{=} \prod_{i=1}^{|K|} \left\lfloor \frac{k_i + c^{(k_i+1)}}{d} + 1 \right\rfloor \end{aligned}$$

In (a), we used the fact that from Thm. 8, $c^{(k+1)} \geq c_1(S^{(k)}; d)$, and from Lem. 13, $|S^{(k)}| \leq \left\lfloor \frac{k + c^{(k+1)}}{d} + 1 \right\rfloor$. In (b), we wrote the elements of K in ascending order as $k_1 < k_2 < \dots < k_{|K|}$. For $|K| = 1$, from Lem. 12, we have $k_1 + c^{(k_1+1)} \leq n - 1$, thus proving the theorem. Let us consider the case $|K| \geq 2$. The following holds:

$$\prod_{i=1}^{|K|} \left\lfloor \frac{k_i + c^{(k_i+1)}}{d} + 1 \right\rfloor \stackrel{(c)}{\leq} \prod_{i=1}^{|K|} \left\lfloor \frac{n-1 - (|K| - i)}{d} + 1 \right\rfloor$$

In (c), we used Lem. 15. The proof completes by considering $\prod_{i=1}^{|K|} \left\lfloor \frac{n-1 - (|K| - i)}{d} + 1 \right\rfloor = \prod_{j=n-|K|}^{n-1} \left\lfloor \frac{j}{d} + 1 \right\rfloor \leq \prod_{j=0}^{n-1} \left\lfloor \frac{j}{d} + 1 \right\rfloor$. ■

Lemma 15. Denote $m := |K|$. For $i = 1, \dots, m - 1$, it holds that

$$k_i + c^{(k_i+1)} \leq n - 1 - (m - i). \quad (5)$$

Proof: First, we prove that for $i = 1, \dots, m - 1$

$$k_i + c^{(k_i+1)} < k_{i+1} + c^{(k_{i+1}+1)}. \quad (6)$$

Note that we have $c^{(k_i+1)} \leq c^{(k_{i+1}+1)}$ since $k_{i+1} \in K$. It is sufficient to consider the following two cases. i) The case k_i and k_{i+1} are consecutive, $k_i + 1 = k_{i+1}$, hence $c^{(k_i+1)} = c^{(k_{i+1})}$: Therefore it holds that $k_i + c^{(k_i+1)} \leq k_{i+1} + c^{(k_{i+1}+1)} - 1$. ii) The case k_i and k_{i+1} are not consecutive, $k_i + 1 < k_{i+1}$: For $k_i + 1 \leq k \leq k_{i+1} - 1$, it holds $k \in K^c$, then we obtain $c^{(k)} = c^{(k+1)} + 1$ from Thm. 7. This implies $c^{(k_i+1)} - c^{(k_{i+1})} = k_{i+1} - k_i - 1$. Thus, $k_i + c^{(k_i+1)} \leq k_{i+1} + c^{(k_{i+1}+1)} - 1$.

From Lem. 12, we have $k_m + c^{(k_m+1)} \leq n - 1$. Applying (6) for $i = m - 1$, we get $k_{m-1} + c^{(k_{m-1}+1)} \leq k_m + c^{(k_m+1)} - 1 \leq n - 2$. Repeating this, we obtain (5). ■

Theorem 10. For $n > d \geq 1$, there exists an $[n, d]$ REP code $C^{(n)}$ of size $|C^{(n)}| = \prod_{j=0}^{n-1} (\lfloor j/d \rfloor + 1)$.

Proof: We construct a REP code $C^{(n)}$ by choosing $S^{(j)} \subset [j + 1]$ such that $|S^{(j)}| = \lfloor j/d \rfloor + 1$, $S^{(j)} := \{0, d, 2d, \dots, (\lfloor S^{(j)} \rfloor - 1)d\}$ for $j = 0, \dots, n - 1$. We see that $d_{\min}(S^{(j)}) = \infty$ for $0 \leq j < d$, and $d_{\min}(S^{(j)}) = d$ for $d \leq j < n$. From Thm. 1, we understand that such $S^{(j)}$ are the largest possible sets that satisfy $d_{\min}(S^{(j)}) \geq d$. The subsequent result is obtained by applying Thm. 2 and Thm. 4 repeatedly: $|C^{(n)}| = \prod_{j=0}^{n-1} |S^{(j)}| = \prod_{j=0}^{n-1} (\lfloor j/d \rfloor + 1)$, $d_{\min}(C^{(j)}) = \infty$ for $0 \leq j \leq d$ and $d_{\min}(C^{(j)}) \geq d$ for $d < j \leq n$. ■

Recall Sec. II-A. The size of $[n, d]$ optimal code size is the same as the size of $[n, d]$ DPGP codes whose size is $\prod_{j=0}^{n-1} (\lfloor j/d \rfloor + 1)$.

V. ENCODING AND DECODING ALGORITHMS

In this section, we present several encoding algorithms of REP code $C^{(n)} = \langle S^0, \dots, S^{n-1} \rangle$. We consider $(s^{(0)}, \dots, s^{(n-1)}) \in S^{(0)} \times \dots \times S^{(n-1)}$ as input to the encoder².

A. Natural Encoding Algorithm

The codewords of $C^{(j+1)}$ are generated by extending the codewords of the j -th code $C^{(j)}$, using each element of $S^{(j)}$. By considering the freedom in the selection of each element in $S^{(j)}$ as message, the following *natural encoding algorithm* is derived.

Recall that $C^{(j)} = \phi(C^{(j-1)}; S^{(j-1)})$ is defined recursively. Thus, the codeword $\underline{x}^{(j)}$ of $C^{(j)}$ can be expressed as $\underline{x}^{(j)} = \phi(\underline{x}^{(j-1)}; s^{(j-1)})$ with $\underline{x}^{(j-1)} \in C^{(j-1)}$ and $s^{(j-1)} \in S^{(j-1)}$. From this observation, it is evident that all codewords of $C^{(n)}$ are exhaustively generated by the naturally defined encoding algorithm. We use $s_j \in S^{(j)}$ for $j \in [n]$

²The size of the code $C^{(n)}$ constructed by $S^{(0)}, \dots, S^{(n-1)}$ is given by $\prod_{j=0}^{n-1} |S^{(j)}|$, as we recall. We represent the message array $\underline{x} = (x_0, \dots, x_{n-1})$, where each x_j is independently chosen from $|S^{(j)}|$. We denote the x_j -th smallest element in $S^{(j)}$ as $s^{(j)}$. Since, (x_0, \dots, x_{n-1}) and (s_0, \dots, s_{n-1}) correspond one-to-one in this mapping for given $S^{(0)}, \dots, S^{(n-1)}$, we can consider \underline{s} as input.

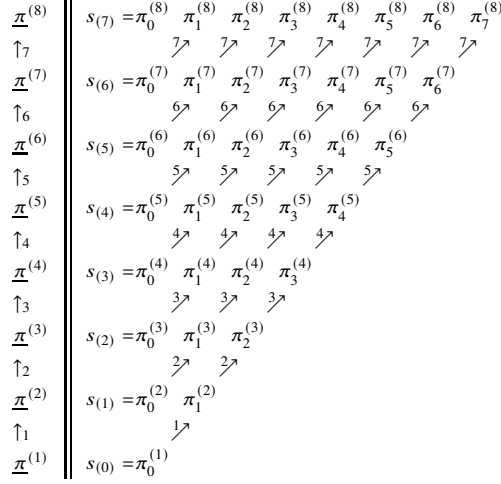


Fig. 1. Dependency of variables in the natural encoding algorithm for the case of $n = 8$. We write $a \xrightarrow{j} b$ when $b = \phi(a; s^{(j)})$ holds.

Algorithm 1 Natural Encoding Algorithm of $C^{(n)}$

Input: $(s^{(0)}, \dots, s^{(n-1)}) \in S^{(0)} \times \dots \times S^{(n-1)}$

Output: $(\pi_0^{(n)}, \dots, \pi_{n-1}^{(n)}) \in C^{(n)}$

- 1: **for** $j := 1$ to n **do**
 - 2: $\pi_0^{(j)} := s^{(j-1)}$
 - 3: **end for**
 - 4: **for** $k := 1$ to $n - 1$ **do**
 - 5: **for** $j := k$ to n **do**
 - 6: $\pi_k^{(j)} := \phi(\pi_{k-1}^{(j-1)}; s^{(j-1)})$
 - 7: **end for**
 - 8: **end for**
-

as input to the encoder. Equivalently, we can use $x_j \in [|S^{(j)}|]$ for $j \in [n]$ as the input, where s_j is the x_j -th smallest element in $S^{(j)}$. This yields $\underline{\pi}^{(n)}$ as a codeword of $C^{(n)}$. We denote this encoder, with some abuse of notation, as $\underline{\pi}^{(n)} := C^{(n)}(\underline{s})$.

The formal component-wise description of this encoder is given in Alg. 1. In Fig. V-A, we depict the dependencies of each variable that appears in this algorithm for the case of $n = 8$. Although natural encoding algorithms are simple, it requires computational complexity of $O(n^2)$.

B. Sequential Encoding Algorithm

For a given encoding algorithm $\underline{x} \mapsto \underline{\pi}^{(n)}$ for the recursively extended code $C^{(n)}$, the algorithm is said to be sequential if the following condition is met: for each $j \in [n]$ the algorithm determines the j -th output $\pi_j^{(n)}$ based on the input x_j and some state variables. The computational order can be rearranged to make natural encoding algorithms sequential. Specifically, the components depicted in Fig. V-A, originally calculated from bottom to top, can alternatively be computed from left to right, thereby rendering the algorithm sequential. Despite these modifications, the computational complexity remains $O(n^2)$. In this subsection, we propose an efficient sequential encoding algorithm with computational cost $O(n \log n)$

So far, we have considered $\phi_s(\cdot)$ as a map $\mathcal{S}_n \rightarrow \mathcal{S}_n$ or a map $[n] \rightarrow [n+1]$, for head $s \in [n+1]$. We now extend the domain of $\phi_s(\cdot)$ to permutations on $[n]$ without duplicate elements, as follows. For a set $A \subset [n-1]$, define $\phi_s(A) \stackrel{\text{def}}{=} \{\phi_s(a) \mid a \in A\} \cup \{s\}$

We denote $\min_{r\text{th}}(A)$ or $\min(A; r)$ denote the r -th smallest element in the array A , where the smallest element is denoted as $\min(A; 0)$.

Lemma 16. Let $\underline{\pi}^{(n)} \in \mathcal{S}_n$ and $s, r \in [n]$. Then, the following holds:

$$\phi_s(\min_{r\text{th}}(\underline{\pi}^{(n)})) = \min_{r\text{th}}(\phi'_s(\underline{\pi}^{(n)})), \quad (7)$$

where we define $\phi'_s(A) \stackrel{\text{def}}{=} \{\phi_s(a) \mid a \in A\}$.

Proof: Let the elements of $\underline{\pi}^{(n)}$ be enumerated in ascending order as $\sigma_0 < \dots < \sigma_{n-1}$. Then the LHS of (7) is $\phi_s(\sigma_r)$. Recalling that $\phi_s(\sigma_r) = \sigma_r + \mathbb{1}[\sigma_r \geq s]$, it is evident that $\phi_s(\cdot)$ preserves the order: $\phi_s(x) < \phi_s(y)$ if $x < y$. Since $\phi'_s(\underline{\pi}^{(n)}) = \{\phi_s(\sigma_0), \dots, \phi_s(\sigma_{n-1})\}$, enumerating the elements of $\phi'_s(\underline{\pi}^{(n)})$ in ascending order yields: $\phi_s(\sigma_0) < \dots < \phi_s(\sigma_{n-1})$. Consequently, the RHS of (7) is $\phi_s(\sigma_r)$. ■

Thus far, we have represented a permutation $\underline{f} := [f_0, \dots, f_{n-1}] \in \mathcal{S}_n$ as an array. However, in the following lemma, we will also interpret it as a set of elements for simplicity.

To simplify notation, for a set $X \subset [n]$, let $\overline{X}^{[n]} := [n] \setminus X$.

Lemma 17. For any $A \subset [n-1]$ and $s \in [n-1]$, it holds that $\phi'_s(\overline{A}^{[n-1]}) = \overline{\phi_s(A)}^{[n]}$.

Proof: For disjoint sets X and Y , we write $X \oplus Y$ instead of $X \cup Y$. Since $\phi'_s(\cdot)$ is a bijection from $[n-1]$ to $[n] \setminus \{s\}$, we can partition $[n]$ as follows: $[n] = \phi'_s([n-1]) \oplus \{s\} = \phi'_s(A \oplus \overline{A}^{[n-1]}) = \phi'_s(\overline{A}^{[n-1]}) \oplus \phi'_s(A) \oplus \{s\}$. From this, the claim immediately follows: $\overline{\phi_s(A)}^{[n]} = \overline{\phi'_s(A) \oplus \{s\}}^{[n]} = \phi'_s(\overline{A}^{[n-1]})$. ■

Consider Alg. 2 for message \underline{s} . The following theorem shows that this algorithm functions as the encoder for the code $C^{(n)}$. Specifically, it confirms that the output is identical to that of the natural encoding algorithm.

Theorem 11. Let $\pi_j^{(n)}$ and $\tilde{\pi}_j^{(n)}$ denote the outputs of Alg. 1 and Alg. 2, respectively. Then, it holds that $\tilde{\pi}_j^{(n)} = \pi_j^{(n)}$ for any $n > 1$ and $0 \leq j < n$.

Proof: For any $n > 1$ and $j = 0$, we have $\pi_0^{(n)} = s^{(n-1)}$, and from Alg. 2, we have $\tilde{\pi}_0^{(n)} = s_{n-1}$. Therefore,

Algorithm 2 Sequential Encoder of $C^{(n)} = \langle S^{(0)}, \dots, S^{(n-1)} \rangle$

Input: $(s^{(0)}, \dots, s^{(n-1)}) \in S^{(0)} \times \dots \times S^{(n-1)}$

Output: $(\tilde{\pi}_0^{(n)}, \dots, \tilde{\pi}_{n-1}^{(n)}) \in C^{(n)}$

- 1: **for** $j = 0$ to $n - 1$ **do**
 - 2: $\tilde{\pi}_j^{(n)} := \min_{s_j^{\text{th}}}([n] \setminus \{\tilde{\pi}_0^{(n)}, \dots, \tilde{\pi}_{j-1}^{(n)}\})$
 - 3: **end for**
 - 4: **return** $(\tilde{\pi}_0^{(n)}, \dots, \tilde{\pi}_{n-1}^{(n)})$
-

$\tilde{\pi}_j^{(n)} = \pi_j^{(n)}$ for any $n > 1$ and $0 \leq j < n$ holds. We use induction for j : we assume that $\tilde{\pi}_{j-1}^{(n-1)} = \pi_{j-1}^{(n-1)}$ for any $n > 0$ and derive that $\tilde{\pi}_j^{(n)} = \pi_j^{(n)}$ for any $n > 0$. We have:

$$\begin{aligned} \phi_{s_{n-1}}(\underline{\pi}_{[j-1]}^{(n-1)}) &= [s_{n-1}, \phi_{s_{n-1}}(\pi_0^{(n-1)}), \dots, \phi_{s_{n-1}}(\pi_{j-1}^{(n-1)})] \\ &= [s_{n-1}, \pi_1^{(n)}, \dots, \pi_j^{(n)}] =: \underline{\pi}_{[j]}^{(n)}, \end{aligned} \quad (8)$$

where we denote $\underline{\pi}_{[j]}^{(n)}$ the array consisting of the first j elements of $\underline{\pi}^{(n)}$. Since $(n-1) - 1 - (j-1) = \bar{j}$, we have $\pi_{j-1}^{(n-1)} = \tilde{\pi}_{j-1}^{(n-1)} = \min_{s_j^{\text{th}}}([n-1] \setminus \underline{\tilde{\pi}}_{[j-1]}^{(n-1)})$. Applying Lem. 16, we get $\pi_j^{(n)} = \phi_{s_{n-1}}(\pi_{j-1}^{(n-1)}) = \min_{s_j^{\text{th}}}(\phi'_{s_{n-1}}([n-1] \setminus \underline{\tilde{\pi}}_{[j-1]}^{(n-1)}))$. Furthermore, from Lem. 17 and (8), we have $\phi'_{s_{n-1}}([n-1] \setminus \underline{\tilde{\pi}}_{[j-1]}^{(n-1)}) = [n] \setminus \phi_{s_{n-1}}(\underline{\tilde{\pi}}_{[j-1]}^{(n-1)}) = [n] \setminus \underline{\tilde{\pi}}_{[j]}^{(n)}$. Summarizing the above, we get $\pi_j^{(n)} = \min_{s_j^{\text{th}}}([n] \setminus \underline{\tilde{\pi}}_{[j]}^{(n)}) = \tilde{\pi}_j^{(n)}$. ■

In Alg. 2, for each index j , the process of selecting the s_j -th smallest element from the set $[n] \setminus \pi_0^{(n)}, \dots, \pi_{j-1}^{(n)}$ can be performed efficiently. This selection process requires at most $O(\log n)$ steps when implemented with an appropriate search or sorting method. Therefore, the overall computational complexity of the encoding algorithm is $O(n \log n)$.

C. Decoding Algorithm of Optimal REP Codes

In Sec. IV-B, we showed that REP codes $C^{(n)} = \langle S^{(0)}, \dots, S^{(n-1)} \rangle$ satisfying $d_{\min}(S^{(j)}) \geq d$ are optimal among $[n, d]$ codes. Let \underline{s} and $\underline{\pi}$ denote the message and the corresponding codeword. Let $\underline{\rho}$ and $\hat{\underline{s}}$ denote the corresponding received word and the estimated message of the decoder. We propose a decoding algorithm for such codes as described in Alg. 3. The function $\psi_i(\cdot; \cdot)$ defined in line 2 of this algorithm mirrors the computation described in line 2 of Alg. 2. It is important to note that $\hat{s}_{\bar{i}} \in S^{(\bar{i})}$ is chosen so that $\psi_i(\hat{s}_{\bar{i}})$ is closest to ρ_i : $|\psi_i(\hat{s}_{\bar{i}}) - \rho_i| \geq |\psi_i(s_{\bar{i}}) - \rho_i|$ for any $s_{\bar{i}} \in S^{(\bar{i})}$. We will show that the decoder can successfully correct any errors as long as $d_{\infty}(\underline{\pi}, \underline{\rho}) < d/2$, where $\underline{\pi}$ and $\underline{\rho}$ are the transmitted codeword and the received word, respectively.

Theorem 12. Consider the setting of optimal REP code and decoder described above. Assume that $|\pi_i - \rho_i| < d/2$ for all $i \in [n]$. Then, it follows that $\hat{\underline{s}} = \underline{s}$.

Proof: Let s_i and \hat{s}_i denote the i -th message and its estimate, respectively. We will prove that $\hat{s}_{\bar{i}} = s_{\bar{i}}$ for all $i \in [n]$ by induction. It clear that $\hat{s}_{\bar{0}} = s_{\bar{0}}$. Now, assume that the decoder has correctly estimated up to step $i - 1$,

Algorithm 3 Sequential Decoder of $\mathcal{C}^{(n)} = \langle S^{(0)}, \dots, S^{(n-1)} \rangle$

Input: Received array $(\rho_0^{(n)}, \dots, \rho_{n-1}^{(n)})$

Output: Estimated message $(\hat{s}_0 \in S^{(0)}, \dots, \hat{s}_{n-1} \in S^{(n-1)})$

```

1: for  $i = 0$  to  $n - 1$  do
2:   Let  $\psi_i(s; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)}) \stackrel{\text{def}}{=} \min_{s \text{ th}}[n] \setminus \{\hat{\pi}_0^{(n)}, \dots, \hat{\pi}_{i-1}^{(n)}\}$ .
3:    $\hat{s}_{\bar{i}} := \operatorname{argmin}_{s \in S^{(\bar{i})}} |\rho_i^{(n)} - \psi_i(s; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)})|$ 
4:    $\hat{\pi}_i^{(n)} := \psi_i(\hat{s}_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)})$ 
5: end for
6: return  $(\hat{s}^{(0)}, \dots, \hat{s}^{(n-1)})$ 

```

specifically: $\hat{s}_0 = s_0, \dots, \hat{s}_{i-1} = s_{i-1}$. We will now derive $\hat{s}_{\bar{i}} = s_{\bar{i}}$. By Alg. 2, we have $\hat{\pi}_0 = \pi_0, \dots, \hat{\pi}_{i-1} = \pi_{i-1}$, then, $\pi_i = \psi_i(s_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)})$. Now, assume for contradiction that $\hat{s}_{\bar{i}} \neq s_{\bar{i}}$. We will derive a contradiction from this assumption.

Recall that $\hat{s}_{\bar{i}} \in S^{(\bar{i})}$ is chosen such that $\psi_i(\hat{s}_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)})$ is the closest head in $S^{(i)}$ to ρ_i . Hence, we have $|\psi_i(\hat{s}_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)}) - \rho_i| \leq |\psi_i(s_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)}) - \rho_i| = |\pi_i - \rho_i|$. Since from the premise $|\pi_i - \rho_i| < d/2$, we obtain: $|\psi_i(\hat{s}_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)}) - \psi_i(s_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)})| = |\psi_i(\hat{s}_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)}) - \pi_i| \leq |\psi_i(\hat{s}_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)}) - \rho_i| + |\pi_i - \rho_i| \leq 2|\pi_i - \rho_i| < d$. On the other hand, from the premise $d_{\min}(S^{(i)}) \geq d$ and $\hat{s}_{\bar{i}}, s_{\bar{i}} \in S^{(i)}$, we have $|\hat{s}_{\bar{i}} - s_{\bar{i}}| \geq d$, and from the definition of $\psi(\cdot; \cdot)$, we have $|\psi_i(\hat{s}_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)}) - \psi_i(s_{\bar{i}}; \hat{\underline{\mathbf{x}}}_{[i]}^{(n)})| \geq d$. ■

Since $d_{\infty}(\underline{\mathbf{x}}, \underline{\rho}) < d/2$ implies $|\pi_i - \rho_i| < d/2$ for all $i \in [n]$, the condition in Thm. 12 can be replaced with $d_{\infty}(\underline{\mathbf{x}}, \underline{\rho}) < d/2$. This shows that the performance of this decoder is equivalent to or better than that of the bounded distance decoder.

VI. CONCLUSIONS

In this paper, we investigate recursively extended permutation (REP) codes. We prove that the optimal REP code matches DPGP codes in terms of size and minimum distance. Moreover, we developed efficient encoding and decoding algorithms for REP codes.

REFERENCES

- [1] D. Slepian, "Permutation modulation," *Proceedings of the IEEE*, vol. 53, no. 3, pp. 228–236, March 1965.
- [2] A. J. H. Vinck, "Coded modulation for powerline communications," in *Proc. Int. J. Elec. Commun.*, no. 1, 2000, pp. 45–49.
- [3] A. J. H. Vinck, J. Haering, and T. Wadayama, "Coded m-FSK for power line communications," in *Proc. 2000 IEEE Int. Symp. Inf. Theory (ISIT)*, 2000, p. 137.
- [4] I. F. Blake, G. Cohen, and M. Deza, "Coding with permutations," *Information and Control*, vol. 43, no. 1, pp. 1 – 19, 1979.
- [5] C. J. Colbourn, T. Kløve, and A. C. H. Ling, "Permutation arrays for powerline communication and mutually orthogonal latin squares," *IEEE Trans. Inf. Theory*, vol. 50, no. 6, pp. 1289–1291, June 2004.
- [6] T. G. Swart and H. C. Ferreira, "Decoding distance-preserving permutation codes for power-line communications," in *Proc. IEEE AFRICON 2007*. Windhoek: IEEE, 2007, pp. 1–7.

- [7] I. Tamo and M. Schwartz, "Correcting limited-magnitude errors in the rank-modulation scheme," *IEEE Trans. Inf. Theory*, vol. 56, no. 6, pp. 2551–2560, 2010.
- [8] F. Farnoud Hassanzadeh, M. Schwartz, and J. Bruck, "Bounds for permutation rate-distortion," *IEEE Trans. Inf. Theory*, vol. 62, no. 2, pp. 703–712, 2016.
- [9] M. Schwartz and P. O. Vontobel, "Improved lower bounds on the size of balls over permutations with the infinity metric," *IEEE Trans. Inf. Theory*, vol. 63, no. 10, pp. 6227–6239, 2017.
- [10] T. Kløve, T. Lin, S. Tsai, and W. Tzeng, "Permutation arrays under the Chebyshev distance," *IEEE Trans. Inf. Theory*, vol. 56, no. 6, pp. 2611–2617, 2010.
- [11] H. Han, J. Mu, Y. He, and X. Jiao, "Coset partitioning construction of systematic permutation codes under the Chebyshev metric," *IEEE Trans. Commun.*, vol. 67, no. 6, pp. 3842–3851, 2019.
- [12] H. Zhou, M. Schwartz, A. A. Jiang, and J. Bruck, "Systematic error-correcting codes for rank modulation," *IEEE Trans. Inf. Theory*, vol. 61, no. 1, pp. 17–32, 2015.
- [13] S. Buzaglo, E. Yaakobi, T. Etzion, and J. Bruck, "Systematic error-correcting codes for permutations and multi-permutations," *IEEE Transactions on Information Theory*, vol. 62, no. 6, pp. 3113–3124, 2016.
- [14] M. Kawasumi and K. Kasai, "A message-passing algorithm realizing MAP decoding of Kløve's permutation codes," *International Symposium on Turbo Codes & Iterative Information Processing 2018*, 2018.
- [15] —, "Concatenated permutation codes under chebyshev distance," *IEICE Trans. Fundamentals*, vol. E106.A, no. 3, pp. 616–632, 2023.