Piece of Table: A Divide-and-Conquer Approach for Selecting Sub-Tables in Table Question Answering

Wonjin Lee* Kyumin Kim* Sungjae Lee Jihun Lee Kwang In Kim POSTECH

{wonjin0403,kyuminkim,leeeesj,gmindflow,kimkin}@postech.ac.kr

Abstract

Applying language models (LMs) to tables is challenging due to the inherent structural differences between twodimensional tables and one-dimensional text for which the LMs were originally designed. Furthermore, when applying linearized tables to LMs, the maximum token lengths often imposed in self-attention calculations make it difficult to comprehensively understand the context spread across large tables. To address these challenges, we present PieTa (Piece of Table), a new framework for sub-table-based question answering (QA). PieTa operates through an iterative process of dividing tables into smaller windows, using LMs to select relevant cells within each window, and merging these cells into a sub-table. This multi-resolution approach captures dependencies across multiple rows and columns while avoiding the limitations caused by long context inputs. Instantiated as a simple iterative sub-table union algorithm, PieTa demonstrates improved performance over previous sub-table-based QA approaches.

1. Introduction

Tables effectively mitigate data complexity by organizing information into curated rows and columns, making them more accessible and comprehensible than plain text. Consequently, various natural language processing (NLP) tasks, including table question answering (QA), have emerged to extract and interpret information from structured data [12, 14, 20].

However, applying (large) language models (LMs) to tables is challenging due to the inherent structural differences between tables and text. Text familiar to LMs is one-dimensional and is read in a linear direction (*e.g.*, in raster order), with contextual relationships confined within sentences. The meaning of a sentence can change significantly if the order of tokens is altered. In contrast, tables are inherently two-dimensional, requiring both horizontal and vertical reading. Often, there is no clear context between table cells

Question: Tell me the number of athletes from India.

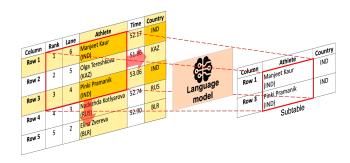


Figure 1. An overview of the proposed *PieTa* (Piece of Table) framework. Given an input table and a question, our algorithm synthesizes a sub-table for subsequent answering by iteratively dividing the table into smaller windows, using language models to select relevant cells within these windows (thereby generating intermediate sub-tables), and merging these intermediate sub-tables. This process is repeated until the final sub-table is formed.

as there is in text, and changing the order of columns or rows does not alter the meaning [6].

Recent advances in table QA have focused on accommodating these differences. For example, Jiang et al. [3], Liu et al. [9] employed table QA-specific pre-training objectives guided by auxiliary SQL queries. However, these methods are limited by the need for paired table-SQL training sets and struggle with large tables or those with many irrelevant entries [15]. Alternatively, Herzig et al. [2], Yang et al. [17], Yin et al. [19] explored positional embeddings applied to linearized tables. A major limitation of these *holistic* approaches is the computational constraint of transformer-based models, which typically restrict self-attention to 512 or 1,024 tokens, insufficient for handling large tables with thousands of rows (see Sec. 4).

To overcome the limitations of holistic approaches, other methods focus on pre-articulating relevant information from tables. These methods first use LMs to translate the given questions into logical formats suited for tabular data retrieval, such as SQL or Python scripts [1, 13]. Ideally, when well-

^{*}These authors contributed equally.

generated, such code can retrieve relevant information effectively, enabling the subsequent QA process to bypass irrelevant distractions. However, generating flexible programs versatile enough to cover wide variations in table remains a significant challenge [10].

Sub-table selection methods aim to balance and mitigate the limitations of both holistic approaches and code generation methods. These methods first reduce the search space by extracting a relevant sub-table, which is then fed to a table QA reader to construct the final answer.

For example, Lin et al. [7]'s *inner table retriever (ITR)* selects rows and columns that align with the given question by calculating the similarity between the question and each individual row or column. This approach is computationally efficient and effective for answering *simple* questions. However, it can struggle to capture dependencies across multiple rows and/or columns. For instance, when answering the question Which was the next aircraft that came into service after Cessna 404 Titan?, *ITR* faces challenges because it must identify the aircraft that started the service after the Cessna 404 Titan without information on when it started the service.

Ye et al. [18]'s *Dater* algorithm attempts to address this limitation by employing LM in-context learning to jointly select multiple rows. While this approach offers improved performance over independent row selection, it inherits the limitation of one-dimensional LMs applied to two-dimensional tables, similar to the challenges encountered when using LMs to generate answers directly from linearized tables. Furthermore, LMs generally struggle to understand and combine long context inputs [8, 16], a challenge particularly pronounced in table QA involving large tables.

In this paper, we present *PieTa* (Piece of Table), a new framework for sub-table-based QA. *PieTa* operates through three main steps: In the *Divide* step, a given table is decomposed into smaller windows. In the subsequent *Conquer* step, an LM selects cells from each window that match the given question (Fig. 1), constructing intermediate sub-tables. Finally, in the *Combination* step, the extracted intermediate sub-tables from individual windows are merged to form a new table. This process is repeated, treating the resulting table as the new input, until the final sub-table is constructed.

PieTa captures and exploits dependencies across multiple rows or columns while avoiding the challenge of combining long context inputs. This is achieved through a multiresolution combination approach that enables the capture of long-term dependencies within the original table. Evaluated on the WikiSQL dataset [20], *PieTa* demonstrates significantly improved QA accuracy and sub-table selection performance.

2. Related work

Holistic table QA readers. In table QA, a reader, often implemented as a language model (LM), generates an answer for a given question based on a complete table or a preprocessed sub-table. The TAPEX reader, for instance, mimics an SQL execution engine by synthesizing answers from tables using SQL query pairs [9]. It employs the BART backbone model [5], initially trained on synthetic SQL queries and later fine-tuned to answer natural language questions.

Generating large-scale, high-quality pairs of tables and corresponding SQL queries to articulate clear answers for large tables can be costly. OmniTab simplified this by replacing sophisticated SQL queries with plain text descriptions [3]. It assumes each table has an accompanying textual description, which it retrieves and uses for pre-training before fine-tuning on table QA tasks.

These *holistic* approaches inherit the limitation of LMs when applied to large tables, as typically only a small subset of cells in the table is relevant to a given question [15]. Our approach efficiently selects relevant cells from the table, helping guide these readers to generate improved answers.

Guiding readers through subset selection. Filtering irrelevant and redundant information from a table per question can help LM readers avoid distraction. Sub-table selection methods achieve this by constructing a tailored sub-table for each question. Lin et al. [7] fine-tuned dense passage retriever encoders [4] to select relevant rows and columns, with their inner table retriever (ITR) using supervised contrastive loss by labeling rows and columns containing answer cells from the WikiSQL dataset as positive. Originally, this technique was designed to keep the input table size within the maximum token limit that an LM can handle, and therefore, it does not directly construct a minimum sub-table that balances precision and recall. While extending this technique to filter irrelevant information is feasible, it cannot capture dependencies across multiple rows or columns (Sec. 1). In contrast, our method can significantly reduce sub-table size while retaining relevant information, leading to improved QA performance.

Dater [18] employs LM in-context learning to synthesize a sub-table and sub-query pair from the given table and question. However, this approach requires extended prompts for the LM to fully comprehend the table structure and devise an effective selection strategy, which becomes a severe burden for large tables. Generally, the effectiveness of LMs can degrade when dealing with extremely long prompts [8, 16]. TabSQLify [11] selects a subset of rows (with full columns) as input to LMs to generate SQL queries for sub-table selection, leading to significantly improved table QA results. Similar to Dater, it relies on LM in-context learning, facing the same challenge of requiring extended prompts. Our ap-

proach mitigates this issue by preemptively breaking down large tables into smaller windows, allowing LMs to focus on extracting relevant cells within each window, thereby alleviating the burden of processing long prompts.

3. Divide-and-conquer sub-table selection

Table question answering (QA) aims to accurately interpret, analyze, and respond to natural language questions based on table. Formally, the task is to generate an answer A given a table T and a human-understandable question Q. The answer A can be a number, word, phrase, sentence, or other forms depending on the types of questions and tables. It is either extracted directly from T or synthesized from the information within T by the reader \mathcal{R} .

In sub-table-based QA approaches, a selector S first generates a sub-table T_s from T, which are then fed to the reader \mathcal{R} to generate the final answer:

$$A = \mathcal{R}(T_s, Q), T_s = \mathcal{S}(T, Q).$$

For the selector S, we fine-tune the output layer of Llama3 (Sec. 3.2). For the reader R, we employ OmniTab [3], which was originally fine-tuned on the WikiSQL dataset (Sec. 4).

Our study focuses on improving the selector S, and therefore, we do not alter readers. However, in principle, joint tuning of R and S is feasible.

3.1. Sub-table selection

Our sub-table selection algorithm iteratively applies three main steps. In the Divide step, the input table T is partitioned into small overlapping windows $\{W_i\}_{i=1}^N$ of size $w \times w$ using a moving window approach (Algorithm 2). In the Conquer step, the selector S extracts a sub-window V_i within each window W_i based on the input question Q as guided by a prompt instruction P (Sec. 3.2 and Fig. A.1):

$$V_i = \mathcal{S}(\mathcal{P}(W_i, Q)).$$

The *Combination* step merges the generated sub-windows $\{V_i\}_{i=1}^N$ into a new table T^t . Specifically, T^t is obtained as the set union of all cells in the sub-windows $\{V_i\}_{i=1}^N$. These steps are repeated, taking T^t as the new input T for the *Divide* step in each iteration t, until the generated table T^t is no longer updated. The complete sub-table selection process is outlined in Algorithm 1.

3.2. Instruction tuning the selector

We construct the selector S by fine-tuning the output layer of the Llama3-8B-Instruct model,* while in principle, our method is applicable to any LM selector that can understand tables with a small window size.

Algorithm 1 SubTableSelection (S).

```
1: Input: Table T and question Q
 2: Parameter: Window size w
 3: Output: Final sub-table T_s
 4: t \leftarrow 1
 5: T^t \leftarrow T; T^0 \leftarrow \varnothing
 6: while T^{t-1} \neq T^t do
        T^{t-1} \leftarrow T^t
         \{W_i\}_{i=1}^N \leftarrow \text{DIVIDETABLE}(T^t; w)
 8:
                                                         ▷ Divide step; see Algorithm 2
10:
         for W_i in \{W_i\}_{i=1}^N do
11:
            V_i^t \leftarrow \mathcal{S}(\mathcal{P}(Q, W_i))
T^t \leftarrow T^t \cup V_i^t
12:
                                                                            ▷ Conquer step
                                                                        ▷ Combination step
13:
14:
15:
16: end while
17: T_s \leftarrow T^t
```

Data generation. The training data are generated by sampling input windows (of size $w \times w$) from the WikiSQL training set of tables and questions, and creating the corresponding *target* sub-windows. Unlike previous approaches [18], which only predict the column and the row indices of the target, our selector additionally predicts the corresponding cell values. Providing such explicit guides leads to improved performance (see Sec. 4.3).

We refer to the columns with cells matching the conditions specified in the question as *condition columns*. Each cell in a condition column may or may not satisfy the corresponding condition. Similarly, the column containing the exact cell values that the question seeks is referred to as the *answer column*. For example, for the question presented in Fig. 2, Horwood, Total, and Result are the condition columns, while Goodman is an answer column.

For each training window W_i sampled from a table T with a corresponding question Q, the target sub-window V_i is constructed by first selecting all condition and answer columns within W_i . Then, for these selected columns, only the rows that satisfy all the conditions present in W_i are further selected.

Figure 2 illustrates the resulting training data generation process. The first window W_1 contains two condition columns, Total and Result. The target sub-window V_1 is then generated from the cells in these columns that jointly satisfy the conditions safe and total score of 31. The second window W_2 includes a condition column Horwood and an answer column Goodman. The target V_2 is created from the subset of these columns in W_2 that satisfy the condition 7 from Horwood. Since no such cells actually exist, V_2 is constructed as an empty table containing only the column header information. The third window W_3 contains only an answer column; since there is no condition imposed, all cells from this column are included in V_3 . This target window generation strategy allows the selector $\mathcal S$ to focus solely on the input windows W when making predictions. See Sec. 3.3

^{*}Accessible at https://llama.meta.com/llama3/

	Week	Dance/song	Horwood	Goodman	Dixon	Tonioli	Total	Result					
row 1	1	cha-cha-cha / ain't no mountain high enough	7	8	8	8	31	-		V_1		Total	Result
row 2	2	foxtrot / she said	7	8	8	8	31	safe	$\overline{}$	V 1	row 2	31	safe
row 3	3	quickstep / dreaming of you	8	7	8	8	31	safe			row 3	31	safe
row 4	4	charleston / forty-second street	9	9	9	8	35	safe	Ī				
row 5	5	argentine tango / bat out of hell	8	8	9	9	34	safe	1	V_2	Horwood	Goodman	
row 6	6	viennese waltz / where the wild roses grow	8	9	9	9	35	safe		v ₂			
row 7	7	rumba / too lost in you	8	9	9	9	35	safe				Goodman	
row 8	8	samba / young hearts run free	9	9	10	10	38	safe		17	row 8	9	
row 9	10	jive / soul bossa nova	8	9	9	9	35	safe		V_3	row 9	9	
row 10	11	salsa / spinning around	7	7	7	7	28	safe			row 10	7	
row 11	11	swing / in the mood	-	-	-	-	2nd/4 points	safe					
row 12	11	tango / hung up	9	10	10	9	38	safe					
row 13	12	samba / young hearts run free	9	9	10	10	38	second place	1	V_{4}		Horwood	Goodman
row 14	12	showdance / i like the way (you move)	7	9	9	9	34	second place		V ₄	row 14	7	9
row 15	12	naso doble / don't let me he misunderstood	9	8	9	9	35	second place	1				

Figure 2. An example of generated training data. The table T and the question Q are sourced from WikiSQL train dataset [20]. Three conditions and the corresponding cell values are color-coded. The four example input windows $\{W_i\}_{i=1}^4$, arranged in raster order, are highlighted with orange boxes, and the corresponding training targets $\{V_i\}_{i=1}^4$ are displayed on the right.

for details.

Sampling training windows. A straightforward approach to generate the training data (pairs of input W_i and the corresponding target V_i sub-windows) for fine-tuning the selector S is to randomly sample from the given input tables T and the corresponding questions Q. However, we observed in preliminary experiments that such naïve sampling leads ${\cal S}$ to generate meaningless single-column target tables. This can be attributed to the resulting imbalance in the target window sizes: For a given input window W of size $w \times w$, there can be w(w+1)+1 different sizes of the underlying target window (including the window of size zero): $\{0 \times 0, 1 \times 1, \dots, 1 \times w, \dots, w \times 1, \dots, w \times w\}.\ 1 \times 0,$ $2\times0,\ldots$, and $w\times0$ are excluded because the table cannot be made without the column. Among them, cases where only one column is selected as the target predominate (Fig. A.2), while cases where the entire input window W becomes the target are rare: This would require all columns in W correspond to either the condition or answer columns, and all cells therein satisfy the question presented in the question. Therefore, we explicitly balance the target window size distribution when sampling the training set. Details of this process and the corresponding examples are presented in Appendix A.3.

3.3. Discussion

The crux of our approach lies in the multi-resolutional table formation technique, which builds upon table (sub-)windows. In images, neighboring pixels often exhibit strong correlations, justifying the use of small windows *e.g.* convolutional kernels in convolutional neural networks (CNNs) and attention windows in vision transformers. However, tables do not necessarily have such a *spatial* structure: For example, in the table in Fig. 3, the neighboring cells 1995–1997 and 1998–2001 are more similar within the Years produced column. Conversely, the cells in the Model 725tds row do

Reader	Original	Union	Gold
OmniTab	87.04	91.25	93.13
Llama3	64.00	75.00	76.00

Table 1. Performance of two table QA readers (measured in exact match %) across three different sub-table types in the WikiSQL dataset. The union table we aim for is not only easier to attain compared to the gold table, but its performance is also on par with that of the gold table.

not have such a relationship (*e.g.*, 1995–2001 is not more strongly related to M51D25 turbocharged I6 than Diesel). In this context, employing sub-windows might initially seem to introduce unnecessary restrictions.

We demonstrate that the set union-based sub-window combination approach can effectively overcome such potential restrictions while ensuring focused answer generation by constructing moderately-sized final sub-tables. Suppose that the following question is presented for the table in Fig. 3: List each of models with diesel fuel produced from 1988-2001. An ideal sub-table for QA in this case would be the intersection of cells satisfying the conditions diesel fuel and 1998-2001, along with their corresponding cell values in the Engine column (see the table at the bottom of the right column in Fig. 3).

Directly identifying such a *gold* table would require a comprehensive understanding of the entire table. Instead, our algorithm iteratively merges sub-window found within each window. For example, by taking the cells that have Diesel or the cells that match 1998–2001 and merging them as a sub-table, our algorithm effectively takes a *union* of them (the table in the upper right column of Fig. 3).

This union approach offers significant advantages: First, identifying a relevant sub-window within a window is much easier than pinpointing the gold table (which effectively acts as intersection of conditions across the entire table), as the

Question: List each of the models with diesel fuel produced from 1998-2001.

Target: M57D30 turbocharged I6, M67D40 turbocharged V8

	Produced	Years produced	Power/Torque	Fuel	Engine	Volume	Model
	38947	1996-2001	142 kW (193 PS; 190 hp) / 280 N·m (207 lb·ft)	Petrol	M52B28 I6	2.8L	728i
1	6816	1996-2001	142 kW (193 PS; 190 hp) / 280 N·m (207 lb·ft)	Petrol	M52B28 I6	2.8L	728iL
i	20876	1994-1996	160 kW (218 PS; 215 hp) / 290 N·m (214 lb·ft)	Petrol	M60B30 V8	3.0L	730i
!	2137	1994-1996	160 kW (218 PS; 215 hp) / 290 N·m (214 lb·ft)	Petrol	M60B30 V8	3.0L	730iL
	21481	1994-1997	173 kW (235 PS; 232 hp) / 320 N·m (236 lb·ft)	Petrol	M62B35 V8	3.5L	735i
į M	-	1998-2001	174 kW (237 PS; 233 hp) / 345 N·m (254 lb·ft)	Petrol	M62TUB35 V8	3.5L	735i
M	6963	1994-1997	173 kW (235 PS; 232 hp) / 320 N·m (236 lb·ft)	Petrol	M62B35 V8	3.5L	735iL
i M6	-	1998-2001	174 kW (237 PS; 233 hp) / 345 N·m (254 lb·ft)	Petrol	M62TUB35 V8	3.5L	735iL
_	-	1994-1996	210 kW (286 PS; 282 hp) / 400 N·m (295 lb·ft)	Petrol	M60B40 V8	4.0L	740i
	-	1994-1996	210 kW (286 PS; 282 hp) / 400 N·m (295 lb·ft)	Petrol	M60B40 V8	4.0L	740iL
İ	88853	1996-1998	210 kW (286 PS; 282 hp) / 420 N·m (310 lb·ft)	Petrol	M62B44 V8	4.4L	740i
i	-	1998-2001	210 kW (286 PS; 282 hp) / 440 N·m (325 lb·ft)	Petrol	M62TUB44 V8	4.4L	740i
ļ	91431	1996-1998	210 kW (286 PS; 282 hp) / 420 N·m (310 lb·ft)	Petrol	M62B44 V8	4.4L	740iL
i	-	1998-2001	210 kW (286 PS; 282 hp) / 440 N·m (325 lb·ft)	Petrol	M62TUB44 V8	4.4L	740iL
Gol	15759	1995-1997	240 kW (326 PS; 322 hp) / 490 N·m (361 lb·ft)	Petrol	M73B54 V12	5.4L	750i-iL
	1032	1998-2001	240 kW (326 PS; 322 hp) / 490 N·m (361 lb·ft)	Petrol	M73TUB54 V12	5.4L	750i-iL
l M	9053	1995-2001	105 kW (143 PS; 141 hp) / 280 N·m (207 lb·ft)	Diesel	M51D25 turbocharged I6	2.5L	725tds
i M6	12336	1998-2001	142 kW (193 PS; 190 hp) / 410 N·m (302 lb·ft)	Diesel	M57D30 turbocharged I6	2.9L	730d
	3450	1998-2001	180 kW (245 PS; 241 hp) / 560 N·m (413 lb·ft)	Diesel	M67D40 turbocharged V8	3.9L	740d

Engine	Fuel	Years produced
M62TUB35 V8	Petrol	1998-2001
M62TUB35 V8	Petrol	1998-2001
M62TUB44 V8	Petrol	1998-2001
M62TUB44 V8	Petrol	1998-2001
M73TUB54 V12	Petrol	1998-2001
M51D25 turbocharged I6	Diesel	1995-2001
M57D30 turbocharged I6	Diesel	1998-2001
M67D40 turbocharged V8	Diesel	1998-2001

Output: M57D30 turbocharged I6, M67D40 turbocharged V8

Gold table		
Engine	Fuel	Years produced
M57D30 turbocharged I6	Diesel	1998-2001
M67D40 turbocharged V8	Diesel	1998-2001

Output: M57D30 turbocharged I6, M67D40 turbocharged V8

X Output: 730d, 750d

Figure 3. Examples of (sub-)tables and the corresponding QA results. The original table has two condition columns (Fue1 and Years produced) and one answer column Engine, which respectively match the conditions and expected outcomes presented in the question. Two conditions and the corresponding cell values are color-coded. The union table consists of rows satisfying at least one condition, while the underlying gold table consists of rows satisfying all conditions. Estimating the gold table is challenging as it requires a comprehensive understanding of the entire input table. The answers below the respective tables are the corresponding outputs of the OmniTab reader. Feeding the original complete table leads to incorrect results, while both the gold and union table produce correct answers.

selection module (LMs) can focus exclusively on the cells within the window. Our training target generation process aligns with this objective: Each target sub-window is constructed based only on the conditions and outputs present within the corresponding input window. Furthermore, we empirically validated that the size of the resulting union sub-tables, while larger than the underlying gold tables, is substantially smaller than the original complete tables, facilitating subsequent answer generation steps. In our experiments, the number of cells in the union table decreased to an average of 13.91% compared to the original table. Combining these strengthens, our union approach offers comparable performance to using the underlying gold table. Table 1 shows an example of building sub-tables, demonstrating significant improvements in final table QA performance.

4. Experiments

4.1. Experimental settings

We evaluate the performance of our table QA algorithm using the WikiSQL dataset [20]. WikiSQL comprises tables extracted from Wikipedia, spanning a variety of domains. The dataset includes questions requring aggregation, column selection, and conditions. It contains 15,878 test examples, with an average table size of 6.4 columns and 18.6 rows, and a maximum of 23 columns and 1,950 rows. WikiSQL has

been widely used in table QA work [7, 11].

The condition and answer columns used to generate the target sub-window V for a window W are determined based on the corresponding SQL queries. The WikiSQL training set provides these {question, table, SQL} triplets, where the SQL queries are annotated by human experts.

The performance of the proposed PieTa model is evaluated from two perspectives. First, to assess the overall table QA performance, we feed the sub-tables generated by PieTa into existing readers to obtain the final answer. We employ OmniTab [3], fine-tuned with the WikiSQL training set, as the reader. The exact match (EM) score, reflecting the empirical probability of predictions that exactly match the ground truth, served as the evaluation criterion. Second, for the sub-table selection sub-task, we use the annotated labels for condition and answer columns, as well as rows, provided by WikiSQL. Precision and recall are used for evaluation: Cells present in the underlying gold table are considered *positive*, while those not found in the gold table are deemed *negative*.

4.2. Main results

Sub-table selection results. To compare our algorithm *PieTa* with existing approaches, we conduct experiments using *ITR* [7], *TabSQLify* [11], and a simple baseline algorithm (referred to as Holistic LM (selector)) that tunes an LM to

generate a sub-table directly from the original input table.* Among these, *TabSQLify*, *PieTa*, and *Holistic LM* use LM selectors. For *PieTa* and *Holistic LM*, we fine-tune Llama3-8B-Instruct for 5 epochs using 56,355 pairs of instruction tuning data, setting the window size w to 3. For *TabSQLify*, we initially assess both ChatGPT and Llama3-70B, selecting the model that achieves the best results for each algorithm.

The results are summarized in Table 2. ITR evaluates each column or row independently and cannot capture dependencies across multiple entities, resulting in low precision, around 16.4%. By explicitly capturing joint dependencies across columns and rows, *PieTa* achieves a 34.8%p precision gain over ITR. Similar to PieTa, TabSQLify can model joint dependencies. However, it relies on in-context learning for sub-table selection, which necessitates extended prompts, thereby straining the LMs. TabSQLify's selection strategy first extracts a few rows (specifically, the first three rows, as in [11], which we follow in our experiments) and then determines condition and answer columns. However, when the cells that satisfy all conditions are not included in the initially extracted rows, the algorithm may sample irrelevant columns. While increasing the number of extracted rows can alleviate this issue, it places additional strain on the LM selector by requiring it to process longer contexts. This limitation contributes to performance degradation in Tab-SQLify as table sizes increase. In contrast, PieTa consistently achieves high precision and recall across varying table sizes (see Table 3).

Another limitation of approaches that generate SQL queries is the risk of producing inoperable SQL code. We empirically observed that *TabSQLify* generated unexecutable SQL code for 10,691 out of 15,878 pairs in the WikiSQL dataset. Finally, Table 4 demonstrates that *PieTa* maintains stable performance across varying numbers of answer columns and rows.

Selector	Precision	Recall
ITR TabSQLify	16.4 13.7	83.2 80.5
Holistic LM	86.0	78.4
PieTa iter. 1 PieTa iter. 2 (ours)	22.4 51.2	98.6 97.8

Table 2. Performance of different sub-table selection algorithms for the sub-table selection sub-task on the WikiSQL dataset, evaluated in precision (%) and recall (%). The last 2 rows show the progression of sub-table selection performance using PieTa over successive sub-table forming iterations (see Sec. 3.2).

#11-	TabSQ	Lify	PieTa			
# cells	Precision	Recall	Precision	Recall		
0-100	16.1	81.1	55.6	97.8		
100-200	10.1	80.7	48.4	97.7		
200-300	7.2	77.6	35.2	97.5		
300-400	10.1	75.8	29.5	98.9		
400-500	12.8	69.5	29.3	96.4		
500+	8.6	76.2	29.7	97.0		

Table 3. Sub-table selection performance (%) across varying size of table (number of cells) on WikiSQL.

# condition & answer columns	Precision	Recall	# answer rows	Precision	Recall
2	59.7	96.9	0-5	56.2	97.2
3	47.0	97.4	5-10	57.7	96.9
4	58.0	98.7	10-15	51.4	93.8
5	63.2	98.0	15-20	75.8	67.9
6	73.6	99.4	20-270	66.3	86.6

Table 4. Sub-table selection performance (%) across varying number of condition and answer columns (left) and answer rows (right) in WikiSQL.

Reader	Selector	WikiSQL
OmniTab	- ITR TabSQLify PieTa	87.04 86.38 82.84 88.55

Table 5. The results of table QA (in % exact match) on WikiSQL. *PieTa* achieves state-of-the-art performance among sub-table-based methods. '-' means that selector is not used (*i.e.* the original table is given as input).

# cells	OmniTab	TabSQLify	PieTa
0-100	90.37	85.35	88.78
100-200	89.85	84.78	90.04
200-300	72.86	73.89	87.91
300-400	56.27	60.57	83.87
400-500	52.25	53.37	79.21
500+	40.00	47.89	75.79

Table 6. Table QA performance (in % exact match) across varying size of table (number of cells) on WikiSQL .

Table QA results. Table 5 presents the table QA performance of various sub-table selection methods combined with different readers. Using sub-tables generated by *PieTa* as input to the reader results in a performance improvement

^{*}Both *Dater* and *TabSQLify* use in-context learning, whereas *PieTa* employs fine-tuning. To the best of our knowledge, no existing fine-tuning approaches specifically address sub-table selection. *Holistic LM* can be considered a simple adaptation of *Dater* for fine-tuning-based sub-table selection

Tuning	Target format	Distribution	Precision	Recall
Output layer	Table	Balanced	51.2	97.8
In-context	Table	Balanced	16.8	88.2
Output layer	Index	Balanced	18.2	48.6
Output layer	Table	Unbalanced	41.2	94.8

Table 7. Sub-table selection performance (%) on 1 step for ablation studies. Our method fine-tunes output layer to generate in table format with balanced training data.

of up to 1.5% compared to using the original table. This improvement can be attributed to the reader processing more focused and relevant information, as irrelevant portions of the original table are excluded.

Overall, *PieTa* outperforms other sub-table selection methods. Additionally, it appears to generate effective sub-tables consistently, regardless of the size of the original table, contributing to stable QA performance across varying table sizes (see Table 6).

4.3. Ablation study

Fine-tuning vs. in-context learning. LMs typically generate supplementary explanations in text format alongside sub-tables. To improve their effectiveness for sub-table selection tasks, we explore in-context learning with a 5-shot approach and output layer fine-tuning methods.

As shown in Table 7, the in-context learning approach results in an 11%p lower recall compared to the output layer fine-tuning approach. Our method relies on obtaining subtables through multiple iterations, meaning that low recall in the initial step prevents the selection of answer cells in subsequent steps. This highlights the limitations of in-context learning from step 2 onwards. Additionally, since Llama3-8B-Instruct is not instruction-tuned specifically for sub-table selection, it sometimes deviates from the intended instructions, such as answering questions within the provided window instead of selecting relevant sub-table cells.

By fine-tuning only the output layer, we adapt the selector's output format specifically for sub-table selection. This eliminates the need for long prompts and results in improved performance for sub-table selection tasks.

Target format variation. As shown in the response in Fig. A.1, the output target of our training data is formatted as a table containing the selected column value, row index, and corresponding cell value. For comparison with the approach used in Dater [18], which selects only row and column indices, we modified the output target format from a table format to an index format and fine-tuned our selector accordingly.

Our table format, which predicts cell values alongside indices, demonstrates better performance than the index-

only prediction method. We attribute this to the fine-tuning process, which enables the selector to generate more sophisticated predictions by learning to reconstruct a complete table structure.

Balanced vs. unbalanced training data. To examine the impact of balancing the training data distribution, we compare a balanced dataset with an unbalanced dataset generated by randomly segmenting tables using a fixed window size, while maintaining the same overall size as the balanced dataset. After fine-tuning, the selector trained on the balanced dataset outperforms the one trained on the unbalanced dataset (see Table 7).

The lower performance of the selector trained on the unbalanced dataset can be attributed to its bias toward the training data distribution. This bias causes it to rarely select two rows or three columns, regardless of the table's actual contents (see the blue bars in Fig. A.2). By balancing the data distribution, this issue is mitigated, leading to improved performance.

5. Conclusion

We have examined the challenges of sub-table selection in table question answering (QA). Existing approaches are limited because they do not account for the joint dependence across multiple rows or columns in table selection, nor do they address the challenge of language models needing to comprehend lengthy sequences of tokens. Our algorithm bypasses these challenges by employing a simple strategy of dividing input tables into small windows and independently constructing sub-tables within them. Our multi-resolution window forming strategy, which essentially takes the union of sub-tables, not only simplifies sub-table selection within each window but also captures long-range relationships across different windows without introducing unnecessary operational assumptions. When evaluated on the WikiSQL dataset, our algorithm demonstrated significant improvements over state-of-the-art methods.

Limitations. Our study focused on improving the subtable selection process independently of the reader that generates the final answer. This approach offers the advantage of flexibility, as the selection process can be easily combined with any type of reader. For instance, our algorithm can directly enhance the performance of readers that generate both natural language answers and SQL queries. However, in principle, tailoring the sub-table selector specifically for the reader could further improve performance. Future research should explore the possibility of jointly optimizing the sub-table selection process and the reader.

A. Appendix

A.1. Sub-window sampling process

Algorithm 2 presents the details of the window generation process from an input table. DIVIDETABLE generates a set of divided tables $t = \{t_1, t_2, ..., t_n\}$ by sliding a window of size w across the input table T with a stride of 1.

Algorithm 2 DIVIDETABLE

```
1: Input: Table T with R rows and C columns
 2: Parameters: Window size w
 3: Output: Set of windows W = \{W_i\}_{i=1}^N
 4: W \leftarrow \emptyset
 5: for i_{start} = 0 to R by 1 do
       for j_{start} = 0 to C by 1 do
          if i + w > R then
 7:
 8:
             i_{\text{start}} = R - w
 9:
          end if
          if j + w > C then
10:
             j_{\text{start}} = C - w
11:
12:
          end if
                                                                          ⊳ Slicing
13:
          W_i = T[i_{\text{start}} : i_{\text{start}} + w, j_{\text{start}} : j_{\text{start}} + w]
          W = W \cup \{W_i\}
14:
15:
       end for
16: end for
17: Return W
```

A.2. Input prompt structure

The input prompt for sub-table selection includes both static components and dynamic elements. The dynamic elements, highlighted in blue and green in Figure A.1, represent the question and the table window, respectively. The static components of the prompt remain unchanged, regardless of any modifications to the table or question.

A.3. Details of training data sampling

As can be seen from the left column in Fig. A.2, the distribution of the number of rows and columns in target sub-tables is seriously unbalanced. In the case of fine-tuning with such a dataset, the selector is biased to the distribution, so there were many cases where only one column is selected regardless of the question and the contents of the table. To solve this problem, we evenly match the distribution of the number of rows and columns in target sub-tables. There are 13 combinations (i.e. $m \times n$ of the number of rows and columns in target sub-tables that can come from a 3×3 window (1×0 , 2×0 , and 3×0 are excluded because the table cannot be made without the column). To generate data for balancing, we first prepare condition column or answer column according to the number of columns in target sub-table to be made *i.e.* n. The remaining 3 - n is filled with columns, which are not condition column nor answer column. Likewise, for the row, we place the cells satisfying the condition in the window according to the number of rows in the target subtable we want to make *i.e.* m, and fill the remaining 3 - m

Prompt

Below is an instruction that describes a task, paired with an input that provides further context.

Write a response that appropriately completes the request.

Instruction: This is a task of extracting sub-table which has gold information to answer the question from a given table. Specifically, you have to select rows and columns which have the information you need. Then, generate the sub-table with those rows and columns. If you don't need anything, choose None.

Input:

```
### Question: Who played in the Toronto Raptors from 1995-96?
### Table:
col: Position | Years in Toronto | School/Club Team
row 1: center | 1995-96 | fordham
row 2: forward | 1998-2001 | virginia union
row 3: center | 2001-02 | Houston
```

Sub-table

Response: col : Years in Toronto row 1 : 1995-96

Figure A.1. An example of prompt. Given an instruction, question Q, and table T, the prompt generator $\mathcal P$ creates a textual prompt (top). This prompt is fed to the sub-table selector $\mathcal S$ to construct the final sub-table (bottom). Note that the prompt contains the complete question Q and table T, highlighted in blue and green, respectively.

with cells that do not meet the condition. In this way, we can generate window and target sub-table pairs as we want by arranging the row and column in the window as needed and the distribution of the number of rows and column in target sub-tables is evenly adjusted.

References

- [1] Zhoujun Cheng, Tianbao Xie, Peng Shi, Chengzu Li, Rahul Nadkarni, Yushi Hu, Caiming Xiong, Dragomir Radev, Mari Ostendorf, Luke Zettlemoyer, Noah A. Smith, and Tao Yu. Binding language models in symbolic languages. In *ICLR*, 2023. 1
- [2] Jonathan Herzig, Pawel Krzysztof Nowak, Thomas Müller, Francesco Piccinno, and Julian Eisenschlos. TaPas: Weakly supervised table parsing via pre-training. In ACL, 2020. 1
- [3] Zhengbao Jiang, Yi Mao, Pengcheng He, Graham Neubig, and Weizhu Chen. OmniTab: Pretraining with natural and synthetic data for few-shot table-based question answering. In *NAACL*, 2022. 1, 2, 3, 5
- [4] Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In EMNLP, 2020. 2
- [5] Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. BART: Denoising sequence-to-

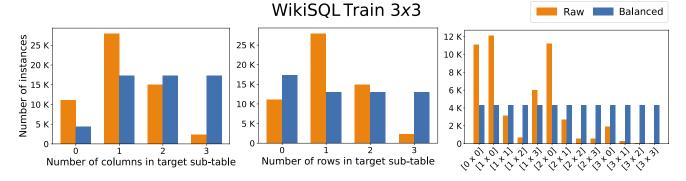


Figure A.2. Histograms illustrating the distribution of the generated training data. The 'raw' histogram represents the original, unfiltered data, while the 'balanced' histogram shows the manipulated data to address class imbalance. The numbers in parentheses indicate the total number of examples in each dataset. The x-axis in the third row represents [number of answer rows × number of condition & answer columns]. Note that the y-axis ranges differ across the histograms.

- sequence pre-training for natural language generation, translation, and comprehension. In ACL, 2020. 2
- [6] Peng Li, Yeye He, Dror Yashar, Weiwei Cui, Song Ge, Haidong Zhang, Danielle Rifinski Fainman, Dongmei Zhang, and Surajit Chaudhuri. Table-gpt: Table fine-tuned gpt for diverse table tasks. Proc. ACM on Management of Data, 2024.
- [7] Weizhe Lin, Rexhina Blloshmi, Bill Byrne, Adria de Gispert, and Gonzalo Iglesias. An inner table retriever for robust table question answering. In *ACL*, 2023. 2, 5
- [8] Nelson F Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. Lost in the middle: How language models use long contexts. *Transactions of the Association for Computational Linguistics* (TACL)., 2024. 2
- [9] Qian Liu, Bei Chen, Jiaqi Guo, Morteza Ziyadi, Zeqi Lin, Weizhu Chen, and Jian-Guang Lou. TAPEX: Table pretraining via learning a neural SQL executor. In *ICLR*, 2022. 1, 2
- [10] Tianyang Liu, Fei Wang, and Muhao Chen. Rethinking tabular data understanding with large language models. arXiv preprint, 2023. 2
- [11] Md Mahadi Hasan Nahid and Davood Rafiei. TabSQLify: Enhancing reasoning capabilities of LLMs through table decomposition. In NAACL, 2024. 2, 5, 6
- [12] Linyong Nan, Chiachun Hsieh, Ziming Mao, Xi Victoria Lin, Neha Verma, Rui Zhang, Wojciech Kryściński, Hailey Schoelkopf, Riley Kong, Xiangru Tang, Mutethia Mutuma, Ben Rosand, Isabel Trindade, Renusree Bandaru, Jacob Cunningham, Caiming Xiong, and Dragomir Radev. Fetaqa: Free-form table question answering. In ACL, 2022. 1
- [13] Ansong Ni, Srini Iyer, Dragomir Radev, Ves Stoyanov, Wentau Yih, Sida I. Wang, and Xi Victoria Lin. Lever: learning to verify language-to-code generation with execution. In *ICML*, 2023. 1
- [14] Panupong Pasupat and Percy Liang. Compositional semantic parsing on semi-structured tables. In ACL-IJCNLP, 2015. 1
- [15] Sohan Patnaik, Heril Changwal, Milan Aggarwal, Sumit Bhatia, Yaman Kumar, and Balaji Krishnamurthy. CABINET:

- Content relevance-based noise reduction for table question answering. In *ICLR*, 2024. 1, 2
- [16] Zilong Wang, Hao Zhang, Chun-Liang Li, Julian Martin Eisenschlos, Vincent Perot, Zifeng Wang, Lesly Miculicich, Yasuhisa Fujii, Jingbo Shang, Chen-Yu Lee, and Tomas Pfister. Chain-of-table: Evolving tables in the reasoning chain for table understanding. In *ICLR*, 2024. 2
- [17] Jingfeng Yang, Aditya Gupta, Shyam Upadhyay, Luheng He, Rahul Goel, and Shachi Paul. TableFormer: Robust transformer modeling for table-text encoding. In ACL, 2022.
- [18] Yunhu Ye, Binyuan Hui, Min Yang, Binhua Li, Fei Huang, and Yongbin Li. Large language models are versatile decomposers: Decomposing evidence and questions for table-based reasoning. In SIGIR, 2023. 2, 3, 7
- [19] Pengcheng Yin, Graham Neubig, Wen-tau Yih, and Sebastian Riedel. TaBERT: Pretraining for joint understanding of textual and tabular data. In *ACL*, 2020. 1
- [20] Victor Zhong, Caiming Xiong, and Richard Socher. Seq2sql: Generating structured queries from natural language using reinforcement learning. *arXiv preprint*, 2017. 1, 2, 4, 5