

EDGE-GRACEFUL USUAL FAN GRAPHS

AARON D.C. ANGEL¹, JOHN RAFAEL M. ANTALAN^{2*}, JOHN LOUREYNZ
F.GAMUROT¹, and RICHARD P. TAGLE²

ABSTRACT. A graph G with p vertices and q edges is said to be edge-graceful if its edges can be labeled from 1 through q , in such a way that the labels induced on the vertices by adding over the labels of incident edges modulo p are distinct. A known result under this topic is Lo's Theorem, which states that if a graph G with p vertices and q edges is edge-graceful, then $p \mid \left(q^2 + q - \frac{p(p-1)}{2}\right)$.

This paper presents novel results on the edge-gracefulness of the usual fan graphs. Using Lo's Theorem, the concepts of divisibility and Diophantine equations, and a computer program created, we determine all edge-graceful usual fan graphs $F_{1,n}$ with their corresponding edge-graceful labels.

1. INTRODUCTION

The study of graphs is a vast field in mathematics which offers a plethora of unique and interesting topics. One of these particular topics in graph theory is graph labeling.

The concept of **graph labeling** was first introduced in the mid-1960s. Graph labeling is an assignment of integers to the vertices or edges, or both, of a graph under certain conditions [1]. In the last 60 years, over 200 types or variations of graph labeling have been studied and about 2500 articles have been published [2]. One type of graph labeling is graceful labeling. A **graceful labeling** or graceful numbering is a special graph labeling of a graph on m edges in which the vertices are labeled, using a subset of distinct nonnegative integers from 0 to m and each edge of the graph is uniquely labeled by the absolute difference between the labels of the vertices incident to it. If the resulting graph edge numbers run from 1 to m inclusive, it is a graceful labeling, and the graph is said to be a graceful graph [3].

On the other hand, the concept of **edge-gracefulness** and edge-graceful graphs was defined and introduced by Lo in 1985 [4]. Edge-graceful labeling is considered as a reversal of graceful labeling because it labels the edges first; then the labels of the vertices would depend on the labels of the edges incident to them. That is, a graph G with p vertices and q edges is said to be edge-graceful if the edges

Date: Received: xxxxxx; Revised: yyyyyy; Accepted: zzzzzz.

* Corresponding author.

2020 *Mathematics Subject Classification.* Primary 05C78; Secondary (None).

Key words and phrases. edge-graceful labeling, Diophantine equation, fan graph.

can be labeled from 1 through q , in such a way that the labels induced on the vertices by adding over the labels of incident edges modulo p are distinct [3].

Since the introduction of the concept of edge-graceful labeling in 1985, several works on the edge-graceful labeling of specific families of graphs have been conducted. For instance, Kuan et al. [5] studied edge-graceful unicyclic graphs. Lee et al. [6] on the other hand, studied the edge-graceful labeling of complete graphs. The work of Small in [7] shows that regular (even) spider graphs are edge-graceful. In 1992, Cabannis et al. [8] studied the edge-gracefulness of regular graphs and trees. Fast-forward to 2017, Venkatesan and Sekar [3] attempted to prove that among all wheel graphs W_n , only W_3 is edge-graceful while a complete proof of their result was provided recently in [9].

In this paper, we used essential graph theory concepts to study the basic properties of usual fan graphs. In particular, their vertex and edge sets were used to apply Lo's Theorem, an initial condition that must be satisfied to conclude that a particular graph is edge-graceful. Then, using the definition of edge-graceful labeling, and some preliminary concepts in number theory, which include the concept of the Diophantine equation, this paper determined which among the said graphs satisfied Lo's Theorem. If a particular graph does not satisfy Lo's Theorem, then it automatically does not qualify to be an edge-graceful graph. Finally, by using a computer program that we created, this paper constructed actual examples of edge-graceful labeling of the usual fan graphs that satisfy these initial conditions, thereby showing that the graphs are indeed edge-graceful.

2. PRELIMINARIES

For completeness, we provide all the preliminary concepts and results necessary for the clear and organized presentation of the results of this study. Moreover, we emphasize that the graph-theoretical definitions used in this section, aside from the concept of edge-graceful labeling, are from Wolfram MathWorld [10]. We also refer the readers who are unfamiliar with graph theory concepts that were briefly stated in this paper, to some standard graph theory references such as Gallian's "A Dynamic Survey of Graph Labeling" [1] and Gross's "Graph theory and its applications" [11].

2.1. Essential Graph Theory Concepts. To begin this subsection, we briefly discuss some key concepts in graph theory that are essential to this paper.

Definition 2.1. A (p, q) -graph $G(V, E)$ is called **edge-graceful** if there exist a bijection $f : E \rightarrow \{1, 2, \dots, q\}$, such that the induced mapping $f^+ : V \rightarrow \mathbb{Z}_p$, defined by

$$f^+(u) \equiv \left(\sum_{v \in N(u)} f(uv) \right) (\text{mod } p)$$

is also a bijection, where \mathbb{Z}_p is the set of integers $\{0, 1, 2, \dots, (p-1)\}$. Moreover, every $f(uv)$ are the labels of the edges with endpoint u in G .

The **Figure 1** in the next page, shows an example of an edge-graceful labeling of a graph. First, the graph involved, has five edges and five vertices. By following

Definition 2.1, the edges of the graph were labeled using distinct integers from 1 to 5, and the induced labels of the vertices are distinct integers from 0 to 4.

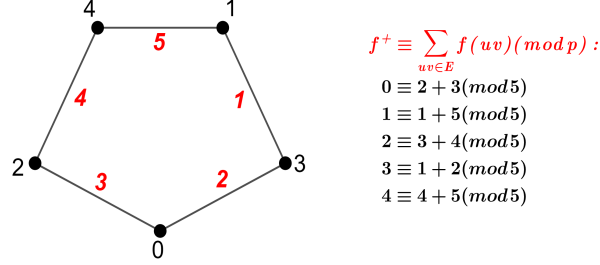


FIGURE 1. An edge-graceful labeling of the cycle graph C_5

Definition 2.2. A **fan graph** denoted by $F_{m,n}$ is defined as the graph join $K_m + P_n$, where K_m is the empty graph on m vertices and P_n is the path graph on n vertices. The case when $m = 1$ corresponds to the usual fan graphs.

Some examples of usual fan graphs are shown in **Figure 2** below.

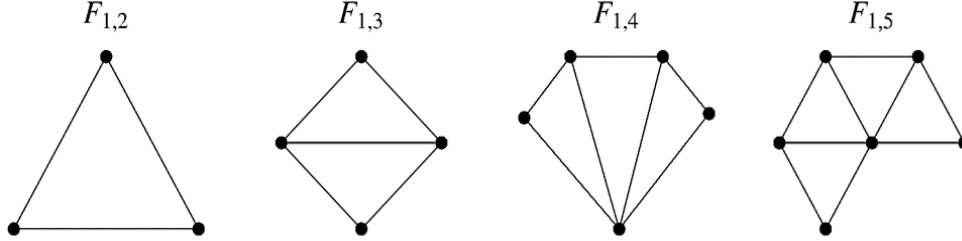


FIGURE 2. Examples of usual fan graphs

2.2. Essential Number Theory Concepts. For this subsection, we enumerate the important concepts in number theory that were utilized in this paper. For a more detailed discussion of basic concepts in number theory, readers may refer to Burton's "Elementary Number Theory" [12].

Definition 2.3. Let a and b be two positive integers, where $a \leq b$. We say that a **divides** b , written in symbols by $a \mid b$, if there is a positive integer c such that $b = ac$. Otherwise, we say that a **does not divide** b , denoted by $a \nmid b$. Now, if $a \mid b$, it also implies the following: (i) b is a multiple of a , (ii) a is a divisor of b , and (iii) a is a factor of b .

Definition 2.4. Let p be a positive integer. Also, let $a, b \in \mathbb{Z}$. We can say that a is congruent to b (modulo p) or $a \equiv b \pmod{p}$ if $p \mid (a - b)$. That is, if $a = b + kp$ for some $k \in \mathbb{Z}$.

Theorem 2.5. Let $a, b \in \mathbb{Z}$, and p be a positive integer. If $a \equiv b \pmod{p}$, then $b \equiv a \pmod{p}$.

Theorem 2.6. *Suppose $a \equiv b \pmod{p}$ and $c \equiv d \pmod{p}$, then $a+c \equiv b+d \pmod{p}$*

Definition 2.7. General Quadratic Diophantine Equation: Diophantine equations are equations wherein only integer solutions are allowed. A general quadratic Diophantine equation is an equation of the form $ax^2 + bxy + cy^2 + dx + ey + f = 0$, where both x and y are integers.

2.3. Essential Results Used in this Paper. This subsection discusses and proves Lo's theorem, which is the main theorem that we will use to obtain the results of this paper. Furthermore, some essential transformations of quadratic Diophantine equations are also discussed in this section.

Theorem 2.8 (Lo's Theorem[4]). *If a graph G of p vertices and q edges is edge-graceful, then*

$$p \mid \left(q^2 + q - \frac{p(p-1)}{2} \right).$$

Proof. Again, we note that a (p, q) -graph $G(V, E)$ is called edge-graceful if there exist a bijection $f : E \rightarrow \{1, 2, \dots, q\}$, such that the induced mapping $f^+ : V \rightarrow \mathbb{Z}_p$, defined by

$$f^+(u) \equiv \left(\sum_{v \in N(u)} f(uv) \right) \pmod{p}$$

is also a bijection, where every $f(uv)$ are the labels of the edges with endpoint u in G .

Now, we denote by u_1, u_2, \dots, u_p , the vertices in our graph with labels

$$f^+(u_i) \equiv \left(\sum_{v \in N(u_i)} f(u_i v) \right) \pmod{p} \quad , \quad i = 1, 2, \dots, p.$$

Adding all the labels of the vertices u_i , and applying **Theorem 2.6**, we arrive at

$$\sum_{i=1}^p f^+(u_i) \equiv \sum_{i=1}^p \left[\left(\sum_{v \in N(u_i)} f(u_i v) \right) \pmod{p} \right]. \quad (2.1)$$

From the definition of edge-graceful labeling, the vertices of the graph G must be distinctly labeled from 0 to $(p-1)$. Thus,

$$\sum_{i=1}^p f^+(u_i) = (0 + 1 + 2 + \dots + (p-1)). \quad (2.2)$$

Substituting (2.2) to (2.1), we will have,

$$(0 + 1 + 2 + \dots + (p-1)) \equiv \sum_{i=1}^p \left[\left(\sum_{v \in N(u_i)} f(u_i v) \right) \pmod{p} \right]. \quad (2.3)$$

Next, observe that $\sum_{v \in N(u_1)} f(u_1 v) \pmod{p}$ is the sum of the labels of the edges

with endpoint u_1 , modulo p . Similarly, $\sum_{v \in N(u_2)} f(u_2 v) \pmod{p}$ is the sum of the labels of the edges with endpoint u_2 , modulo p . This will be the case up to

$\sum_{v \in N(u_p)} f(u_p v) \pmod p$ which is the sum of the labels of the edges with end-point u_p , modulo p . Also, an edge connects two vertices in a graph. Thus, $\sum_{i=1}^p \left[\left(\sum_{v \in N(u_i)} f(u_i v) \right) \pmod p \right]$ represents the twice the sum of the labels of all the edges, modulo p . Therefore,

$$\sum_{i=1}^p \left[\left(\sum_{v \in N(u_i)} f(u_i v) \right) \pmod p \right] = 2(1 + 2 + \dots + q) \pmod p. \quad (2.4)$$

Consequently, by substituting (2.4) to (2.3) we will have,

$$(0 + 1 + 2 + \dots + (p-1)) \equiv 2(1 + 2 + \dots + q) \pmod p.$$

Now, by **Theorem 2.5**, we will have,

$$2(1 + 2 + \dots + q) \equiv (0 + 1 + 2 + \dots + (p-1)) \pmod p$$

$$2 \sum_{x=1}^q x \equiv \left(0 + \sum_{x=1}^{p-1} x \right) \pmod p.$$

Since $\sum_{x=1}^N x = \frac{N(N+1)}{2}$, we will have,

$$\begin{aligned} 2 \left(\frac{q(q+1)}{2} \right) &\equiv 0 + \left(\frac{(p-1)p}{2} \right) \pmod p \\ (q^2 + q) &\equiv \left(\frac{(p-1)p}{2} \right) \pmod p; \end{aligned}$$

which implies that,

$$p \mid \left(q^2 + q - \frac{p(p-1)}{2} \right).$$

□

Lemma 2.9 ([13]). *The quadratic Diophantine equation*

$$ax^2 + bxy + cy^2 + dx + ey + f = 0 \quad (2.5)$$

where a, b, c, d, e , and f are integer coefficients, and x and y are the unknown variables can be reduced to

$$X^2 - DY^2 = N \quad (2.6)$$

where $X = Dy + E$, $Y = 2ax + by + d$ and $N = E^2 - DF$.

Note that in this transformation, $D = b^2 - 4ac$, $E = bd - 2ae$, and $F = d^2 - 4af$. Moreover, observe that if X and Y is a solution to equation (2.6), then there are integers x and y , such that

$$X = Dy + E \rightarrow y = \frac{X - E}{D}$$

and

$$Y = 2ax + by + d \rightarrow x = \frac{Y - by - d}{2a}$$

where x and y are the integer solutions for equation (2.5).

Remark 2.10. The Diophantine equations involved in this study have $c = 0$. Thus, equation (2.6) will just be written as

$$X^2 - (bY)^2 = N. \quad (2.7)$$

Observe that we can factor the left side of equation (2.7) as $(X + bY)(X - bY)$. Moreover, if the pair N_1 and N_2 is a factor pair of N , then we will have linear system of equation,

$$\begin{aligned} (X + bY) &= N_1 \\ (X - bY) &= N_2 \end{aligned}$$

Now, solving for X and Y , we will have,

$$X = \frac{N_1 + N_2}{2} \quad \text{and} \quad Y = \frac{N_1 - N_2}{2b}.$$

3. RESULTS

We are now ready to present and discuss the main result of this paper.

Theorem 3.1. *Among all usual fan graphs $F_{1,n}$, only $F_{1,2}$, $F_{1,3}$, and $F_{1,11}$ are edge-graceful.*

Proof. First, recall that a usual fan graph $F_{1,n}$ has $n+1$ vertices and $2n-1$ edges. Using **Theorem 2.8**, which is also known as the **Lo's Theorem**, if a graph with p vertices and q edges is edge graceful, then

$$p \mid \left(q^2 + q - \frac{p(p-1)}{2} \right).$$

Thus, we substitute $p = n+1$ and $q = 2n-1$ in **Theorem 2.8**. That is,

$$(n+1) \mid \left((2n-1)^2 + (2n-1) - \frac{(n+1)(n)}{2} \right),$$

which further implies that,

$$\left(\frac{7n^2 - 5n}{2n+2} \right) \in \mathbb{Z}.$$

This means,

$$\begin{aligned} 7n^2 - 5n &= (2n+2)k \\ &= 2nk + 2k, \quad \text{for some } k \in \mathbb{Z}. \end{aligned}$$

Thus, we solve for all the possible integer values of n and k in the Diophantine equation,

$$7n^2 - 5n - 2nk - 2k = 0 \quad (3.1)$$

where $n, k \in \mathbb{Z}$. This Diophantine equation is of the form,

$$an^2 + bnk + ck^2 + dn + ek + f = 0,$$

where $a = 7, b = -2, c = 0, d = -5, e = -2$, and $f = 0$.

Using the transformation stated in **Lemma 2.9**, equation (3.1) can be reduced to

$$\mathbf{X}^2 - 4\mathbf{Y}^2 = 1344 \quad (3.2)$$

where $Y = 2an + bk + d = 14n - 2k - 5$ and $X = Dk + E = 4k + 38$.

By factoring the left side of the equation (3.2), we will have,

$$(X + 2Y)(X - 2Y) = 1344.$$

Therefore, by **Lemma 2.9** and **Remark 2.10**, we have the following:

$$X = \frac{N_1 + N_2}{2}, \quad Y = \frac{N_1 - N_2}{-4}, \quad k = \frac{X - 38}{4}, \quad n = \frac{Y + 2k + 5}{14},$$

where (N_1, N_2) are the factor pairs of $N = 1344$. Using these information, we can now solve for the integer values of n and k , by considering all the factor pairs of 1344, as shown in **Table 1** below.

N_1	N_2	X	Y	n	k
1	1344	672.5	335.75	47	158.625
2	672	337	167.5	23	74.75
3	448	225.5	111.25	15	46.875
4	336	170	83	11	33
6	224	115	54.5	7	19.25
7	192	99.5	46.25	5.857142857	15.375
8	168	88	40	5	12.5
12	112	62	25	3	6
14	96	55	20.5	2.428571429	4.25
16	84	50	17	2	3
21	64	42.5	10.75	1.285714286	1.125
24	56	40	8	1	0.5
28	48	38	5	0.714285714	0
32	42	37	2.5	0.5	-0.25
1344	1	672.5	-335.75	-0.964285714	158.625
672	2	337	-167.5	-0.928571429	74.75
448	3	225.5	-111.25	-0.892857143	46.875
336	4	170	-83	-0.857142857	33
224	6	115	-54.5	-0.785714286	19.25
192	7	99.5	-46.25	-0.75	15.375
168	8	88	-40	-0.714285714	12.5
112	12	62	-25	-0.571428571	6
96	14	55	-20.5	-0.5	4.25
84	16	50	-17	-0.428571429	3
64	21	42.5	-10.75	-0.25	1.125
56	24	40	-8	-0.142857143	0.5
48	28	38	-5	0	0
42	32	37	-2.5	0.142857143	-0.25
-1	-1344	-672.5	-335.75	-49	-177.625
-2	-672	-337	-167.5	-25	-93.75

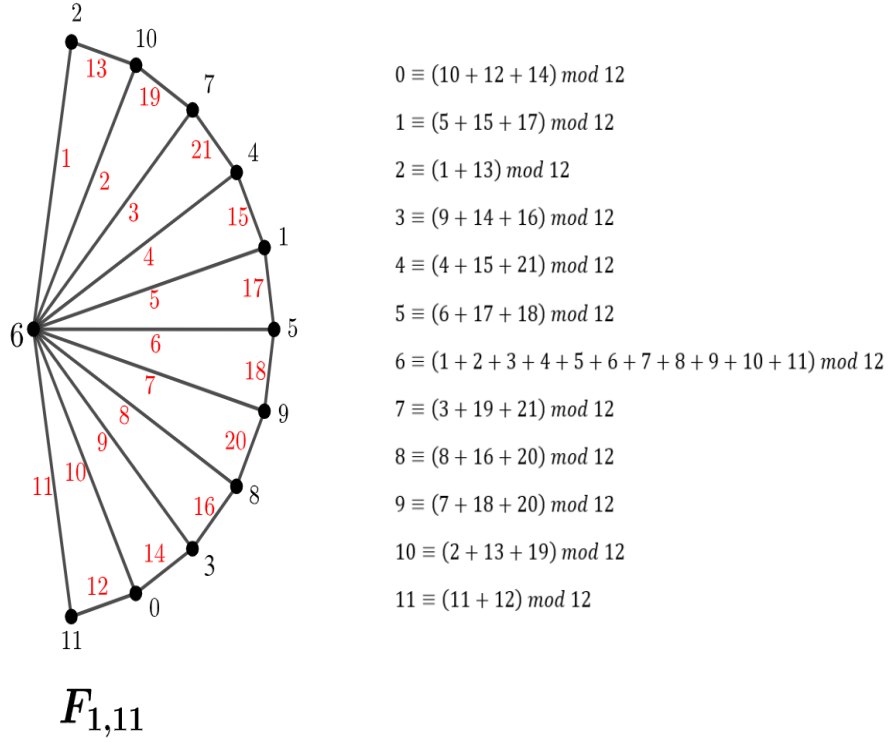
-3	-448	-225.5	-111.25	-17	-65.875
-4	-336	-170	-83	-13	-52
-6	-224	-115	-54.5	-9	-38.25
-7	-192	-99.5	-46.25	-7.857142857	-34.375
-8	-168	-88	-40	-7	-31.5
-12	-112	-62	-25	-5	-25
-14	-96	-55	-20.5	-4.428571429	-23.25
-16	-84	-50	-17	-4	-22
-21	-64	-42.5	-10.75	-3.285714286	-20.125
-24	-56	-40	-8	-3	-19.5
-28	-48	-38	-5	-2.714285714	-19
-32	-42	-37	-2.5	-2.5	-18.75
-1344	-1	-672.5	335.75	-1.035714286	-177.625
-672	-2	-337	167.5	-1.071428571	-93.75
-448	-3	-225.5	111.25	-1.107142857	-65.875
-336	-4	-170	83	-1.142857143	-52
-224	-6	-115	54.5	-1.214285714	-38.25
-192	-7	-99.5	46.25	-1.25	-34.375
-168	-8	-88	40	-1.285714286	-31.5
-112	-12	-62	25	-1.428571429	-25
-96	-14	-55	20.5	-1.5	-23.25
-84	-16	-50	17	-1.571428571	-22
-64	-21	-42.5	10.75	-1.75	-20.125
-56	-24	-40	8	-1.857142857	-19.5
-48	-28	-38	5	-2	-19
-42	-32	-37	2.5	-2.142857143	-18.75

Table 1: Solutions for $7n^2 - 5n - 2nk - 2k = 0$

Table 1 shows that there are 8 possible solutions for the Diophantine equation $7n^2 - 5n - 2nk - 2k = 0$. These are: $(n,k) = (11,33), (3,6), (2,3), (0,0), (-13,-52), (-5,-25), (-4,-22)$ and $(-2,-19)$. However, since we are only concern with possible values of n for usual fan graph $F_{1,n}$, then n must be a positive integer only. Hence, from our 8 solutions, only $(2,3), (3,6)$, and $(11,33)$ where $n = 2, 3$ and 11 , respectively, will satisfy this condition. Therefore, we have shown that $F_{1,2}$, $F_{1,3}$, and $F_{1,11}$ are the only usual fan graphs that satisfy the **Lo's Theorem**.


To complete this proof, an actual example of an edge-graceful labeling of $F_{1,11}$, $F_{1,2}$, and $F_{1,3}$ are provided in **Figure 3**, **Figure 4**, and **Figure 5**, respectively.


Starting with the usual fan graph $F_{1,11}$, observe that this particular graph has 12 vertices and 21 edges. Thus, by permutation, there is a total of $21!$ possible labeling for its edge. Hence, since graph $F_{1,11}$ is too large, the researchers created and used computer program on C language to generate an edge-graceful for the said graph. One of the result form the computer program is the labeling shown

FIGURE 3. An Edge-graceful labeling of $F_{1,11}$

in **Figure 3**. The notes located at the right side of the labeled-graph in **Figure 3** show that it satisfies the definition of an edge-graceful labeling.

Similar computer programs were created and used to find an edge-graceful labeling for graphs $F_{1,2}$ and $F_{1,3}$. The notes located at the right side of the labeled-graph in **Figure 4** and **Figure 5** shows that they satisfy the definition of an edge-graceful labeling.

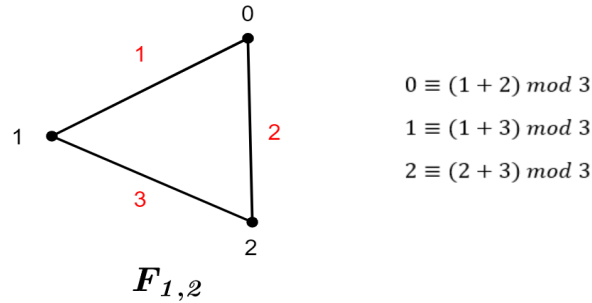FIGURE 4. An Edge-graceful labeling of $F_{1,2}$

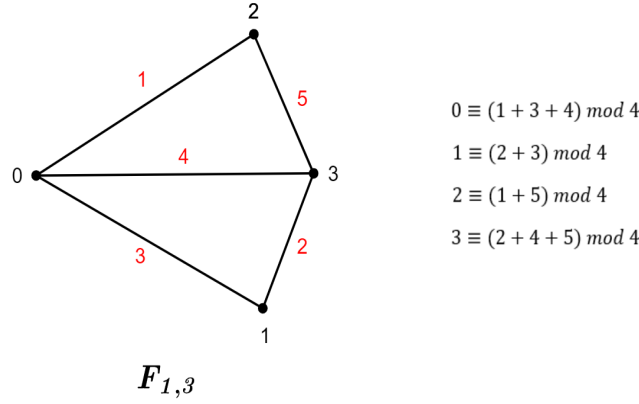FIGURE 5. An Edge-graceful labeling of $F_{1,3}$

Since all the needed conditions were satisfied, then we can now conclude that $F_{1,2}$, $F_{1,3}$, and $F_{1,11}$ are the only edge-graceful usual fan graphs. \square

4. CONCLUSION AND FUTURE WORKS

In this paper, using Lo's Theorem, the concept of divisibility, solving the Diophantine equation, and a computer program, we have successfully found all edge-graceful usual fan graphs. They are $F_{1,2}$, $F_{1,3}$, and $F_{1,11}$. The determination of edge-graceful graphs among other families of graphs, such as trees and circulant graphs, is highly recommended as a research study.

Acknowledgment. The completion of this paper would not be possible without the help and support of the following people and organizations: Central Luzon State University (CLSU), CLSU, College of Science, Department of Mathematics and Physics, Department of Science and Technology-Science Education Institute (DOST-SEI), so our heartfelt gratitude to them. We also express our gratitude to various reviewers for their comments and suggestions that helped improve the overall content of this paper.

REFERENCES

1. Gallian, J. A. (2022). A dynamic survey of graph labeling. Electronic Journal of Combinatorics, DS6. <https://www.combinatorics.org/files/Surveys/ds6/ds6v25-2022.pdf>
2. Ramachandran, S., & Gnanaseelan, T. (2022). Prime labeling on some cycle related graphs. Advances and Applications in Mathematical Sciences, 21(12), 6711-6719. https://www.mililink.com/upload/article/718638021aams_vol_2112_october_2022_a8_p6711-6719_s._ramachandran_and_t._gnanaseelan.pdf
3. Venkatesan S., & Sekar, P. (2017). Not all wheel graphs were edge-graceful. International Journal of Engineering, Science, and Mathematics, 6(5), 170-173. https://ijesm.co.in/article_html.php?did=3445&issueno=0
4. Lo S.-P. (1985). On edge-graceful labelings of graphs. Proc. Conf., Sundance/Utah 1985, Congr. Numerantium, 50, 231-241. https://ijesm.co.in/article_html.php?did=3445&issueno=0
5. Kuan Q., Lee S., Mitchem J., & Wang A. (1988). On edge-graceful unicyclic graphs. Congressus Numerantium, 61, 65-74.

6. Lee L., Lee S., & Murty G. (1988). On edge-graceful labelings of complete graphs: solutions of Lo's conjecture. *Congressus Numerantium*, 62, 225-233.
7. Small D. (1990). Regular (even) spider graphs are edge-graceful. *Congressus Numerantium*, 74, 247-254.
8. Cabannis S., Low R., & Mitchem J. (1992). On edge-graceful regular graphs and trees. *Ars Combinatoria*, 34, 129-142.
9. Angel A., Gamurot J.L., Antalán J.R. & Tagle R. (2024). On edge-gracefulness of wheel graphs. *Communications in Combinatorics, Cryptography & Computer Science*, 2024(2), 213-219.
10. Wolfram mathworld:the web's most extensive mathematics resource. (2024/10/25) <http://mathworld.wolfram.com/>
11. Gross J.L., Yellen J., & Anderson M. (2018). *Graph theory and its applications*. Chapman and Hall/CRC, 2018.
12. Burton D. *Elementary number theory*. McGraw Hill, 2010.
13. Tamang B.B. On the study of quadratic Diophantine equations. PhD thesis, TRIBHUVAN UNIVERSITY KATHMANDU, 2021. https://www.researchgate.net/publication/354447535_ON_THE_STUDY_OF_QUADRATIC_DIOPHANTINE_EQUATIONS

APPENDIX A. COMPUTER PROGRAMS USED IN THE PAPER

This section shows all the computer programs created and used for this study. These are computer programs in C language and were used to generate actual edge-graceful labeling of needed particular graphs, in order to complete the proof of the main results of this study.

Below, is the C program, used for generating an actual edge-graceful labeling of $F_{1,11}$

```
//usual fan graph F_{1,11} program

#include <stdio.h>
#include <stdbool.h>

#define MAX_SIZE 21

int Edge[MAX_SIZE];
int Vertex[MAX_SIZE];
int count = 1;
int n;
int numEdges;

void vertices(int n){

    Vertex[0] = (Edge[0] + Edge[1] + Edge[2] + Edge[3] + Edge[4] +
        Edge[5] + Edge[6] + Edge[7] + Edge[8] + Edge[9] + Edge[10]
        +11) % 12;
    Vertex[1] = (Edge[10] + Edge[11] +2) % 12;
    Vertex[2] = (Edge[11] + Edge[9] + Edge[12] +3) % 12;
    Vertex[3] = (Edge[12] + Edge[8] + Edge[13] +3) % 12;
    Vertex[4] = (Edge[13] + Edge[7] + Edge[14] +3) % 12;
```

```

Vertex[5] = (Edge[14] + Edge[6] + Edge[15] +3) % 12;
Vertex[6] = (Edge[15] + Edge[5] + Edge[16] +3) % 12;
Vertex[7] = (Edge[16] + Edge[4] + Edge[17] +3) % 12;
Vertex[8] = (Edge[17] + Edge[3] + Edge[18] +3) % 12;
Vertex[9] = (Edge[18] + Edge[2] + Edge[19] +3) % 12;
Vertex[10] =(Edge[19] + Edge[1] + Edge[20] +3) % 12;
Vertex[11] =(Edge[21] + +Edge[0] +2) % 12;

}

bool isSafe(int row, int col) {
    int i;
    for (i = 0; i < row; i++) {
        if (Edge[i] == col)
            return false;
    }

    return true;
}

void printEdge() {
    int i;

    for (i = 0; i < numEdges; i++) {
        printf("%d ", Edge[i] + 1);
    }
    printf("---->\n");
    for(i = 0; i <= 11; i++){
        printf("%d ", Vertex[i]);
    }
    printf("\n\n");
    //    }
}

void combinationofedge(int row) {
    int col;
    if (row >= numEdges) {
        vertices(n);

        if(Vertex[0] != Vertex[1] && Vertex[0] != Vertex[2]
        && Vertex[0] != Vertex[3] &&Vertex[0] != Vertex[4]
        && Vertex[0] != Vertex[5] && Vertex[0] != Vertex[6]
        && Vertex[0] != Vertex[7] && Vertex[0] != Vertex[8]
        && Vertex[0] != Vertex[9] && Vertex[0] != Vertex[10]
        && Vertex[0] != Vertex[11]

```

```

&& Vertex[1] != Vertex[2]
&& Vertex[1] != Vertex[3] && Vertex[1] != Vertex[4]
&& Vertex[1] != Vertex[5] && Vertex[1] != Vertex[6]
&& Vertex[1] != Vertex[7] && Vertex[1] != Vertex[8]
&& Vertex[1] != Vertex[9] && Vertex[1] != Vertex[10]
&& Vertex[1] != Vertex[11]

&& Vertex[2] != Vertex[3] && Vertex[2] != Vertex[4]
&& Vertex[2] != Vertex[5] && Vertex[2] != Vertex[6]
&& Vertex[2] != Vertex[7] && Vertex[2] != Vertex[8]
&& Vertex[2] != Vertex[9] && Vertex[2] != Vertex[10]
&& Vertex[2] != Vertex[11]

&& Vertex[3] != Vertex[4]
&& Vertex[3] != Vertex[5] && Vertex[3] != Vertex[6]
&& Vertex[3] != Vertex[7] && Vertex[3] != Vertex[8]
&& Vertex[3] != Vertex[9] && Vertex[3] != Vertex[10]
&& Vertex[3] != Vertex[11]

&& Vertex[4] != Vertex[5] && Vertex[4] != Vertex[6]
&& Vertex[4] != Vertex[7] && Vertex[4] != Vertex[8]
&& Vertex[4] != Vertex[9] && Vertex[4] != Vertex[10]
&& Vertex[4] != Vertex[11]

&& Vertex[5] != Vertex[6]
&& Vertex[5] != Vertex[7] && Vertex[5] != Vertex[8]
&& Vertex[5] != Vertex[9] && Vertex[5] != Vertex[10]
&& Vertex[5] != Vertex[11]

&& Vertex[6] != Vertex[7] && Vertex[6] != Vertex[8]
&& Vertex[6] != Vertex[9] && Vertex[6] != Vertex[10]
&& Vertex[6] != Vertex[11]

&& Vertex[7] != Vertex[8]
&& Vertex[7] != Vertex[9] && Vertex[7] != Vertex[10]
&& Vertex[7] != Vertex[11]

&& Vertex[8] != Vertex[9] && Vertex[8] != Vertex[10]
&& Vertex[8] != Vertex[11]

&& Vertex[9] != Vertex[10]
&& Vertex[9] != Vertex[11]

&& Vertex[10] != Vertex[11]

){
    printf("Solution %d:\n", count++);

```

```

        printEdge();
    }

    return;
}
for (col = 0; col < numEdges; col++) {
    if (isSafe(row, col)) {
        Edge[row] = col;
        combinationofedge(row + 1);
    }
}
}

void numberofcombinations(int n) {
    numEdges = n;
    combinationofedge(0);
}

int main() {

    n = 21;

    if (n > MAX_SIZE) {
        printf("Error: Maximum size exceeded.\n");
        return 0;
    }

    numberofcombinations(n);

    if (count == 0) {
        printf("No solutions found.\n");
    }

    return 0;
}

```

Below, is the C program, used for generating an actual edge-graceful labeling of $F_{1,2}$

```
//usual fan graph  $F_{1,2}$  program
```

```

#include <stdio.h>
#include <stdbool.h>

#define MAX_SIZE 3

int Edge[MAX_SIZE];
int Vertex[MAX_SIZE];

```

```

int count = 1;
int n;
int numEdges;

void vertices(int n){

    Vertex[0] = (Edge[0] + Edge[1] + 2) % 3;
    Vertex[1] = (Edge[1] + Edge[2] + 2) % 3;
    Vertex[2] = (Edge[2] + Edge[0] + 2) % 3;

}

bool isSafe(int row, int col) {
    int i;
    for (i = 0; i < row; i++) {
        if (Edge[i] == col)
            return false;
    }

    return true;
}

void printEdge() {
    int i;

    for (i = 0; i < numEdges; i++) {
        printf("%d ", Edge[i]+1);
    }
    printf("---->\n");
    for(i = 0; i <= 2; i++){
        printf("%d ", Vertex[i]);
    }
    printf("\n\n");
}

void combinationofedge(int row) {
    int col;
    if (row >= numEdges) {
        vertices(n);

        if(Vertex[0] != Vertex[1] && Vertex[0] != Vertex[2]
        && Vertex[1] != Vertex[2]

```

```

    ){
        printf("Solution %d:\n", count++);
        printEdge();
    }

    return;
}
for (col = 0; col < numEdges; col++) {
    if (isSafe(row, col)) {
        Edge[row] = col;
        combinationofedge(row + 1);
    }
}
}

void numberofcombinations(int n) {
    numEdges = n;
    combinationofedge(0);
}

int main() {

    n = 3;

    if (n > MAX_SIZE) {
        printf("Error: Maximum size exceeded.\n");
        return 0;
    }

    numberofcombinations(n);

    if (count == 0) {
        printf("No solutions found.\n");
    }

    return 0;
}

```

Below, is the C program, used for generating an actual edge-graceful labeling of $F_{1,3}$

```

// usual fan graph F_{1,3} program

#include <stdio.h>
#include <stdbool.h>

#define MAX_SIZE 5

int Edge[MAX_SIZE];

```



```

int Vertex[MAX_SIZE];
int count = 1;
int n;
int numEdges;

void vertices(int n){

    Vertex[0] = (Edge[0] + Edge[1] + Edge[2] + 3) % 4;
    Vertex[1] = (Edge[2] + Edge[3] + 2) % 4;
    Vertex[2] = (Edge[1] + Edge[3] + Edge[4] + 3) % 4;
    Vertex[3] = (Edge[0] + Edge[4] + 2) % 4;

}

bool isSafe(int row, int col) {
    int i;
    for (i = 0; i < row; i++) {
        if (Edge[i] == col)
            return false;
    }

    return true;
}

void printEdge() {
    int i;

    for (i = 0; i < numEdges; i++) {
        printf("%d ", Edge[i] + 1);
    }
    printf("---->\n");
    for(i = 0; i <= 3; i++){
        printf("%d ", Vertex[i]);
    }
    printf("\n\n");
}

void combinationofedge(int row) {
    int col;
    if (row >= numEdges) {
        vertices(n);

        if(Vertex[0] != Vertex[1] && Vertex[0] != Vertex[2]

```

```
&& Vertex[0] != Vertex[3] && Vertex[0] != Vertex[4]

&& Vertex[1] != Vertex[2] && Vertex[1] != Vertex[3]
&& Vertex[1] != Vertex[4]

&& Vertex[2] != Vertex[3] && Vertex[2] != Vertex[4]

){
    printf("Solution %d:\n", count++);
    printEdge();
}

return;
}
for (col = 0; col < numEdges; col++) {
    if (isSafe(row, col)) {
        Edge[row] = col;
        combinationofedge(row + 1);
    }
}
}

void numberofcombinations(int n) {
    numEdges = n;
    combinationofedge(0);
}

int main() {

    n = 5;

    if (n > MAX_SIZE) {
        printf("Error: Maximum size exceeded.\n");
        return 0;
    }

    numberofcombinations(n);

    if (count == 0) {
        printf("No solutions found.\n");
    }

    return 0;
}
```

¹ ALUMNI, DEPARTMENT OF MATHEMATICS AND PHYSICS, COLLEGE OF SCIENCE, CENTRAL LUZON STATE UNIVERSITY (3120), SCIENCE CITY OF MUÑOZ, NUEVA ECIJA, PHILIPPINES.

Email address: aaronangel1123@gmail.com, angel.aaron@clsu2.edu.ph

Email address: gamurotloureyznz@gmail.com, gamurot.john@clsu2.edu.ph

² FACULTY, DEPARTMENT OF MATHEMATICS AND PHYSICS, COLLEGE OF SCIENCE, CENTRAL LUZON STATE UNIVERSITY (3120), SCIENCE CITY OF MUÑOZ, NUEVA ECIJA, PHILIPPINES.

Email address: jrantalan@clsu.edu.ph

Email address: richard.tagle@clsu.edu.ph