

Advances in Transformers for Robotic Applications: A Review

Nikunj Sanghai¹ and Nik Bear Brown²

¹University of California, Los Angeles

²Northeastern University

*Corresponding author: Nikunj Sanghai, email: nikunjsanghai@ucla.edu

Abstract

The introduction of Transformers architecture has brought about significant breakthroughs in Deep Learning (DL), particularly within Natural Language Processing (NLP). Since their inception, Transformers have outperformed many traditional neural network architectures due to their "self-attention" mechanism and their scalability across various applications. In this paper, we cover the use of Transformers in Robotics. We go through recent advances and trends in Transformer architectures and examine their integration into robotic perception, planning, and control for autonomous systems. Furthermore, we review past work and recent research on use of Transformers in Robotics as pre-trained foundation models and integration of Transformers with Deep Reinforcement Learning (DRL) for autonomous systems. We discuss how different Transformer variants are being adapted in robotics for reliable planning and perception, increasing human-robot interaction, long-horizon decision-making, and generalization. Finally, we address limitations and challenges, offering insight and suggestions for future research directions.

1 Introduction

Researchers in the domain of robotics have long relied on classical algorithms that have been proven to be extremely effective for a limited range of tasks in structured and predictable environments. Early robotic systems often relied on rule-based systems, where predefined rules could handle a limited range of tasks in a structured environment. A notable early example will be Shakey, developed by Stanford AI Lab in the 1960s which could implement logical reasoning and planning [96]. By the 1990s, probabilistic methods started to be used with Markov Localization to account for sensor data noise and uncertainty in dynamic unstructured environment[33]. Stanford's Stanley, won the 2005 DARPA Grand Challenge, the milestone marked a shift from rule-based approaches to methods that integrated learning and probabilistic reasoning using machine learning and other data-based approaches to tackle the unpredictability of real world environments[142]. However, challenges persisted in developing robots that can operate robustly in dynamic outdoor settings [91]. The transition from classical algorithms to probabilistic approaches has been crucial in addressing uncertainties in robot perception and action [10].

The increase in capabilities of Deep Learning architectures began to be integrated into autonomous systems, especially in perception. AlexNet [68] outperformed all classical computer vision (CV) algorithms and popularized convolutional neural networks (CNN). Adoption of Recurrent Neural Networks(RNNs)[122] and Long Short-Term Memory (LSTM) networks[43], which enabled robots to process time-series data for tasks like speech recognition and navigation. Recent advances in scene understanding, sensor fusion, and multimodal approaches have further improved autonomous navigation capabilities[152]. Despite these developments, achieving robust autonomy in unfamiliar outdoor environments remains a significant challenge, requiring sophisticated scene understanding and adaptive navigation strategies [36][152].

Transformers [144] have emerged as the dominant architecture in deep learning, especially for NLP applications [108], Transformers employ self-attention to capture long-term dependencies and model relationships across data, independent of sequence length. Their adaptability and scalability have made them powerful tools in various applications. Initially designed for NLP [144], transformers have been introduced in robotics [165] [163][147], Signal Processing [145][47][16], Medical Imaging [5][73][126][41][155][40][56], and many other areas. Transformers have consistently outperformed RNNs and CNNs in various sequence modeling tasks[129]. Since then, innovations such as Bidirectional Transformers for Language Understanding(BERT) [26], Generative Pre-trained Transformer(GPT) [113] , and Vision Transformers [29] have extended their applicability to robotics. This paper explores the role of transformers in advancing robotic perception, control, and decision making[108]. In robotics, Transformers are being adopted in three major ways: (1) as pre-trained foundation models facilitating Human-Robot Interaction and generalization[98][163][11][12][62]. (2) as transformer variants integrated with Deep Reinforcement Learning enhancing long-horizon planning (3) To enhance perception, planning, and control systems. Recent models like Decision Transformer [17] and Trajectory Transformer [52] highlight how Transformers can be applied in robotics, enabling complex task planning and autonomous control in dynamic scenarios [3][77]. There have been many survey papers covering the use of Transformers as pre-trained foundation models in robotics [163][147][54][32][45][63][59][155]. Some survey papers have covered integration of transformers in RL covering all applications [3][77][44] , while some have exclusively focused on application in Robotics[90][160].Our paper gives a broad overview of all the different ways Transformers have been used in Robotics. At the same time, the scope of our paper is narrower than surveys covering various advances in Transformers [137][48][158][80], in this paper we wish to exclusively focus on applications in robotics. Some Transformer architectures have been tailored for robotic perception, planning, and control, other areas of usage include pre-trained foundation models to specialized variants used in DRL. We also address current limitations and propose directions for future research with the goal of enhancing adaptability, generalization, and long-horizon decision making in robotic systems.

2 Background

This section introduces the fundamental concepts of the original Transformers [144] architecture. We start with an overview and then discuss the core components.

2.1 Overview of Transformer Architecture

Traditional sequence models like RNNs were capable of handling variable-length inputs and temporal dependencies [27] [109], LSTMs were a variant of RNNs with an added gating mechanism that addressed long-term dependency problems [159] [168] to an extent, but due to the inherent way RNNs and LSTMs process data, each time step depends on the previous step. This dependency limits parallel processing and struggles with long-term dependencies, as information from earlier inputs can fade over long sequences due to issues such as vanishing gradients [70][4] and explosion [127]. CNNs, though useful for capturing local dependencies in sequences, lack the ability to model long-range dependencies.

The Transformer model addresses these limitations by employing self-attention and eliminating recurrence and convolution. Self-attention, also referred to as intra-attention, connects various positions within a single sequence to generate a meaningful representation of that sequence[144]. Self-attention allows each input position to focus on relevant positions across the entire sequence simultaneously, which not only captures dependencies at varying distances but also enables efficient parallelization during training and inference Transformer-based models like BERT and GPT have achieved state-of-the-art results in machine translation and other

language tasks [171][135].

2.2 Core Components of Transformer Architecture

The Transformer architecture consists of an encoder-decoder architecture[144], each consisting of multiple layers stacked together, with each layer containing sublayers designed to carry out a particular operation. The encoder in sequence transduction models processes an input sequence of symbolic representations (x_1, \dots, x_n) and transforms it into a corresponding sequence of continuous representations $\mathbf{z} = (z_1, \dots, z_n)$. The decoder then uses \mathbf{z} to generate an output sequence (y_1, \dots, y_m) , producing one symbol at a time. At each generation step, the model operates in an auto-regressive manner, relying on both the encoded representations and the previously generated outputs as additional inputs for predicting the next symbol.

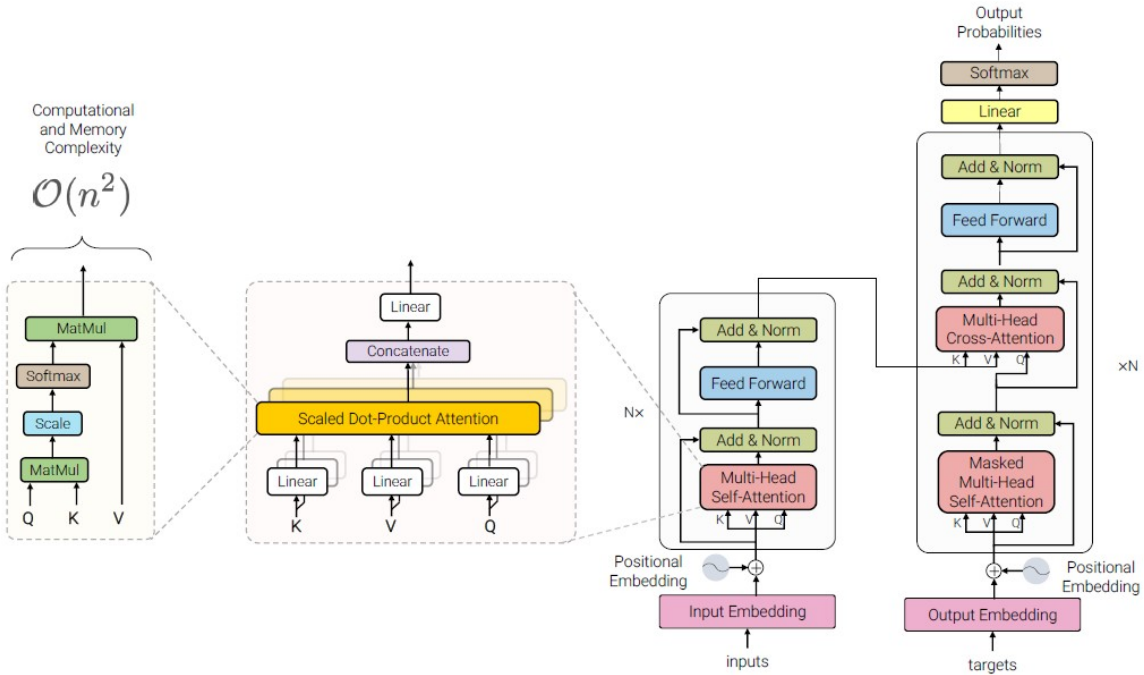


Figure 1: The Original "Vanilla" Transformer Architecture [144]. Visual representation taken from[137]

2.2.1 Encoder and Decoder Architecture

Encoder: The input sequence is tokenized into smaller units, such as characters or words. The encoder converts the input sequence into a series of contextual embeddings that capture the relationship between these tokens in the input sequence. Each encoder layer has two main components: 1)Self-Attention Mechanism: It enables each token in the input sequence to consider and relate to other tokens, capturing relations between the sequence 2)Feed-Forward Neural Network: The neural network applies non-linear transformations independent of the embeddings of each token. To improve training stability and address issues like vanishing gradient, residual connections are used around each sub-layer. These connections add the input of a sub-layer to its output, followed by layer normalization. The output of each sub-layer is

$$\text{LayerNorm}(\mathbf{x} + \text{Sublayer}(\mathbf{x})),$$

where $\text{Sublayer}(\mathbf{x})$ is the output of the sub-layer applied to the input \mathbf{x} .

Decoder: The decoder generates the output sequence by combining the encoded representation from the encoder along with the previously generated outputs to predict the next token. Each decoder layer has three sub-layers: 1) Masked Self-Attention Mechanism: Similar to the encoder’s self-attention, this mechanism ensures each token can only attend to previous tokens and itself, preventing any dependence on future tokens. 2) Encoder-Decoder Attention: This sub-layer uses multi-head attention to allow the decoder to focus on relevant parts of the encoder’s output, helping it incorporate meaningful input context while generating the sequence 3) Feed-Forward Neural Network: A fully connected layer independently processes each token to learn more complex patterns in the sequence.

As in the encoder, residual connections are applied around each sub-layer, and layer normalization is performed. This ensures smoother gradient flow and better convergence during training. The decoder combines these mechanisms to generate coherent output token-by-token.

2.2.2 Self-Attention Mechanism

Self-attention allows each token to be considered and related to every other token in the sequence, enabling the model to learn relationships across long distances.

Scaled Dot-Product Attention: Self-attention is implemented using a scaled dot-product mechanism, where three vectors are computed for each input token:

- **Key (K):** Represents the token holding relevant information.
- **Value (V):** Contains the actual information that is distributed based on the
- **Query (Q):** Represents the token making a request for related information. attention scores.

The attention score between a query q and a key k is calculated as:

$$\text{Attention}(Q, K, V) = \text{softmax} \left(\frac{QK^T}{\sqrt{d_k}} \right) V$$

Here, d_k is the dimensionality of the keys, and the score is scaled by $\sqrt{d_k}$ to prevent exceedingly large values that could affect the gradient flow.

Multi-Head Attention: Transformer architecture uses multiple attention heads to capture different aspects of the relationships in the same sequence. Each head has its own learned linear transformations, allowing the model to learn different types of dependencies across the sequence.

Multi-head attention is calculated by concatenating the outputs of multiple attention heads followed by a linear transformation:

$$\text{MultiHead}(Q, K, V) = \text{Concat}(\text{head}_1, \dots, \text{head}_h)W^O$$

where W^O is a learned weight matrix for the output.

2.2.3 Positional Encoding

Since the Transformer lacks recurrence and does not inherently process tokens sequentially, it must encode positional information to understand the order of tokens. The positional encoding vector is added to the input embeddings to provide each position with unique positional information.

The positional encoding for each position pos and dimension i is given by:

$$\text{PE}(pos, 2i) = \sin \left(\frac{pos}{10000^{2i/d_{model}}} \right)$$

$$\text{PE}(\text{pos}, 2i + 1) = \cos\left(\frac{\text{pos}}{10000^{2i/d_{\text{model}}}}\right)$$

where d_{model} is the dimension of the embeddings. These sine and cosine functions encode relative positions in a way that is interpretable by the model.

2.2.4 Feed-Forward Neural Network (FFN)

Each position in the sequence is independently passed through a fully connected feed-forward network. The FFN consists of two linear transformations with a ReLU activation in between:

$$\text{FFN}(x) = \max(0, xW_1 + b_1)W_2 + b_2$$

where W_1 , W_2 , b_1 , and b_2 are learnable parameters. This component allows for non-linear transformation, which improves the model’s ability to capture complex relationships.

2.3 Architectural Innovations in Transformers

Transformers have undergone numerous enhancements to address limitations of the architecture, the quadratic computational complexity of the attention mechanism that limits their ability to handle long sequences [173] being just one of them. We will briefly go over some prominent innovations.

2.3.1 Efficient Transformers

Efficient transformer variants try to address the computational challenges of long sequences by reducing the quadratic time complexity of the original attention mechanism, making transformers feasible for resource-constrained or real-time environments. There are many different approaches researchers have taken, Performer [20] replaces softmax attention mechanism with kernel-based approximation function, thus being able to handle much longer sequences compared to original transformer, and drastically reduces the memory footprint along with linear computational complexity. Linformer [148] reduces the attention complexity to linear time by projecting the attention matrix, allowing for efficient processing of large state-action spaces.

Model	Complexity	Key Technique
Transformer [144]	$O(n^2)$	Original transformer architecture with quadratic time complexity.
Performer [20]	$O(n)$	Kernel-based approximation for softmax attention;
Linformer [148]	$O(n)$	Projection of attention matrix into lower-dimensional space; linear complexity.
Synthesizer [138]	$O(n)$	Learned or random synthetic attention for reduced complexity.
Nyströmformer [156]	$O(n)$	Nyström method for approximating self-attention;
Linear Transformer [57]	$O(n)$	Kernel-based approximation of softmax attention;
FlashAttention [24]	$O(n^2)$	Kernel-level optimized attention for speed and memory efficiency achieves significant runtime improvements.
FNet [71]	$O(n)$	Replaces attention with Fast Fourier Transform for efficiency.
Hyena [111]	$O(n \log n)$	Lightweight convolutional structures for long-sequence processing.

2.3.2 Multimodal Transformers

Original Transformers were developed for NLP application specifically to use encoder-decoder mechanism for text. Multimodal Transformers are capable of processing multiple type of inputs, ViLBERT [86] extended the popular BERT [26] architecture introducing a co-attention mechanism, by exchanging key-value pairs in multi-headed attention, the structure incorporates linguistic queues to visual ones and vice versa, see Figure ??

Model	Key Technique
CLIP [112]	Jointly learns embeddings for text and images, leveraging contrastive learning.
FLAVA [130]	Unified architecture for vision, language, and their joint representation.
Data2Vec [7]	Multimodal framework using the same architecture for vision, audio, and text.
VisualGPT [74]	Combines image features with text generation for vision-to-language tasks.
DALL-E [115]	Text-to-image generation using multimodal Transformer architecture.
ALIGN [55]	Pretrained on large-scale image-text pairs for robust visual and language tasks.
MERLOT [162]	Learns multimodal representation for video and text understanding.
VideoBERT [132]	Processes video frames and associated text for video-language tasks.

- **VisualBERT** [74]: Integrates text and image data, with potential applications in robotic vision systems where contextual understanding of visual inputs is required. For example, in human-robot interaction scenarios, understanding both spoken commands and visual context enhances a robot’s ability to interact with humans naturally.
- **UNITER** [78]: Pretrained on multimodal datasets, it is useful for tasks requiring joint text and image understanding, such as scene description and semantic mapping, which can improve the situational awareness of service robots.

2.3.3 Sparse and Adaptive Transformers

Sparse transformers introduce sparsity in the self-attention mechanism to reduce computational overhead without sacrificing performance. Adaptive transformers dynamically adjust computation based on input data characteristics, optimizing resource usage—crucial for deploying transformers in real-time robotic systems. Longformer [8] introduces a combination of global and sliding window local attention mechanisms, suitable for tasks requiring long-range dependencies. Reformer [65] Reduces time complexity in processing large datasets through locality-sensitive hashing.

Model	Complexity	Key Technique
Sparse Transformer[19]	$O(n\sqrt{n})$	Sparse attention with structured sparsity patterns for efficient long-sequence modeling.
Longformer [8]	$O(n)$	Global and sliding window local attention, suited for long-range dependencies.
BigBird [161]	$O(n)$	Combination of random, sliding window and global attention mechanisms.

Model	Complexity	Key Technique
Routing Transformer [121]	$O(n \log n)$	Sparse attention using K-means clustering-based routing.
Reformer [65]	$O(n \log n)$	Locality-sensitive hashing (LSH) for reduced time complexity.
Routing Transformer [121]	$O(n^{1.5}d^*)$	K-means clustering-based sparse attention routing.
Sinkhorn Transformer [138]	$O(n)$	Differentiable sorting in attention for structured inputs.
Mega [87]	$O(n)$	Combines sparse and memory-efficient attention for general long-sequence modeling.

**Here, d represents the hidden dimension of the model.*

- **Adaptive Attention Span Transformer** [131]: Adjusts the attention span dynamically extends significantly the maximum context size used in Transformer, while maintaining control over their memory footprint and computational time. Many researchers have considered different approaches across various applications some names include Universal Transformer [25], Dynamic Vision Transformer [151] and Feedback Transformer [30].

2.4 Overview of Reinforcement Learning

Reinforcement Learning (RL) is a computational approach of understanding and automating goal-directed learning and decision-making. In RL, an agent learns to make decisions by performing actions in an environment to maximize cumulative rewards [136]. The agent interacts with the environment in discrete time steps, receiving observations and rewards, and updates its policy—a mapping from states to actions—based on this feedback.

In the context of robotics, RL provides a policy for robots to learn optimal actions through trial and error, without explicit programming of the desired task [66]. RL algorithms can be categorized into model-based and model-free methods. Model-based RL involves learning a model of the environment’s dynamics, while model-free RL directly learns the policy or value function without an explicit model.

Classical RL approaches faced challenges in handling high-dimensional state and action spaces typical in robotics. However, the integration of deep learning with RL, known as Deep Reinforcement Learning (DRL), has enabled the handling of complex, high-dimensional inputs like images and sensor data [89]. DRL has shown success in various domains, including robotic manipulation, navigation, and control tasks [72].

2.5 Innovations in Reinforcement Learning

Recent innovations in RL focus on improving sample efficiency, stability, and generalization of learning algorithms. Key advancements include:

- **Policy Gradient Methods:** Algorithms like Proximal Policy Optimization (PPO) [124] and Trust Region Policy Optimization (TRPO) [123] have improved the stability of policy updates, facilitating more reliable training in continuous action spaces common in robotics.
- **Off-Policy Learning:** Techniques such as Deep Deterministic Policy Gradient (DDPG) [79] and Soft Actor-Critic (SAC) [39] enable efficient learning from off-policy data, enhancing sample efficiency which is critical when interactions with the real world are costly or limited.

- **Model-Based RL:** Methods that incorporate learning a model of the environment, such as Model-Based Policy Optimization (MBPO) [51], have shown improved sample efficiency by utilizing simulated experiences, which is particularly beneficial in robotics where real-world data collection is expensive.
- **Meta-RL and Transfer Learning:** Approaches like Model-Agnostic Meta-Learning (MAML) [31] allow agents to rapidly adapt to new tasks with minimal data, addressing the challenge of generalization in RL.
- **Hierarchical Reinforcement Learning (HRL):** Techniques such as the Options Framework [6] and Hierarchical DDPG [92] enable agents to learn policies at multiple levels of abstraction, making them efficient in solving tasks with hierarchical structures, such as multi-step navigation or manipulation [6].
- **Exploration Strategies:** Strategies like intrinsic motivation (e.g., curiosity-driven learning) [107] and uncertainty-aware exploration (e.g., bootstrapped DQN) [97] enhance RL’s ability to explore efficiently in sparse-reward environments.
- **Safety in RL:** Methods such as Constrained Policy Optimization (CPO) [2] and Reward Shaping [95] introduce safety constraints during training, ensuring safe exploration and operation, especially important in robotics.
- **Multi-Agent Reinforcement Learning (MARL):** Frameworks like Multi-Agent Deep Deterministic Policy Gradient (MADDPG) [85] and QMIX [118] extend RL to multi-agent settings, enabling collaboration and competition in complex environments like swarm robotics or team-based games.
- **Offline Reinforcement Learning:** Techniques like Conservative Q-Learning (CQL) [69] train agents on previously collected datasets without additional interaction with the environment, making them practical for real-world scenarios where data collection is expensive.
- **Incorporation of Attention Mechanisms:** The integration of attention mechanisms, particularly through Transformer architectures, has enhanced the ability of RL agents to focus on relevant parts of the input space, improving performance in tasks requiring long-term dependencies and memory [103].

These innovations have significantly advanced the capability of RL algorithms, making them more applicable to the complex and dynamic environments encountered in robotics.

3 Applications in Robotics

Recently there have been numerous studies that have applied Transformers architecture, we will be broadly discuss various applications in detail.

3.1 Transformers as Pre-trained Foundation Models

In this section we discuss primarily 2 broad topics in which foundation models are being utilized in zero-shot robot generalization and Human-Robot collaborations. Pretrained Large Language Models (LLMs) [113], Large Vision-Language Models (VLMs), and Vision-Language-Action Models (VLA) [12][11] are currently being used to increase generalization in Robotics. Prior to the emergence of foundation models, traditional deep learning models for robotics were typically trained on limited datasets gathered for distinct tasks [133] [32]. Much progress has been done via collaboration, datasets such as Open X-Embodiment [21] consist of data from 22 different

robot embodiments, demonstrating 527 skills over 160,266 tasks, containing 1M+ real robot trajectories. The dataset was created by pooling 60 existing datasets from 34 research labs. The datasets were preprocessed into a consistent data format RLDS [116] for better access.


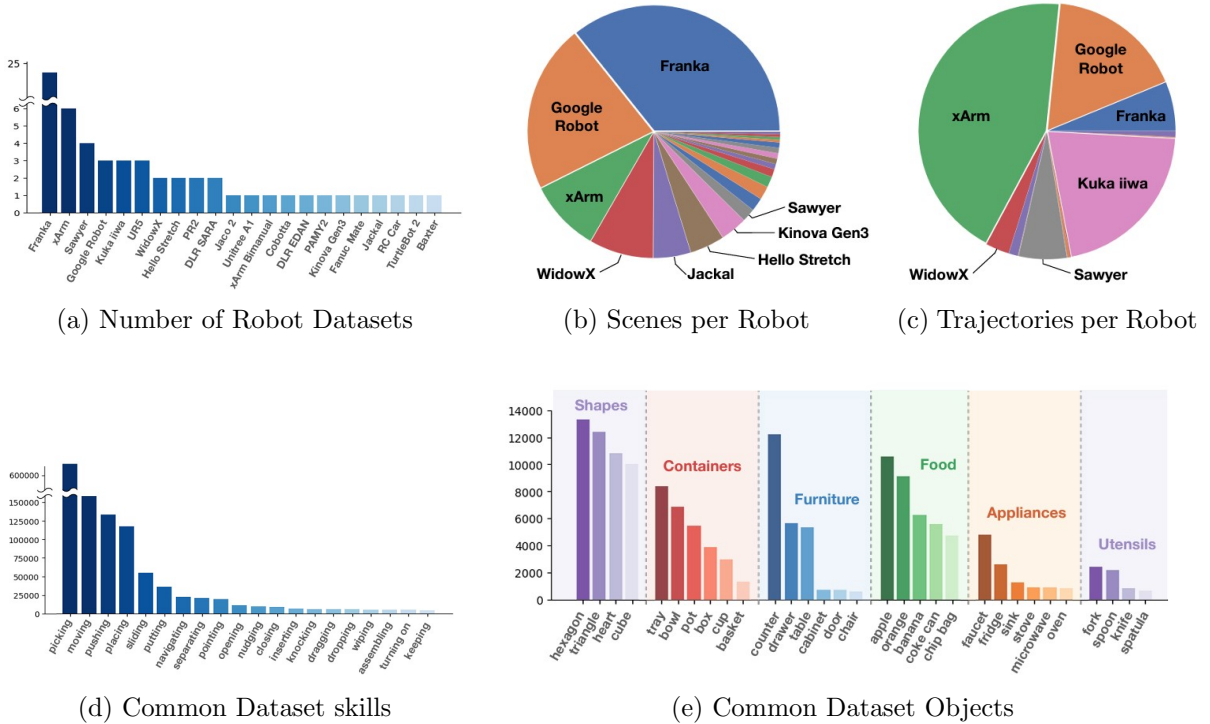


Figure 2: The Open X-Embodiment(OXE) Dataset, graphs are from the original paper. a) The dataset consists of 60 datasets across 22 embodiments. The dataset has a wide range of skills and object interactions please see 2d and 2e. While Franka has the most number of scenes see 2a x-Arm and Google Robot have the biggest contribution to trajectory data see 2b and 2c [21]

In recent times, many generalist robot models have been introduced, Gato [120], BC-Z[50], Octo [139], RT-1 [12], RT-2 [11], OpenVLA [62] and π_0 [9]. In the case of RT-1 the authors have collected their own data. Most of the other models have used a subset of the OXE dataset to train their models. π_0 has taken a subset of the OXE dataset along with some proprietary closed-source data to train their model. Octo trains a generalist policy that can control multiple robots within the OXE dataset for zero-shot tasks and allows for fine-tuning to new robot setup. The performance of Octo fluctuates depending on the robot used. Prior works like Octo typically compose pretrained components such as t5-base [114] for tokenization of language instructions with additional original subsystems of the architecture that are fine-tuned for performance benefits during training. OpenVLA’s approach can be characterized as an end-to-end pipeline, developed by directly fine-tuning VLMs to generate robot actions see Figure ?? . RT-2-X trains a 55B-parameter VLA policy on the Open X-Embodiment dataset, but the model is limited to cloud deployment because of the size of the model, in comparison models like Octo are much smaller 100M parameters. OpenVLA is able to outperform RT-2-X models on a much smaller memory footprint, further quantization done by authors shows no signs of significant drop in performance. While RT-1, RT-2, and π_0 are close-source, Octo and OpenVLA are open-source models.

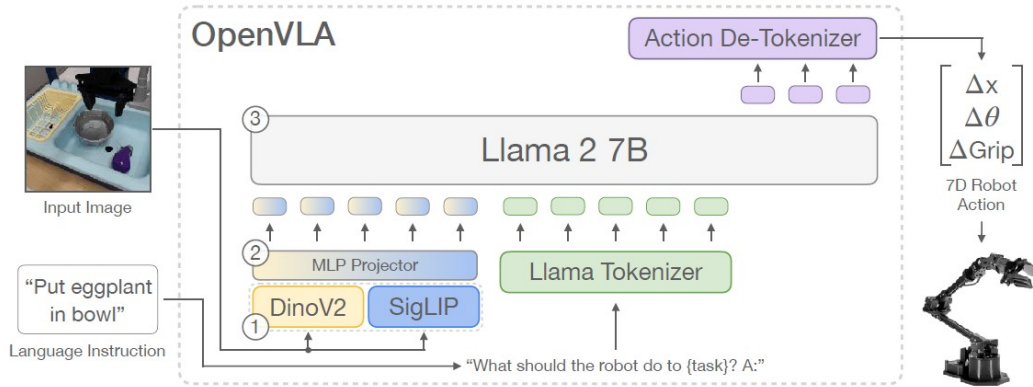

(a) OpenVLA architecture

Figure 3: Visual representation of OpenVLA architecture, generating low-level robot action from high-level human commands. Image representations taken from original authors[62].

Transformers have been utilized as pre-trained foundation models to improve human-robot interaction (HRI) and human-robot collaboration (HRC), giving robots the ability to discern tasks from human speech [98][105] [104]. Using large-scale language models such as BERT [26] and GPT [113], robots can better understand and process natural language commands, leading to more intuitive and effective communication with humans, even taking personal preferences[94][93][146] into account. It is to be noted that human commands can introduce ambiguity and uncertainty in robot actions [46]. Some newer research has shown the use of human feedback to correct errors in planning [15][164].

Models like **LAMA** [110] demonstrate the potential of pre-trained Transformers in capturing factual knowledge, which can be applied in robots for question-answering and dialogue systems. Additionally, integrating multimodal Transformers that process both language and visual inputs enhances a robot’s ability to interpret instructions within the context of its environment [86]. To improve trust, there has also been research to evaluate policy for communication from autonomous robots to humans, to build trust with humans [61].

In HRI, pre-trained Transformers enable:

- **Natural Language Understanding:** Improved parsing and comprehension of human language, allowing robots to interpret and execute complex instructions [140].
- **Contextual Awareness:** Ability to consider contextual cues from the environment and prior interactions, leading to more appropriate responses [141].
- **Adaptability:** Enhanced learning from limited data through transfer learning, reducing the need for extensive task-specific training [14].

Some successful case studies have demonstrated the ability of foundation models to augment Human-Robot Collaboration(HRC), researchers have demonstrated robustness with a 92.73% detection of fault instructions by humans, and validated real-world performance in construction settings where multi-modal inputs were given to robots [104]. Validation studies to demonstrate robot performance from natural language commands from non-experts have demonstrated 99.95% success rate in simulation in a construction setting [105]. Other applications include grasping[157][76], autonomous driving[149], assistive feeding[98][53] and household robots [154].

3.2 Transformer Variants Integrated in Deep Reinforcement Learning

Many studies have been conducted to integrate transformers to address the challenges in Deep Reinforcement Learning(DRL) such as sample efficiency and partial observability [3][77]. Transformers have shown to be effective as world models, enabling sample-efficient learning in complex

environments [101][88]. Actor-Learner distillation has been proposed to allow a large complex "learner" model based on transformer architecture to transfer its learning progress to a smaller simpler LSTM "actor" model, having low inference times while maintaining low sample efficiency of transformers[102]. Transformers have also been used to encode temporal logic into latent task features, allowing hierarchical reinforcement learning for long-horizon manipulation [84]. Innovations such as the Online Decision Transformer (ODT) integrate offline pre-training with online fine-tuning, using sequence modeling for reinforcement learning (RL), bridging the performance gap when offline RL models are suboptimal for tasks involving online interactions [170]. Constrained Decision Transformer(CDT) integrates transformers to solve offline RL problems by learning high-reward policies while adhering to strict safety constraints [82]

Decision Transducer (DTd), a multimodal Transformer framework for offline reinforcement learning (RL) [150]. Traditional RL approaches treat trajectories (state, action, reward) as a single sequence. DTd disentangles these into three unimodal sequences (states, actions, rewards) and processes them independently before selectively fusing them for decision-making. Transformers have been integrated with Deep Reinforcement Learning to address challenges in planning and decision-making over long horizons. The sequential modeling capabilities of Transformers enable RL agents to consider extended sequences of actions and states, improving performance in complex tasks. Language Models have also been shown to implement policy iteration faster than both imitation learning and gradient descent based RL [13] Notable Transformer-based RL models include:

- **Decision Transformer** [17]: This model formulates RL as a sequence modeling problem, using a Transformer to predict future actions based on past states, actions, and returns. It has shown promise in handling long-horizon tasks without explicit policy optimization.
- **Trajectory Transformer** [52]: This approach models the distribution of trajectories in a dataset, enabling planning by sampling and optimizing over possible future trajectories. It allows for efficient utilization of offline datasets, beneficial in robotics where collecting new data can be expensive.
- **GTrXL (Gated Transformer-XL)** [103]: Enhances the stability of Transformer architectures in RL by incorporating gating mechanisms, improving performance on tasks requiring long-term memory and reasoning.
- **Perceiver** [49]: A model capable of handling multimodal inputs and scalable to high-dimensional data, suitable for robotic applications involving complex sensory information processing.
- **Behavior Transformers** [125]: Combines Transformers with behavior cloning to enable RL agents to mimic human actions effectively in imitation learning setups.

The integration of Transformers in DRL offers several advantages for robotics:

- **Long-Horizon Planning:** Ability to model dependencies over long time scales, essential for tasks like navigation and manipulation where early decisions affect long-term outcomes [153].
- **Sample Efficiency:** Improved utilization of collected data through better generalization and representation learning, reducing the need for extensive interactions with the environment [67].
- **Handling High-Dimensional Inputs:** Effective processing of complex sensory inputs, including images, point clouds, and proprioceptive data, enabling richer perception capabilities [120].

- **Flexibility in Policy Representation:** Transformers can represent complex policies that consider sequences of past observations and actions, facilitating more sophisticated decision-making strategies [34].
- **Few-Shot and Zero-Shot Learning:** Pre-trained Transformers demonstrate robust generalization capabilities, enabling RL agents to adapt to new tasks with minimal or no additional training [14].
- **Scalability Across Modalities:** Transformers are inherently capable of handling multi-modal data, making them ideal for robotic tasks requiring integration of vision, language, and proprioception [49]

These Transformer variants represent a significant step toward more capable and autonomous robotic systems, capable of operating in unstructured and dynamic environments. MarineFormer [101] used spatio-temporal graph where the nodes included the Unmanned Surface Vehicle (USV), static and dynamic obstacles, and current flow dynamics, it demonstrated 20% success rate improvement over state-of-the-art reinforcement learning-based methods for marine environments. Researchers have used VLA models to enhance RL capabilities by requiring robot arms to grasp objects in a cluttered environment [157]. Multimodal Transformers have been used in behavior cloning RL, InstructRL, trains a policy based on natural language and visual observations [81].

3.3 Transformers in Perception, Planning and Control

This section gives the readers a section-wise overview of current use of Transformers for perception, planning, and control.

3.3.1 Perception

Vision Transformers (ViTs) [29] have been used in Robotics, particularly in manipulation and navigation tasks. ViTs have shown promising results in 3D object manipulation [37] and real-world control of manipulators [12][120][62]. Models like CLIP [112] (Contrastive Language-Image Pretraining) developed by OpenAI, have enabled robots to align textual and visual modalities effectively, allowing them to interpret human instructions, classify objects, and even adapt to novel scenarios with zero-shot learning. This capability is particularly useful for building generalizable models in unstructured environments where predefined object categories or explicit annotations may not be available. CLIP has been utilized for tasks such as real-time object recognition, semantic scene understanding, and human-robot interaction, enhancing robots' contextual awareness and adaptability. Subsequent work has decreased the memory footprint of CLIP [134], expanded the applications to 3D point cloud scene understanding [166][18] and grounding, which is the process of associating objects with text descriptions [75][117]. Meanwhile, the Segment Anything Model (SAM)[64], a foundation model for image segmentation, has revolutionized how robots process and segment visual data in real-time. By generating accurate object masks from any point prompt within an image, SAM enables precise object manipulation and navigation in cluttered environments, which is critical for domains like warehouse automation and medical robotics. Researchers have integrated SAM into robotic systems for tasks like autonomous grasping and visual servoing, where the ability to identify and segment objects dynamically ensures better control and decision making. Current research has broadened the scope of the application by reducing computational cost [58] and introducing video segmentation using a memory mechanism to process frames sequentially storing and using information from previous frames to predict masks over time [119]. While VLMs excel at tasks like prediction or segmentation, they lack a deep understanding of the physical attributes of the objects, PG-InstructBLIP [35], fine tunes InstructBLIP [22] model to improve model's ability to reason about physical concepts.

3.3.2 Planning

Transformers model sequences of actions and observations, aiding in long-horizon decision-making for autonomous robots. Their ability to maintain long-term dependencies allows them to plan paths that maximize safety and efficiency. Decision Transformers [17] treat RL as a sequence modeling problem, making them suitable for long-term planning in autonomous vehicles. Gated Transformer-XL [23] for Long-Term Memory can also be used for the same purpose. To increase robustness in planning over long horizons, researchers have proposed introducing human-like reasoning capabilities to generate sub-tasks, and getting top-k hypothesis and the best selection is made based on feedback from the environment [83]. Another approach taken is to facilitate planning by creating out-of-distribution (OOD) scenarios using LLMs for both environmental scenarios such as extreme weather or road obstructions and unpredictable behavior from other road users [1]. Often a limitation for planning could be the limited number of tasks a planner can execute, using LLMs to facilitate a natural language task breakdown, and using neural descriptor fields (NDFS) to learn new tasks in a few shots [99]. Recently, the ALOHA 2 platform uses a transformer-based architecture with diffusion policy to perform challenging bi-manual manipulation tasks [169]. ViNT, a Transformer-based model for visual navigation, demonstrates significant potential in long-horizon decision-making by enabling zero-shot generalization across diverse environments. It employs an EfficientNet encoder for tokenizing image inputs and a diffusion model for proposing subgoals, making it effective in complex, unstructured scenarios. Some researchers have also explored use of human feedback to improve long-horizon task success rates, and have noticed a 20% increase in task completion rate [128].

3.3.3 Control

At the time of writing of this article (December, 2024), integration of transformers in control systems remains relatively unexplored, but few selected studies have shown great promise and performance improvements. Decision Transformer (DT)-based control strategies have been shown to generalize easily attaining reasonable performance in previously unseen (zero-shot) control tasks, and outperform other control strategies with 10 shot adaptations, similarly in high perturbation environment DT is shown to generalize better than H_2/H_∞ . DT has been shown to capture parameter-agnostic structures [167]. TransformerMPC, comprehensively demonstrated use of Transformers to accelerate performance by reducing upto 95.8% inactive constraints, and substantial time reduction for wheeled bipeds, quadrotors and humanoid robots in the range of 6.8x to 34.9x [172]. Some researchers have taken a completely different approach using Convolutional Vision Transformer(CvT), "DonkeyNet", as a replacement for MPC, in highly nonlinear scenarios, achieving up to 3x faster times, maintaining consistently low computational time of 20-40 ms while MPC showed significant spikes for complex path points [42]. Architectures like MetaMorph, using transformers to create a universal controller capable of generalizing to 100 different robots, showing strong zero-shot performance and 2-3x more sample efficient during fine-tuning [38].

4 Challenges and Limitations

During the course of this paper, the authors have tried to give a broad understanding about the different ways in which Transformers are being applied in robotics. Despite their potential, several challenges remain, including difficulty in generalization across environments. Foundation Models are being used in various operations from robot manipulation, navigation, to perception. One of the major challenges has been generation of datasets, for training and datasets generated for manipulation may not easily be transferrable to train other subsystems like navigation models for mobile robots. Many researchers are able to create datasets in simulation environment, but scaling and testing same models for real world remains challenging. The

largest dataset to date Open X-Embodiment has disproportionate amount of either trajectory or vision data from one particular robot, thus needing corrective measures so as to prevent overfitting of generalist models. There is no guarantee that the zero-shot generalization shown by a system in simulation will be recreated to the same extent for real-world deployment. The generalization and human-robot interaction that is demonstrated is often in an indoor setting with manipulation tasks; how to deal with large variations in physical environments, platforms, and range of potential tasks while still maintaining generalization remains a challenge. Recently introduced datasets such as DROID [60] provide a gist of the potential improvements that can be achieved with better real-world data. Safety concerns are always heavy, as there are no pre-determined safety guardrails or hard constraints that ensure safety in cases such as zero-shot generalization. An additional challenge is managing the memory requirement during real-time inference and ensuring robustness in adverse weather conditions, such as rain or fog. Future work could involve optimizing attention mechanisms for real-time applications.

5 Future Directions

Current SOTA platforms like RT-2 [11] use cloud deployment and rely on the frequency of responses over the cloud for control, which can limit deployment in applications in areas of low connectivity and online computations on hardware. OpenVLA [62] has demonstrated the use of quantization to reduce the memory footprint of generalist models while maintaining low inference times to avoid latency in the system. Creating generalization for robots under resource-constrained models, and optimization of current computations can enable real-time online computations. Recently CrossFormer [28], demonstrated the ability to take in data from any robot embodiment, and the same network weights can control robots of vastly different dynamics, ranging from single and dual arm manipulation systems to quadcopters. Future works with more diverse datasets can provide an opportunity for generalist models capable of working with humans in a collaborative environment. Current generalist policies show variations in performance when deployed across different embodiments. Platforms like DART [106] make low-cost robot manipulation data collection possible using human demonstrations. It is yet to be determined whether or not data collected from platforms like DART can be successfully used to train generalist models, so far no generalist model is using data collected from human demonstrations. The emphasis needs to be on sample-efficient human demonstrations and some research has shown promise for robots to acquire new skills in a few shots [100]. Other possible directions may include reconciling the performance disparities in simulations with the real world. Some platforms like RealTo [143] have already shown an excellent increase in the robustness of real-world performance.

6 Conclusion

Transformers have fundamentally transformed NLP with the advent of models like GPT and BERT. Their use in robotics is becoming more prevalent. The study details their role in augmenting human-robot interaction with the use of foundation models such as LLMs. We explore the advancements in zero-shot generalization that have been achieved particularly in the manipulation and controlled environment using various mechanisms including co-training with VLMs. We look over how various augmentations like Vision Transformers and subsequent visuo-linguistic models have provided zero-shot or few-shot generalization capabilities to robots for perception, how transformers integrated with RL have provided the ability to perform tasks over longer horizons, and how predictive abilities of transformers are being used to augment control system performance and reduce computational load. While use of multimodal transformers have given us the ability to integrate various sources, zero-shot generalization in scenarios such as factory floors, search and rescue, caregiving remain untested due to paucity of readily available

internet scale robot datasets and whatever availability exists is capital intensive and limited in orders of magnitude lesser when compared to visual or text data. As newer and better architectures are developed and the attention span of robots increases, robots capable of human instruction can meet the demands of real-world environments.

7 References

References

- [1] Erfan Aasi, Phat Nguyen, Shiva Sreeram, Guy Rosman, Sertac Karaman, and Daniela Rus. Generating out-of-distribution scenarios using language models, 2024.
- [2] Joshua Achiam, David Held, Aviv Tamar, and Pieter Abbeel. Constrained policy optimization, 2017.
- [3] Pranav Agarwal, Aamer Abdul Rahman, Pierre-Luc St-Charles, Simon J. D. Prince, and Samira Ebrahimi Kahou. Transformers in reinforcement learning: A survey, 2023.
- [4] Safwan Mahmood Al-Selwi, Mohd Fadzil, Said Jadid Abdulkadir, and Amgad Muneer. Lstm inefficiency in long-term dependencies regression problems. *Journal of Advanced Research in Applied Sciences and Engineering Technology*, 2023.
- [5] Reza Azad, Amirhossein Kazerouni, Moein Heidari, Ehsan Khodapanah Aghdam, Amir Molaei, Yiwei Jia, Abin Jose, Rijo Roy, and Dorit Merhof. Advances in medical image analysis with vision transformers: A comprehensive review. *Medical image analysis*, 91:103000, 2023.
- [6] Pierre-Luc Bacon, Jean Harb, and Doina Precup. The option-critic architecture, 2016.
- [7] Alexei Baevski, Wei-Ning Hsu, Qiantong Xu, Arun Babu, Jiatao Gu, and Michael Auli. data2vec: A general framework for self-supervised learning in speech, vision and language, 2022.
- [8] Iz Beltagy, Matthew E. Peters, and Arman Cohan. Longformer: The long-document transformer, 2020.
- [9] Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, Szymon Jakubczak, Tim Jones, Liyiming Ke, Sergey Levine, Adrian Li-Bell, Mohith Mothukuri, Suraj Nair, Karl Pertsch, Lucy Xiaoyang Shi, James Tanner, Quan Vuong, Anna Walling, Haohuan Wang, and Ury Zhilinsky. π_0 : A vision-language-action flow model for general robot control. *arXiv preprint arXiv:2410.24164*, 2024.
- [10] Josh C. Bongard. Probabilistic robotics. sebastian thrun, wolfram burgard, and dieter fox. (2005, mit press.) 647 pages. *Artificial Life*, 14:227–229, 2008.
- [11] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Xi Chen, Krzysztof Choromanski, Tianli Ding, Danny Driess, Avinava Dubey, Chelsea Finn, Pete Florence, Chuyuan Fu, Montse Gonzalez Arenas, Keerthana Gopalakrishnan, Kehang Han, Karol Hausman, Alexander Herzog, Jasmine Hsu, Brian Ichter, Alex Irpan, Nikhil Joshi, Ryan Julian, Dmitry Kalashnikov, Yuheng Kuang, Isabel Leal, Lisa Lee, Tsang-Wei Edward Lee, Sergey Levine, Yao Lu, Henryk Michalewski, Igor Mordatch, Karl Pertsch, Kanishka Rao, Krista Reymann, Michael Ryoo, Grecia Salazar, Pannag Sanketi, Pierre Sermanet, Jaspier Singh, Anikait Singh, Radu Soricut, Huong Tran, Vincent Vanhoucke, Quan Vuong, Ayzaan Wahid, Stefan Welker, Paul Wohlhart, Jialin Wu, Fei Xia, Ted Xiao,

- Peng Xu, Sichun Xu, Tianhe Yu, and Brianna Zitkovich. Rt-2: Vision-language-action models transfer web knowledge to robotic control, 2023.
- [12] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Joseph Dabis, Chelsea Finn, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Jasmine Hsu, Julian Ibarz, Brian Ichter, Alex Irpan, Tomas Jackson, Sally Jesmonth, Nikhil J Joshi, Ryan Julian, Dmitry Kalashnikov, Yuheng Kuang, Isabel Leal, Kuang-Huei Lee, Sergey Levine, Yao Lu, Utsav Malla, Deeksha Manjunath, Igor Mordatch, Ofir Nachum, Carolina Parada, Jodilyn Peralta, Emily Perez, Karl Pertsch, Jornell Quiambao, Kanishka Rao, Michael Ryoo, Grecia Salazar, Pannag Sanketi, Kevin Sayed, Jaspiar Singh, Sumedh Sontakke, Austin Stone, Clayton Tan, Huong Tran, Vincent Vanhoucke, Steve Vega, Quan Vuong, Fei Xia, Ted Xiao, Peng Xu, Sichun Xu, Tianhe Yu, and Brianna Zitkovich. Rt-1: Robotics transformer for real-world control at scale, 2023.
- [13] Ethan Brooks, Logan Walls, Richard L. Lewis, and Satinder Singh. Large language models can implement policy iteration, 2023.
- [14] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020.
- [15] Owen Burns, Dana Hughes, and Katia Sycara. Plancritic: Formal planning with human feedback, 2024.
- [16] Feng-Ju Chang, Martin H. Radfar, Athanasios Mouchtaris, Brian King, and Siegfried Kunzmann. End-to-end multi-channel transformer for speech recognition. *ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5884–5888, 2021.
- [17] Lili Chen, Kevin Lu, Aravind Rajeswaran, Kimin Lee, Aditya Grover, Michael Laskin, Pieter Abbeel, Aravind Srinivas, and Igor Mordatch. Decision transformer: Reinforcement learning via sequence modeling, 2021.
- [18] Runnan Chen, Youquan Liu, Lingdong Kong, Xinge Zhu, Yuexin Ma, Yikang Li, Yuenan Hou, Yu Qiao, and Wenping Wang. Clip2scene: Towards label-efficient 3d scene understanding by clip, 2023.
- [19] Rewon Child, Scott Gray, Alec Radford, and Ilya Sutskever. Generating long sequences with sparse transformers, 2019.
- [20] Krzysztof Choromanski, Valerii Likhoshesterov, David Dohan, Xingyou Song, Andreea Gane, Tamas Sarlos, Peter Hawkins, Jared Davis, Afroz Mohiuddin, Lukasz Kaiser, David Belanger, Lucy Colwell, and Adrian Weller. Rethinking attention with performers, 2022.
- [21] Embodiment Collaboration, Abby O’Neill, Abdul Rehman, Abhinav Gupta, Abhiram Maddukuri, Abhishek Gupta, Abhishek Padalkar, Abraham Lee, Acorn Pooley, Agrim Gupta, Ajay Mandlekar, Ajinkya Jain, Albert Tung, Alex Bewley, Alex Herzog, Alex Irpan, Alexander Khazatsky, Anant Rai, Anchit Gupta, Andrew Wang, Andrey Kolobov, Anikait Singh, Animesh Garg, Aniruddha Kembhavi, Annie Xie, Anthony Brohan, Antonin Raffin, Archit Sharma, Arefeh Yavary, Arhan Jain, Ashwin Balakrishna, Ayzaan Wahid, Ben Burgess-Limerick, Beomjoon Kim, Bernhard Schölkopf, Blake Wulfe, Brian

Ichter, Cewu Lu, Charles Xu, Charlotte Le, Chelsea Finn, Chen Wang, Chenfeng Xu, Cheng Chi, Chenguang Huang, Christine Chan, Christopher Agia, Chuer Pan, Chuyuan Fu, Coline Devin, Danfei Xu, Daniel Morton, Danny Driess, Daphne Chen, Deepak Pathak, Dhruv Shah, Dieter Büchler, Dinesh Jayaraman, Dmitry Kalashnikov, Dorsa Sadigh, Edward Johns, Ethan Foster, Fangchen Liu, Federico Ceola, Fei Xia, Feiyu Zhao, Felipe Vieira Frujeri, Freek Stulp, Gaoyue Zhou, Gaurav S. Sukhatme, Gautam Salhotra, Ge Yan, Gilbert Feng, Giulio Schiavi, Glen Berseth, Gregory Kahn, Guangwen Yang, Guanzhi Wang, Hao Su, Hao-Shu Fang, Haochen Shi, Henghui Bao, Heni Ben Amor, Henrik I Christensen, Hiroki Furuta, Homanga Bharadhwaj, Homer Walke, Hongjie Fang, Huy Ha, Igor Mordatch, Ilija Radosavovic, Isabel Leal, Jacky Liang, Jad Abou-Chakra, Jaehyung Kim, Jaimyn Drake, Jan Peters, Jan Schneider, Jasmine Hsu, Jay Vakil, Jeanette Bohg, Jeffrey Bingham, Jeffrey Wu, Jensen Gao, Jiaheng Hu, Jiajun Wu, Jialin Wu, Jiankai Sun, Jianlan Luo, Jiayuan Gu, Jie Tan, Jihoon Oh, Jimmy Wu, Jingpei Lu, Jingyun Yang, Jitendra Malik, João Silvério, Joey Hejna, Jonathan Booher, Jonathan Tompson, Jonathan Yang, Jordi Salvador, Joseph J. Lim, Junhyek Han, Kaiyuan Wang, Kanishka Rao, Karl Pertsch, Karol Hausman, Keegan Go, Keerthana Gopalakrishnan, Ken Goldberg, Kendra Byrne, Kenneth Oslund, Kento Kawaharazuka, Kevin Black, Kevin Lin, Kevin Zhang, Kiana Ehsani, Kiran Lekkala, Kirsty Ellis, Krishan Rana, Krishnan Srinivasan, Kuan Fang, Kunal Pratap Singh, Kuo-Hao Zeng, Kyle Hatch, Kyle Hsu, Laurent Itti, Lawrence Yunliang Chen, Lerrel Pinto, Li Fei-Fei, Liam Tan, Linxi "Jim" Fan, Lionel Ott, Lisa Lee, Luca Weihs, Magnum Chen, Marion Lepert, Marius Mammel, Masayoshi Tomizuka, Masha Itkina, Mateo Guaman Castro, Max Spero, Maximilian Du, Michael Ahn, Michael C. Yip, Mingtong Zhang, Mingyu Ding, Minh Heo, Mohan Kumar Srirama, Mohit Sharma, Moo Jin Kim, Naoaki Kanazawa, Nicklas Hansen, Nicolas Heess, Nikhil J Joshi, Niko Suenderhauf, Ning Liu, Norman Di Palo, Nur Muhammad Mahi Shafiullah, Oier Mees, Oliver Kroemer, Osbert Bastani, Pannag R Sanketi, Patrick "Tree" Miller, Patrick Yin, Paul Wohlhart, Peng Xu, Peter David Fagan, Peter Mitrano, Pierre Sermanet, Pieter Abbeel, Priya Sundaesan, Qiuyu Chen, Quan Vuong, Rafael Rafailov, Ran Tian, Ria Doshi, Roberto Mart'in-Mart'in, Rohan Bajjal, Rosario Scalise, Rose Hendrix, Roy Lin, Runjia Qian, Ruohan Zhang, Russell Mendonca, Rutav Shah, Ryan Hoque, Ryan Julian, Samuel Bustamante, Sean Kirmani, Sergey Levine, Shan Lin, Sherry Moore, Shikhar Bahl, Shivin Dass, Shubham Sonawani, Shubham Tulsiani, Shuran Song, Sichun Xu, Siddhant Haldar, Siddharth Karamcheti, Simeon Adebola, Simon Guist, Soroush Nasiriany, Stefan Schaal, Stefan Welker, Stephen Tian, Subramanian Ramamoorthy, Sudeep Dasari, Suneel Belkhale, Sungjae Park, Suraj Nair, Suvir Mirchandani, Takayuki Osa, Tanmay Gupta, Tatsuya Harada, Tatsuya Matsushima, Ted Xiao, Thomas Kollar, Tianhe Yu, Tianli Ding, Todor Davchev, Tony Z. Zhao, Travis Armstrong, Trevor Darrell, Trinity Chung, Vidhi Jain, Vikash Kumar, Vincent Vanhoucke, Wei Zhan, Wenxuan Zhou, Wolfram Burgard, Xi Chen, Xiangyu Chen, Xiaolong Wang, Xinghao Zhu, Xinyang Geng, Xiyuan Liu, Xu Liangwei, Xuanlin Li, Yansong Pang, Yao Lu, Yecheng Jason Ma, Yejin Kim, Yevgen Chebotar, Yifan Zhou, Yifeng Zhu, Yilin Wu, Ying Xu, Yixuan Wang, Yonatan Bisk, Yongqiang Dou, Yoonyoung Cho, Youngwoon Lee, Yuchen Cui, Yue Cao, Yueh-Hua Wu, Yujin Tang, Yuke Zhu, Yunchu Zhang, Yunfan Jiang, Yunshuang Li, Yunzhu Li, Yusuke Iwasawa, Yutaka Matsuo, Zehan Ma, Zhuo Xu, Zichen Jeff Cui, Zichen Zhang, Zipeng Fu, and Zipeng Lin. Open x-embodiment: Robotic learning datasets and rt-x models, 2024.

- [22] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. Instructblip: Towards general-purpose vision-language models with instruction tuning, 2023.
- [23] Zihang Dai, Zhilin Yang, Yiming Yang, Jaime Carbonell, Quoc V. Le, and Ruslan

- Salakhutdinov. Transformer-xl: Attentive language models beyond a fixed-length context, 2019.
- [24] Tri Dao, Daniel Y. Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. Flashattention: Fast and memory-efficient exact attention with io-awareness, 2022.
- [25] Mostafa Dehghani, Stephan Gouws, Oriol Vinyals, Jakob Uszkoreit, and Łukasz Kaiser. Universal transformers, 2019.
- [26] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *North American Chapter of the Association for Computational Linguistics*, 2019.
- [27] Robert S. DiPietro and Gregory Hager. Deep learning: Rnns and lstm. 2020.
- [28] Ria Doshi, Homer Walke, Oier Mees, Sudeep Dasari, and Sergey Levine. Scaling cross-embodied learning: One policy for manipulation, navigation, locomotion and aviation, 2024.
- [29] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale, 2021.
- [30] Angela Fan, Thibaut Lavril, Edouard Grave, Armand Joulin, and Sainbayar Sukhbaatar. Addressing some limitations of transformers with feedback memory, 2021.
- [31] Chelsea Finn, Pieter Abbeel, and Sergey Levine. Model-agnostic meta-learning for fast adaptation of deep networks, 2017.
- [32] Roya Firoozi, Johnathan Tucker, Stephen Tian, Anirudha Majumdar, Jiankai Sun, Weiyu Liu, Yuke Zhu, Shuran Song, Ashish Kapoor, Karol Hausman, Brian Ichter, Danny Driess, Jiajun Wu, Cewu Lu, and Mac Schwager. Foundation models in robotics: Applications, challenges, and the future. *The International Journal of Robotics Research*, 0(0):02783649241281508, 0.
- [33] D. Fox, W. Burgard, and S. Thrun. Markov localization for mobile robots in dynamic environments. *Journal of Artificial Intelligence Research*, 11:391–427, November 1999.
- [34] Hiroki Furuta, Yutaka Matsuo, and Shixiang Shane Gu. Generalized decision transformer for offline hindsight information matching, 2022.
- [35] Jensen Gao, Bidipta Sarkar, Fei Xia, Ted Xiao, Jiajun Wu, Brian Ichter, Anirudha Majumdar, and Dorsa Sadigh. Physically grounded vision-language models for robotic manipulation, 2024.
- [36] Christian Glaser and Philipp Hennig. Learning in reality: A case study of stanley, the robot that won the darpa challenge. 2012.
- [37] Ankit Goyal, Jie Xu, Yijie Guo, Valts Blukis, Yu-Wei Chao, and Dieter Fox. Rvt: Robotic view transformer for 3d object manipulation. *ArXiv*, abs/2306.14896, 2023.
- [38] Agrim Gupta, Linxi Fan, Surya Ganguli, and Li Fei-Fei. Metamorph: Learning universal controllers with transformers, 2022.
- [39] Tuomas Haarnoja, Aurick Zhou, Pieter Abbeel, and Sergey Levine. Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor, 2018.

- [40] Kelei He, Chen Gan, Zhuoyuan Li, Islem Rekik, Zihao Yin, Wen Ji, Yang Gao, Qian Wang, Junfeng Zhang, and Dinggang Shen. Transformers in medical image analysis: A review. *ArXiv*, abs/2202.12165, 2022.
- [41] Emerald U. Henry, Onyeka Emebob, and Conrad Asotie Omonhinmin. Vision transformers in medical imaging: A review. *ArXiv*, abs/2211.10043, 2022.
- [42] Sandesh Hiremath, Cheng-Yi Huang, Argtim Tika, and Naim Bajcinca. Convolutional vision transformer as a path following controller for omnidirectional robots. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 16633–16639, 2024.
- [43] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural Computation*, 9:1735–1780, 1997.
- [44] Shengchao Hu, Li Shen, Ya Zhang, Yixin Chen, and Dacheng Tao. On transforming reinforcement learning with transformers: The development trajectory. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(12):8580–8599, 2024.
- [45] Yafei Hu, Quanting Xie, Vidhi Jain, Jonathan Francis, Jay Patrikar, Nikhil Keetha, Seungchan Kim, Yaqi Xie, Tianyi Zhang, Hao-Shu Fang, Shibo Zhao, Shayegan Omidshafiei, Dong-Ki Kim, Ali akbar Agha-mohammadi, Katia Sycara, Matthew Johnson-Roberson, Dhruv Batra, Xiaolong Wang, Sebastian Scherer, Chen Wang, Zsolt Kira, Fei Xia, and Yonatan Bisk. Toward general-purpose robots via foundation models: A survey and meta-analysis, 2024.
- [46] Wenlong Huang, Pieter Abbeel, Deepak Pathak, and Igor Mordatch. Language models as zero-shot planners: Extracting actionable knowledge for embodied agents, 2022.
- [47] Murat Isik, Hiruna Vishwamith, Kayode Inadagbo, and Ismail Can Dikmen. Hpcneuronet: Advancing neuromorphic audio signal processing with transformer-enhanced spiking neural networks. *2024 4th Interdisciplinary Conference on Electrics and Computer (INTCEC)*, pages 1–7, 2023.
- [48] Saidul Islam, Hanae Elmekki, Ahmed Elsebai, Jamal Bentahar, Najat Drawel, Gaith Rjoub, and Witold Pedrycz. A comprehensive survey on applications of transformers for deep learning tasks. *ArXiv*, abs/2306.07303, 2023.
- [49] Andrew Jaegle, Felix Gimeno, Andrew Brock, Andrew Zisserman, Oriol Vinyals, and Joao Carreira. Perceiver: General perception with iterative attention, 2021.
- [50] Eric Jang, Alex Irpan, Mohi Khansari, Daniel Kappler, Frederik Ebert, Corey Lynch, Sergey Levine, and Chelsea Finn. Bc-z: Zero-shot task generalization with robotic imitation learning, 2022.
- [51] Michael Janner, Justin Fu, Marvin Zhang, and Sergey Levine. When to trust your model: Model-based policy optimization, 2021.
- [52] Michael Janner, Qiyang Li, and Sergey Levine. Offline reinforcement learning as one big sequence modeling problem. In *Advances in Neural Information Processing Systems*, 2021.
- [53] Rajat Kumar Jenamani, Priya Sundaresan, Maram Sakr, Tapomayukh Bhattacharjee, and Dorsa Sadigh. Flair: Feeding via long-horizon acquisition of realistic dishes, 2024.
- [54] Hyeongyo Jeong, Haechan Lee, Changwon Kim, and Sungtae Shin. A survey of robot intelligence with large language models. *Applied Sciences*, 14(19), 2024.

- [55] Chao Jia, Yinfei Yang, Ye Xia, Yi-Ting Chen, Zarana Parekh, Hieu Pham, Quoc V. Le, Yunhsuan Sung, Zhen Li, and Tom Duerig. Scaling up visual and vision-language representation learning with noisy text supervision, 2021.
- [56] John Jumper, Richard Evans, Alexander Pritzel, and et al. Highly accurate protein structure prediction with alphafold. *Nature*, 596:583–589, 2021.
- [57] Angelos Katharopoulos, Apoorv Vyas, Nikolaos Pappas, and François Fleuret. Transformers are rnns: Fast autoregressive transformers with linear attention, 2020.
- [58] Lei Ke, Mingqiao Ye, Martin Danelljan, Yifan Liu, Yu-Wing Tai, Chi-Keung Tang, and Fisher Yu. Segment anything in high quality, 2023.
- [59] Andrew Gambardella Jiaxian Guo Chris Paxton Kento Kawaharazuka, Tatsuya Matsushima and Andy Zeng. Real-world robot applications of foundation models: a review. *Advanced Robotics*, 38(18):1232–1254, 2024.
- [60] Alexander Khazatsky, Karl Pertsch, Suraj Nair, Ashwin Balakrishna, Sudeep Dasari, Siddharth Karamcheti, Soroush Nasiriany, Mohan Kumar Srirama, Lawrence Yunliang Chen, Kirsty Ellis, Peter David Fagan, Joey Hejna, Masha Itkina, Marion Lepert, Yecheng Jason Ma, Patrick Tree Miller, Jimmy Wu, Suneel Belkhale, Shivin Dass, Huy Ha, Arhan Jain, Abraham Lee, Youngwoon Lee, Marius Memmel, Sungjae Park, Ilija Radosavovic, Kaiyuan Wang, Albert Zhan, Kevin Black, Cheng Chi, Kyle Beltran Hatch, Shan Lin, Jingpei Lu, Jean Mercat, Abdul Rehman, Pannag R Sanketi, Archit Sharma, Cody Simpson, Quan Vuong, Homer Rich Walke, Blake Wulfe, Ted Xiao, Jonathan Heewon Yang, Arefeh Yavary, Tony Z. Zhao, Christopher Agia, Rohan Bajjal, Mateo Guaman Castro, Daphne Chen, Qiuyu Chen, Trinity Chung, Jaimyn Drake, Ethan Paul Foster, Jensen Gao, David Antonio Herrera, Minh Heo, Kyle Hsu, Jiaheng Hu, Donovan Jackson, Charlotte Le, Yunshuang Li, Kevin Lin, Roy Lin, Zehan Ma, Abhiram Maddukuri, Suvir Mirchandani, Daniel Morton, Tony Nguyen, Abigail O’Neill, Rosario Scalise, Derick Seale, Victor Son, Stephen Tian, Emi Tran, Andrew E. Wang, Yilin Wu, Annie Xie, Jingyun Yang, Patrick Yin, Yunchu Zhang, Osbert Bastani, Glen Berseth, Jeannette Bohg, Ken Goldberg, Abhinav Gupta, Abhishek Gupta, Dinesh Jayaraman, Joseph J Lim, Jitendra Malik, Roberto Martín-Martín, Subramanian Ramamoorthy, Dorsa Sadigh, Shuran Song, Jiajun Wu, Michael C. Yip, Yuke Zhu, Thomas Kollar, Sergey Levine, and Chelsea Finn. Droid: A large-scale in-the-wild robot manipulation dataset, 2024.
- [61] Gwangbin Kim, Dohyeon Yeo, Taewoo Jo, Daniela Rus, and SeungJun Kim. What and when to explain? on-road evaluation of explanations in highly automated vehicles. *Proc. ACM Interact. Mob. Wearable Ubiquitous Technol.*, 7(3), September 2023.
- [62] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, Quan Vuong, Thomas Kollar, Benjamin Burchfiel, Russ Tedrake, Dorsa Sadigh, Sergey Levine, Percy Liang, and Chelsea Finn. Openvla: An open-source vision-language-action model, 2024.
- [63] Yeseung Kim, Dohyun Kim, Jieun Choi, Jisang Park, Nayoung Oh, and Daehyung Park. A survey on integration of large language models with intelligent robots. *Intelligent Service Robotics*, 17(5):1091–1107, August 2024.
- [64] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollár, and Ross Girshick. Segment anything, 2023.
- [65] Nikita Kitaev, Łukasz Kaiser, and Anselm Levskaya. Reformer: The efficient transformer, 2020.

- [66] Jens Kober, J Andrew Bagnell, and Jan Peters. Reinforcement learning in robotics: A survey. *The International Journal of Robotics Research*, 32(11):1238–1274, 2013.
- [67] Ilya Kostrikov, Denis Yarats, and Rob Fergus. Image augmentation is all you need: Regularizing deep reinforcement learning from pixels, 2021.
- [68] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E. Hinton. Imagenet classification with deep convolutional neural networks. *Communications of the ACM*, 60:84 – 90, 2012.
- [69] Aviral Kumar, Aurick Zhou, George Tucker, and Sergey Levine. Conservative q-learning for offline reinforcement learning, 2020.
- [70] Phong Le and Willem H. Zuidema. Quantifying the vanishing gradient and long distance dependency problem in recursive neural networks and recursive lstms. In *Rep4NLP@ACL*, 2016.
- [71] James Lee-Thorp, Joshua Ainslie, Ilya Eckstein, and Santiago Ontanon. Fnet: Mixing tokens with fourier transforms, 2022.
- [72] Sergey Levine, Chelsea Finn, Trevor Darrell, and Pieter Abbeel. End-to-end training of deep visuomotor policies. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 1334–1342, 2016.
- [73] Jun Li, Junyu Chen, Yucheng Tang, Ce Wang, Bennett A. Landman, and S. Kevin Zhou. Transforming medical imaging with transformers? a comparative review of key properties, current progresses, and future perspectives. *Medical image analysis*, 85:102762, 2022.
- [74] Liunian Harold Li, Mark Yatskar, Da Yin, Cho-Jui Hsieh, and Kai-Wei Chang. Visualbert: A simple and performant baseline for vision and language, 2019.
- [75] Liunian Harold Li, Pengchuan Zhang, Haotian Zhang, Jianwei Yang, Chunyuan Li, Yiwu Zhong, Lijuan Wang, Lu Yuan, Lei Zhang, Jenq-Neng Hwang, Kai-Wei Chang, and Jianfeng Gao. Grounded language-image pre-training, 2022.
- [76] Samuel Li, Sarthak Bhagat, Joseph Campbell, Yaqi Xie, Woojun Kim, Katia Sycara, and Simon Stepputtis. Shapegrasp: Zero-shot task-oriented grasping with large language models through geometric decomposition, 2024.
- [77] Wenzhe Li, Hao Luo, Zichuan Lin, Chongjie Zhang, Zongqing Lu, and Deheng Ye. A survey on transformers in reinforcement learning, 2023.
- [78] Xiujun Li, Xi Yin, Chunyuan Li, Pengchuan Zhang, Xiaowei Hu, Lei Zhang, Lijuan Wang, Houdong Hu, Li Dong, Furu Wei, Yejin Choi, and Jianfeng Gao. Oscar: Object-semantics aligned pre-training for vision-language tasks, 2020.
- [79] Timothy P. Lillicrap, Jonathan J. Hunt, Alexander Pritzel, Nicolas Heess, Tom Erez, Yuval Tassa, David Silver, and Daan Wierstra. Continuous control with deep reinforcement learning, 2019.
- [80] Tianyang Lin, Yuxin Wang, Xiangyang Liu, and Xipeng Qiu. A survey of transformers. *AI Open*, 3:111–132, 2022.
- [81] Hao Liu, Lisa Lee, Kimin Lee, and Pieter Abbeel. Instruction-following agents with multimodal transformer, 2023.

- [82] Zuxin Liu, Zijian Guo, Yihang Yao, Zhepeng Cen, Wenhao Yu, Tingnan Zhang, and Ding Zhao. Constrained decision transformer for offline safe reinforcement learning. In Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett, editors, *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 21611–21630. PMLR, 23–29 Jul 2023.
- [83] Lajanugen Logeswaran, Yao Fu, Moontae Lee, and Honglak Lee. Few-shot subgoal planning with language models, 2022.
- [84] Faraz Lotfi, Khalil Virji, Farnoosh Faraji, Lucas Berry, Andrew Holliday, David Meger, and Gregory Dudek. Uncertainty-aware hybrid paradigm of nonlinear mpc and model-based rl for offroad navigation: Exploration of transformers in the predictive model. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 2925–2931, 2024.
- [85] Ryan Lowe, Yi Wu, Aviv Tamar, Jean Harb, Pieter Abbeel, and Igor Mordatch. Multi-agent actor-critic for mixed cooperative-competitive environments, 2020.
- [86] Jiasen Lu, Dhruv Batra, Devi Parikh, and Stefan Lee. Vilbert: Pretraining task-agnostic visiolinguistic representations for vision-and-language tasks, 2019.
- [87] Xuezhe Ma, Chunting Zhou, Xiang Kong, Junxian He, Liangke Gui, Graham Neubig, Jonathan May, and Luke Zettlemoyer. Mega: Moving average equipped gated attention, 2023.
- [88] Vincent Micheli, Eloi Alonso, and Franccois Fleuret. Transformers are sample efficient world models. *ArXiv*, abs/2209.00588, 2022.
- [89] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Andrei A Rusu, Joel Veness, Marc G Bellemare, Alex Graves, Martin Riedmiller, Andreas K Fidjeland, Georg Ostrovski, Stig Petersen, et al. Human-level control through deep reinforcement learning. *Nature*, 518(7540):529–533, 2015.
- [90] Angelo Moroncelli, Vishal Soni, Asad Ali Shahid, Marco Maccarini, Marco Forgione, Dario Piga, Blerina Spahiu, and Loris Roveda. Integrating reinforcement learning with foundation models for autonomous robotics: Methods and perspectives, 2024.
- [91] Jane Mulligan and Gregory Z. Grudic. Editorial for journal of field robotics—special issue on machine learning based robotics in unstructured environments. *Journal of Field Robotics*, 23, 2006.
- [92] Ofir Nachum, Shixiang Gu, Honglak Lee, and Sergey Levine. Data-efficient hierarchical reinforcement learning, 2018.
- [93] B. A. Newman et al. Many household tasks can be posed as multi-object rearrangement tasks, but solutions to these problems often target a single, hand defined solution or are ... *Carnegie Mellon University*, page 4, 2024. Retrieved from <https://www.andrew.cmu.edu/~bnewman1/data>.
- [94] Benjamin A. Newman, Pranay Gupta, Kris Kitani, Yonatan Bisk, Henny Admoni, and Chris Paxton. Degustabot: Zero-shot visual preference estimation for personalized multi-object rearrangement, 2024.
- [95] Andrew Y Ng, Daishi Harada, and Stuart J Russell. Policy invariance under reward transformations: Theory and application to reward shaping. In *Proceedings of the 16th International Conference on Machine Learning (ICML)*, pages 278–287, 1999.

- [96] Nils J. Nilsson. Shakey the robot. 1984.
- [97] Ian Osband, Charles Blundell, Alexander Pritzel, and Benjamin Van Roy. Deep exploration via bootstrapped dqn, 2016.
- [98] Akhil Padmanabha, Jessie Yuan, Janavi Gupta, Zulekha Karachiwalla, Carmel Majidi, Henny Admoni, and Zackory Erickson. Voicepilot: Harnessing llms as speech interfaces for physically assistive robots. In *Proceedings of the 37th Annual ACM Symposium on User Interface Software and Technology, UIST '24*, page 1–18. ACM, October 2024.
- [99] Meenal Parakh, Alisha Fong, Anthony Simeonov, Tao Chen, Abhishek Gupta, and Pulkit Agrawal. Lifelong robot learning with human assisted language planners, 2023.
- [100] Meenal Parakh, Alisha Fong, Anthony Simeonov, Tao Chen, Abhishek Gupta, and Pulkit Agrawal. Lifelong robot learning with human assisted language planners. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 523–529, 2024.
- [101] Emilio Parisotto and Ruslan Salakhutdinov. Efficient transformers in reinforcement learning using actor-learner distillation, 2021.
- [102] Emilio Parisotto and Ruslan Salakhutdinov. Efficient transformers in reinforcement learning using actor-learner distillation. *ArXiv*, abs/2104.01655, 2021.
- [103] Emilio Parisotto, H. Francis Song, Jack W. Rae, Razvan Pascanu, Caglar Gulcehre, Siddhant M. Jayakumar, Max Jaderberg, Raphael Lopez Kaufman, Aidan Clark, Seb Noury, Matthew M. Botvinick, Nicolas Heess, and Raia Hadsell. Stabilizing transformers for reinforcement learning, 2019.
- [104] Somin Park, Carol C. Menassa, and Vineet R. Kamat. Integrating large language models with multimodal virtual reality interfaces to support collaborative human-robot construction work, 2024.
- [105] Somin Park, Xi Wang, Carol C. Menassa, Vineet R. Kamat, and Joyce Y. Chai. Natural language instructions for intuitive human interaction with robotic assistants in field construction work. *Automation in Construction*, 161:105345, May 2024.
- [106] Younghyo Park, Jagdeep Singh Bhatia, Lars Ankile, and Pulkit Agrawal. Dexhub and dart: Towards internet scale robot data collection, 2024.
- [107] Deepak Pathak, Pulkit Agrawal, Alexei A. Efros, and Trevor Darrell. Curiosity-driven exploration by self-supervised prediction, 2017.
- [108] Narendra Patwardhan, Stefano Marrone, and Carlo Sansone. Transformers in the real world: A survey on nlp applications. *Information*, 14(4), 2023.
- [109] Chun-Cheng Peng and G. D. Magoulas. Sequence processing with recurrent neural networks. In *Encyclopedia of Artificial Intelligence*, 2009.
- [110] Fabio Petroni, Tim Rocktäschel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, Alexander H. Miller, and Sebastian Riedel. Language models as knowledge bases?, 2019.
- [111] Michael Poli, Stefano Massaroli, Eric Nguyen, Daniel Y. Fu, Tri Dao, Stephen Baccus, Yoshua Bengio, Stefano Ermon, and Christopher Ré. Hyena hierarchy: Towards larger convolutional language models, 2023.

- [112] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision, 2021.
- [113] Alec Radford and Karthik Narasimhan. Improving language understanding by generative pre-training. 2018.
- [114] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67, 2020.
- [115] Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation, 2021.
- [116] Sabela Ramos, Sertan Girgin, Léonard Hussenot, Damien Vincent, Hanna Yakubovich, Daniel Toyama, Anita Gergely, Piotr Stanczyk, Raphael Marinier, Jeremiah Harmsen, Olivier Pietquin, and Nikola Momchev. Rlds: an ecosystem to generate, share and use datasets in reinforcement learning, 2021.
- [117] Hanoona Rasheed, Muhammad Maaz, Sahal Shaji Mullappilly, Abdelrahman Shaker, Salman Khan, Hisham Cholakkal, Rao M. Anwer, Erix Xing, Ming-Hsuan Yang, and Fahad S. Khan. Glamm: Pixel grounding large multimodal model, 2024.
- [118] Tabish Rashid, Mikayel Samvelyan, Christian Schroeder de Witt, Gregory Farquhar, Jakob Foerster, and Shimon Whiteson. Qmix: Monotonic value function factorisation for deep multi-agent reinforcement learning, 2018.
- [119] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, Eric Mintun, Junting Pan, Kalyan Vasudev Alwala, Nicolas Carion, Chao-Yuan Wu, Ross Girshick, Piotr Dollár, and Christoph Feichtenhofer. Sam 2: Segment anything in images and videos, 2024.
- [120] Scott Reed, Suraj Nair, Felix Hill, Oriol Vinyals, Nando de Freitas, et al. Generalist agents. *arXiv preprint arXiv:2205.06175*, 2022.
- [121] Aurko Roy, Mohammad Saffar, Ashish Vaswani, and David Grangier. Efficient content-based sparse attention with routing transformers, 2020.
- [122] David E. Rumelhart, Geoffrey E. Hinton, and Ronald J. Williams. Learning representations by back-propagating errors. *Nature*, 323:533–536, 1986.
- [123] John Schulman, Sergey Levine, Philipp Moritz, Michael I. Jordan, and Pieter Abbeel. Trust region policy optimization, 2017.
- [124] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms, 2017.
- [125] Nur Muhammad Mahi Shafiullah, Zichen Jeff Cui, Ariuntuya Altanzaya, and Lerrel Pinto. Behavior transformers: Cloning k modes with one stone, 2022.
- [126] Fahad Shamshad, Salman Hameed Khan, Syed Waqas Zamir, Muhammad Haris Khan, Munawar Hayat, Fahad Shahbaz Khan, and H. Fu. Transformers in medical imaging: A survey. *Medical image analysis*, 88:102802, 2022.

- [127] Alex Sherstinsky. Fundamentals of recurrent neural network (rnn) and long short-term memory (lstm) network. *ArXiv*, abs/1808.03314, 2018.
- [128] Lucy Xiaoyang Shi, Zheyuan Hu, Tony Z. Zhao, Archit Sharma, Karl Pertsch, Jianlan Luo, Sergey Levine, and Chelsea Finn. Yell at your robot: Improving on-the-fly from language corrections, 2024.
- [129] Andrew Shin, Masato Ishii, and Takuya Narihira. Perspectives and prospects on transformer architecture for cross-modal tasks with language and vision. *International Journal of Computer Vision*, 130:435 – 454, 2021.
- [130] Amanpreet Singh, Ronghang Hu, Vedanuj Goswami, Guillaume Couairon, Wojciech Galuba, Marcus Rohrbach, and Douwe Kiela. Flava: A foundational language and vision alignment model, 2022.
- [131] Sainbayar Sukhbaatar, Edouard Grave, Piotr Bojanowski, and Armand Joulin. Adaptive attention span in transformers, 2019.
- [132] Chen Sun, Austin Myers, Carl Vondrick, Kevin Murphy, and Cordelia Schmid. Videobert: A joint model for video and language representation learning, 2019.
- [133] Jiankai Sun, De-An Huang, Bo Lu, Yun-Hui Liu, Bolei Zhou, and Animesh Garg. Plate: Visually-grounded planning with transformers in procedural tasks. *IEEE Robotics and Automation Letters*, 7(2):4924–4930, April 2022.
- [134] Quan Sun, Yuxin Fang, Ledell Wu, Xinlong Wang, and Yue Cao. Eva-clip: Improved training techniques for clip at scale, 2023.
- [135] Ilya Sutskever, Oriol Vinyals, and Quoc V. Le. Sequence to sequence learning with neural networks. *ArXiv*, abs/1409.3215, 2014.
- [136] Richard S Sutton and Andrew G Barto. *Reinforcement Learning: An Introduction*. MIT Press, 2nd edition, 2018.
- [137] Yi Tay, Mostafa Dehghani, Dara Bahri, and Donald Metzler. Efficient transformers: A survey. *ACM Computing Surveys*, 55:1 – 28, 2020.
- [138] Yi Tay, Mostafa Dehghani, Dara Bahri, and Donald Metzler. Sparse sinkhorn attention. *arXiv preprint arXiv:2002.11296*, 2020.
- [139] Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep Dasari, Joey Hejna, Tobias Kreiman, Charles Xu, Jianlan Luo, You Liang Tan, Lawrence Yunliang Chen, Pannag Sanketi, Quan Vuong, Ted Xiao, Dorsa Sadigh, Chelsea Finn, and Sergey Levine. Octo: An open-source generalist robot policy, 2024.
- [140] Stefanie Tellex, Nakul Gopalan, Hadas Kress-Gazit, and Cynthia Matuszek. Robots that use language. *Annu. Rev. Control. Robotics Auton. Syst.*, 3:25–55, 2020.
- [141] Jesse Thomason, Michael Murray, Maya Cakmak, and Luke Zettlemoyer. Vision-and-dialog navigation, 2019.
- [142] Sebastian Thrun, Michael Montemerlo, Hendrik Dahlkamp, David Stavens, Andrei Aron, James Diebel, Philip W. Fong, John Gale, Morgan Halpenny, Gabriel Hoffmann, Kenny Lau, Celia M. Oakley, Mark Palatucci, Vaughan R. Pratt, Pascal Stang, Sven Strohband, Cedric Dupont, Lars-Erik Jendrossek, Christian Koelen, Charles Markey, Carlo Rummel, Joe van Niekerk, Eric Jensen, Philippe Alessandrini, Gary R. Bradski, Bob Davies, Scott Ettinger, Adrian Kaehler, Ara V. Nefian, and Pamela Mahoney. Stanley: The robot that won the darpa grand challenge. *Journal of Field Robotics*, 23, 2006.

- [143] Marcel Torne, Anthony Simeonov, Zechu Li, April Chan, Tao Chen, Abhishek Gupta, and Pulkit Agrawal. Reconciling reality through simulation: A real-to-sim-to-real approach for robust manipulation, 2024.
- [144] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need, 2023.
- [145] Prateek Verma and Jonathan Berger. Audio transformers: Transformer architectures for large scale audio understanding. adieu convolutions. *ArXiv*, abs/2105.00335, 2021.
- [146] Huaxiaoyue Wang, Nathaniel Chin, Gonzalo Gonzalez-Pumariiega, Xiangwan Sun, Neha Sunkara, Maximus Adrian Pace, Jeannette Bohg, and Sanjiban Choudhury. Apricot: Active preference learning and constraint-aware task planning with llms, 2024.
- [147] Jiaqi Wang, Zihao Wu, Yiwei Li, Hanqi Jiang, Peng Shu, Enze Shi, Huawen Hu, Chong Ma, Yiheng Liu, Xuhui Wang, Yincheng Yao, Xuan Liu, Huaqin Zhao, Zhengliang Liu, Haixing Dai, Lin Zhao, Bao Ge, Xiang Li, Tianming Liu, and Shu Zhang. Large language models for robotics: Opportunities, challenges, and perspectives, 2024.
- [148] Sinong Wang, Belinda Z. Li, Madian Khabsa, Han Fang, and Hao Ma. Linformer: Self-attention with linear complexity, 2020.
- [149] Tsun-Hsuan Wang, Alaa Maalouf, Wei Xiao, Yutong Ban, Alexander Amini, Guy Rosman, Sertac Karaman, and Daniela Rus. Drive anywhere: Generalizable end-to-end autonomous driving with multi-modal foundation models, 2023.
- [150] Yiqi Wang, Mengdi Xu, Laixi Shi, and Yuejie Chi. A trajectory is worth three sentences: multimodal transformer for offline reinforcement learning. In Robin J. Evans and Ilya Shpitser, editors, *Proceedings of the Thirty-Ninth Conference on Uncertainty in Artificial Intelligence*, volume 216 of *Proceedings of Machine Learning Research*, pages 2226–2236. PMLR, 31 Jul–04 Aug 2023.
- [151] Yulin Wang, Rui Huang, Shiji Song, Zeyi Huang, and Gao Huang. Not all images are worth 16x16 words: Dynamic transformers for efficient image recognition, 2021.
- [152] Liyana Wijayathunga, Alexander Rassau, and Douglas Chai. Challenges and solutions for autonomous ground robot scene understanding and navigation in unstructured outdoor environments: A review. *Applied Sciences*, 2023.
- [153] Bohan Wu, Suraj Nair, Roberto Martin-Martin, Li Fei-Fei, and Chelsea Finn. Greedy hierarchical variational autoencoders for large-scale video prediction, 2021.
- [154] Jimmy Wu, Rika Antonova, Adam Kan, Marion Lepert, Andy Zeng, Shuran Song, Jeannette Bohg, Szymon Rusinkiewicz, and Thomas Funkhouser. Tidybot: personalized robot assistance with large language models. *Autonomous Robots*, 47(8):1087–1102, November 2023.
- [155] Han Xiao, Li Li, Qi yu Liu, Xiuhong Zhu, and Qihang Zhang. Transformers in medical image segmentation: A review. *Biomed. Signal Process. Control.*, 84:104791, 2023.
- [156] Yunyang Xiong, Zhanpeng Zeng, Rudrasis Chakraborty, Mingxing Tan, Glenn Fung, Yin Li, and Vikas Singh. Nyströmformer: A nyström-based algorithm for approximating self-attention, 2021.
- [157] Kechun Xu, Shuqi Zhao, Zhongxiang Zhou, Zizhang Li, Huaijin Pi, Yue Wang, and Rong Xiong. A joint modeling of vision-language-action for target-oriented grasping in clutter, 2024.

- [158] Peng Xu, Xiadian Zhu, and David A. Clifton. Multimodal learning with transformers: A survey, 2023.
- [159] Yong Yu, Xiaosheng Si, Changhua Hu, and Jian xun Zhang. A review of recurrent neural networks: Lstm cells and network architectures. *Neural Computation*, 31:1235–1270, 2019.
- [160] Weilin Yuan, Jiaxing Chen, Shaofei Chen, Dawei Feng, Zhenzhen Hu, and Peng Li. Transformer in reinforcement learning for decision-making: A survey. October 2023.
- [161] Manzil Zaheer, Guru Guruganesh, Avinava Dubey, Joshua Ainslie, Chris Alberti, Santiago Ontanon, Philip Pham, Anirudh Ravula, Qifan Wang, Li Yang, and Amr Ahmed. Big bird: Transformers for longer sequences, 2021.
- [162] Rowan Zellers, Ximing Lu, Jack Hessel, Youngjae Yu, Jae Sung Park, Jize Cao, Ali Farhadi, and Yejin Choi. Merlot: Multimodal neural script knowledge models, 2021.
- [163] Fanlong Zeng, Wensheng Gan, Yongheng Wang, Ning Liu, and Philip S. Yu. Large language models for robotics: A survey, 2023.
- [164] Lihan Zha, Yuchen Cui, Li-Heng Lin, Minae Kwon, Montserrat Gonzalez Arenas, Andy Zeng, Fei Xia, and Dorsa Sadigh. Distilling and retrieving generalizable knowledge for robot manipulation via language corrections, 2024.
- [165] Jianke Zhang, Yanjiang Guo, Xiaoyu Chen, Yen-Jen Wang, Yucheng Hu, Chengming Shi, and Jianyu Chen. Hirt: Enhancing robotic control with hierarchical robot transformers, 2024.
- [166] Renrui Zhang, Ziyu Guo, Wei Zhang, Kunchang Li, Xupeng Miao, Bin Cui, Yu Qiao, Peng Gao, and Hongsheng Li. Pointclip: Point cloud understanding by clip, 2021.
- [167] Xiangyuan Zhang, Weichao Mao, Haoran Qiu, and Tamer Başar. Decision transformer as a foundation model for partially observable continuous control, 2024.
- [168] Yunong Zhang. Encoder-decoder models in sequence-to-sequence learning: A survey of rnn and lstm approaches. *Applied and Computational Engineering*, 2023.
- [169] Tony Z. Zhao, Jonathan Tompson, Danny Driess, Pete Florence, Kamyar Ghasemipour, Chelsea Finn, and Ayzaan Wahid. Aloha unleashed: A simple recipe for robot dexterity, 2024.
- [170] Qinqing Zheng, Amy Zhang, and Aditya Grover. Online decision transformer. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato, editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 27042–27059. PMLR, 17–23 Jul 2022.
- [171] Jiancong Zhu. Comparative study of sequence-to-sequence models: From rnns to transformers. *Applied and Computational Engineering*, 2024.
- [172] Vrushabh Zinage, Ahmed Khalil, and Efsthios Bakolas. Transformermpc: Accelerating model predictive control via transformers, 2024.
- [173] Atabay A. A. Ziyaden, Amir Yelenov, and Alexander Pak. Long-context transformers: A survey. *2021 5th Scientific School Dynamics of Complex Networks and their Applications (DCNA)*, pages 215–218, 2021.